



# HYPER-BW

Pico-ITX SBC with on-board SoC

## Quick Installation Guide/快速安裝指南

Version 1.01

October 27, 2017

### Packing List / 內容清單

- 1 x HYPER-BW single board computer with heatsink / HYPER-BW 單板電腦附散熱器
- 1 x RS-232 cable / RS-232 傳輸線
- 1 x SATA with power cable kit / SATA 信號與電源線
- 1 x QIG (Quick Installation Guide) / 快速安裝指南
- 1 x One Key Recovery CD / 一鍵還原光碟
- 1 x Utility CD / 公用程式光碟

## Specifications / 規格

Specification	HYPER-BW
SoC	Intel® Pentium® N3710 on-board SoC (up to 2.56GHz, quad-core, 2MB cache, TDP=6W) Intel® Celeron® N3160 on-board SoC (up to 2.24GHz, quad-core, 2MB cache, TDP=6W) Intel® Celeron® N3060 on-board SoC (up to 2.48GHz, dual-core, 2MB cache, TDP=6W) Intel® Celeron® N3010 on-board SoC (up to 2.24GHz, dual-core, 2MB cache, TDP=4W) Intel® Celeron® x5-E8000 on-board SoC (up to 2.00GHz, quad-core, 2MB cache, TDP=5W)
BIOS	AMI UEFI BIOS
Memory	One 204-pin 1333/1600 MHz single-channel DDR3L SDRAM unbuffered SO-DIMM slot supports up to 8 GB
Graphics	Intel® HD Graphics Gen 8 Engine with 16 low-power execution units, supporting DX11.1, OpenGL 4.2 and OpenCL1.2
Display Output	Dual independent display 2 x Mini HDMI (up to 3840x2160@30Hz)
Ethernet	LAN1: Realtek RTL8111 controller
EC	IT8587
Watchdog Timer	Software programmable support 1~255 sec. system reset
<b>I/O Interface</b>	
Audio Connector	1 x HD Audio by 10-pin (2x5) header
Ethernet	One RJ-45 port
Serial Ports	1 x RS-232 (by pin header)
USB Ports	1 x USB 3.0 (on rear I/O) 3 x USB 2.0 (1 on rear I/O, 2 by pin header)
Front Panel	1 x Front panel by 10-pin (1x10) header (power LED, HDD LED, power button, reset button)
LAN LED	1 x 2-pin (1x2) header
Fan	1 x Smart fan connector by 4-pin (1x4) wafer
Expansion	1 x M.2 2242 (B-Key)
Serial ATA	1 x SATA 6G/s with 5V SATA power connector (No RAID) (SATA port0)
<b>Environmental and Power Specifications</b>	
Power Supply	12V DC input only, support AT/ATX mode 1 x Power terminal block (1x2 pin)
Power Consumption	12V@1.52A (Intel® Pentium® processor N3710 with 8 GB 1600 MHz DDR3L memory)

<b>Operating Temperature</b>	-20°C ~ 60°C
<b>Storage Temperature</b>	-30°C ~ 70°C
<b>Humidity</b>	5% ~ 95%, non-condensing
<b>Vibration</b>	3G
<b>Physical Specifications</b>	
<b>Dimensions</b>	100 mm x 72 mm
<b>Weight GW/NW</b>	600 g / 250 g

## Ordering Information / 訂購資料

- HYPER-BW-N4-R10:  
Pico-ITX SBC with Intel® Pentium® 14nm quad-core N3710 up to 2.56GHz (6W)  
on-board SoC with dual Mini HDMI, PCIe GbE, M.2, USB 3.0, SATA 6Gb/s, COM, Audio  
and RoHS
- HYPER-BW-N3-R10:  
Pico-ITX SBC with Intel® Celeron® 14nm quad-core N3160 up to 2.24GHz (6W)  
on-board SoC with dual Mini HDMI, PCIe GbE, M.2, USB 3.0, SATA 6Gb/s, COM, Audio  
and RoHS
- HYPER-BW-N2-R10:  
Pico-ITX SBC with Intel® Celeron® 14nm dual-core N3060 up to 2.48GHz (6W)  
on-board SoC with dual Mini HDMI, PCIe GbE, M.2, USB 3.0, SATA 6Gb/s, COM, Audio  
and RoHS
- HYPER-BW-N1-R10:  
Pico-ITX SBC with Intel® Celeron® 14nm dual-core N3010 up to 2.24GHz (4W)  
on-board SoC with dual Mini HDMI, PCIe GbE, M.2, USB 3.0, SATA 6Gb/s, COM, Audio  
and RoHS
- HYPER-BW-E8-ECO-R10:  
Pico-ITX SBC with Intel® Atom® 14nm quad-core x5-E8000 up to 2.00GHz (5W)  
on-board SoC with dual Mini HDMI, PCIe GbE, M.2, USB 3.0, SATA 6Gb/s, COM, Audio,  
ECO packing and RoHS
- HYPER-BW-E8-R10:  
Pico-ITX SBC with Intel® Atom® 14nm quad-core x5-E8000 up to 2.00GHz (5W)  
on-board SoC with dual Mini HDMI, PCIe GbE, M.2, USB 3.0, SATA 6Gb/s, COM, Audio  
and RoHS\_
- 32000-070301-RS: Dual-port USB cable
- AC-KIT-892HD-R10: Realtek ALC892 7.1 channel HD Audio board, RoHS

## Connector Pinouts / 連接器腳位定義

USB_CON1: External USB 2.0 and USB 3.0 connector			
Pin	Description	Pin	Description
1	+5V	2	USB2P0_DM0_L
3	USB2P0_DP0_L	4	GND
5	USB3P0_RXDN0_C	6	USB3P0_RXDP0_C
7	GND	8	USB3P0_TXDN0_C
9	USB3P0_TXDP0_C	10	+5V
11	USB2P0_DM1_L	12	USB2P0_DP1_L
13	GND		



The diagram shows two USB connectors. The top one is a USB 2.0 connector with a label 'USB 2.0'. The bottom one is a USB 3.0 connector with a label 'USB 3.0'. Both are shown from a top-down perspective, highlighting their distinct shapes and pin configurations.

COM1: RS-232 serial port connector			
Pin	Description	Pin	Description
1	NDCD1	6	NDSR1
2	NRXD1	7	NRTS1
3	NTXD1	8	NCTS1
4	NDTR1	9	NRI1
5	GND	10	GND



The diagram shows a 10-pin D-sub connector. The pins are numbered 1 through 10. Pin 1 is on the right side, and pin 10 is on the left side. The connector is shown from a top-down perspective.

F_PANEL1: Front panel connector			
Pin	Description	Pin	Description
1	NC	2	PWRBTN_SW
3	GND	4	HDDLED+
5	HDDLED-	6	PWRLED+
7	HDDLED+	8	GND
9	EXTRST-	10	GND




The diagram shows a 10-pin header connector. The pins are numbered 1 through 10. Pin 1 is at the bottom, and pin 10 is at the top. The connector is shown from a side perspective.

J_AUDIO1: HDA audio connector			
Pin	Description	Pin	Description
1	HDA_SYNC	2	HDA_BCLK
3	HDA_SDO	4	HDA_SPKR
5	HDA_SDI	6	HDA_RST#
7	+5V	8	AGND
9	+12V	10	AGND




The diagram shows a 10-pin header connector. The pins are numbered 1 through 10. Pin 1 is on the right side, and pin 10 is on the left side. The connector is shown from a top-down perspective.

<b>USB2: USB 2.0 connector</b>			
Pin	Description	Pin	Description
1	+5V	2	GND
3	USB20_C_N2	4	USB20_C_P3
5	USB20_C_P2	6	USB20_C_N3
7	GND	8	+5V



<b>SPI1: BIOS FW connector</b>			
Pin	Description	Pin	Description
1	+SPI_VCC	2	SPI_CS0#_CN
3	SPI_SO0_CN	4	SPI_CLK0_CN
5	SPI_SIO_CN	6	GND




<b>EC_JP1: EC FW connector</b>			
Pin	Description	Pin	Description
1	SMB_CLK_FW	2	SMB_DATA_FW



<b>CPU_FAN1: CPU fan connector</b>			
Pin	Description	Pin	Description
1	GND	2	+12V
3	FANIO1	4	FANOUT1



<b>SMBUS1: SMBus connector</b>			
Pin	Description	Pin	Description
1	GND	2	SMB_DATA
3	SMB_CLK	4	+V5S



<b>LED_LAN1: LAN1 link LED connector</b>			
Pin	Description	Pin	Description
1	+3.3VLAN	2	LAN1_LED_LINK#



<b>PWR1: +12V DC power input connector</b>			
Pin	Description	Pin	Description
1	GND	2	12V



<b>SATA1: SATA connector</b>			
Pin	Description	Pin	Description
1	GND	2	SATA_TX0+
3	SATA_TX0-	4	GND
5	SATA_RX0+	6	SATA_RX0-
7	GND		



<b>SATA_PWR2: SATA power connector</b>			
Pin	Description	Pin	Description
1	+5V	2	GND



<b>SP1: Buzzer connector</b>			
Pin	Description	Pin	Description
1	5V	2	GND






<b>J_ATX_AT1: AT/ATX power mode selection</b>	
Pin	Description
Short 1-2	ATX power mode (default)
Short 2-3	AT power mode



<b>J_CMOS1: Clear CMOS button</b>	
Pin	Description
Open	Normal operation
Push	Clear CMOS



# Dimensions / 尺寸 (Unit: mm)

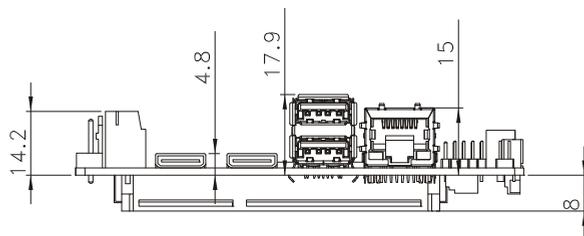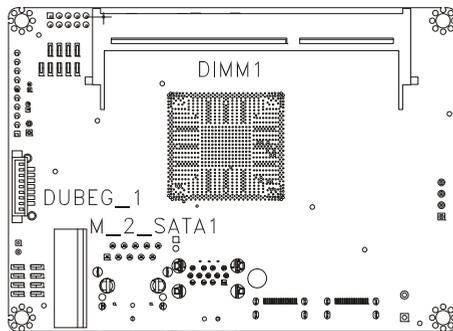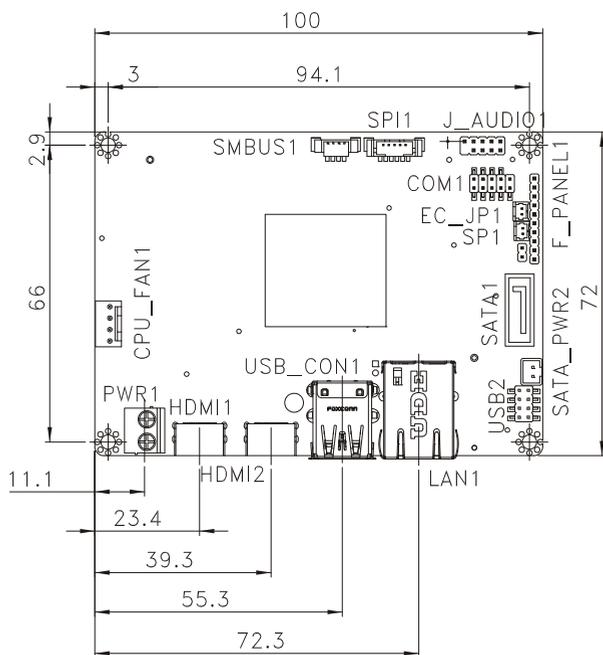

## Safety Instructions / 安全守則

 Warning! To prevent the system from overheating, do not operate it in an area that exceeds the maximum operating temperature described in the user manual. Ultimate disposal of this product should be handled according to all national laws and regulations.

 警告！為防止系統過熱，不要在使用手冊上記載的產品工作溫度範圍之外操作此系統。本產品的廢棄處理應根據該國家的法律和規章進行。

## IEI Support URL / IEI 線上諮詢

[https://www.ieiworld.com/en/online\\_support\\_form/index.php](https://www.ieiworld.com/en/online_support_form/index.php)

## Compliance / 安規



This equipment has been tested and found to comply with specifications for CE marking. If the user modifies and/or installs other devices in the equipment, the CE conformity declaration may no longer apply.



This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.



According to the requirement of the WEEE legislation the following user information is provided to customers for all branded IEI Electronics products subject to the WEEE directive.

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

### Headquarters

威強電工業電腦 IEI Integration Corp.  
No. 29, ZhongXing Rd., Xizhi Dist.,  
New Taipei City 221, Taiwan  
TEL: +886-2-8691-6798/+886-2-2690-2098  
FAX: +886-2-6616-0028  
sales@ieiworld.com  
www.ieiworld.com

### America

IEI Technology USA Corp.  
138 University Parkway, Pomona,  
CA 91768, USA  
Tel:+1-909-595-2819  
Fax:+1-909-595-2816  
sales@usa.ieiworld.com  
usa.ieiworld.com

### China

威強电工业电脑 IEI Integration (Shanghai) Corp.  
上海市闵行区莘庄工业区申富路 515 号  
No. 515, Shen Fu Rd., Xin Zhuang Industrial Develop Zone,  
Shanghai, 201108, China  
Tel:+86-21-3116-7799  
Fax:+86-21-3462-7797  
sales@ieiworld.com.cn  
www.ieiworld.com.cn