



PRODUCT SELECTION GUIDE

2025-2026

TABLE OF CONTENTS



SmartEdge Industrial

IEI Edge Computing solutions are designed to meet the demands of diverse vertical markets, combining powerful computing, rugged reliability, and flexible I/O expansion across Intel®, AMD, and ARM platforms. From smart manufacturing and intelligent transportation to retail automation and food & beverage management, IEI enables real-time data processing and intelligent decision-making at the edge—accelerating digital transformation across industries.



Secure Network Edge

IEI stands as your premier hardware partner, distinguished by our application-focused design and tailored customization IEI options crafted to meet your exacting standards. Our portfolio boasts an extensive range of products powered by the industry's leading processors from Intel, AMD, and Marvell®. This ensures that no matter what your project's requirements are, we have the technology to drive it forward.



Digital Healthcare Edge

IEI is deeply involved in the medical industry. We continuously integrate the latest technologies to develop high-quality and reliable nursing cart computers, all-in-one panel PCs, AI box PC and other innovative products to provide high-quality medical solutions, create a good working environment for medical personnel, and ensure better medical services for patients.

About IEI	P. 1 – 2
Why Choose IEI?	P. 3
2025 Featured Solution Highlights	P. 4 – 8
Operating System and CPU Compatibility Matrix	P. 9 – 27



Next-Generation Edge Computing Platforms

P. 28 – 34



AIoT Developer Kit

P. 35 – 36



Embedded Computers

P. 37 – 74



Embedded Systems

P. 75 – 88



Industrial Chassis

P. 89 – 93



Storage Servers

P. 94



Industrial Panel PCs

P. 95 – 116



Industrial Monitors

P. 117 – 124



ePaper Solutions

P. 125 – 126



Network Appliances

P. 127 – 138



Digital Healthcare

P. 139 – 150



Power Supplies

P. 149 – 156

About IEI

Your Partner to Innovate Edge Intelligence

Founded in 1997 and headquartered in Taipei, Taiwan, IEI brings over 28 years of expertise in embedded computing. With a global team of more than 1,200 employees—including over 300 R&D professionals—IEI delivers high-performance AIoT solutions across edge AI computing, smart healthcare, and intelligent network infrastructure by providing professional design and manufacturing services to customers worldwide.

Driven by a customer-centric philosophy, IEI integrates global logistics, localized service, and agile deployment to meet evolving industry needs. Backed by in-house R&D and strong ecosystem partnerships, IEI empowers industrial transformation—anchored in cybersecurity resilience, and sustainability.



300+ R&D

Exceptional Engineering
Excellence


100%

Commitment to
Manufacturing Resilience

>3-5 YEARS

Reliable Long-Term
Availability

Global Fulfillment Service

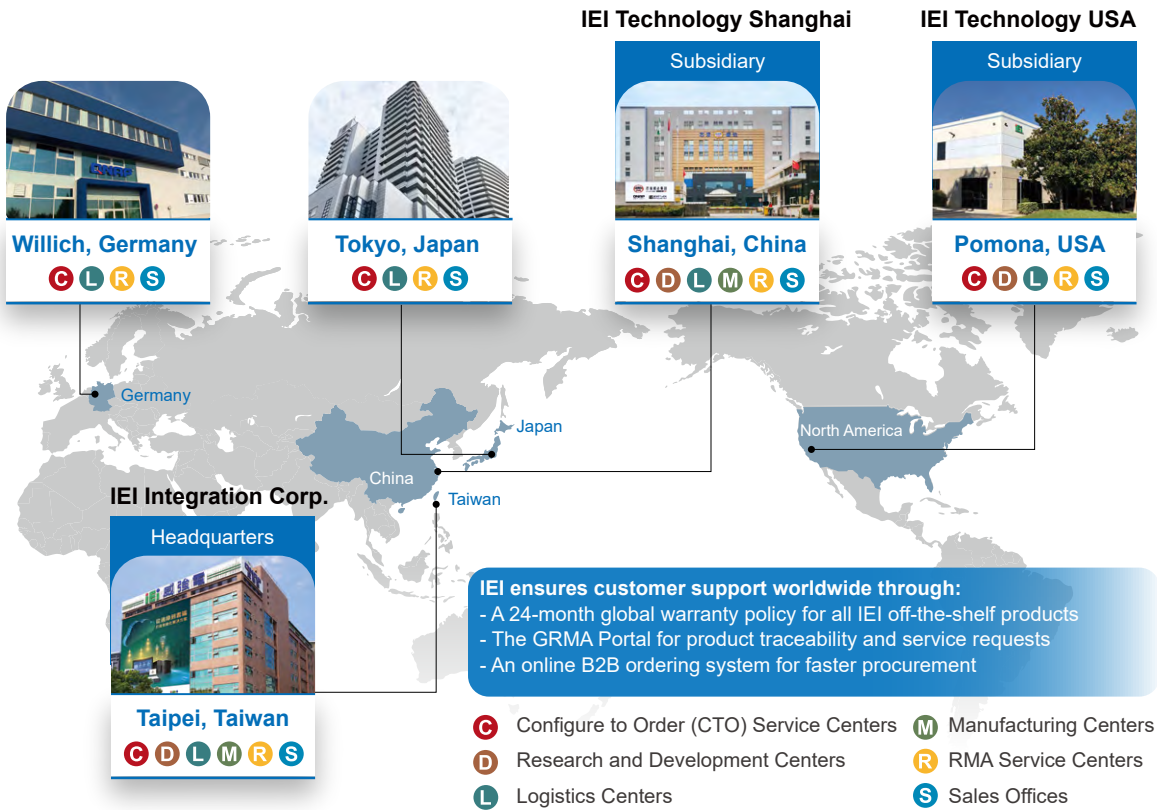

Green Policy

As a responsible global enterprise, IEI is committed to environmental stewardship. We align our operations with international standards, holding ISO 14001 and ISO 14064 certifications. Through voluntary carbon audits, we reduce energy consumption and environmental risks. IEI promotes sustainability through ESG performance and collaborates with partners to advance eco-friendly manufacturing and minimize hazardous substances.

Strengthening Information Security Governance



IEI is committed to information security through strong governance and rapid response. We established a PSIRT in 2024 and joined the global FIRST community to strengthen coordination. Our CSIRT, active since 2018, has been part of TWCERT since 2019. IEI has also maintained ISO 27001 certification since 2014, ensuring high standards across our systems, products, and services.

Core Business Segments

Industrial Automation



- Autonomous Mobile Robot
- Vision-Based Defect Detection
- Machine Vision
- Laser Cutting Machine Controller
- Weighing System

Network and Communications



- Router
- 5G CPE
- Firewall
- VPN
- IPS/IDS
- SD-WAN
- vRouter

Digital Healthcare



- Edge AI Inferencing in Healthcare
- Telemedicine
- Internet of Medical Things (IoMT)
- Critical Care
- Point-of-Care
- Data Acquisition Terminal

Transportation



- Advanced Highway Traffic Management
- Automatic Fare Collection System
- Intelligent Traffic Law Enforcement
- Railway Traffic Management
- Maritime System

Power and Energy



- EV Charging Station
- Environmental Data Collection Terminal

Why Choose IEI?

At IEI, our core competencies are the driving force behind our innovation and reliability. With decades of engineering expertise and extensive in-house capabilities, we deliver high-performance, application-specific computing solutions trusted by global customers across diverse industries.



Rugged Design & Environmental Reliability

Our products are built to withstand harsh conditions with IP-rated sealing, shock and vibration resistance, and superior thermal and humidity endurance—ideal for industrial and mission-critical applications.



Advanced Networking Acceleration

We integrate advanced packet processing and cryptographic acceleration technologies to ensure high throughput, low latency, and secure data transmission in demanding networks.



RF Design and Wireless Tuning

Our in-house RF experts conduct rigorous Wi-Fi and 5G signal validation and system tuning to deliver fast, stable, and reliable wireless connectivity.



Precision LCD Calibration (Color & DICOM)

IEI's LCDs are calibrated using proprietary tools to meet DICOM and color standards, ensuring imaging accuracy for healthcare and high-end displays.



Optical System Engineering

Our optics team designs lenses and systems with precision by mastering light physics and optical materials—ensuring clarity in every device.



FPGA & Algorithm Development

We specialize in FPGA-based hardware acceleration for medical imaging, video analysis, and real-time signal processing, offering low-latency, high-efficiency system design.



Complete In-House Design Validation

From EMC and thermal to mechanical and signal integrity testing, our internal validation facilities accelerate product development while ensuring compliance and durability.



SI/PI Simulation Expertise

Our signal and power integrity simulation services empower optimized PCB layout and system stability, enabling faster development cycles with minimized risk.



AI and Medical Computing Excellence

IEI leads in designing multi-processor platforms tailored for AI workloads and medical environments, delivering reliable, high-performance solutions for next-generation applications.

Design and Manufacturing Services

From Concept to Mass Production – Accelerating Time-to-Market with Trusted Design & Manufacturing

IEI's DMS (Design and Manufacturing Services) provides comprehensive design, engineering, and production solutions tailored for embedded systems and vertical applications.

With decades of experience and a global presence, we collaborate with customers across healthcare, transportation, energy, and automation to accelerate development and support long product lifecycles.

From early-stage design and board customization to system integration and worldwide logistics, IEI is your trusted partner for reliable, scalable, and future-ready solutions.

2025 FEATURED

NETWORK EDGE SOLUTIONS

intel
Granite Rapids

DDR5
16x RDIMMs

PCIe 5.0
4 x FHFL PCIe 5.0
x16

4
OCP 3.0 Slots

2+2
2x 2.5" U.2 NVMe SSDs / 2x M.2 2280
M-Key

Built for High-Performance
Networking—Ready for AI
and HPC

PUZZLE-9070

Visit P.129

Coming Soon

5U Premium Network Appliance



Visit P.129

Coming Soon



PUZZLE-8010

2U Premium Network Appliance

- Intel® Granite Rapids Xeon-W
- 8x DDR5 5600 MHz RDIMMs
- 2x 2.5" NVMe SSDs (PCIe x2), and 2x M.2 2280 (M-Key)
- 2x 1GbE RJ45, and 2x 10GbE SFP+

Hyperconverged Infrastructure & MEC



PUZZLE-5070

Visit P.132

Coming Soon

1U Premium Network Appliance

- Intel® Arrow Lake S
- 4x DDR5 6400 MHz UDIMMs
- 2x 2.5" U.2 External SSDs
- 1x M.2 2280 (M-Key)

Virtualization Workload Consolidation

INDUSTRIAL SOLUTIONS

Smart factories represent a growing industrial trend, leveraging networking and intelligent technologies to integrate every process—from sourcing and manufacturing to distribution.



Pitaya-E29
Warehouse Label

NEW Visit P.125

The ePaper label consumes no power in standby mode and supports remote real-time updates via ideaRoomX, improving efficiency and reducing manual effort.



UPC-F12M1-RPLP
Vehicle Mounting System

Visit P.115


Connects to external sensors and imaging systems (e.g., 360° surround view, reversing displays, blind spot warnings) to enhance safety and reduce accident risk.



DM2-UW123
12.3" Dashboard

NEW Visit P.120

The ultra-wide 1920x720 display with 850 nits high brightness clearly shows engine speed, oil temperature, water temperature, oil pressure, voltage, GPS location, and more—enabling operators to monitor vehicle status in real time.

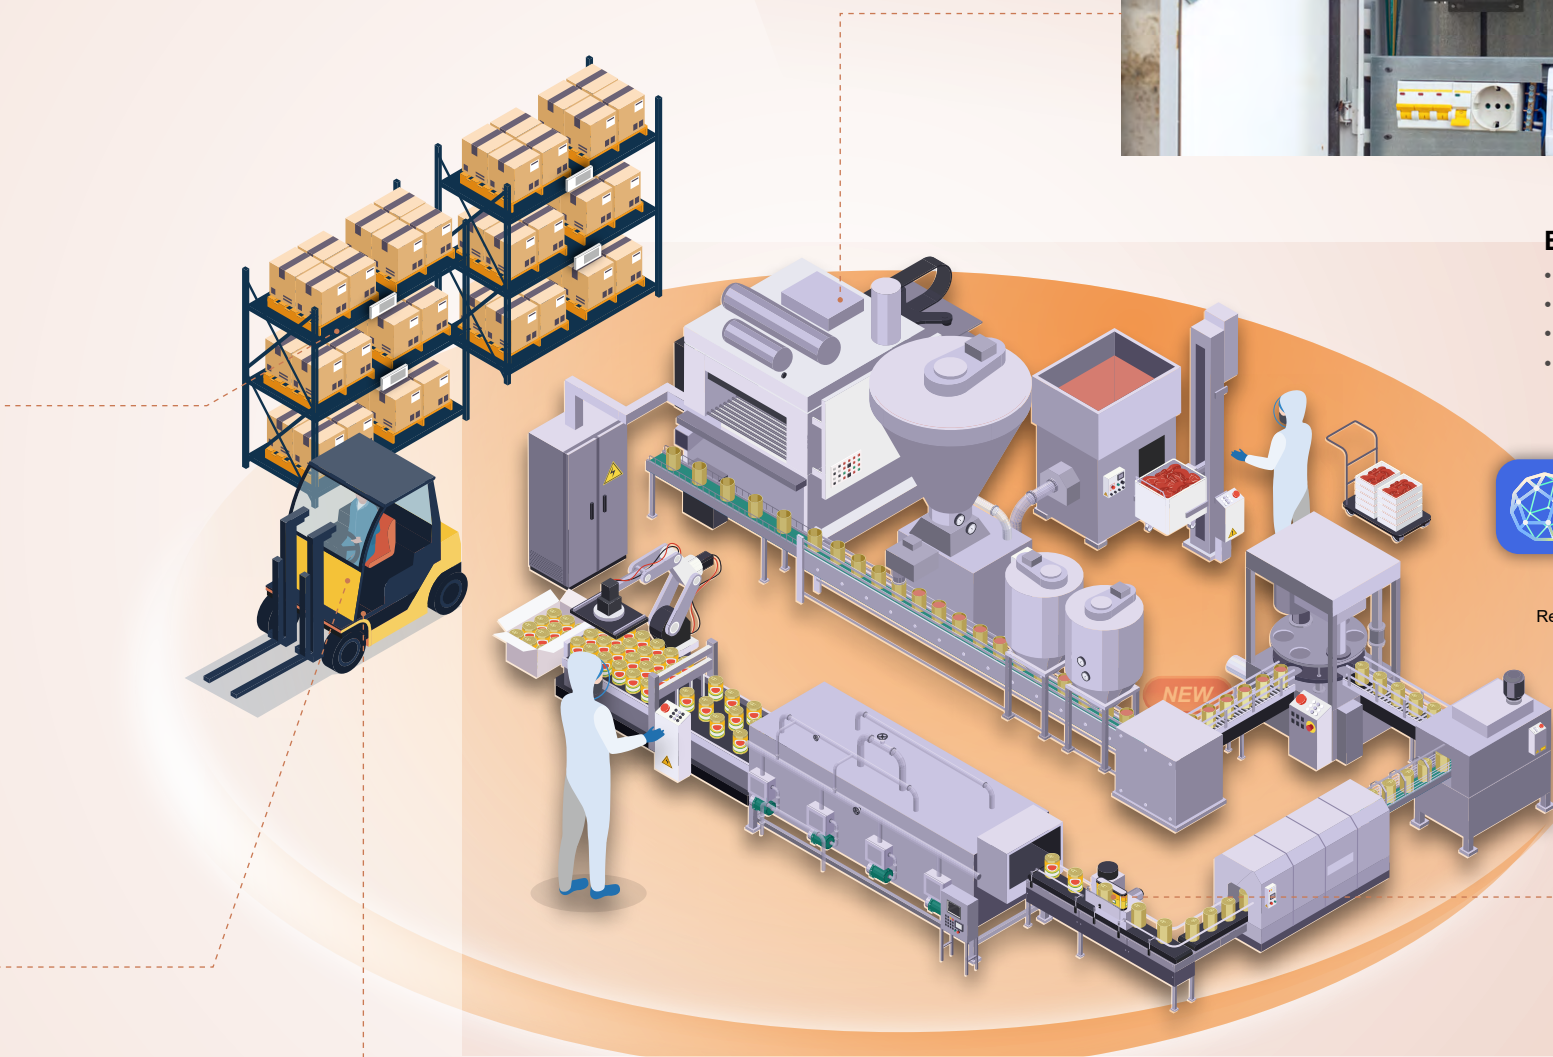



PPC2-CW123-EHL
12.3" Autonomous Driving System

NEW Visit P.112

The IP65-rated ultra-wide 1920x720 industrial panel PC supports 4G and Wi-Fi network modules, allowing managers to remotely access vehicle location and operation records in real time.



SHIELD Series
IP66 HMI Terminal

NEW Visit P.116

Available in 15.6", 18.5", and 21.5" sizes, these panel PCs support wide temperature ranges as low as -30°C. They easily connect to external barcode and RFID modules for efficient production data collection, while real-time displays of capacity, abnormalities, and yield help enhance responsiveness and operational efficiency.



TANK-XM813
Edge AI Computer

NEW Visit P.77

It features powerful Intel® Core™ Ultra processors, rich I/O interfaces, and modular expansion with a fanless rugged design, making it highly suitable for real-time control on production lines.



Business Information Center Edge Computing Platform


- Seamless device networking across the production line
- Real-time remote monitoring and control for enhanced responsiveness
- Comprehensive data collection, analysis, and visualized reporting
- Integrated interfacing for streamlined manufacturing processes

iRM Remote Management Solution

iVEC Virtualization Edge Computer

Visit P.116

Central Control Room

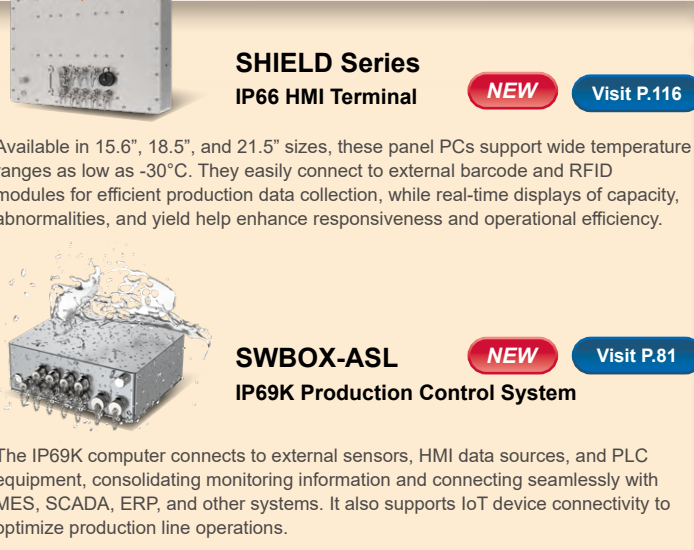

SWBOX-ASL
IP69K Production Control System

NEW Visit P.81

The IP69K computer connects to external sensors, HMI data sources, and PLC equipment, consolidating monitoring information and connecting seamlessly with MES, SCADA, ERP, and other systems. It also supports IoT device connectivity to optimize production line operations.

DIGITAL HEALTHCARE SOLUTIONS

As digital transformation accelerates across the healthcare industry, hospitals are embracing AI-powered edge computing, medical-grade panel PCs, and integrated video solutions to enhance diagnostics, streamline workflows, and support smarter patient care. IEI delivers tailored solutions for radiology, operating rooms, smart wards, and mobile nursing stations, etc.enhancing clinical efficiency, enabling real-time access, and meeting the highest standards for hygiene, mobility, and interoperability.



NEW Visit P.141

HTB-230D-R680E
10.1" Medical AI Computer

Equipped with a powerful 13th Gen Intel® Core™ i9/i7/i5 processor, it supports NVIDIA GPUs and offers flexible PCIe expansion for efficient AI-driven medical imaging and analysis.



NEW Visit P.144

IASO-W08PLED-N6210
8" Medical Data Terminal


It features a compact design and PoE support. Large side LED bars offer clear status signals, helping medical staff respond quickly and accurately.



NEW Visit P.148

MPOCm-W24
24" Mobile Medical Monitor

With three hot-swappable batteries and two configurable DC outputs, it delivers power to peripherals on non-powered medical carts. Combined with AI cameras, it enables advanced telemedicine deployment.

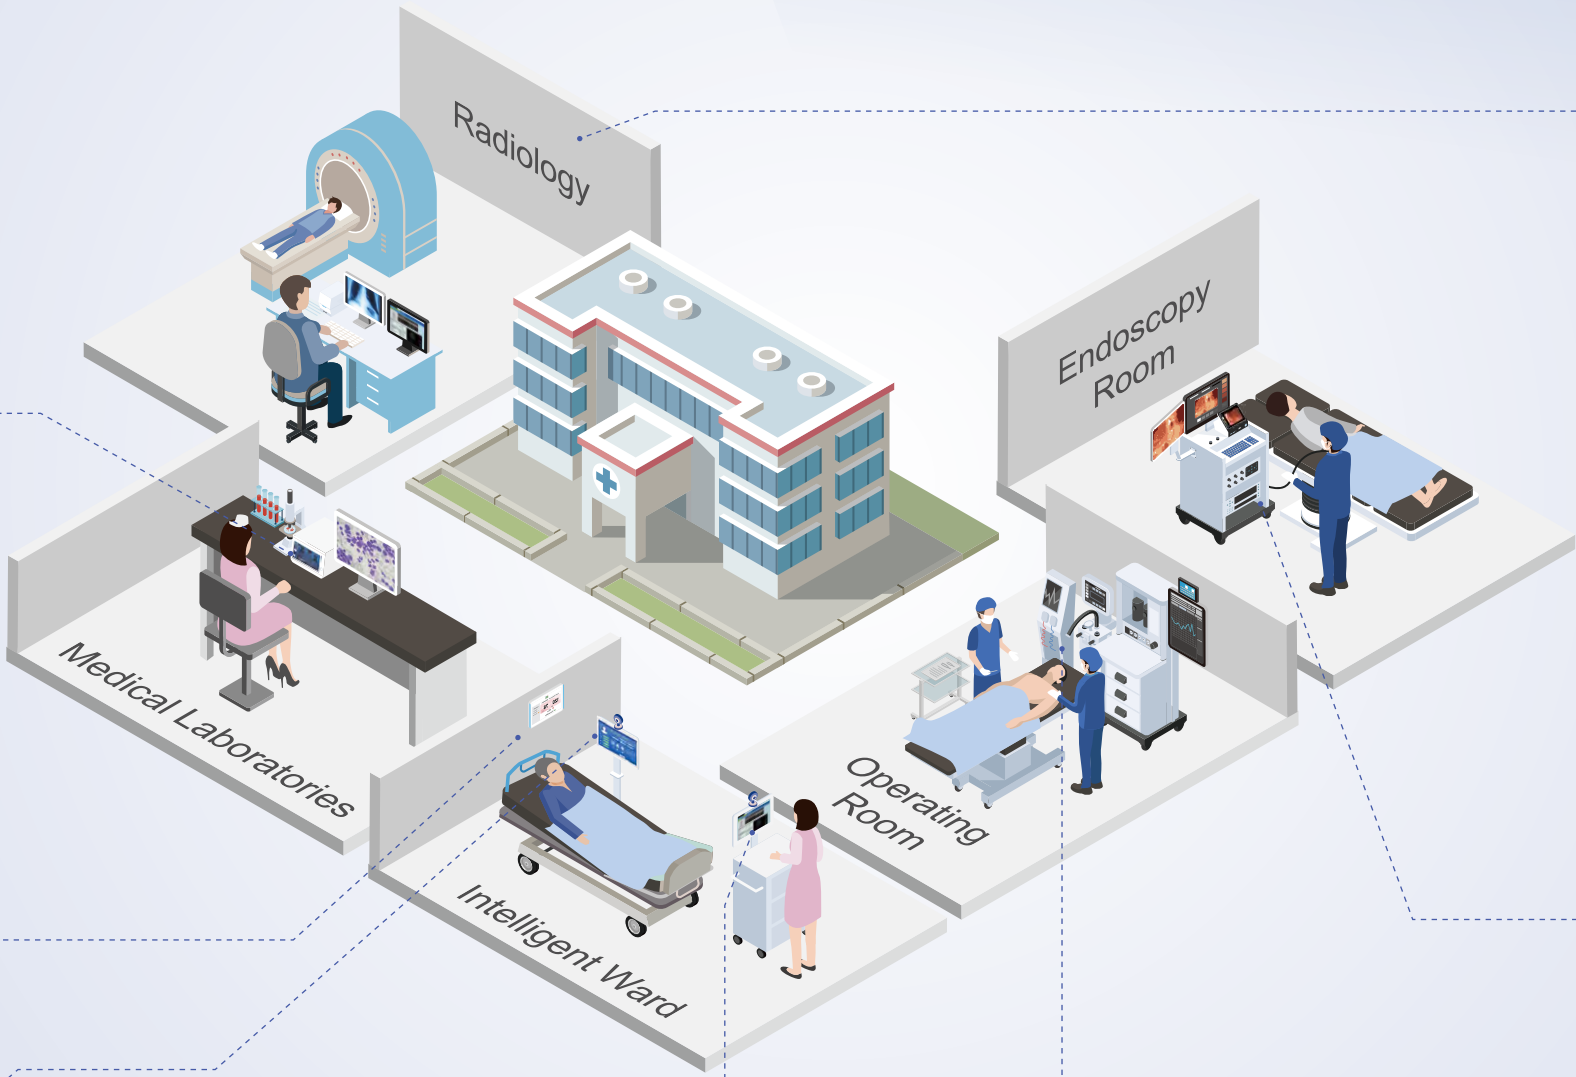

NEW Visit P.141

HTB-300-MTL-H
Medical AI Embedded system

By combining Intel® Core™ Ultra processors with a built-in NPU and MXM GPU expansion, it enables AI inference and supports integration into medical equipment for imaging and real-time edge computing.



NEW Visit P.143

EndoCap-3588
8" 4K Video Recorder


The EndoCap-3588 is ideal for endoscopic video recording due to its FDA-certified software. It supports 4K@60FPS recording, complies with the DICOM 3.0 standard, and offers foot pedal support.



NEW Visit P.144

POCm-RPL Series
Medical Panel PC


Equipped with hot-swappable batteries, antimicrobial housing, and a glove-friendly touchscreen, it ensures mobility, hygiene, and usability in mobile medical care environments.

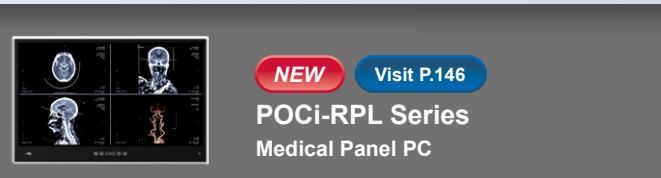

NEW Visit P.146

POCi-RPL Series
Medical Panel PC

PCIe x4 and dual M.2 slots offer flexible expansion. The built-in medical power module, IP66 front panel, and slim bezel meet medical standards and enhance user experience.



NEW Visit P.149

AXON-mPOWER
Medical online DC UPS system

Comes with three hot-swappable 9000mAh batteries to ensure uninterrupted power for mission-critical medical systems, with dual configurable DC outputs supporting mobile carts and clinical devices.

IEI OS Support List (Windows / Linux) offers a quick reference for verifying OS compatibility across Intel® and AMD platforms. It helps developers and system integrators identify supported Windows versions and Linux kernels by chipset—streamlining evaluation, deployment, and maintenance planning.

System Chipset	CE 6.0	Embedded Compact 7 CE 7.0	Embedded Compact 2013	2000	XP Pro	7	8.1	10 32 bit	10 64 bit	11	Server 2003	Server 2008	Server 2012	Server 2016	Server 2019	Linux Kernel
Arrow Lake S	Intel® W880								V	V						Linux Kernel 5.4
	Intel® Q870								V	V						Linux Kernel 5.4
	Intel® H810								V	V						Linux Kernel 5.4
Intel® Meteor Lake U/H									V	V						Linux Kernel 5.4
Alder Lake S	Intel® R680								V	V					V	Linux Kernel 5.4
	Intel® Q670								V	V						Linux Kernel 5.4
	Intel® H610								V	V						Linux Kernel 5.4
Intel® Alder Lake P									V	V						Linux Kernel 5.4
Intel® Alder Lake PS									V	V						Linux Kernel 5.4
Intel® Alder Lake N									V	V						Linux Kernel 5.4
Comet Lake	Intel® Q470								V	V						Linux Kernel 5.4
	Intel® H420E								V	V						Linux Kernel 5.4
	Intel® H410								V	V						Linux Kernel 5.4
Intel® Elkhart Lake									V	V						Linux Kernel 5.4
Intel® Jasper Lake									V	V						Linux Kernel 5.4
Intel® Atom® C3000 R									V			V	V			Linux Kernel 4.4
Intel® Atom® C3000							V		V			V	V			Linux Kernel 4.4
Intel® Tiger Lake UP3									V	V						Linux Kernel 5.4
Coffee Lake R	Intel® C246								V	V		V	V	V		Linux Kernel 4.19
	Intel® Q370								V	V						Linux Kernel 4.19
	Intel® H310								V	V						Linux Kernel 4.19
	Intel® CM246								V	V						Linux Kernel 4.19
	Intel® QM370								V	V						Linux Kernel 4.19
	Intel® HM370								V	V						Linux Kernel 4.19
Intel® Whiskey Lake ULT							V		V	V		V	V	V	V	Linux Kernel 4.19
Coffee Lake	Intel® C246								V	V		V	V	V		Linux Kernel 4.14
	Intel® Q370								V	V						Linux Kernel 4.14
	Intel® H310								V	V						Linux Kernel 4.14
	Intel® CM246								V	V						Linux Kernel 4.14
	Intel® QM370								V	V						Linux Kernel 4.14
	Intel® HM370								V	V						Linux Kernel 4.14
Intel® Broadwell-DE							V	V	V			V	V	V		Linux Kernel 3.19
Kaby Lake	Intel® C236								V			V	V	V		Linux Kernel 4.14
	Intel® Q170								V							Linux Kernel 4.14
	Intel® H110								V							Linux Kernel 4.14
	Intel® CM238								V							Linux Kernel 4.14
	Intel® QM175								V							Linux Kernel 4.14
	Intel® HM175								V							Linux Kernel 4.14
	Intel® Kaby Lake ULT								V							Linux Kernel 4.14
Skylake	Intel® C236						V	V	V			V	V	V		Linux Kernel 4.0 (3.2)
	Intel® Q170						V	V	V							Linux Kernel 4.0 (3.2)
	Intel® H110						V	V	V							Linux Kernel 4.0 (3.2)
	Intel® CM236						V	V	V							Linux Kernel 4.0 (3.2)
	Intel® QM170						V	V	V							Linux Kernel 4.0 (3.2)
	Intel® HM170						V	V	V							Linux Kernel 4.0 (3.2)
	Intel® Skylake ULT						V	V	V							Linux Kernel 4.0 (3.2)
Intel® Broadwell ULT							V	V	V							Linux Kernel 3.19

System Chipset	CE 6.0	Embedded Compact 7 CE 7.0	Embedded Compact 2013	2000	XP Pro	7	8.1	10 32 bit	10 64 bit	11	Server 2003	Server 2008	Server 2012	Server 2016	Server 2019	Linux Kernel
Haswell	Intel® C226				V	V	V		V		V	V	V			Linux Kernel 3.x
	Intel® Q87				V	V	V		V							Linux Kernel 3.x
	Intel® H81				V	V	V		V							Linux Kernel 3.x
	Intel® QM87				V	V	V		V							Linux Kernel 3.x
	Intel® Haswell ULT					V	V		V							Linux Kernel 2.6.3x
Ivy Bridge	Intel® C216				V	V	V		V		V	V	V			Linux Kernel 2.6.3x
	Intel® Q77				V	V	V		V							Linux Kernel 2.6.3x
	Intel® QM77				V	V	V		V							Linux Kernel 2.6.3x
Sandy Bridge	Intel® C206				V	V	V				V	V	V			Linux Kernel 2.6.3x
	Intel® Q67	V			V	V	V									Linux Kernel 2.6.3x
	Intel® B65	V			V	V	V									Linux Kernel 2.6.3x
	Intel® H61	V			V	V	V									Linux Kernel 2.6.3x
	Intel® QM67	V			V	V	V									Linux Kernel 2.6.3x
Intel® Legacy	Intel® HM65	V			V	V	V									Linux Kernel 2.6.3x
	Intel® Q57				V	V										Linux Kernel 2.6.2x
	Intel® QM57				V	V										Linux Kernel 2.6.2x
Intel® Atom®	Intel® HM55				V	V										Linux Kernel 2.6.2x
	Intel® Apollo Lake N4000/E3900								V							Linux Yocto Project 4.1
	Intel® Braswell N3000					V	V	V	V							Linux Kernel 3.14 Android 5.0
Intel® Atom®	Intel® Bay Trail J1900/N2930/ N2807/E3800	V	V			V	V	V	V							Linux Kernel 3.12 Android 4.2 (32 bit) Android 4.4 (64 bit)
	Intel® D2550/ N2600/N2800+ NM10				V	V										Linux Kernel 2.6.35
	Intel® D2550/ N2600/N2800 + ICH10R				V	V										Linux Kernel 2.6.35
	Intel® D525/D425/ N455/N425 + ICH8M	V			V	V										Linux Kernel 2.6.2x
	AMD® V1000-series (Ryzen Embedded) SoC								V							Linux Kernel 4.14
AMD®	AMD® R1000-series (Ryzen Embedded) SoC								V							Linux Kernel 4.14
	AMD® R-series (MERLIN FALCON) SoC					V	V		V							Linux Kernel 3.13
	AMD® G-series (eKABINI) SoC	V	V	V	V	V	V		V							Linux Kernel 3.x
	AMD® Geode LX800 + CS5536				V											Linux Kernel 2.6.18

To help customers accurately match CPU performance with platform requirements, IEI provides a comprehensive compatibility reference covering Intel® Xeon®, Atom®, and server-grade processors.

Intel® Xeon® D-1500 Family Microserver CPU List

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCBGA1667	Xeon® E3	22nm Broadwell	16/32	D-1577	1.30 GHz	24 MB	45 W	None	None	DDR4-2133, DDR3L-1600	-
			16/32	D-1571	1.30 GHz	24 MB	45 W				
			12/24	D-1567	2.10 GHz	18 MB	65 W				
			12/24	D-1559	1.50 GHz	18 MB	45 W				
			12/24	D-1557	1.50 GHz	18 MB	45 W				
			8/16	D-1548	2.00 GHz	12 MB	45 W				
			8/16	D-1541	2.10 GHz	12 MB	45 W				
			8/16	D-1540	2.00 GHz	12 MB	45 W				
			8/16	D-1539	1.60 GHz	12 MB	35 W				
			8/16	D-1537	1.70 GHz	12 MB	35 W				
			6/12	D-1531	2.20 GHz	9 MB	45 W				
			4/8	D-1529	1.30 GHz	6 MB	20 W				
			6/12	D-1528	1.90 GHz	9 MB	35 W				
			4/8	D-1527	2.20 GHz	6 MB	35 W				
			4/8	D-1521	2.40 GHz	6 MB	45 W				
			4/8	D-1520	2.20 GHz	6 MB	45 W				
			4/8	D-1518	2.20 GHz	6 MB	35 W				
			Pentium®	4/8	D1519	1.50 GHz	6 MB			25 W	
	4/8			D1517	1.60 GHz	6 MB	25 W				
	2/2			D1509	1.50 GHz	3 MB	19 W				
	2/4			D1508	2.20 GHz	3 MB	25 W				
	2/2			D1507	1.20 GHz	3 MB	20 W				

Intel® Atom® C3000 Series (Denverton) CPU List

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCBGA1310	Atom®	14nm Denverton	16/16	C3958	2.0GHz	16MB	31W	None	None	DDR4 2400	None
			12/12	C3858	2.0GHz	12MB	25W	None	None		
			8/8	C3758	2.2GHz	16MB	25W	None	None		
			4/4	C3558	2.2GHz	8MB	16W	None	None	DDR4 2133	
			4/4	C3538	2.1GHz	8MB	15W	None	None		
			2/2	C3338	1.5GHz	4MB	8.5W	None	None	DDR4 1866	
			2/2	C3336	1.5GHz	4MB	11W	None	None		
			8/8	C3758R	2.4GHz	16MB	26W	None	None	DDR4 2400	
			4/4	C3558R	2.4GHz	8MB	17W	None	None		
			4/4	C3436L	1.3GHz	8MB	10.75W	None	None	DDR4 1866	
			2/2	C3338R	1.8GHz	4MB	10.5W	None	None		

Intel® Xeon® E3, E, and W Series CPU List for Workstations

Supported Sockets	Brand	Process	Cores/ Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCLGA2066	Xeon® W	14nm Cascade Lake	18/36	W-2295	3.00 GHz	24.75 MB	165 W	None	None	DDR4 2933	C422
			14/28	W-2275	3.30GHz	19.25 MB	165 W	None	None		
			12/24	W-2265	3.50 GHz	19.25 MB	165 W	None	None		
			10/20	W-2255	3.70 GHz	19.25 MB	165 W	None	None		
			8/16	W-2245	3.90 GHz	16.5 MB	155 W	None	None		
			6/12	W-2235	3.80 GHz	8.25 MB	130W	None	None		
			4/8	W-2225	4.10 GHz	8.25 MB	105W	None	None		
			4/8	W-2223	3.60 GHz	8.25 MB	120W	None	None	DDR4 2666	

Yellow means long-term support

Intel® Xeon® E3, E, and W Series CPU List for Workstations

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCLGA3647	Xeon® W	14nm Cascade Lake	28/56	W-3275	2.50 GHz	38.5 MB	205W	None	None	DDR4 2933	C621
			24/48	W-3265M	2.70 GHz	33 MB	205W	None	None		
			24/48	W-3265	2.70GHz	33MB	205W	None	None		
			16/32	W-3245M	3.20 GHz	22MB	205W	None	None		
			16/32	W-3245	3.20 GHz	22 MB	205W	None	None		
			12/24	W-3235	3.30 GHz	19.25 MB	180W	None	None		
			8/16	W-3225	3.70 GHz	16.5 MB	160W	None	None	DDR4-2666	C621
			8/16	W-3223	3.50 GHz	16.5 MB	160W	None	None		
FCLGA1151	Xeon® E	14nm Coffee lake	6/12	E-2186G	3.80 GHz	12MB	95W	Intel® UHD Graphics P630	350 MHz	DDR4-2666	C246/ C242
			6/12	E-2176G	3.70 GHz	12MB	80W				
			4/8	E-2174G	3.80 GHz	8MB	71W				
			6/12	E-2146G	3.50 GHz	12MB	80W				
			4/8	E-2144G	3.60 GHz	8MB	71W				
			6/12	E-2136	3.30 GHz	12MB	80W	NA	NA		
			4/8	E-2134	3.50 GHz	8MB	71W	NA	NA		
			6/6	E-2126G	3.30 GHz	12MB	80W	Intel® UHD Graphics P630	350 MHz		
			4/4	E-2124	3.30 GHz	8MB	71W	NA	NA		
			4/4	E-2124G	3.40 GHz	8MB	71W	Intel® UHD Graphics P630	350 MHz		
FCLGA1151	Xeon® E3	14nm Kaby Lake	4/8	E3-1285 V6	4.1GHz	8 MB	79W	Intel® HD Graphics P630	350 MHz	DDR4-2400, DDR3L-1866	C236
			4/8	E3-1280 V6	3.9GHz	8 MB	72W	None	None		
			4/8	E3-1275 V6	3.8GHz	8 MB	73W	Intel® HD Graphics P630	350 MHz		
			4/8	E3-1270 V6	3.8GHz	8 MB	72W	None	None		
			4/8	E3-1245 V6	3.7GHz	8 MB	73W	Intel® HD Graphics P630	350 MHz		
			4/8	E3-1240 V6	3.7GHz	8 MB	72W	None	None		
			4/8	E3-1230 V6	3.5GHz	8 MB	72W	None	None		
			4/4	E3-1225 V6	3.3GHZ	8 MB	73W	Intel® HD Graphics P630	350 MHz		
			4/4	E3-1220 V6	3.0GHz	8 MB	72W	None	None		
FCLGA2066	Xeon® W	14nm Skylake	4/4	W-2123	3.60 GHz	8.25MB	120W	None	None	DDR4-2666 ECC R-DIMM / LR-DIMM	C422
			4/4	W-2125	4.00 GHz	8.25MB	120W	None	None		
			6/12	W-2133	3.60 GHz	8.25MB	140W	None	None		
			6/12	W-2135	3.70 GHz	8.25MB	140W	None	None		
			8/16	W-2145	3.70 GHz	11MB	140W	None	None		
			10/20	W-2155	3.30 GHz	13.75MB	140W	None	None		
			14/28	W-2175	2.50 GHz	19MB	140W	None	None		
			18/36	W-2195	2.30 GHz	24.75MB	140W	None	None		
FCLGA1151	Xeon® E3	14nm Skylake	4/8	E3-1515MV5	2.80 GHz	8 MB	45 W	Intel® Iris™ Pro Graphics P580	350 MHz	DDR4-2133, LPDDR3-1866, DDR3L-1600	C236
			4/8	E3-1505MV5	2.80 GHz	8 MB	45 W	Intel® HD Graphics P530			
			4/8	E3-1578LV5	2.00 GHz	8 MB	45 W	Intel® Iris™ Pro Graphics P580	700 MHz	DDR3L, DDR4 2133MHz at 1.2V	
			4/8	E3-1558LV5	1.90 GHz	8 MB	45 W	Intel® Iris™ Pro Graphics P555	650 MHz		
			4/8	E3-1505LV5	2.00 GHz	8 MB	25 W	Intel® HD Graphics P530	350 MHz	DDR4-2133, LPDDR3-1866, DDR3L-1600	
			4/8	E3-1268LV5	2.40 GHz	8 MB	35 W			DDR4-1866/2133, DDR3L-1333/1600@1.35V	
			4/8	E3-1585V5	3.50 GHz	8 MB	65 W	Intel® Iris™ Pro Graphics P580			
			4/8	E3-1585LV5	3.00 GHz	8 MB	45 W			DDR3L, LPDDR3 1600MHz, DDR4 2133MHz at 1.2V	
			4/8	E3-1565LV5	2.50 GHz	8 MB	35 W				

Intel® Xeon® E3, E, and W Series CPU List for Workstations

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCLGA1151	Xeon® E3	14nm Skylake	4/8	E3-1280V5	3.70 GHz	8 MB	80 W	None	None	DDR4-1866/2133, DDR3L-1333/1600@1.35V	C236
			4/8	E3-1275V5	3.60 GHz	8 MB	80 W	Intel® HD Graphics P530	400 MHz		
			4/8	E3-1270V5	3.60 GHz	8 MB	80 W	None	None		
			4/8	E3-1260LV5	2.90 GHz	8 MB	45 W				
			4/8	E3-1245V5	3.50 GHz	8 MB	80 W	Intel® HD Graphics P530	400 MHz		
			4/8	E3-1240LV5	2.10 GHz	8 MB	25 W	None	None		
			4/8	E3-1240V5	3.50 GHz	8 MB	80 W				
			4/4	E3-1235LV5	2.00 GHz	8 MB	25 W	Intel® HD Graphics P530	400 MHz		
			4/8	E3-1230V5	3.40 GHz	8 MB	80 W	None	None		
			4/4	E3-1225V5	3.30 GHz	8 MB	80 W	Intel® HD Graphics P530	400 MHz		
			4/4	E3-1220V5	3.00 GHz	8 MB	80 W	None	None		
FCLGA1150	Xeon® E3	22nm Haswell	4/4	E3-1220 v3	3.1 GHz	8 MB	80 W	None	-	DDR3 and DDR3L 1333/1600 at 1.5V	C226
			2/4	E3-1220LV3	1.1 GHz	4 MB	13 W		-	DDR3 1333/1600	
			4/4	E3-1225V3	3.2 GHz	8 MB	84 W	Intel® HD Graphics P4600	350 MHz	DDR3 and DDR3L 1333/1600 at 1.5V	
			4/4	E3-1226V3	3.3 GHz	8 MB	84 W				
			4/8	E3-1230 v3	3.3 GHz	8 MB	80 W	None	-		
			4/8	E3-1230Lv3	1.8 GHz	8 MB	25 W		-		
			4/8	E3-1231V3	3.4 GHz	8 MB	80 W		-		
			4/8	E3-1240 v3	3.4 GHz	8 MB	80 W		-		
			4/8	E3-1240LV3	2 GHz	8 MB	25 W		-		
			4/8	E3-1241V3	3.5 GHz	8 MB	80 W		-		
			4/8	E3-1245 v3	3.4 GHz	8 MB	84 W		Intel® HD Graphics P4600		
			4/8	E3-1246V3	3.5 GHz	8 MB	84 W				
			4/8	E3-1265Lv3	2.5 GHz	8 MB	45 W	Intel® HD Graphics	350 MHz	DDR3 1333/1600	
			4/8	E3-1268LV3	2.3 GHz	8 MB	45 W	Intel® HD Graphics 4600			
			4/8	E3-1270 v3	3.5 GHz	8 MB	80 W	None	-		
			4/8	E3-1271V3	3.6 GHz	8 MB	80 W		-		
			4/8	E3-1275 v3	3.5 GHz	8 MB	84 W	Intel® HD Graphics P4600	350 MHz	DDR3 and DDR3L 1333/1600 at 1.5V	
			4/8	E3-1275LV3	2.7 GHz	8 MB	45 W	Intel® HD Graphics			
			4/8	E3-1276V3	3.6 GHz	8 MB	84 W	Intel® HD Graphics P4600			
			4/8	E3-1280 v3	3.6 GHz	8 MB	82 W	None			
			4/8	E3-1281V3	3.7 GHz	8 MB	82 W	None	-		
			4/8	E3-1285 v3	3.6 GHz	8 MB	84 W	Intel® HD Graphics P4700	350 MHz		
			4/8	E3-1285LV3	3.1 GHz	8 MB	65 W				
			4/8	E3-1286V3	3.7 GHz	8 MB	84 W				
			4/8	E3-1286LV3	3.2 GHz	8 MB	65 W				
LGA1155	Xeon® E3	22nm Ivy Bridge	4/8	E3-1290V2	3.7 GHz	8 MB	87 W	-	-		DDR3-1333/1600
			4/8	E3-1280V2	3.6 GHz	8 MB	69 W	-	-		
			4/8	E3-1275V2	3.5 GHz	8 MB	77 W	-	1.25 GHz		
			4/8	E3-1270V2	3.5 GHz	8 MB	69 W	-	-		
			4/8	E3-1265LV2	2.5 GHz	8 MB	45 W	-	1.15 GHz		
			4/8	E3-1245V2	3.4 GHz	8 MB	77 W	-	1.25 GHz		
			4/8	E3-1240V2	3.4 GHz	8 MB	69 W	-	-		
			4/8	E3-1230V2	3.3 GHz	8 MB	69 W	-	-		
			4/4	E3-1225V2	3.2 GHz	8 MB	77 W	-	1.25 GHz		
			4/4	E3-1220V2	3.1 GHz	8 MB	69 W	-	-		
4/2	E3-1220LV2	2.3 GHz	3 MB	17 W	-	-					

Yellow means long-term support

Intel® Xeon® E3, E, and W Series CPU List for Workstations

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
LGA1155	Xeon® E3	32nm Sandy Bridge	4/8	E3-1290	3.6 GHz	8 MB	95 W	-	-	DDR3-1066/1333	C206/ C216
			4/8	E3-1280	3.5 GHz	8 MB	95 W	-	-		
			4/8	E3-1275	3.4 GHz	8 MB	95 W	-	1.35 GHz		
			4/8	E3-1270	3.4 GHz	8 MB	80 W	-	-		
			4/8	E3-1260L	2.4 GHz	8 MB	45 W	-	1.25 GHz		
			4/8	E3-1245	3.3 GHz	8 MB	95 W	-	1.35 GHz		
			4/8	E3-1240	3.3 GHz	8 MB	80 W	-	-		
			4/8	E3-1235	3.2 GHz	8 MB	95 W	-	1.35 GHz		
			4/8	E3-1230	3.2 GHz	8 MB	80 W	-	-		
			4/4	E3-1225	3.1 GHz	6 MB	95 W	-	1.35 GHz		
			4/2	E3-1220L	2.2 GHz	3 MB	20 W	-	-		
			4/4	E3-1220	3.1 GHz	8 MB	80 W	-	-		

Intel® Alder Lake-P / Raptor Lake-P

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCBGA1744	13th Gen Intel® Core™ Processor	Raptor Lake-P P-Series	14/20	i7-1370PE	1.90 GHz (Performance-core) 1.20 GHz (Efficient-core)	24 MB	28W	Intel® Iris® Xe Graphics	1.4 GHz	DDR5-5200 LPDDR5x-6400	-
			12/16	i5-1350PE	1.80 GHz (Performance-core) 1.30 GHz (Efficient-core)	12 MB	28W		-		-
			12/16	i3-1340PE	1.80 GHz (Performance-core) 1.30 GHz (Efficient-core)	12 MB	28W	Intel® UHD Graphics	1.35 GHz		-
			8/12	i3-1320PE	1.70 GHz (Performance-core) 1.20 GHz (Efficient-core)	12 MB	28W		-		-
		Raptor Lake-P U-Series	10/12	i7-1365UE	1.70 GHz (Performance-core) 1.20 GHz (Efficient-core)	12 MB	15W	Intel® Iris® Xe Graphics	1.3 GHz		-
			10/12	i5-1345UE	1.40 GHz (Performance-core) 1.10 GHz (Efficient-core)	12 MB	15W		1.25 GHz		-
			6/8	i3-1315UE	1.20 GHz (Performance-core) 0.90 GHz (Efficient-core)	10 MB	15W	Intel® UHD Graphics	1.2 GHz		-
			5/6	U300E	1.10 GHz (Performance-core) 0.90 GHz (Efficient-core)	8 MB	15W		1.1 GHz		-
		Alder Lake-P P-Series	12/16	i7-1270PE	1.80 GHz (Performance-core) 1.20 GHz (Efficient-core)	18 MB	28W	Intel® Iris® Xe Graphics	1.35 GHz	DDR5-4800 LPDDR5x-5200	-
			12/16	i5-1250PE	1.70 GHz (Performance-core) 1.20 GHz (Efficient-core)	12 MB	28W		1.3 GHz		-
			8/12	i3-1220PE	1.50 GHz (Performance-core) 1.10 GHz (Efficient-core)	12 MB	28W	Intel® UHD Graphics	1.25 GHz		-
	12th Gen Intel® Core™ Processor	Alder Lake-P U-Series	10/12	i7-1265UE	1.70 GHz (Performance-core) 1.20 GHz (Efficient-core)	12 MB	15W	Intel® Iris® Xe Graphics	1.25 GHz		-
			10/12	i5-1245UE	1.50 GHz (Performance-core) 1.10 GHz (Efficient-core)	12 MB	15W		1.2 GHz		-
			6/8	i3-1215UE	1.20 GHz (Performance-core) 0.90 GHz (Efficient-core)	10 MB	15W	Intel® UHD Graphics	1.1 GHz		-
		Alder Lake-P U-Series	5/5	7305E	1.00 GHz (Performance-core) 0.90 GHz (Efficient-core)	8 MB	15W		1.1 GHz		-

Yellow means long-term support

Desktop CPU List: Intel® Core™ i9, i7, i5, i3, Pentium®, and Celeron®

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCLGA1851	Intel® Core™ Ultra 9	Arrow Lake-S	24/24	285K	3.70 GHz (Performance-core) 3.20 GHz (Efficient-core)	40 MB	125 W	Intel® Xe LPG Graphics	300 MHz	DDR5 6400	W880/ Q870/ H810
				285	2.50 GHz (Performance-core) 1.90 GHz (Efficient-core)	40 MB	65W				
				285T	1.40 GHz (Performance-core) 1.20 GHz (Efficient-core)	40 MB	35W				
	Intel® Core™ Ultra 7		20/20	265K	3.90 GHz (Performance-core) 3.30 GHz (Efficient-core)	36 MB	125 W	Intel® Xe LPG Graphics			
				265	2.10 GHz (Performance-core) 1.60 GHz (Efficient-core)	36 MB	65W				
				265T	1.30 GHz (Performance-core) 1.00 GHz (Efficient-core)	36 MB	35W				
	Intel® Core™ Ultra 5		14/14	245K	4.20 GHz (Performance-core) 3.60 GHz (Efficient-core)	26 MB	125 W	Intel® Xe LPG Graphics			
				245	2.70 GHz (Performance-core) 1.00 GHz (Efficient-core)	26 MB	65W				
				245T	2.20 GHz(Performance-core) 1.70 GHz(Efficient-core)	26 MB	35W				
			235	3.40 GHz(Performance-core) 2.90 GHz(Efficient-core)	26 MB	65W					
			235T	2.20 GHz (Performance-core) 1.60 GHz (Efficient-core)	26 MB	35W					
			10/10	225	3.30 GHz (Performance-core) 2.70 GHz (Efficient-core)	22 MB	65W				
225T	2.50 GHz (Performance-core) 1.90 GHz (Efficient-core)	22 MB		35W							
FCLGA1700	Core™ i9	14nm Alder Lake-S	24/32	i9-14900K	3.20 GHz(Performance-core) 2.40 GHz (Efficient-core)	36 MB	125 W	Intel® UHD Graphics 770	300 MHz	DDR5 4800 DDR4 3200	R680/ Q670/H610
				i9-14900	2.00 GHz (Performance-core) 1.80 GHz (Efficient-core)	36 MB	65W				
				i9-14900T	1.10 GHz (Performance-core) 1.00 GHz (Efficient-core)	36 MB	35W				
	Core™ i7		20/28	i7-14700K	3.40 GHz (Performance-core) 2.70 GHz (Efficient-core)	33 MB	125 W	Intel® UHD Graphics 770			
				i7-14700	2.10 GHz (Performance-core) 1.60 GHz (Efficient-core)	33 MB	65W				
				i7-14700T	1.30 GHz (Performance-core) 1.00 GHz (Efficient-core)	33 MB	35W				
	Core™ i5		14/20	i5-14600K	3.50 GHz (Performance-core) 1.00 GHz (Efficient-core)	24 MB	125 W	Intel® UHD Graphics 770			
				i5-14600	2.70 GHz (Performance-core) 1.00 GHz (Efficient-core)	24 MB	65W				
				i5-14600T	1.30 GHz (Performance-core) 1.00 GHz (Efficient-core)	24 MB	35W				
	Core™ i3		4/8	i3-14100	3.50 GHz (Performance-core) 1.00 GHz (Efficient-core)	12 MB	60W	Intel® UHD Graphics 770			
				i3-14100T	2.70 GHz (Performance-core) 1.00 GHz (Efficient-core)	12 MB	35W				

Yellow means long-term support

Desktop CPU List: Intel® Core™ i9, i7, i5, i3, Pentium®, and Celeron®

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCLGA1700	Core™ i9	14nm Alder Lake-S	24/32	i9-13900K	3.00 GHz(Performance-core) 2.40 GHz(Efficient-core)	36 MB	125 W	Intel® UHD Graphics 770	300 MHz	DDR5 4800 DDR4 3200	R680/ Q670/H610
				i9-13900	2.00 GHz(Performance-core) 1.80 GHz(Efficient-core)	36 MB	65W				
				i9-13900E	1.80 GHz(Performance-core) 1.70 GHz(Efficient-core)	36 MB	65W				
				i9-13900TE	1.00 GHz(Performance-core) 1.00 GHz(Efficient-core)	36 MB	35W				
	Core™ i7		16/24	i7-13700K	3.60 GHz(Performance-core) 2.70 GHz(Efficient-core)	30 MB	125 W	Intel® UHD Graphics 770			
				i7-13700	2.10 GHz(Performance-core) 1.60 GHz(Efficient-core)	30 MB	65W				
				i7-13700E	2.10 GHz(Performance-core) 1.60 GHz(Efficient-core)	30 MB	65W				
				i7-13700TE	1.40 GHz(Performance-core) 1.00 GHz(Efficient-core)	30 MB	35W				
	Core™ i5		14/20	i5-13600K	3.50 GHz(Performance-core) 1.00 GHz(Efficient-core)	24 MB	125 W	Intel® UHD Graphics 770			
				i5-13500	2.50 GHz(Performance-core) 1.00 GHz(Efficient-core)	24 MB	65W				
				i5-13500E	2.40 GHz(Performance-core) 1.00 GHz(Efficient-core)	24 MB	65W				
				i5-13500TE	1.30 GHz(Performance-core) 1.00 GHz(Efficient-core)	24 MB	35W				
	Core™ i3		4/8	i3-13100	3.40 GHz(Performance-core) 1.00 GHz(Efficient-core)	12 MB	60W	Intel® UHD Graphics 770			
				i3-13100E	3.30 GHz(Performance-core) 1.00 GHz(Efficient-core)	12 MB	60W				
				i3-13100TE	2.40 GHz(Performance-core) 1.00 GHz(Efficient-core)	12 MB	35W				
FCLGA1700	Core™ i9	16/24	i9-12900K	3.20 GHz(Performance-core) 2.40 GHz(Efficient-core)	14 MB	125 W	Intel® UHD Graphics 770	300 MHz	DDR5 4800 DDR4 3200	R680/ H610	
			i9-12900	2.40 GHz(Performance-core) 1.80 GHz(Efficient-core)	14 MB	65W					
			i9-12900E	2.30 GHz(Performance-core) 1.70 GHz(Efficient-core)	30 MB	65W					
			i9-12900TE	1.10 GHz(Performance-core) 1.00 GHz(Efficient-core)	30 MB	35W					
	Core™ i7	12/20	i7-12700K	3.60 GHz(Performance-core) 2.70 GHz(Efficient-core)	12 MB	125 W	Intel® UHD Graphics 770				
			i7-12700	2.10 GHz(Performance-core) 1.60 GHz(Efficient-core)	12 MB	65W					
			i7-12700E	2.10 GHz(Performance-core) 1.60 GHz(Efficient-core)	25 MB	65W					
			i7-12700TE	1.40 GHz(Performance-core) 1.00 GHz(Efficient-core)	25 MB	35W					
	Core™ i5	6/12	i5-12600K	2.80 GHz	9.5 MB	125 W	Intel® UHD Graphics 770				
			i5-12500	3.00 GHz	18 MB	65W					
			i5-12500E	2.90 GHz	18 MB	65W					
			i5-12500TE	1.90 GHz	18 MB	35W					
	Core™ i3	4/8	i3-12300	3.50 GHz	5 MB	60W	Intel® UHD Graphics 770				
			i3-12100E	3.20 GHz	12 MB	60W					
			i3-12100TE	2.10 GHz	12 MB	35W					
	Pentium®	2/4	G7400E	3.60 GHz	6 MB	46W	Intel® UHD Graphics 770				
			G7400TE	3.00 GHz	6 MB	35W					
Celeron®	2/2	G6900E	3.00 GHz	4 MB	46W	Intel® UHD Graphics 770					
		G6900TE	2.40 GHz	4 MB	35W						

Yellow means long-term support

Desktop CPU List: Intel® Core™ i9, i7, i5, i3, Pentium®, and Celeron®

Supported Sockets	Brand	Process	Cores/ Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCLGA1200	Core™ i9	14nm Comet Lake-S	8/16	i9-11900K	3.50 GHz	16 MB	125 W	Intel® UHD Graphics 750	350 MHz	DDR4-3200	W480E/ W480/ Q470E/ Q470/ H420E/ H410
				i9-11900	2.50 GHz	16 MB	65 W				
				i9-11900T	1.50 GHz	16 MB	35 W				
	Core™ i7		8/16	i7-11700K	3.60 GHz	16 MB	125 W	Intel® UHD Graphics 750			
				i7-11700	2.50 GHz	16 MB	65 W				
				i7-11700T	1.40 GHz	16 MB	35 W				
	Core™ i5		6/12	i5-11600K	3.90 GHz	12 MB	125 W	Intel® UHD Graphics 750			
				i5-11500	2.50 GHz	12 MB	65 W				
				i5-11500T	1.50 GHz	12 MB	35 W				
	Core™ i3		8/16	i3-11300K	3.50 GHz	16 MB	125 W	Intel® UHD Graphics 750			
				i3-11300	2.50 GHz	16 MB	65 W				
				i3-11300T	1.50 GHz	16 MB	35 W				
	Core™ i9		10/20	i9-10900K	3.70 GHz	20 MB	125 W	Intel® UHD Graphics 630			
				i9-10900	2.80 GHz	20 MB	65 W				
				i9-10900E	2.80 GHz	20 MB	65 W				
				i9-10900TE	1.80 GHz	20 MB	35W				
	Core™ i7		8/16	i7-10700K	3.80 GHz	16 MB	125 W	Intel® UHD Graphics 630			
				i7-10700	2.90 GHz	16 MB	65 W				
				i7-10700E	2.90 GHz	16 MB	65 W				
				i7-10700TE	2.00 GHz	16 MB	35 W				
	Core™ i5		6/12	i5-10600K	4.10 GHz	12 MB	125 W	Intel® UHD Graphics 630			
				i5-10500	3.10 GHz	12 MB	65 W				
				i5-10500E	3.10 GHz	12 MB	65 W				
				i5-10500TE	2.30 GHz	12 MB	35W				
	Core™ i3		4/8	i3-10300	3.70 GHz	8 MB	65 W	Intel® UHD Graphics 630			
				i3-10100E	3.20 GHz	8 MB	65 W				
				i3-10100TE	2.30 GHz	8 MB	35W				
	Pentium®		2/4	G6400E	3.80 GHz	4 MB	58 W	Intel® UHD Graphics 630			
				G6400TE	3.20 GHz	4 MB	35 W				
	Celeron®		2/2	G5900E	3.20 GHz	2 MB	58 W	Intel® UHD Graphics 630			
G5900TE		3.00 GHz		2 MB	35 W						
FCLGA1151	Core™ i9	14nm Coffee Lake refresh	8/16	i9-9900KF	3.60 GHz	16MB	95W	N/A	350 MHz	DDR4-2666	H310/Q370/ C246
			8/16	i9-9900T	2.10 GHz	16MB	35W	Intel® UHD Graphics 630			
			8/16	i9-9900	3.10 GHz	16MB	65W				
	Core™ i7	14nm Coffee Lake refresh	8/8	i7-9700E	2.60 GHz	12MB	65W	Intel® UHD Graphics 630			
			8/8	9700TE	1.80 GHz	12MB	35W				
			8/8	i7-9700K	3.60 GHz	12MB	95W				
			8/8	i7-9700	3.00 GHz	12MB	65W				
			8/8	i7-9700T	2.00 GHz	12MB	35W				
	Core™ i5	14nm Coffee Lake refresh	6/6	i5-9500E	3.00 GHz	9MB	65W	Intel® UHD Graphics 630			
			6/6	i5-9500TE	2.20 GHz	9MB	35W				
			6/6	i5-9600K	3.70 GHz	9MB	95W				
			6/6	i5-9500	3.00 GHz	9MB	65W				
			6/6	i5-9400	2.90 GHz	9MB	65W				
			6/6	i5-9500T	2.20 GHz	9MB	35W				
	Core™ i3	14nm Coffee Lake refresh	4/4	i3-9100E	3.10 GHz	6MB	65W	Intel® UHD Graphics 630			
			4/4	i3-9100TE	2.20GHz	6MB	35W				
		14nm Coffee Lake	4/4	i3-9100	3.60 GHz	6MB	65W				
			4/4	i3-9300	3.70 GHz	8MB	62W				
			4/4	i3-9300T	3.20 GHz	8MB	35W				
			4/4	i3-9100T	3.10 GHz	6MB	35W				
			4/4	i3-9350K	4.00 GHz	8MB	91W				

Yellow means long-term support

Desktop CPU List: Intel® Core™ i9, i7, i5, i3, Pentium®, and Celeron®

Supported Sockets	Brand	Process	Cores/ Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset	
FCLGA1151	Core™ i9	14nm Coffee Lake	8/16	i9-9900K	3.60 GHz	16MB	95W	Intel® UHD Graphics 630	350 MHz	DDR4-2666	H310/Q370	
	Core™ i7	14nm Coffee Lake	8/8	i7-9700K	3.60 GHz	12MB	95W					
			6/12	i7-8700T	2.40 GHz	12MB	35W					
			6/12	i7-8700K	3.70 GHz	12MB	95W					
			6/12	i7-8700	3.20 GHz	12MB	65W					
			6/12	i7-8086K	4.00 GHz	12MB	95W					
	Core™ i3	14nm Coffee Lake	4/4	i3-8350K	4.00 GHz	8MB	91W	Intel® UHD Graphics 630		DDR4-2400	H310/Q370	
			4/4	i3-8300	3.70 GHz	8MB	62W					
		14nm Coffee Lake	4/4	i3-8300T	3.20 GHz	8MB	35W					
			4/4	i3-8100	3.60 GHz	6MB	65W					
	Core™ i5	14nm Coffee Lake	4/4	i3-8100T	3.10 GHz	6MB	35W					
			6/6	i5-9600K	3.70 GHz	9MB	95W	Intel® UHD Graphics 630				
			6/6	i5-8600T	2.30 GHz	9MB	35W					
			6/6	i5-8600K	3.60 GHz	9MB	95W					
			6/6	i5-8600	3.10 GHz	9MB	65W					
			6/6	i5-8500T	2.10 GHz	9MB	35W					
			6/6	i5-8500	3.00 GHz	9MB	65W					
			6/6	i5-8400T	1.70 GHz	9MB	35W					
	Pentium®	14nm Coffee Lake	2/4	G5600	3.90 GHz	4MB	54W		Intel® UHD Graphics 630	DDR4-2400	H310/Q370	
			2/4	G5500T	3.20 GHz	4MB	35W					
			2/4	G5500	3.80 GHz	4MB	54W	Intel® UHD Graphics 610				
			2/4	G5400T	3.10 GHz	4MB	35W					
			Celeron®	14nm Coffee Lake	2/2	G4920	3.20 GHz	2MB	54W			Intel® UHD Graphics 610
	2/2	G4900T			2.90 GHz	2MB	35W					
	2/2	G4900			3.10 GHz	2 MB	54W					
	FCLGA1151	Core™ i7			14nm Kaby Lake	4/8	i7-7700	3.6GHz	8 MB	65W	Intel® HD Graphics 630	350 MHz
			4/8	i7-7700K		4.2GHz	8 MB	91W				
4/8			i7-7700T	2.9GHz		8 MB	35W					
14nm Skylake			4/8	i7-6785R	3.30 GHz	8 MB	65 W	Intel® Iris™ Pro Graphics 580				
			4/8	i7-6700K	4.00 GHz	8 MB	91 W		Intel® HD Graphics 530			
			4/8	i7-6700T	2.80 GHz	8 MB	35 W					
Core™ i5		14nm Kaby Lake	4/8	i7-6700	3.40 GHz	8 MB	65 W	Intel® HD Graphics 630				
			4/8	i7-6700TE	2.40 GHz	8 MB	35 W					
			4/4	i5-7600K	3.8GHz	6 MB	91W					
			4/4	i5-7600T	2.8GHz	6 MB	35W					
			4/4	i5-7600	3.5GHz	6 MB	65W					
			4/4	i5-7500	3.4GHz	6 MB	65W					
		14 nm Skylake	4/4	i5-7400T	2.4GHz	6 MB	35W					
			4/4	i5-7400	3.5GHz	6 MB	65W					
			4/4	i5-6600	3.30 GHz	6 MB	65 W	Intel® Iris™ Pro Graphics 580				
			4/4	i5-6600K	3.50 GHz	6 MB	91 W					
			4/4	i5-6585R	2.80 GHz	6 MB	65 W	Intel® HD Graphics 530				
			4/4	i5-6500	3.20 GHz	6 MB	65 W					
			4/4	i5-6500T	2.50 GHz	6 MB	35 W					
			4/4	i5-6402P	2.80 GHz	6 MB	65 W	Intel® HD Graphics 510				
4/4	i5-6400	2.70 GHz	6 MB	65 W								
Core™ i3	14nm Kaby Lake	4/4	i5-6400T	2.20 GHz	6 MB	35 W	Intel® HD Graphics 530					
		4/4	i5-6500TE	2.30 GHz	6 MB	35 W						
		14nm Kaby Lake	2/4	i3-7350K	4.2GHz	4 MB	60W	Intel® HD Graphics 630				
			2/4	i3-7320	4.1GHz	4 MB	51W					
			2/4	i3-7300	4.0GHz	4 MB	51W					
			2/4	i3-7300T	3.5GHz	4 MB	35W					
			2/4	i3-7101E	3.9GHz	3 MB	54W					
			2/4	i3-7101TE	3.4GHz	3 MB	35W					
	14 nm Skylake	2/4	i3-7100T	3.4GHz	3 MB	35W						
		2/4	i3-7100T	3.9GHz	3 MB	51W						
		2/4	i3-6300	3.80 GHz	4 MB	51 W	Intel® HD Graphics 530					
		2/4	i3-6300T	3.30 GHz	4 MB	35 W						
		2/4	i3-6320	3.90 GHz	4 MB	51 W						
		2/4	i3-6100	3.70 GHz	3 MB	51 W						
2/4	i3-6100T	3.20 GHz	3 MB	35 W								
2/4	i3-6100TE	2.70 GHz	4 MB	35 W								

Desktop CPU List: Intel® Core™ i9, i7, i5, i3, Pentium®, and Celeron®

Supported Sockets	Brand	Process	Cores/ Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset	
FCLGA1151	Pentium®	14nm Kaby Lake	2/4	G4620	3.7GHz	3 MB	51W	Intel® HD Graphics 630	350 MHz	DDR4-2133/2400, DDR3L-1333/1600 @ 1.35V	C236/ Q170/ H110	
			2/4	G4600T	3.0GHz	3 MB	35W					
			2/4	G4600T	3.6GHz	3 MB	51W					
			2/4	G4560T	2.9GHz	3 MB	35W	Intel® HD Graphics 610				
			2/4	G4560	3.5GHz	3 MB	54W					
		14nm Skylake	2/2	G4500	3.50 GHz	3 MB	51W	Intel® HD Graphics 530	350 MHz	DDR4-1866/2133, DDR3L-1333/1600 @ 1.35V		
			2/2	G4500T	3.00 GHz	3 MB	35W					
			2/2	G4520	3.60 GHz	3 MB	51W					
			2/2	G4400	3.30 GHz	3 MB	54W					
			2/2	G4400T	2.90 GHz	3 MB	35W	Intel® HD Graphics 510				
			2/2	G4400TE	2.40 GHz	3 MB	35W					
	Celeron®	14nm Kaby Lake	2/2	G3950	3.0GHz	2 MB	51W	Intel® HD Graphics 610	350 MHz	DDR4 2133, DDR3L 1333/1600 @ 1.35V	C236/ Q170/ H110	
			2/2	G3930TE	2.7GHz	2 MB	35W					
			2/2	G3930T	2.7GHz	2 MB	35W					
			2/2	G3930E	2.9GHz	2 MB	54W					
			2/2	G3930	2.9GHz	2 MB	51W					
		14 nm Skylake	2/2	G3920	2.90 GHz	2 MB	51 W	Intel® HD Graphics 510	350 MHz	DDR4-1866/2133, DDR3L-1333/1600 @ 1.35V		
			2/2	G3900T	2.60 GHz	2 MB	35 W					
			2/2	G3900	2.80 GHz	2 MB	51 W					
			2/2	G3900TE	2.30 GHz	2 MB	35 W					
			2/2									
FCLGA1150	Core™ i7	22 nm Haswell	4/4	i7-4765T	2 GHz	8 MB	35 W	Intel® HD Graphics 4600	350 MHz	DDR3-1333/1600, DDR3L-1333/1600 @ 1.5V	C226/ Q87/ H81 C226/ Q87/ H81	
			2/4	i7-4770	3.4 GHz	8 MB	84 W		350 MHz			
			4/4	i7-4770K	3.5 GHz	8 MB	84 W		350 MHz			
			4/8	i7-4770S	3.1 GHz	8 MB	65 W		350 MHz			
			4/8	i7-4770T	2.5 GHz	8 MB	45 W		350 MHz			
			4/8	i7-4771	3.5 GHz	8 MB	84 W		350 MHz			
			4/8	i7-4785T	2.2 GHz	8 MB	35 W		350 MHz			
			4/8	i7-4790	3.6 GHz	8 MB	84 W		350 MHz			
			4/8	i7-4790S	3.2 GHz	8 MB	65 W		350 MHz			
			4/8	i7-4790T	2.7 GHz	8 MB	45 W		350 MHz			
			Core™ i5	4/4	i5-4670	3.4 GHz	6 MB	84 W				350 MHz
				4/4	i5-4670K	3.4 GHz	6 MB	84 W				350 MHz
				4/4	i5-4670S	3.1 GHz	6 MB	65 W				350 MHz
				4/4	i5-4670T	2.3 GHz	6 MB	45 W				350 MHz
				4/4	i5-4690	3.5 GHz	6 MB	84 W				350 MHz
				4/4	i5-4690S	3.2 GHz	6 MB	65 W				350 MHz
				4/4	i5-4690T	2.5 GHz	6 MB	45 W				350 MHz
	4/4			i5-4570	3.2 GHz	6 MB	84 W		350 MHz			
	4/4			i5-4570S	2.9 GHz	6 MB	65 W		350 MHz			
	2/4			i5-4570T	2.9 GHz	4 MB	35 W		200 MHz			
	4/4			i5-4590	3.3 GHz	6 MB	84 W		350 MHz			
	4/4			i5-4590S	3 GHz	6 MB	65 W		350 MHz			
	4/4			i5-4590T	2 GHz	6 MB	35 W		350 MHz			
	Core™ i3		4/4	i5-4460T	1.9 GHz	6 MB	35 W		350 MHz			
			4/4	i5-4460S	2.9 GHz	6 MB	65 W		350 MHz			
			4/4	i5-4460	3.2 GHz	6 MB	84 W		350 MHz			
			4/4	i5-4440S	2.8 GHz	6 MB	65 W		350 MHz			
			4/4	i5-4440	3.1 GHz	6 MB	84 W		350 MHz			
			4/4	i5-4430S	2.7 GHz	6 MB	65 W		350 MHz			
			4/4	i5-4430	3 GHz	6 MB	84 W		350 MHz			
			2/4	i3-4330	3.5 GHz	4 MB	54 W	Intel® HD Graphics 4600	350 MHz			
			2/4	i3-4330T	3 GHz	4 MB	35 W		200 MHz			
			2/4	i3-4340	3.6 GHz	4 MB	54 W		350 MHz			
			2/4	i3-4350	3.6 GHz	4 MB	54 W		350 MHz			
			2/4	i3-4350T	3.1 GHz	4 MB	35 W		200 MHz			
			2/4	i3-4360	3.7 GHz	4 MB	54 W		350 MHz			
			2/4	i3-4360T	3.2 GHz	4 MB	35 W		200 MHz			
			2/4	i3-4370	3.8 GHz	4 MB	54 W		350 MHz			
			2/4	i3-4370T	3.3 GHz	4 MB	35 W	Intel® HD Graphics 4400	200 MHz			
			2/4	i3-4170T	3.2 GHz	3 MB	35 W		200 MHz			
	2/4		i3-4170	3.7 GHz	3 MB	54 W		350 MHz				
	2/4		i3-4160T	3.1 GHz	3 MB	35 W		200 MHz				
	2/4		i3-4160	3.6 GHz	3 MB	54 W		350 MHz				
	2/4		i3-4150T	3 GHz	3 MB	35 W		200 MHz				
	2/4		i3-4150	3.5 GHz	3 MB	54 W		350 MHz				
	2/4		i3-4130T	2.9 GHz	3 MB	35 W		200 MHz				
	2/4		i3-4130	3.4 GHz	3 MB	54 W		350 MHz				

Yellow means long-term support

Desktop CPU List: Intel® Core™ i9, i7, i5, i3, Pentium®, and Celeron®

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCLGA1150	Pentium®	22nm Haswell	2/2	G3470	3.6 GHz	3 MB	53 W	Intel® HD Graphics	350 MHz	DDR3-1333/1600, DDR3L-1333/1600 @ 1.5V	C226/ Q87/H81
			2/2	G3460T	3 GHz	3 MB	35 W		200 MHz		
			2/2	G3460	3.5 GHz	3 MB	53 W		350 MHz		
			2/2	G3450T	2.9 GHz	3 MB	35 W		200 MHz		
			2/2	G3450	3.4 GHz	3 MB	53 W		350 MHz		
			2/2	G3440T	2.8 GHz	3 MB	35 W		200 MHz		
			2/2	G3440	3.3 GHz	3 MB	53 W		350 MHz		
			2/2	G3430	3.3 GHz	3 MB	53 W		350 MHz		
			2/2	G3420T	2.7 GHz	3 MB	35 W		200 MHz		
			2/2	G3420	3.2 GHz	3 MB	53 W		350 MHz		
			2/2	G3260T	2.9 GHz	3 MB	35 W		200 MHz		
			2/2	G3260	3.3 GHz	3 MB	53 W		350 MHz		
			2/2	G3258	3.2 GHz	3 MB	53 W		350 MHz		
			2/2	G3250T	2.8 GHz	3 MB	35 W		200 MHz		
			2/2	G3250	3.2 GHz	3 MB	53 W		350 MHz		
			2/2	G3240T	2.7 GHz	3 MB	35 W		200 MHz		
			2/2	G3240	3.1 GHz	3 MB	53 W		350 MHz		
			2/2	G3220T	2.6 GHz	3 MB	35 W		200 MHz		
	Celeron®	2/2	G3220	3 GHz	3 MB	53 W	350 MHz	DDR3-1333, DDR3L-1333 @ 1.5V			
		2/2	G1820	2.7 GHz	2 MB	53 W	350 MHz				
		2/2	G1820T	2.4 GHz	2 MB	35 W	200 MHz				
		2/2	G1830	2.8 GHz	2 MB	53 W	350 MHz				
		2/2	G1840	2.8 GHz	2 MB	53 W	350 MHz				
		2/2	G1840T	2.5 GHz	2 MB	35 W	200 MHz				
		2/2	G1850	2.9 GHz	2 MB	53 W	350 MHz				
		2/2	G1850	2.9 GHz	2 MB	53 W	350 MHz				
LGA1155	Core™ i7	22nm Ivy Bridge	4/8	i7-3770T	2.5 GHz	8 MB	45 W	-	1.15 GHz	DDR3-1333/1600	Q77/Q67/ B65/H61
			4/8	i7-3770S	3.1 GHz	8 MB	65 W	-	1.15 GHz		
			4/8	i7-3770K	3.5 GHz	8 MB	77 W	-	1.15 GHz		
			4/8	i7-3770	3.4 GHz	8 MB	77 W	-	1.15 GHz		
	Core™ i7	32nm Sandy Bridge	4/8	i7-2700K	3.5 GHz	8 MB	95 W	-	1.35 GHz	DDR3-1066/1333	
			4/8	i7-2600S	2.8 GHz	8 MB	65 W	-	1.35 GHz		
			4/8	i7-2600K	3.4 GHz	8 MB	95 W	-	1.35 GHz		
			4/8	i7-2600	3.4 GHz	8 MB	95 W	-	1.35 GHz		
	Core™ i5	22nm Ivy Bridge	4/4	i5-3570T	2.3 GHz	6 MB	45 W	-	1.15 GHz	DDR3-1333/1600	
			4/4	i5-3570S	3.1 GHz	6 MB	65 W	-	1.15 GHz		
			4/4	i5-3570K	3.4 GHz	6 MB	77 W	-	1.15 GHz		
			4/4	i5-3570	3.4 GHz	6 MB	77 W	-	1.15 GHz		
			4/4	i5-3550S	3 GHz	6 MB	65 W	-	1.15 GHz		
			4/4	i5-3550	3.3 GHz	6 MB	77 W	-	1.15 GHz		
			4/4	i5-3475S	2.9 GHz	6 MB	65 W	-	1.1 GHz		
			2/4	i5-3470T	2.9 GHz	3 MB	35 W	-	1.1 GHz		
			4/4	i5-3470S	2.9 GHz	6 MB	65 W	-	1.1 GHz		
			4/4	i5-3470	3.2 GHz	6 MB	77 W	-	1.1 GHz		
			4/4	i5-3450S	2.8 GHz	6 MB	65 W	-	1.1 GHz		
			4/4	i5-3450	3.1 GHz	6 MB	77 W	-	1.1 GHz		
			4/4	i5-3350P	3.1 GHz	6 MB	69 W	-	1.05 GHz		
			4/4	i5-3330S	2.7 GHz	6 MB	65 W	-	1.05 GHz		
	4/4	i5-3330	3 GHz	6 MB	77 W	-	1.05 GHz				
	Core™ i5	32nm Sandy Bridge	4/4	i5-2550K	3.4 GHz	6 MB	95 W	-	1.25 GHz	DDR3-1066/1333	
			4/4	i5-2500T	2.3 GHz	6 MB	45 W	-	1.25 GHz		
			4/4	i5-2500S	2.7 GHz	6 MB	65 W	-	1.1 GHz		
			4/4	i5-2500K	3.3 GHz	6 MB	95 W	-	1.1 GHz		
			4/4	i5-2500	3.3 GHz	6 MB	95 W	-	1.1 GHz		
			4/4	i5-2450P	3.2 GHz	6 MB	95 W	-	1.1 GHz		
			4/4	i5-2405S	2.5 GHz	6 MB	65 W	-	1.1 GHz		
			4/4	i5-2400S	2.5 GHz	6 MB	65 W	-	1.1 GHz		
			4/4	i5-2400	3.1 GHz	6 MB	95 W	-	1.1 GHz		
2/4			i5-2390T	2.7 GHz	3 MB	35 W	-	1.1 GHz			
4/4			i5-2380P	3.1 GHz	6 MB	95 W	-	1.1 GHz			
4/4			i5-2320	3 GHz	6 MB	95 W	-	1.1 GHz			
4/4			i5-2310	2.9 GHz	6 MB	95 W	-	1.1 GHz			
4/4			i5-2300	2.8 GHz	6 MB	95 W	-	1.1 GHz			

Desktop CPU List: Intel® Core™ i9, i7, i5, i3, Pentium®, and Celeron®

Supported Sockets	Brand	Process	Cores/ Threads	Processor Number	Processor Base Frequency	Cache	TDP	Graphics Base Frequency	Memory Types	Chipset			
LGA1155	Core™ i3	22nm Ivy Bridge	2/4	i3-3240T	2.9 GHz	3 MB	35 W	1.05 GHz	DDR3-1333/1600	Q77/Q67/B65/H61			
			2/4	i3-3240	3.4 GHz	3 MB	55 W	1.05 GHz					
			2/4	i3-3225	3.3 GHz	3 MB	55 W	1.05 GHz					
			2/4	i3-3220T	2.8 GHz	3 MB	35 W	1.05 GHz					
			2/4	i3-3220	3.3 GHz	3 MB	55 W	1.05 GHz					
	Core™ i3	32nm Sandy Bridge	2/4	i3-2130	3.4 GHz	3 MB	65 W	1.1 GHz	DDR3-1066/1333				
			2/4	i3-2125	3.3 GHz	3 MB	65 W	1.1 GHz					
			2/4	i3-2120T	2.6 GHz	3 MB	35 W	1.1 GHz					
			2/4	i3-2120	3.3 GHz	3 MB	65 W	1.1 GHz					
			2/4	i3-2105	3.1 GHz	3 MB	65 W	1.1 GHz					
			2/4	i3-2102	3.1 GHz	3 MB	65 W	1.1 GHz					
			2/4	i3-2100T	2.5 GHz	3 MB	35 W	1.1 GHz					
			2/4	i3-2100	3.1 GHz	3 MB	65 W	1.1 GHz					
	Pentium®	22nm Ivy Bridge	2/2	G2120	3.1 GHz	3 MB	55 W	1.05 GHz	DDR3-1333/1600				
			2/2	G2100T	2.6 GHz	3 MB	35 W	1.05 GHz					
LGA1155	Pentium®	32nm Sandy Bridge	2/2	G870	3.1 GHz	3 MB	65 W	1.1 GHz	DDR3-1066/1333	Q77/Q67/B65/H61			
			2/2	G860T	2.6 GHz	3 MB	35 W	1.1 GHz					
			2/2	G860	3 GHz	3 MB	65 W	1.1 GHz					
			2/2	G850	2.9 GHz	3 MB	65 W	1.1 GHz					
			2/2	G840	2.8 GHz	3 MB	65 W	1.1 GHz					
			2/2	G645T	2.5 GHz	3 MB	35 W	1.1 GHz					
			2/2	G645	2.9 GHz	3 MB	65 W	1.1 GHz					
			2/2	G640T	2.4 GHz	3 MB	35 W	1.1 GHz					
			2/2	G640	2.8 GHz	3 MB	65 W	1.1 GHz					
			2/2	G632	2.7 GHz	3 MB	65 W	1.1 GHz					
			2/2	G630T	2.3 GHz	3 MB	35 W	1.1 GHz					
			2/2	G630	2.7 GHz	3 MB	65 W	1.1 GHz					
			2/2	G622	2.6 GHz	3 MB	65 W	1.1 GHz					
			2/2	G620T	2.2 GHz	3 MB	35 W	1.1 GHz					
			2/2	G620	2.6 GHz	3 MB	65 W	1.1 GHz					
	Celeron®	22nm Ivy Bridge	2/2	G1610	2.6 GHz	2 MB	55 W	1.05 GHz	DDR3-1066				
			2/2	G1620	2.7 GHz	2 MB	55 W	1.05 GHz					
			2/2	G1610T	2.3 GHz	2 MB	35 W	1.05 GHz					
			2/2	G555	2.7 GHz	2 MB	65 W	1 GHz					
	Celeron®	32nm Sandy Bridge	2/2	G550T	2.2 GHz	2 MB	35 W	1 GHz					
			2/2	G550	2.6 GHz	2 MB	65 W	1 GHz					
			2/2	G540T	2.1 GHz	2 MB	35 W	1 GHz					
			2/2	G540	2.5 GHz	2 MB	65 W	1 GHz					
			2/2	G530T	2 GHz	2 MB	35 W	1 GHz					
			2/2	G530	2.4 GHz	2 MB	65 W	1 GHz					
			1/2	G465	1.9 GHz	1.5 MB	35 W	1 GHz					
			1/2	G460	1.8 GHz	1.5 MB	35 W	1 GHz					
			1/1	G440	1.6 GHz	1 MB	35 W	1 GHz					
LGA1156			Core™ i7	45nm	Quad Core	i7-880	2.93G	8M	95W	-		DDR3-1333/1600	Q57
						i7-875K	2.93G	8M	95W	-			
						i7-870S	2.66G	8M	82W	-			
						i7-870	2.93G	8M	95W	-			
	i7-860S	2.53G				8M	82W	-					
	i7-860	2.8G				8M	95W	-					
	Core™ i5			i5-760	2.8G	8M	95W	-					
				i5-750S	2.4G	8M	82W	-					
				i5-750	2.66G	8M	95W	-					
				i5-680	3.6G	4M	73W	733MHz					
	Core™ i5			i5-670	3.46G	4M	73W	733MHz					
				i5-661	3.33G	4M	87W	900MHz					
				i5-660	3.33G	4M	73W	733MHz					
				i5-665K	3.2G	4M	73W	733MHz					
				i5-650	3.2G	4M	73W	733MHz					
i3-560				3.33G	4M	73W	733MHz						
Core™ i3			i3-550	3.2G	4M	73W	733MHz						
			i3-540	3.06G	4M	73W	733MHz						
			i3-530	2.93G	4M	73W	733MHz						
			G6960	2.933G	3M	73W	533MHz	DDR3-1333					
Pentium®			G6950	2.8G	3M	73W	533MHz						

Yellow means long-term support

Intel® Arrow Lake-U / H

Supported Sockets	Brand	process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Max Frequency	Memory Types	Chipset
FCBGA2049	Intel® Core™ Ultra 9	Meteor Lake H	16/16	285H	2.90 GHz (Performance-core) 2.70 GHz (Efficient-core) 1.00 GHz (Low Power Efficient-core)	24 MB	45W	Intel® Arc™ 140T GPU	2.35 GHz	LPDDR5/x8400 DDR5 6400	-
	265H			2.20 GHz (Performance-core) 1.70 GHz (Efficient-core) 0.70 GHz (Low Power Efficient-core)	24 MB	28W	2.30 GHz				
	255H			2.00 GHz (Performance-core) 1.50 GHz (Efficient-core) 0.70 GHz (Low Power Efficient-core)	24 MB	28W	2.25 GHz				
	Intel® Core™ Ultra 5		14/14	235H	2.50 GHz (Performance-core) 1.80 GHz (Efficient-core) 0.70 GHz (Low Power Efficient-core)	18 MB	28W	2.25 GHz			
				225H	2.90 GHz (Performance-core) 2.70 GHz (Efficient-core) 1.00 GHz (Low Power Efficient-core)	18 MB	15W	Intel® Arc™ 130T GPU	2.20 GHz		
	Intel® Core™ Ultra 7		Meteor Lake U	12/14	265U	2.90 GHz (Performance-core) 2.70 GHz (Efficient-core) 1.00 GHz (Low Power Efficient-core)	12 MB	15W	Intel® Graphics		
		255U			2.90 GHz (Performance-core) 2.70 GHz (Efficient-core) 1.00 GHz (Low Power Efficient-core)	12 MB	15W	2.10 GHz			
		235U			2.90 GHz (Performance-core) 2.70 GHz (Efficient-core) 1.00 GHz (Low Power Efficient-core)	12 MB	15W	2.05 GHz			
		225U			2.90 GHz (Performance-core) 2.70 GHz (Efficient-core) 1.00 GHz (Low Power Efficient-core)	12 MB	15W	2.00 GHz			

Intel® Meteor Lake-U / H

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCBGA2049	Intel® Core™ Ultra 7	Meteor Lake H	16/22	165H	1.40 GHz(Performance-core) 0.90 GHz(Efficient-core)	24 MB	28W	Intel® ARC® Graphics	2.3 GHz	LPDDR5/x7467 DDR5 5600	-
				155H	1.40 GHz(Performance-core) 0.90 GHz(Efficient-core)	24 MB	28W				-
	Intel® Core™ Ultra 5		14/18	135H	1.70 GHz(Performance-core) 1.20 GHz(Efficient-core)	18 MB	28W	Intel® ARC® Graphics		LPDDR5/x7467 DDR5 5600	-
				125H	1.20 GHz(Performance-core) 0.70 GHz(Efficient-core)	18 MB	28W				-
	Intel® Core™ Ultra 7	Meteor Lake U	12/14	165U	1.70 GHz(Performance-core) 1.20 GHz(Efficient-core)	12 MB	15W	Intel® ARC® Graphics		LPDDR5/x7467 DDR5 5600	-
				155U	1.70 GHz(Performance-core) 1.20 GHz(Efficient-core)	12 MB	15W				-
	Intel® Core™ Ultra 5		12/14	135U	1.60 GHz(Performance-core) 1.10 GHz(Efficient-core)	12 MB	15W	Intel® ARC® Graphics		LPDDR5/x7467 DDR5 5600	-
				125U	1.30 GHz(Performance-core) 0.80 GHz(Efficient-core)	12 MB	15W				-

Yellow means long-term support

Intel® ULT / UP3

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCBGA1449	Core™ i7	10nm Tiger Lake-UP3	4/8	i7-1185G7E	2.8GHz/ 1.8GHz/ 1.2GHz	12MB	28W/ 15W/ 12W	Intel® Iris® Xe Graphics 96 EU 4x4k or 2x8k Displays 2 VDBOX	1.35 GHz	DDR4-3200, LPDDR4x-4267	-
				i7-1185GRE						DDR4-3200, LPDDR4x-4267, In-Band ECC	-
	Core™ i5		4/8	i5-1145G7E	2.6GHz/ 1.5GHz/ 1.1GHz	8MB	28W/ 15W/ 12W	Intel® Iris® Xe Graphics 80 EU 4x4k or 2x8k Displays 2 VDBOX Intel® Iris® Xe Graphics 80 EU 4x4k or 1x8k Displays 2 VDBOX	1.30 GHz	DDR4-3200, LPDDR4x-4267	-
				i5-1145GRE						DDR4-3200, LPDDR4x-4267, In-Band ECC	-
	Core™ i3		2/4	i3-1115G4E	3.0GHz/ 2.2GHz/ 1.7 GHz	6MB	28W/ 15W/ 12W	Intel® UHD Graphics 48EU 4x4k or 1x8k Displays 1 VDBOX	1.25 GHz	DDR4-3200, LPDDR4x-3733	-
				i3-1115GRE						DDR4-3200, LPDDR4x-3733, In -Band ECC	-
	Celeron®		2/2	6305E	1.8 GHz	4MB	15W	Intel® UHD Graphics 48EU 4x4k or 1x8k Displays 1 VDBOX	1.25 GHz	DDR4-3200, LPDDR4x-3733	-
	FCBGA1528		Core™ i7	14nm Whiskey Lake	4/8	i7-8565U	1.8GHz	8MB	15W	Intel® UHD Graphics 620	300 MHz
4/8		i7-8665U			1.9GHz	8MB	15W	-			
Core™ i5		4/8	i7-8665UE		1.7GHz	8MB	15W	-			
		4/8	i5-8265U		1.6GHz	6MB	15W	-			
		4/8	i5-8365U		1.6GHz	6MB	15W	-			
		4/8	i5-8365UE		1.6GHz	6MB	15W	-			
Core™ i3		2/4	i3-8145U		2.10 GHz	4MB	15W	-			
		2/4	i3-8145UE		2.2GHz	4MB	15W	-			
Pentium®		2/4	5405U		2.3GHz	2MB	15W	-			
Celeron®		2/2	4205U		1.8GHz	2MB	15W	Intel® UHD Graphics 610	DDR4-2133, LPDDR3-1866	-	
2/2	4305UE	2.00GHz	2MB	15W	DDR4-2133, LPDDR3-1866	-					
FCBGA1356	Core™ i7	14nm Coffee lake	4/8	i7-8559U	2.70 GHz	8MB	28W	Intel® Iris™ Plus Graphics 655	300 MHz	DDR4-2400, LPDDR3-2133	-
	Core™ i5		4/8	i5-8269U	2.60 GHz	6MB	28W				-
			4/8	i5-8259U	2.30 GHz	6MB	28W				-
			Core™ i3	2/4	i3-8109U	3.00 GHz	4MB				28W
FCBGA1356	Core™ i7	14nm Kabylake	2/4	i7-7660U	2.5GHz	4MB	15W	Intel® Iris™ Plus Graphics 640	300 MHz	DDR4-2133, LPDDR3-1866, DDR3L-1600	-
			2/4	i7-7600U	2.8GHz	4MB	15W	Intel® HD Graphics 620			-
			2/4	i7-7567U	3.5GHz	4MB	28W	Intel® Iris™ Plus Graphics 650			-
			2/4	i7-7560U	2.4GHz	4MB	15W	Intel® Iris™ Plus Graphics 640			-
			2/4	i7-7500U	2.70 GHz	4MB	15 W	Intel® HD Graphics 620			-
			2/4	i5-7360U	2.3GHz	4MB	15W	Intel® Iris™ Plus Graphics 640			-
	Core™ i5		2/4	i5-7300U	2.6GHz	3MB	15W	Intel® HD Graphics 620			-
			2/4	i5-7287U	3.3GHz	4MB	28W	Intel® Iris™ Plus Graphics 650			-
			2/4	i5-7267U	3.1GHz	4MB	28W	Intel® Iris™ Plus Graphics 640			-
			2/4	i5-7260U	2.2GHz	4MB	15W	Intel® Iris™ Plus Graphics 640			-
			2/4	i5-7200U	2.50 GHz	3MB	15W	Intel® HD Graphics 620		-	
			2/4	i3-8130U	2.20 GHz	4MB	15W	Intel® HD Graphics 620		DDR4-2400, LPDDR3-2133	-
	Core™ i3		2/4	i3-7130U	2.7GHz	3MB	15W	Intel® Iris™ Plus Graphics 650			DDR4-2133, LPDDR3-1866, DDR3L-1600
			2/4	i3-7167U	2.8GHz	3MB	28W			-	
			2/4	i3-7100U	2.40 GHz	3MB	15W	Intel® HD Graphics 620		-	
			Pentium®	2/4	4415U	2.3GHz	2MB	15W		Intel® HD Graphics 610	
	2/2			3965U	2.2GHz	2MB	15W	-			
	Celeron®		2/2	3865U	1.8GHz	2MB	15W	-			
FCBGA1356	Core™ i7	14nm Skylake	2/4	i7-6500U	2.50 GHz	4 MB	15 W	Intel® HD Graphics 520	300 MHz	DDR4-2133, LPDDR3-1866, DDR3L-1600	-
			2/4	i7-6560U	2.20 GHz	4 MB	15 W	Intel® Iris™ Graphics 540			-
			2/4	i7-6567U	3.30 GHz	4 MB	28 W	Intel® Iris™ Graphics 550			-
			2/4	i7-6600U	2.60 GHz	4 MB	15 W	Intel® HD Graphics 520			-
			2/4	i7-6660U	2.40 GHz	4 MB	15 W	Intel® Iris™ Graphics 540			-
			2/4	i7-6650U	2.20 GHz	4 MB	15 W	-			

Yellow means long-term support

Intel® ULT / UP3

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset	
FCBGA1356	Core™ i5	14nm Skylake	2/4	i5-6287U	3.10 GHz	4 MB	28 W	Intel® Iris™ Graphics 550	300 MHz	DDR4-2133, LPDDR3-1866, DDR3L-1600	-	
			2/4	i5-6267U	2.90 GHz	4 MB	28 W				-	
			2/4	i5-6260U	1.80 GHz	4 MB	15 W	Intel® Iris™ Graphics 540			-	
			2/4	i5-6200U	2.30 GHz	3 MB	15 W	Intel® HD Graphics 520			-	
			2/4	i5-6300U	2.40 GHz	3 MB	15 W				-	
			2/4	i5-6360U	2.00 GHz	4 MB	15 W	Intel® Iris™ Graphics 540			-	
	Core™ i3		2/4	i3-6006U	2.00 GHz	3 MB	15 W	Intel® HD Graphics 520			-	
			2/4	i3-6167U	2.70 GHz	3 MB	28 W	Intel® Iris™ Graphics 550			-	
			2/4	i3-6157U	2.40 GHz	3 MB	28 W				-	
			2/4	i3-6100U	2.30 GHz	3 MB	15 W	Intel® HD Graphics 520			-	
			Pentium®	2/4	4405U	2.10 GHz	2 MB	15 W		Intel® HD Graphics 510	DDR4-1866/2133, LPDDR3-1600/1866	-
				Celeron®	2/2	3855U	1.60 GHz	2 MB			15 W	DDR4-1866/2133, LPDDR3-1600/1866, DDR3L-1333/1600
			2/2		3955U	2.00 GHz	2 MB	15 W				-
	FCBGA1168		Core™ i7	14nm Broadwell	2/4	i7-5650U	2.2 GHz	4 MB		15 W	Intel® HD Graphics 6000	300 MHz
Core™ i5		2/4	i5-5350U		1.8 GHz	3 MB	15 W		300 MHz	-		
Core™ i3		2/4	i3-5010U		2.1 GHz	3 MB	15 W	Intel® HD Graphics 5500	300 MHz	DDR3L 1333/1600, LPDDR 1333/1600	-	
Celeron®		2/2	3765U		1.9 GHz	2 MB	15 W	Intel® HD Graphics	300 MHz	-		
Core™ i7		22nm Haswell	2/4	i7-4650U	1.7 GHz	4 MB	15 W	Intel® HD Graphics 5000	200 MHz	DDR3L 1333/1600, LPDDR3 1333/1600	-	
Core™ i5			2/4	i5-4300U	1.9 GHz	3 MB	15 W	Intel® HD Graphics 4400	200 MHz		-	
Core™ i3			2/4	i3-4010U	1.7 GHz	3 MB	15 W		200 MHz		-	
Celeron®			2/2	2980U	1.6 GHz	2 MB	15 W	Intel® HD Graphics	200 MHz		-	

Intel® Mobile Processors: Core™ i7, i5, i3, and Celeron®

Supported Sockets	Brand	Process	Cores Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset		
FCLGA1151	Xeon® E	14nm Coffee Lake refresh	8/16	E-2288G	3.70 GHz	16MB	95W	Intel® UHD Graphics P630	350MHz	DDR4-2666	C246		
			6/12	E-2286G	4.00 GHz	12MB	95W	N/A	N/A		C240		
			8/16	2278GE	3.30 GHz	16MB	80W	Intel® UHD Graphics P630	350MHz		C246		
			8/16	2278GEL	2.00 GHz	16MB	35W	Intel® UHD Graphics P630	350MHz		C240		
			8/16	E-2278G	3.40 GHz	16MB	80W	N/A	N/A		C246		
			6/12	E-2276G	3.80 GHz	12MB	80W	Intel® UHD Graphics P630	350MHz				
			4/8	E-2274G	4.00 GHz	8MB	83W						
			6/12	E-2246G	3.60 GHz	12MB	80W						
			4/8	E-2244G	3.80 GHz	8MB	71W						
			6/12	E-2236	3.40 GHz	12MB	80W	N/A	N/A		C240		
			4/8	E-2234	3.60 GHz	8MB	71W	Intel® UHD Graphics P630	350MHz				
			6/6	E-2226G	3.40 GHz	12MB	80W						
			6/6	E-2226GE	3.40 GHz	12MB	80W						
			4/4	E-2224	3.40 GHz	8MB	71W				N/A	N/A	C240
FCBGA1440	Xeon® E	14nm Coffee lake	6/12	E-2186M	2.90 GHz	12MB	45W	Intel® UHD Graphics P630	350 MHz	DDR4-2666, LPDDR3-2133	CM246		
			6/12	E-2176M	2.70 GHz	12MB	45W	Intel® UHD Graphics P630			DDR4-2400, LPDDR3-2133, DDR3L-1600	CM236	
	Xeon® E3	14nm Kabylake	4/8	E3-1535MV6	3.10 GHz	8 MB	45W	Intel® HD Graphics P630		DDR4-2400			CM236
			4/8	E3-1505MV6	3.00 GHz	8 MB	45 W						
			4/8	E3-1505LV6	2.20 GHz	8 MB	25 W						
			4/4	E3-1501LV6	2.10 GHz	6 MB	25 W						
	Xeon® E3	14nm Skylake	4/4	E3-1501MV6	2.90 GHz	6 MB	45 W	Intel® HD Graphics P630		DDR4-2133, LPDDR3-1866, DDR3L-1600	CM236		
			4/8	E3-1575MV5	3.00 GHz	8 MB	45 W					Intel® Iris™ Pro Graphics P580	
			4/8	E3-1545MV5	2.90 GHz	8 MB	45 W					Intel® HD Graphics P530	
			4/8	E3-1535MV5	2.90 GHz	8 MB	45 W					Intel® Iris™ Pro Graphics P580	
			4/8	E3-1515MV5	2.80 GHz	8 MB	45 W					Intel® HD Graphics P530	

Intel® Mobile Processors: Core™ i7, i5, i3, and Celeron®

Supported Sockets	Brand	Process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset
FCBGA1440	Core™ i9	14nm Coffee lake	6/12	i9-8950HK	2.90 GHz	12MB	45W	Intel® UHD Graphics 630	350 MHz	DDR4-2666, LPDDR3-2133	CM246
	Core™ i7		6/12	i7-8850H	2.60 GHz	9MB	45W				
			6/12	i7-8750H	2.20 GHz	9MB	45W				
	Core™ i5		6/12	i7-8700B	3.20 GHz	12MB	65W				
			6/6	i5-8500B	3.00 GHz	9MB	65W				
			4/8	i5-8400H	2.50 GHz	8MB	45W				
			6/6	i5-8400B	2.80 GHz	9MB	65W				
	Core™ i3		4/8	i5-8300H	2.30 GHz	8MB	45W				
4/4		i3-8100H	3.00 GHz	8MB	35W						
FCBGA1440	Core™ i7	14nm Kabylake	4/8	i7-7920HQ	3.10 GHz	8 MB	45W	Intel® HD Graphics 630	350MHz	DDR4-2400, LPDDR3-2133, DDR3L-1600	CM236
			4/8	i7-7820HQ	2.90 GHz	8 MB	45W				
			4/8	i7-7820HK	2.90 GHz	8 MB	45W				
			4/8	i7-7820EQ	3.00 GHz	8 MB	45W				
			4/8	i7-7700HQ	2.80 GHz	6 MB	45W				
	Core™ i5		4/4	i5-7442EQ	2.10 GHz	6 MB	25W			DDR4-2400, LPDDR3-2133, DDR3L-1600	
			4/4	i5-7440HQ	2.80 GHz	6 MB	45W				
			4/4	i5-7440EQ	2.90 GHz	6 MB	45W				
			4/4	i5-7300HQ	2.50 GHz	6 MB	45W				
			Core™ i3	2/4	i3-7102E	2.10 GHz	3 MB			25W	
	2/4			i3-7100E	2.90 GHz	3 MB	35W				
	FCBGA1440		Core™ i7	14nm Skylake	4/8	i7-6820EQ	2.80 GHz			8 MB	
4/8		i7-6822EQ			2.00 GHz	8 MB	25 W				
4/8		i7-6700HQ			2.60 GHz	6 MB	45 W				
4/8		i7-6770HQ			2.60 GHz	6 MB	45 W	Intel® Iris™ Pro Graphics 580			
4/8		i7-6820HK			2.70 GHz	8 MB	45 W	Intel® HD Graphics 530			
4/8		i7-6820HQ			2.70 GHz	8 MB	45 W	Intel® HD Graphics 530			
4/8		i7-6870HQ			2.70 GHz	8 MB	45 W	Intel® Iris™ Pro Graphics 580			
4/8		i7-6920HQ			2.90 GHz	8 MB	45 W	Intel® HD Graphics 530			
4/8		i7-6970HQ			2.80 GHz	8 MB	45 W	Intel® Iris™ Pro Graphics 580			
FCBGA1440	Core™ i5	14nm Skylake	4/4	i5-6442EQ	1.90 GHz	6 MB	25 W	Intel® HD Graphics 530	350 MHz	DDR4-2133, LPDDR3-1866, DDR3L-1600	QM170/HM170
			4/4	i5-6440EQ	2.70 GHz	6 MB	45 W				
			4/4	i5-6300HQ	2.30 GHz	6 MB	45 W				
			4/4	i5-6350HQ	2.30 GHz	6 MB	45 W	Intel® Iris™ Pro Graphics 580			
	Core™ i3		2/4	i3-6102E	1.90 GHz	3 MB	25 W	Intel® HD Graphics 530			
			2/4	i3-6100E	2.70 GHz	3 MB	35 W				
			2/4	i3-6100H	2.70 GHz	3 MB	35 W				
			2/2	G3900E	2.40 GHz	2 MB	35 W				
	Celeron®		2/2	G3902E	1.60 GHz	2 MB	25 W				
FCBGA1364		Core™ i7	22nm Haswell	4/8	i7-4700EC	2.7 GHz	8 MB	43 W	Intel® HD Graphics 4600	400 MHz	DDR3L 1333/1600
	4/8			i7-4700EQ	2.4 GHz	6 MB	47 W	None	400 MHz		
	4/8			i7-4702EC	2 GHz	8 MB	27 W	None	400 MHz		
	Core™ i5	2/4		i5-4422E	1.8 GHz	3 MB	25 W	Intel® HD Graphics 4600	400 MHz		
		2/4		i5-4410E	2.9 GHz	3 MB	37 W	None	400 MHz		
		2/4		i5-4402EC	2.5 GHz	4 MB	27 W	None	-		
		2/4		i5-4402E	1.6 GHz	3 MB	25 W	Intel® HD Graphics 4600	400 MHz		
		2/4		i5-4400E	2.7 GHz	3 MB	37 W		400 MHz		
		Core™ i3		2/4	i3-4100E	2.4 GHz	3 MB		37 W	400 MHz	
	2/4			i3-4102E	1.6 GHz	3 MB	25 W		400 MHz		
	2/4			i3-4110E	2.6 GHz	3 MB	37 W		400 MHz		
	2/4			i3-4112E	1.8 GHz	3 MB	25 W		400 MHz		
	Celeron®			2/2	2002E	1.5 GHz	2 MB	25 W	Intel® HD Graphics	400 MHz	
		2/2		2000E	2.2 GHz	2 MB	37 W	400 MHz			

Yellow means long-term support

Intel® Mobile Processors: Core™ i7, i5, i3, and Celeron®

Supported Sockets	Brand	Process	Cores/Threads	Package Type	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset	
rPGA988B	Core™ i7 Extreme Edition	22nm Ivy Bridge	4/8	PGA	i7-3940XM	3 GHz	8 MB	55 W	-	1.35 GHz	DDR3/L-RS 1333/1600	QM77/ QM67	
			4/8		i7-3920XM	2.9 GHz	8 MB	55 W	-	1.3 GHz			
	Core™ i7 Extreme Edition	32nm Sandy Bridge	4/8		i7-2960XM	2.7 GHz	8 MB	55 W	-	1.3 GHz	DDR3-1066/1333/1600		
			4/8		i7-2920XM	2.5 GHz	8 MB	55 W	-	1.3 GHz			
	Core™ i7	22nm Ivy Bridge	4/8		i7-3840QM	2.8 GHz	8 MB	45 W	-	1.3 GHz	DDR3/L-RS 1333/1600	QM77/ QM67/ HM65	
			4/8		i7-3820QM	2.7 GHz	8 MB	45 W	-	1.25 GHz			
			4/8		i7-3740QM	2.7 GHz	6 MB	45 W	-	1.3 GHz			
			4/8		i7-3720QM	2.6 GHz	6 MB	45 W	-	1.25 GHz			
			4/8		i7-3632QM	2.2 GHz	6 MB	35 W	-	1.15 GHz			
			4/8		i7-3630QM	2.4 GHz	6 MB	45 W	-	1.15 GHz			
			4/8		i7-3612QM	2.1 GHz	6 MB	35 W	-	1.1 GHz			
			4/8		i7-3610QM	2.3 GHz	6 MB	45 W	-	1.1 GHz			
			4/8		i7-3610QE	2.3 GHz	6 MB	45 W	-	1.0 GHz			DDR3/L 1333/1600
			2/4		i7-3520M	2.9 GHz	4 MB	35 W	-	1.25 GHz			DDR3/L-RS 1333/1600
		32nm Sandy Bridge	4/8		i7-2860QM	2.5 GHz	8 MB	45 W	-	1.3 GHz	DDR3-1066/1333/1600		QM77/ QM67/ HM65
			4/8		i7-2820QM	2.3 GHz	8 MB	45 W	-	1.3 GHz			
			4/8		i7-2760QM	2.4 GHz	6 MB	45 W	-	1.3 GHz			
			4/8		i7-2720QM	2.2 GHz	6 MB	45 W	-	1.3 GHz			
	4/8	i7-2710QE	2.1 GHz		6 MB	45 W	-	1.2 GHz	DDR3-1066/1333				
	4/8	i7-2670QM	2.2 GHz		6 MB	45 W	-	1.1 GHz					
	2/4	i7-2640M	2.8 GHz		4 MB	35 W	-	1.3 GHz					
	4/8	i7-2630QM	2 GHz		6 MB	45 W	-	1.1 GHz					
	2/4	i7-2620M	2.7 GHz		4 MB	35 W	-	1.3 GHz	DDR3/L 1333/1600				
	Core™ i5	22nm Ivy Bridge	2/4		i5-3610ME	2.7 GHz	3 MB	35 W		-	950 MHz	DDR3/L-RS 1333/1600	
			2/4		i5-3360M	2.8 GHz	3 MB	35 W	-	1.2 GHz			
			2/4		i5-3320M	2.6 GHz	3 MB	35 W	-	1.2 GHz	DDR3/L-RS 1333/1600		
			2/4		i5-3210M	2.5 GHz	3 MB	35 W	-	1.1 GHz			
	Core™ i5	32nm Sandy Bridge	2/4		i5-2540M	2.6 GHz	3 MB	35 W	-	1.3 GHz	DDR3-1066/1333		
			2/4		i5-2520M	2.5 GHz	3 MB	35 W	-	1.3 GHz			
			2/4		i5-2510E	2.5 GHz	3 MB	35 W	-	1.1 GHz			
			2/4		i5-2450M	2.5 GHz	3 MB	35 W	-	1.3 GHz			
			2/4		i5-2435M	2.4 GHz	3 MB	35 W	-	1.3 GHz			
2/4			i5-2430M	2.4 GHz	3 MB	35 W	-	1.2 GHz					
2/4			i5-2410M	2.3 GHz	3 MB	35 W	-	1.2 GHz					
2/4			i3-3120M	2.5 GHz	3 MB	35 W	-	1.1 GHz	DDR3/L-RS 1333/1600				
2/4	i3-3110M	2.4 GHz	3 MB	35 W	-	1 GHz							
rPGA988B	Core™ i3	22nm Ivy Bridge	2/4	PGA	i3-3120M	2.5 GHz	3 MB	35 W	-	1.1 GHz	QM77/ QM67/ HM65		
			2/4		i3-3110M	2.4 GHz	3 MB	35 W	-	1 GHz			
	Core™ i3	32nm Sandy Bridge	2/4		i3-2370M	2.4 GHz	3 MB	35 W	-	1.15 GHz			
			2/4		i3-2350M	2.3 GHz	3 MB	35 W	-	1.15 GHz			
			2/4		i3-2330M	2.2 GHz	3 MB	35 W	-	1.1 GHz			
			2/4		i3-2330E	2.2 GHz	3 MB	35 W	-	1.05 GHz			
			2/4		i3-2328M	2.2 GHz	3 MB	35 W	-	1.1 GHz			
			2/4		i3-2312M	2.1 GHz	3 MB	35 W	-	1.1 GHz			
	Celeron®	32nm Sandy Bridge	2/2		i3-2310M	2.1 GHz	3 MB	35 W	-	1.1 GHz			
			2/2		B840	1.9 GHz	2 MB	35 W	-	1 GHz			
			2/2		B830	1.8 GHz	2 MB	35 W	-	1.05 GHz			
			2/2		B820	1.7 GHz	2 MB	35 W	-	1.05 GHz			
			2/2		B815	1.6 GHz	2 MB	35 W	-	1.05 GHz			
			2/2		B810	1.6 GHz	2 MB	35 W	-	950 MHz			
			2/2		B800	1.5 GHz	2 MB	35 W	-	1 GHz			
			1/1		B720	1.7 GHz	2 MB	35 W	-	1 GHz			
1/1	B710	1.6 GHz	1.5 MB	35 W	-	1 GHz							
Socket988A	Core™ i7 Extreme Edition	Quad	PGA	i7-940XM	2.13G	8M	55W	-	-	1333 MHz 1066 MHz	QM57/ HM55		
				i7-920XM	2.0G	8M	55W	-	-				
	Core™ i7			i7-840QM	1.86G	8M	45W	-	-			500MHz	
				i7-820QM	1.73G	8M	45W	-	-				
				i7-740QM	1.73G	6M	45W	-	-				
				i7-720QM	1.6G	6M	45W	-	-				
				i7-640M	2.8G	4M	35W	-					
				i7-620M	2.66G	4M	35W	-					
		i5-580M		2.66G	3M	35W	-						
		i5-560M		2.66G	3M	35W	-						
	Core™ i5	45nm		i5-540M	2.53G	3M	35W	-					
				i5-520M	2.4G	3M	35W	-					
				i5-480M	2.66G	3M	35W	-					
				i5-460M	2.53G	3M	35W	-					
				i5-450M	2.4G	3M	35W	-					
				i5-430M	2.26G	3M	35W	-					
				i3-390M	2.66G	3M	35W	-					
				i3-380M	2.53G	3M	35W	-					
	Core™ i3			i3-370M	2.4G	3M	35W	-					
				i3-350M	2.26G	3M	35W	-					
i3-330M			2.13G	3M	35W	-							
P4600			2.0G	2M	35W	-							
Celeron®		P4500	1.86G	2M	35W	-							

AMD® CPU List

Supported Sockets	Brand	process	Cores/Threads	Processor Number	Processor Base Frequency	Cache	TDP	Processor Graphics	Graphics Base Frequency	Memory Types	Chipset	
AMD AM5	Ryzen™ 7	Ryzen 8000 Series	8/16	AMD Ryzen™ 7 8700G	4.2 GHz	8 MB	65 W	AMD Radeon™ 780M	2900 MHz	DDR5	A620/ B650/ X670/ X670E	
				AMD Ryzen™ 7 8700F	4.1 GHz	8 MB	65W	Discrete Graphics Card Required	-			
	Ryzen™ 5		6/12	AMD Ryzen™ 5 8600G	4.30 GHz	6 MB	65W	AMD Radeon™ 760M	2800 MHz			
				AMD Ryzen™ 5 8500G	3.50 GHz	6 MB	65W	AMD Radeon™ 740M	2800 MHz			
				AMD Ryzen™ 5 8400F	4.20 GHz	6 MB	65W	Discrete Graphics Card Required	-			
	Ryzen™ 3		4/8	AMD Ryzen™ 3 8300G	3.40 GHz	4 MB	65W	AMD Radeon™ 740M	2600 MHz			
	Ryzen™ 9	Ryzen 7000 Series	16/32	AMD Ryzen™ 9 7950X3D	4.20 GHz	16 MB	120W	AMD Radeon™ Graphics	2200 MHz			
				AMD Ryzen™ 9 7950X	4.50 GHz	16 MB	170W					
			12/24	AMD Ryzen™ 9 7900X3D	4.40 GHz	12 MB	120W					
				AMD Ryzen™ 9 7900X	4.70 GHz	12MB	170W					
				AMD Ryzen™ 9 7900	3.70 GHz	12 MB	65W					
				AMD Ryzen™ 9 PRO 7945	3.70 GHz	12MB	65W					
	Ryzen™ 7		8/16	AMD Ryzen™ 7 7800X3D	4.20 GHz	8 MB	120 W					
				AMD Ryzen™ 7 7700X	4.50 GHz	8 MB	105 W					
				AMD Ryzen™ 7 7700	3.80 GHz	8 MB	65 W					
				AMD Ryzen™ 7 PRO 7745	3.80 GHz	8 MB	65 W					
	Ryzen™ 5	6/12	AMD Ryzen™ 5 7600X	4.70 GHz	6 MB	105 W						
			AMD Ryzen™ 5 7600	3.80 GHz	6 MB	65 W						
			AMD Ryzen™ 5 PRO 7645	3.80 GHz	6 MB	65 W						
			AMD Ryzen™ 5 7500F	3.70 GHz	6 MB	65 W	Discrete Graphics Card Required	-				
AMD Phoenix FP7/FP7r2/FP8	Ryzen™ 9	Ryzen 8000 Series	8/16	Ryzen™ 9 8945HS	4.0 GHz	8 MB	45w	AMD Radeon™ 780M	2800 MHz	DDR5 (FP7r2) , LPDDR5X (FP7-FP8)	-	
	Ryzen™ 7		8/16	Ryzen™ 7 8845HS	3.8 GHz	8 MB	45w	AMD Radeon™ 780M	2700 MHz			
				Ryzen™ 7 8840U	3.3 GHz	8 MB	28w		2700 MHz			
				Ryzen™ 7 8840HS	3.3 GHz	8 MB	28w		2700 MHz			
	Ryzen™ 5		6/12	Ryzen™ 5 8645HS	4.30 GHz	6 MB	45W	AMD Radeon™ 760M	2600 MHz			
				Ryzen™ 5 8640U	3.50 GHz	6 MB	28W		2600 MHz			
				Ryzen™ 5 8640HS	3.50 GHz	6 MB	28W		2600 MHz			
	Ryzen™ 3		4/8	Ryzen™ 5 8540U	3.2 GHz	6 MB	28W	AMD Radeon™ 740M	2800 MHz			
				Ryzen™ 3 8440U	3.0 GHz	4 MB	28W	AMD Radeon™ 740M	2500 MHz			
				Ryzen™ 9	8/16	Ryzen™ 9 7940HS	4.0 GHz	8 MB	45W			AMD Radeon™ 780M
	Ryzen™ 9 PRO 7940HS		4.0 GHz			8 MB	45W	2800 MHz				
	Ryzen™ 7	8/16	Ryzen™ 7 7840U			3.30 GHz	8 MB	28W	AMD Radeon™ 780M			2700 MHz
			Ryzen™ 7 PRO 7840U			3.30 GHz	8 MB	28W				2700 MHz
			Ryzen™ 7 7840HS			3.30 GHz	8 MB	28W				2700 MHz
			Ryzen™ 7 PRO 7840HS			3.80 GHz	8 MB	45W				
			Ryzen™ 7 7736U	2.70 GHz	4 MB	28W	AMD Radeon™ 680M	2200 MHz				
	Ryzen™ 7 7735U	2.70 GHz	4 MB	28W	AMD Radeon™ 680M	2200 MHz						
	Ryzen™ 7 7735HS	3.20 GHz	4 MB	45W	AMD Radeon™ 680M	2200 MHz						
	Ryzen™ 5	6/12	Ryzen™ 7 7435HS	3.1 GHz	4 MB	45W	Discrete Graphics Card Required	-				
			Ryzen™ 5 7640U	3.50 GHz	6 MB	28W	AMD Radeon™ 760M	2600 MHz				
			Ryzen™ 5 PRO 7640U	3.50 GHz	6 MB	28W	AMD Radeon™ 760M	2600 MHz				
			Ryzen™ 5 PRO 7640HS	4.30 GHz	6 MB	45W	AMD Radeon™ 760M	2600 MHz				
			Ryzen™ 5 7640HS	3.80 GHz	6 MB	45W	AMD Radeon™ 760M	2600 MHz				
			Ryzen™ 5 PRO 7545U	3.20 GHz	6 MB	28w	AMD Radeon™ 740M	2800 MHz				
			Ryzen™ 5 7545U	3.20 GHz	6 MB	28w	AMD Radeon™ 740M	2800 MHz				
			Ryzen™ 5 PRO 7540U	3.20 GHz	6 MB	28w	AMD Radeon™ 740M	2800 MHz				
			Ryzen™ 5 7540U	3.20 GHz	6 MB	28W	AMD Radeon™ 740M	2500 MHz				
			Ryzen™ 5 7535U	2.9 GHz	3 MB	28W	AMD Radeon™ 660M	1900 MHz				
Ryzen™ 5 7535HS	3.3 GHz	3 MB	45W	AMD Radeon™ 660M	1900 MHz							
Ryzen™ 3	4/8	Ryzen™ 3 7440U	3.0 GHz	4 MB	28W	AMD Radeon™ 740M	2500 MHz					
		Ryzen™ 3 7335U	3.0 GHz	2 MB	28W	AMD Radeon™ 660M	1800 MHz					

Yellow means long-term support


Next Generation Edge Computing Platform


Empowering resilient, scalable, and sustainable edge infrastructure



Introduction

To address the challenges of managing diverse edge workloads, reducing system complexity, and improving resource utilization in industrial environments, IEI introduces the Next Generation Edge Computing Platform — a comprehensive solution integrating the IEI Remote Management (iRM) system and the Virtualization Edge Computer (iVEC).

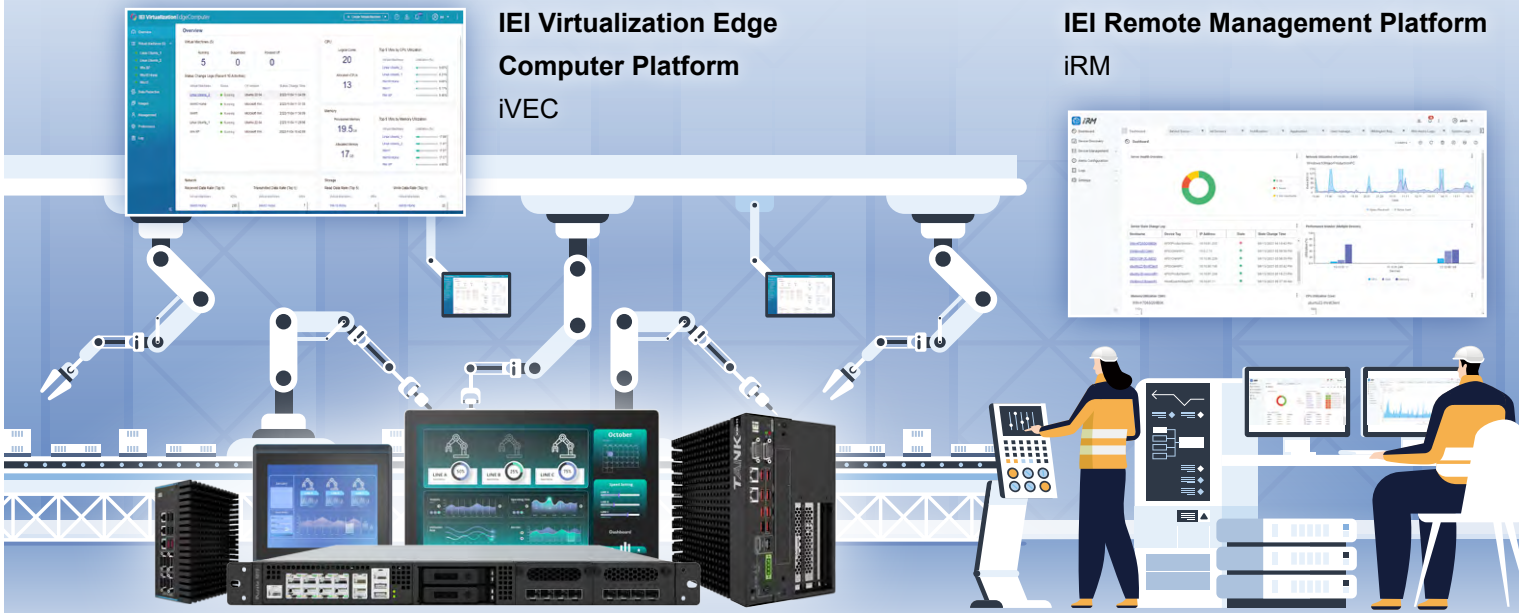

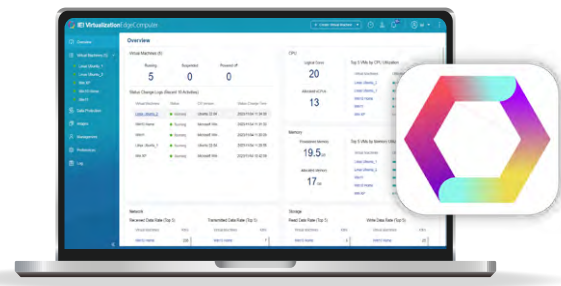

iVEC
IEI Virtualization Edge Computer Platform

iVEC (IEI Virtualization Edge Computer) is a virtualization-based edge computing platform developed by IEI, designed specifically for industrial automation and smart manufacturing applications. It integrates virtualization technology with high-performance hardware to run multiple operating systems and applications simultaneously on a single device, improving hardware resource utilization and simplifying system management.

Why iVEC:
Features, Advantages, and Benefits for the Industrial Edge




Efficient Resource Management

- F: Customizable edge computer configurations: CPU, memory, storage, and networking
- A: Maximizes hardware utilization and ensures QoS (Quality of Service) for critical applications
- B: Optimizes hardware cost-efficiency and streamlines the supply chain




Web-Based Remote Access for Streamlined Maintenance

- F: Web-based remote desktop for user session login and system control
- A: Enables remote maintenance through multi-team collaboration
- B: Reduces OT/IT maintenance costs and accelerates support response




Multi-OS Virtualization for Industrial Efficiency

- F: Multi-OS isolated deployment on a single physical host
- A: Saves physical space and reduces hardware requirements
- B: Simplifies deployment across industrial environments while minimizing device count

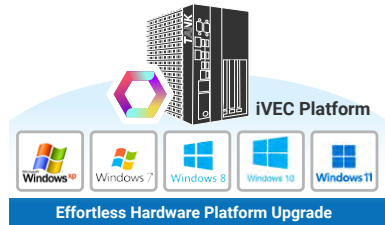


Legacy-to-Modern OS Compatibility for Smooth Upgrades

- F: Compatible with both Windows and Linux operating systems
- A: Enables operation of both legacy and modern software environments
- B: Seamlessly upgrades outdated platforms to modern hardware

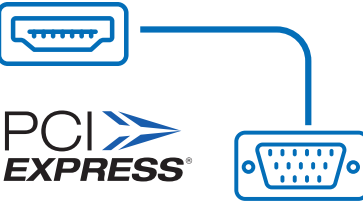

Advanced Peripheral Control and Secure I/O Access

- F: PCIe and USB device management
- A: Optional serial ports and USB access authorization
- B: Enhances hardware flexibility and local I/O security to meet regulatory compliance

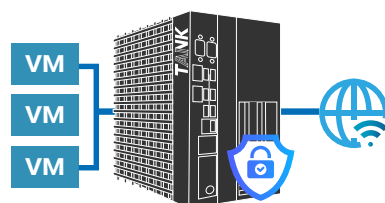

Secure and Efficient Networking with SDN

- F: Supports software-defined networking (SDN)
- A: Efficiently manages external network access and internal routing
- B: Strengthens threat protection across networks and systems to meet regulatory compliance



Integrated Monitoring and Redundancy for High System Availability

- F: Real-time virtual host monitoring and redundancy through iRM integration
- A: Provides a unified platform for continuous status tracking and redundancy management
- B: Supports incident response with comprehensive device information and enhances system availability to meet regulatory compliance


Software Specifications

Main Features	Sub Features	Main Features	Sub Features	
System Management Console	Web-based management console	Supported Guest Operating Systems	● Microsoft Windows: Windows 11, Windows 10, Windows 8.1, Windows 8, Windows 7, Windows XP SP3 ● Windows Server: Windows Server 2022, Windows Server 2019, Windows Server 2016 ● Linux - Ubuntu: Ubuntu 22.04, Ubuntu 20.10, Ubuntu 20.04, Ubuntu 19.10, Ubuntu 19.04, Ubuntu 18.10, Ubuntu 18.04, Ubuntu 17.10, Ubuntu 17.04, Ubuntu 16.10, Ubuntu 16.04 ● Linux - Debian: Debian 9.1.0 (Linux kernel: 4.9.0-6), Debian 10, Debian 11, Debian 12 ● Linux - Fedora: Fedora 24 – 26, Fedora 27–38 ● Linux - Red Hat: Red Hat Enterprise Linux 7, Red Hat Enterprise Linux 8, Red Hat Enterprise Linux 9 ● Linux - CentOS: CentOS 7.0 - 7.4, CentOS 8.0-8.5, CentOS Stream 8/9 ● Linux - SUSE: Suse Linux Enterprise Server 15 ● UNIX - FreeBSD: FreeBSD 11, FreeBSD 12, FreeBSD 13	
System Overview Dashboard	● VM Status Monitoring: VM running and status change ● CPU Utilization Monitoring: CPU utilization ranking ● Memory Utilization Monitoring: Memory utilization ranking ● Network Traffic Bandwidth Monitoring: Network received and transmitted data rate ● Storage Performance Monitoring: Storage read and write data rate		Serial Connection Expansion Card for VM	IEI approved RS232/RS485 card
Virtual Machine Management	● VM Creation ● VM Import ● VM Migration ● Virtual Desktop Console Support for Managing VMs: Browser base ● VM Power Management ● Single VM management: > Information and dashboard: General, System, Display and Sound, Others, Storage, Network > Real time monitor: CPU usage, memory usage, network throughput, disk throughput > Snapshot management > Logs query ● Edit VM: > Synchronize time > Edit > Clone > Export > Data protection > Single VM share link management > Delete VM		AI Acceleration for VM	● iGPU (CPU integrated GPU): virtual GPU card supports up to 7 VM (based on Intel Core-i9 13900TE) ● Dedicated GPU : NVIDIA GeForce Series Note: The VM enabled AI Acceleration will not support Browser base VM remote desktop
			NIC Expansion Card	IEI approved POE NIC Card
			Maximum Number of Snapshots	Up to 32 per VM
Data Protection Plan Management	● Query for Protection Plan ● Creating a Backup Data Protection Plan ● Restoring a Backup Data Protection Plan ● Run Backup Data Protection Plan ● Edit Data Protection Plan ● Delete Data Protection Plan	Maximum Number of Simultaneously Running VMs	The number of concurrently-running VMs is generally limited to the available CPU and memory resources of the device. Running multiple VMs at the same time may affect the performance of the device.	
OS Images Management	● Search OS Image ● Edit OS Image ● Delete OS Image ● Upload OS Image	Maximum Number of VMs	No limit	
		Maximum Number of Virtual Devices	Each VM supports up to 16 devices, including hard disks and CD/ DVD ROMs.	
System Management	● User management ● VM access permissions ● Overall VM share link management ● Overall VM exported file management	Maximum Number of Virtual Network Adapters	Up to 8 per VM	
		Maximum Number of Physical USB Connections	Up to 4 per VM	
System Preferences	● Memory: >Provisioning System Memory >Memory Optimizer ● Remote Device Credentials Management	Maximum Number of Physical PCIe Connections	Up to 3 per VM	
		Supported File Types for Import	*.ova, *.ovf, *.vmx, *.qvm(from iVEC), *.vhdx	
System Log	● Query Log ● Save and export Log ● Clear Log	Supported File Types for Export	*.ovf, *.qvm, *.vhdx	
		Host OS Support	Ubuntu IoT 22.04 LTS for Intel Platform	
Virtual Desktop Console for Managing VM	● Browser base remote desktop ● Pin task bar ● Task bar layout option ● VM power management ● Take snapshot ● Display quality setting ● Send function key and custom key ● Full screen ● Capture screen to image ● Audio on/off	Hardware Support	IEI approved hardware	
		Application OTA Upgrade	Supported	
		External Storage Support	● iRM Mini Server (recommended QTS OS V5.1.*) ● iVEC Node ● QNAP Storage (recommended QTS OS V5.1.*)	
		Network	● IP Configurations: Manual (Static IP) / DHCP (Dynamical IP) Client ● Network Mode: Bridge and NAT ● Network Redundancy Support: Active/Standby mode of operation (for detail setting , please check user manual) ● Virtual Networking Support: Yes Note: ● Support user-defined bridge networks ● Optional Accessories: IEI PoE LAN Module for network expansion	



Hardware Specifications

Model	IVEC-TANKXM811-RPL01-R10	IVEC-TANKXM811-RPL02-R10	IVEC-TANKXM811-RPL03-R10	IVEC-TANKXM811-RPL04-R10
Form Factor				
Color	Black			
Dimension (W x D x H)	137.9 x 255.4 x 230.6 mm			
Fan/Fanless	Fanless (optional external fan helps to increase system performance in harsh environment)			
Chassis Construction	Extruded aluminum alloys			
Motherboard				
CPU	Intel® Core™ i9-13900TE 1.0GHz [up to 5.0GHz, 24-Core (8P+16E), 32 Thread, TDP 35W]	Intel® Core™ i7-13700TE 1.1GHz [up to 4.8GHz, 16-Core (8P+8E), 24 Thread, TDP 35W]	Intel® Core™ i5-13500TE 1.3GHz [up to 4.5GHz, 14-Core (6P+8E), 20 Thread, TDP 35W]	Intel® Core™ i3-13100TE 2.4GHz [up to 4.1GHz, 4-Core (4P), 8 Thread, TDP 35W]
Virtual CPU	32	24	20	8
Chipset	Intel® R680E			
System Memory	1 x 32GB SO-DIMM DDR4 3200MHz (pre-installed)	1 x 32GB SO-DIMM DDR4 3200MHz (pre-installed)	1 x 16GB SO-DIMM DDR4 3200MHz (pre-installed)	1 x 16GB SO-DIMM DDR4 3200MHz (pre-installed)
	up to 2 x SO-DIMM DDR4 and 64GB, support ECC memory SKU			
Storage				
Hard Drive	Host OS: 1 x 2.5" 512GB SATA 6Gb/s SSD (pre-installed)			
	VM Storage: 1 x 1TB M.2 2280 M-key SSD (NVMe PCIe x4, pre-installed)			
I/O Interfaces				
Ethernet	2 x RJ45: 1 x Intel I226LM 2.5GbE 1 x Intel I226-V 2.5GbE (Note: I225 LM/-V 2.5GbE in the previous motherboard version)			
USB 3.2 Gen 2 (10Gb/s)	8			
COM	2 x RS-232/422/485			
	4 x RS-232			
Digital I/O	12-bit (6-in/6-out)			
Display	1 x DP++ (up to 4096 x 2160@60Hz)			
	1 x HDMI (up to 4096 x 2160@30Hz)			
Expansion Slots				
M.2	1 x 2230 A-key (PCIe x1/ USB 2.0 support Intel® vPro)			
Backplane	2 x PCIe x16 slot (x8 signal, pre-installed, total power up to 75W, support FHHL card)			
Power				
Power Input	DC Jack: 12V ~ 28V DC			
	Terminal Block: 12V ~ 28V DC			
Remote Power	Terminal Block: 2-pin			
Reliability				
Mounting	Wall mount			
Operating Temperature	-20°C ~ 60°C with air flow (with SSD), 10% ~ 95%, non-condensing			
Storage Temperature	-40°C ~ 80°C, 10% ~ 95%, non-condensing			
Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (with SSD)			
Operation Vibration	MIL-STD-810G 514.6C-1 (with SSD)			
Weight (Net / Gross)	4.6kg / 5.6kg			
Safety / EMC	CE / FCC			
Watchdog Timer	Programmable 1 ~ 255 sec/min			
OS				
Host OS	Ubuntu IoT 22.04 LTS for Intel Platform (pre-installed) Ubuntu IoT Certified Device : https://ubuntu.com/certified/202307-31831			
Guest OS	Windows / Linux OS (For detail, refer to software spec)			

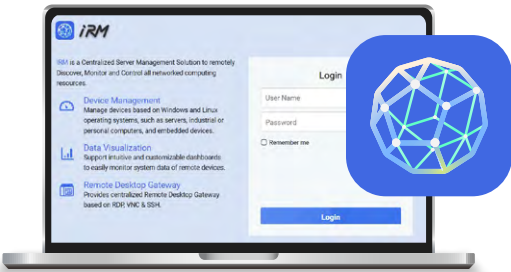

iRM
IEI Remote Management Solution


iRM is IEI's Centralized Remote Management Solution designed for OT/IT Teams for Industry PC. It provides single point solution to monitor all the Critical IPC such as Industrial Servers/IPC/vIPC in OT network. iRM helps to easily monitor your OT/IT infrastructure worldwide through single interface within fraction of time.

Comprehensive Edge Management Solution




Centralized Device Management

iRM provides a unified platform for monitoring and controlling multiple edge devices across various locations, simplifying IT/OT operations and reducing maintenance costs.

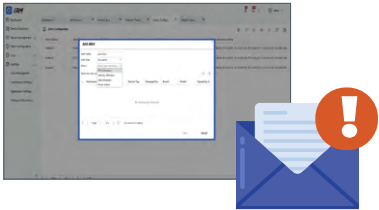

Configurable Email Alerts

The iRM solution offers configurable email alerts, enabling real-time notifications on critical metrics and system anomalies. This proactive approach helps users respond quickly, minimizing downtime and ensuring continuous performance.



Resilient Reliability

With wide-temperature support from -40 to 70 °C, it's built for demanding industrial environments.



Advanced Data Protection

With support for various RAID configurations, iRM enhances data reliability and safeguards against potential data loss.



Cross-Platform Compatibility

RM is fully compatible with x86 platforms and can manage devices running both Linux and Windows operating systems, offering flexibility in diverse industrial settings.



Ready to Recover

The mini server features pre-installed iRM software and an embedded OS with built-in malware removal. It supports one-click restore to factory settings while preserving field configurations via snapshots. Optional McAfee antivirus adds an extra layer of protection to this all-in-one solution



Application : Logistics & Warehousing

With over 3,000 logistics sites across China deploying 4U edge servers, the customer faced major challenges in remotely managing and maintaining systems from headquarters. The absence of an out-of-band management solution resulted in prolonged recovery times and increased operational costs. To solve this, IEI deployed a comprehensive out-of-band management solution featuring: OOB Module (iRIS2-2600) for remote power control and full KVM access One Key Recovery 2 Software for fast system backup and recovery iRM Platform for centralized web-based management, enabling remote KVM, device grouping, and fault alert tracking

Software Specifications

Main Features	Sub Features	
Dashboard and Widget (user defined dashboard by system built-in widget)	CPU Utilization, Memory Utilization, Disk Utilization Disk Volume Live Information, Disk Throughput Network Utilization, IPMI Device Monitor CPU and system temperature , FAN Speed	Device Health Overview State Change Log Shutdown Devices (Recent 10) State Change Log Shutdown Devices (Recent 10) Performance Monitor Multiple Devices Monitor Single Devices Monitor Export to PDF Export and email as PDF document
	Device Discovery (add your client device in iRM platform through network)	Device Discovery by network Add Device Search Device
Device Management	Single and Multi Device Management Page • Export PDF • Email as PDF • Add Device • Delete Device	Remote Power Control Remote Desktop Remote Wtchdog Control Network Topology View
	Alert Configuration	CPU or System Temperature FAN speed
OOB (Out-of-Band) Management	Remote KVM Remote Power Control Hardware health monitor	IPMI 2.0 based remote management IEI IRIS2 Support
Logs	iRM Alerts Log System Log Historic Data IPMI Log Log Query	
Settings	Notification Settings Application Settings User Management: system admin, OT power user iRMAgent Repository Download	
Monitored Client OS Support	• Windows® 32-Bit: Windows® 7, Windows® 8/8.1 • Windows® 64-Bit: Windows® 7, Windows® 8/8.1, Windows® 10, Windows® 11, Windows® Server 2012, Windows® Server 2016,Windows® Server 2019, Windows® Server 2022 • Ubuntu 64-Bit: Ubuntu 16.04, Ubuntu 18.04, Ubuntu 20.04, Ubuntu 22.04, Ubuntu 24.04 • Debian 64-Bit : Debian 8, Debian 9, Debian 10, Debian 11, Debian 12 • CentOS 64-Bit: CentOS 7	
	Software Standard Warranty and Support	1 Year



Mini Server Appliance Specifications

Model		iRM-TSi410X	iRM-TS410E
Chassis	Color	Black	Black
	Dimensions (H x W x D)	65 x 180 x 254 mm (2.56 x 7.09 x 10 in)	60 x 180 x 254 mm (2.36 x 7.09 x 10 in)
	Fan/Fanless	Fanless	Fanless
	Construction	Extruded aluminum alloy	Extruded aluminum alloy (front panel: plastic)
Processor	CPU	Intel® Atom® x6425E	Intel® Celeron® J6412
	Frequency	4-core/4-thread 2.0 GHz base/3.0 GHz burst	4-core/4-thread processor, burst up to 2.6 GHz
	Encryption engine	AES-NI	AES-NI
	Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	Intel® UHD Graphics for 10th Gen Intel® Processors
Memory	Pre-installed	8 GB RAM	8 GB RAM (on board)
	Maximum	8 GB RAM	8 GB RAM (non-expandable)
	Flash memory	4 GB (dual-boot OS protection)	4 GB (dual-boot OS protection)
Storage	Drive bays	4 x 2.5-inch SATA 6 Gbps	4 x 2.5-inch SATA 6 Gbps
	Hot-swapping	This device supports hot-swapping for all drives.	This device supports hot-swapping for all drives.
	Pre-installed SSD/ HDD	2 x 2.5-inch 512GB SATA SSD with RAID 1 Operational Temperature: - 20°C to 75°C	2 x 2.5-inch 512GB SATA SSD with RAID 1 Operational Temperature: 0°C to 70°C
	RAID	Support RAID 1 / 5 / 6 / 10	Support RAID 1 / 5 / 6 / 10
Network	10 Gigabit network interface	2 x 10G BASE-T (10G/5G/2.5G/1G)	2 x 2.5 GbE RJ45 (2.5G/1G/100 Mb./10 Mb.)
External I/ O Ports & Expansion Slots	USB ports	4 x USB 3.2 Gen 2 Type-A	4 x USB 3.2 Gen 2 Type-A
	HDMI™ ports	1 x HDMI™ 1.4b (up to 3840 x 2160 resolution at 30Hz)	1 x HDMI™ 1.4b (up to 3840 x 2160 resolution at 30 Hz)
Interface	Buttons	Power / Reset	Power / Reset
Power	Power supply unit	1. External power adapter 90W and above, 100-240V AC 2. 9-36V DC input	External power adapter, 90W and above, 100-240V AC
	System battery	CR2032 lithium battery (3V, 225 mAh)	CR2032 lithium battery (3V, 225 mAh)
Relative Humidity	Relative humidity	• Non-condensing relative humidity: 5% to 95% • Wet-bulb temperature: 27°C (80.6°F)	• Non-condensing relative humidity: 5% to 95% • Wet-bulb temperature: 27°C (80.6°F)
Package	Package Dimensions	290 x340 x195 mm (11.42 x 11.39 x 7.68 in)	290 x340 x195 mm (11.42 x 11.39 x 7.68 in)
Reliability	Operating Temperature	-40°C to 70°C (-40°F to 158°F)	0°C to 40°C (32°F to 104°F)
	Storage Temperature	-45 - 85°C (-49°F - 185°F)	-20°C to 70°C (-4°F - 158°F)
Mount	Mount support	• VESA mount: 75 x 75 mm (2.95 x 2.95 in) Load bearing: > 15 kg (33.07 lbs) M4x6 screws Hole depth: 7.5 mm (0.26 in) Tooth depth: 5 mm (0.20 in)	• Stand Mount • VESA mount: 75 x 75 mm (2.95 x 2.95 in) Load bearing: > 15 kg (33.07 lbs) M4x6 screws Hole depth: 7.5 mm (0.26 in) Tooth depth: 5 mm (0.20 in)
Weight	Net weight	2.54 kg (5.6 lbs)	2.64 kg (5.82 lbs)
	Gross weight	3.85 kg (8.5 lbs)	3.83 kg(8.44 lbs)
Safety / EMC		CE / UKCA / FCC / VCCI-B / BSMI	CE / UKCA / FCC / VCCI-B / BSMI
Hardware Standard Warranty		3 Years	3 Years
Pre-install Application		iRM (IEI Remote Management)	iRM (IEI Remote Management)

AIoT Developer Kit

IEI's AIoT Dev Kit is an all-in-one solution designed to streamline the development of edge AI applications. It integrates Intel® Iris® Xe Graphics, delivering enhanced GPU computing performance and speed. Powered by the Intel® Distribution of OpenVINO™ Toolkit and the Intel® Arc™ Graphics Card, the kit further boosts AI inference capabilities.you can enjoy next-gen AI applications in automating business, inference computing, and data analysis.




Model		TANK-XM811 AIoT_RPL Refresh	TANK-XM811 AIoT_RPL	TANK-XM811 AIoT_ADL
Form Factor	Color	Black		
	Dimension (W x D x H)	137.9 x 255.4 x 230.6 mm		137.9 x 255.4 x 230.6 mm
	Fan/Fanless	Fan		Fan (in expansion chassis)
	Chassis Construction	Extruded aluminum alloys		
Motherboard	CPU	Intel® Core™ i9-14900T 1.1GHz (up to 5.1GHz, 24-Core (8P+16E), TDP 35W) Intel® Core™ i7-14700T 1.3GHz (up to 5.0GHz, 16-Core (8P+12E), TDP 35W)	Intel® Core™ i9-13900TE 1.0GHz (up to 5.0GHz, 24-Core (8P+16E), TDP 35W) Intel® Core™ i7-13700TE 1.1GHz (up to 4.8GHz, 16-Core (8P+8E), TDP 35W)	Intel® Core™ i5-12500TE 1.9GHz (up to 4.3GHz, 6-Core, TDP 35W)
	Chipset	Intel® R680E		
	System Memory	2 x SO-DIMM DDR4 3200MHz (2 x 16GB non-ECC Pre-installed, up to 64GB, support ECC SKU)		
Storage	Hard Drive	13th (RPL): 1 x 2.5" HDD/SSD bay (256GB SSD pre-installed) 14th (RPL Refresh): 1 x 2.5" HDD/SSD bay (512GB SSD pre-installed)		2 x SO-DIMM DDR4 3200MHz (2 x 8GB non-ECC Pre-installed, up to 64GB, support ECC SKU)
I/O Interfaces	Ethernet	2 x RJ45: 1 x Intel I226LM 2.5GbE 1 x Intel I226-V 2.5GbE (Note: I225-LM/-V 2.5GbE on previous motherboard version)		2 x RJ45: 1 x Intel I225LM 2.5GbE 1 x Intel I225V 2.5GbE
	USB 3.2 Gen 2 (10Gb/s)	8		8
	COM	2 x RS-232/422/485 4 x RS-232		
	Digital I/O	12-bit (6-in/6-out)		
	Display	1 x DP++ (up to 4096 x 2160@60Hz) 1 x HDMI (up to 4096 x 2160@30Hz)		
	TPM 2.0	Supports Intel® Platform Trust Technology (Intel® PTT)		
Expansion Slots	M.2	1 x 2230 A-key (PCIe x1/ USB 2.0 support Intel® vPro) 1 x 2280 M-key (PCIe x4)		
	Backplane	2 x PCIe x8 slot (total power up to 75W, support FHHL card)		1 x PCIe Gen4 x16 (PCIe x8 signal) - support dual slot card 1 x PCIe Gen4 x16 (PCIe x8 signal) - Intel Arc Pro A40 pre-installed (Maximum total 75W for add-on card power consumption and support FHHL card)
Power	Power Input	DC Jack: 12V ~ 28V DC Terminal Block: 12V ~ 28V DC		
	Remote Power	Terminal Block: 2-Pin		
Reliability	Mounting	Wall mount		
	Operating Temperature	-20°C ~ 60°C with air flow (with SSD), 10% ~ 95%, non-condensing		0°C ~ 40°C with air flow (SSD + Discrete Graphics)
	Storage Temperature	-40°C ~ 80°C, 10% ~ 95%, non-condensing		
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (with SSD)		Half-sine wave shock 5G, 11ms, 100 shocks per axis (with SSD + Discrete Graphics)
	Operation Vibration	MIL-STD-810G 514.6C-1 (with SSD)		MIL-STD-810G 514.6C1 (with SSD + Discrete Graphics)
	Weight (Net / Gross)	4.6kg / 5.6kg		5.02 kg/ 6.02 kg
	Safety / EMC	CE / FCC		
	Watchdog Timer	Programmable 1 ~ 255 sec/min		
OS	Supported OS	Windows® 10 IoT Enterprise / Linux		Windows® 10/11 IoT Enterprise / Linux (Ubuntu 22.04 IoT)



Model		DRPC-240-TGL TSN/TCC
Form Factor	Dimensions	190 x 150 x 81 mm (DRPC-240AI-i5RCS-R10) 190 x 150 x 126 mm (DRPC-240AI-i5RC-R10)
	System Fan	Fanless (DRPC-240AI-i5RCS-R10) Fan (DRPC-240AI-i5RC-R10)
Motherboard	CPU	Intel® Core™ i5-1145GRE Processor 1.50GHz (up to 4.10GHz, quad core, TDP 12W to 28W)
	Chipset	SoC
	System Memory	2 x SO-DIMM DDR4 3200MHz (8GB pre-installed, up to 64GB)
Storage	Hard Drive	1 x 2.5" SATA 6Gb/s HDD/SSD bay (256GB SSD pre-installed)
I/O Interfaces	USB	2 x USB 3.2 Gen 2 2 x USB 2.0
	Ethernet	1 x RJ-45 PCIe 2.5 GbE via Intel® I225LM 3 x RJ-45 PCIe 2.5 GbE via Intel® I225V (colay i225LM) (Optional PoE at power board)
	COM	2 x RS-232 (DB9 with 2.5KV isolation, 1 reserved for TGPIO and console port) 2 x DB9 RS-422/485 with AFC (DB9 with 2.5KV isolation)
	DIO	1 x 12-bit digital I/O (6-in/6-out) (pin header)
	Display	1 x Lockable HDMI (up to 3840 x 2160 @ 30Hz) 1 x DP++ (up to 4096 x 2160 @ 60Hz)
	TPM 2.0	Supports Intel® Platform Trust Technology (Intel® PTT)
Expansion Slots	M.2	1 x 2230 A-key (PCIe x1 / USB 2.0) 1 x 3042/52/80 B-key (PCIe x2 / USB 2.0) with SIM slot
	Backplane	1 x PCIe Gen3 x4 (DRPC-240AI-i5RC only)
Others	Indicator	2 x LED (HDD, Power)
	Button	1 x Power button 1 x Reset button 1 x AT/ATX switch 1 x Remote power connector
Power	Power Input	3-pin terminal block: 12 ~ 28 VDC
	Remote Power	2-pin terminal block
Reliability	Mounting	DIN-Rail
	Operating Temperature	-20°C ~ 60°C with air flow (with SSD)
	Storage Temperature	-40°C ~ 85°C
	Humidity	10% ~ 95%, non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (with SSD)
	Operating Vibration	MIL-STD-810G 514.6C-1 (with SSD)
	Weight	1.5kg / 2.9kg (DRPC-240AI-i5RCS-R10) 1.9kg / 3.3kg (DRPC-240AI-i5RC-R10)
	Safety/EMC	CE / FCC
OS	Supported OS	Windows 10, Linux

Embedded Computers

AI-Accelerated Hybrid Computing



NPU Powered for Real-Time AI Acceleration



Scalable AI Performance:
PCIe x16, DDR5 and M.2 M-key

IEI offers a full range of industrial motherboards in ATX, MicroATX, Mini-ITX, and Computer-on-Module form factors. Featuring multi-core processing and robust integration, these platforms are ideal for demanding industrial applications. With long-term support, seamless upgrades, and strict revision control, IEI ensures dependable performance for mission-critical environments.

IMBA-ARL-W880

ATX powered by Intel® Core™ Ultra processors (Series 2) S-Series



KALI-ADL-Q670

Extended Mini-ITX powered by 14th Gen Intel® Core™ processors



Imaging Processing

Automatic Equipment

AI Inference

Highlights



Full Spectrum of Form Factors

- Seamless system integration
- From COM modules, ultra-compact 2.5" Pico-ITX to ATX



Touchable BIOS

- User-friendly interface
- Quick configuration
- Real-time monitoring



Industrial-Grade Durability

- Rugged, reliable, long lifecycle
- Wide temperature support
- Stable in harsh conditions



Advanced Thermal Management

- Passive & active cooling
- Optimized heat dissipation



High Speed Signal Simulation

- Ensures signal integrity for high-speed data transmission
- Enables optimized PCB layout for reliable system performance



Conformal Coating

- Protects the PCB from moisture, dust, and chemical contaminants
- Enhances reliability in harsh or high-humidity environments

* By project request

KINO-MPHX

Mini-ITX powered by AMD Ryzen™ 7040/8040 series

Optimized for vision AI and real-time analytics, this platform boost image inference and visual computing for scalable, high-performance AI deployments.



Quad Displays



3 x 2.5G LAN



6 x USB 3.2

NEW


ATX series



Model	IMBA-ARL-W880	IMBA-ARL-H810	IMBAX-SP6	IMBA-AM5
CPU Socket	LGA1851 socket	LGA1851 socket	AMD SP6 socket (LGA4844)	AMD Socket AM5
CPU Type	High-Performance Intel® Core™ Ultra Processors (Series 2) (up to 125W TDP CPU)	High-Performance Intel® Core™ Ultra Processors (Series 2)	AMD EPYC™ 8004 Series Processors	AMD Ryzen™ 7000&8000G PHX1&9000 Series Desktop Processors (up to 170W TDP CPU)
Chipset	Intel® W880	Intel® H810	N/A	AMD B650
Memory	Four 288-pin 6400 MHz Dual-Channel DDR5 SDRAM Unbuffered DIMMs supported up to 192GB (ECC & non-ECC support)	Two 288-pin 6400 MHz Dual-Channel DDR5 SDRAM CUDIMMs supported up to 96GB (ECC & non-ECC support)	Six 288-pin DDR5 4800MHz ECC RDIMM	Four 288-pin 5200 MHz Dual-Channel DDR5 SDRAM Unbuffered DIMMs supported up to 192GB
Display Interface	Quad independent display 1 x DP1.4 (up to 4K@60Hz) 1 x HDMI1.4 (up to 4K@30Hz) 1 x USB4 (up to 4K@60Hz) 1 x DP1.4 (up to 4K@60Hz) internal	Triple independent display 1 x DP1.4 (up to 4K@60Hz) 1 x HDMI2.0 (up to 4K@60Hz) 1 x iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)	1 x DP	Triple independent display 1 x DP 1.4 2 x HDMI 1.4
Ethernet	LAN1: Intel® I226-LM 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller	LAN1: Intel® I219 LM controller LAN2: Intel® I226V 2.5GbE controller	4 x 2.5G (I225-LM / I226-LM) Base-T LAN Ports	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller
I/O Interface	4 x USB 2.0 (2x4 pin, P=2.54) 2 x USB 3.2 Gen1 (2 X 10PIN P=2.00 pin wafer) (5Gb/s) 4 x RS-232 (2x5 pin, P=2.54)	2 x RS-232/422/485 (RS-485 support AFC) 2 x USB 3.2 Gen1 (Type-A) (5Gb/s) 2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 4 x RS-232 (2x5 pin, P=2.54) 4 x USB 2.0 (2x4 pin, P=2.54) 2 x USB 2.0 (Type-A)	On board IPMI AST-2600 (1 x DP1.1a, 1 x RJ45) 4 x USB 3.2 Gen1 (Type-A) (5Gb/s) 1 x RJ45 (RS-232 Console) 2 x USB (2x4 pin, P=2.54)	2 x USB 2.0 (2x4 pin, P=2.54) 1 x RS-232/422/485 (2x5 pin, P=2.54) 2 x USB 3.2 Gen1 (2x10 pin) 4 x RS-232 (2x5 pin, P=2.54) 4 x USB 3.2 Gen2 (Type-A) (10Gb/s) 2 x USB 3.2 Gen1 (Type-A) (5Gb/s) 1 x RS-232/422/485 (RS-485 support AFC)
Storage Interface	4 x SATA 6Gb/s (RAID 0/1/5/10 supported)	4 x SATA 6Gb/s	8 x SATA 6Gb/s	4 x SATA 6Gb/s
Audio	Realtek ALC888S HD codec 3 x Audio Jack (Line-in, Line-out, Mic-in) on rear IO 1 x Analog audio (2x5 pin)	Realtek ALC888S HD codec 1 x Audio Jack (Line-in, Line-out, Mic-in) on rear IO 1 x Analog audio (2x5 pin)	N/A	Realtek ALC888S HD Audio codec supports 2.1-channel 3 x Audio jacks (line-out, line-in, mic-in) on rear IO, 1 x Front audio (2x5 pin)
Digital I/O	12-bit digital I/O (2x7 pin)			12-bit digital I/O (2x7 pin)
Power Consumption	TBD	TBD	5VSB@0.7A, 5V@1.68A, 3.3V@0.87A, 12V@9.4A (AMD SP6 Siena 8-64 cores with 192GB (six of 32GB) 4800MHz DDR5 memory)	3.3V@1.62A, 5V@11.63A, 12V@19.46A, 5VSB@0.04A (AMD Ryzen 9 7950X; AMD Ryzen 9 7900 CPU with Apacer D12.35306H.001 32GB DDR5 5600 CL46 memory)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operation Environment	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x PCIe x16 with Signal Gen5 1 x PCIe x4 open-end Gen4 2 x PCIe x4 open-end Gen4 2 x PCIe x1 Gen4 1 x M.2 M Key (2280, PCIe x4) NVMe support 1 x M.2 M Key (2280, PCIe x2) NVMe support 1 x M.2 B key for IRIS2-2600	1 x PCIe x16 with Signal Gen5 1 x PCIe x4 open-end Gen4 2 x PCIe x1 Gen4 2 x PCI	3 x PCIe Gen4 x16 slot 3 x PCIe Gen4 x8 slot 4 x M.2 M Key slot (2242/2280, PCIe Gen4 x4 for SSD), NVMe supported	1 x PCIe Gen4 x16 2 x PCIe Gen4 x4 open-end 4 x PCIe Gen4 x1 open-end 1 x M.2 M Key
CPU Cooler			19100-000358-00-RS	19100-000344-00-RS 19100-000345-00-RS 19100-000348-00-RS 19100-000338-00-RS

**Intel® recommends that Alder Lake-S CPU PCIe ports are only used for discrete graphics and storage devices


ATX series

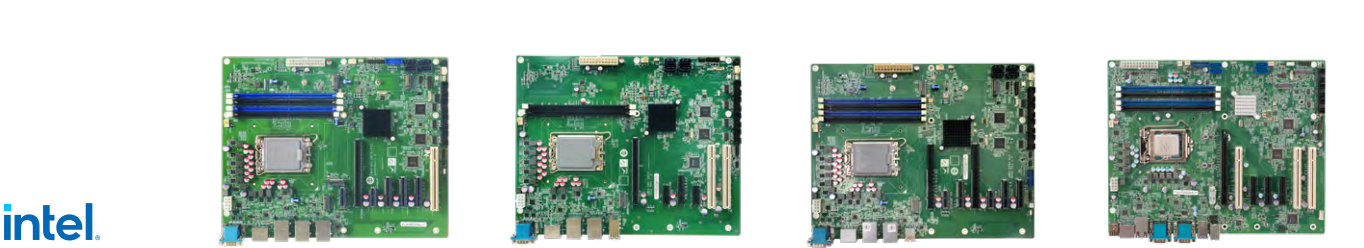

Model	IMBA-ADL-Q670	IMBA-ADL-H610	IMBA-R680	IMBA-Q470
CPU Socket	LGA1700	LGA1700	LGA1700	LGA1200
CPU Type	12th/13th/14th generation Alder Lake-S/ Raptor Lake-S Intel® Core™ i9/i7/i5/i3/ Pentium®/Celeron® Processor (up to 125W TDP CPU)	12th/13th/14th generation Alder Lake-S/Raptor Lake-S Intel® Core™ i9/i7/i5/i3/Pentium®/Celeron® Processor (up to 65W TDP CPU)	12th/13th/14th Generation Alder Lake-S/Raptor Lake-S Core™ i9/i7/i5/ i3/Pentium®/Celeron® Processor. up to 125W TDP CPU	10th/11th generation Intel® Core™ i9/i7/i5/i3, Pentium® or Celeron® processor. up to 125W TDP
Chipset	Intel® Q670/Q670E	Intel® H610/H610E	Intel® R680E	Intel® Q470/Q470E
Memory	Four 288-pin 3200 MHz dual-channel DDR4 SDRAM unbuffered DIMMs supported up to 128GB	Two 288-pin 3200 MHz dual-channel DDR4 SDRAM unbuffered DIMMs supported up to 64GB	Four 288-pin Dual-Channel DDR5 (up to 4400 MHz) SDRAM Unbuffered DIMMs supported up to 192GB (ECC & non-ECC support)	Four 288-pin 2933 MHz dual-channel DDR4 SDRAM unbuffered DIMMs (system max. 128 GB)
Display Interface	Triple independent display 1 x DP 1.4a (up to 4096 x 2304 @60Hz) 1 x HDMI 1.4 (up to 4096 x 2304 @30Hz) 1 x iDPM support IEI eDP/ LVDS/ VGA module	Triple independent display 1 x DP (up to 4096 x 2304 @60Hz) 1 x HDMI (up to 4096 x 2304 @30Hz) 1 x iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)	Triple independent display 1 x DP 1 x HDMI 1 x iDPM	Triple independent display 1 x VGA 1 x DP 1 x HDMI
Ethernet	LAN1: Intel® I225V/I226V 2.5GbE controller (CO-LAY I225LM/I226LM support vPro) LAN2: Intel® I225V/I226V 2.5GbE controller (CO-LAY I225LM/I226LM support vPro)	LAN1: Intel® i219 LM controller LAN2: Intel® I225V/I226V 2.5GbE controller	LAN1: Intel® I225LMX/I226LM 2.5GbE controller (colay I225V/I226V support vPro) LAN2: Intel® I225V/I226V 2.5GbE controller	LAN1: Intel® I225V/I226V 2.5GbE controller LAN2: Intel® I225V/I226V 2.5GbE controller
I/O Interface	4 x USB 3.2 Gen2 (Type-A) 2 x USB 3.2 Gen1 (Type-A) 2 x RS-232/422/485 4 x USB 2.0 (2x4 pin, P=2.54) 2 x USB 3.2 Gen1 (2x10pin P=2.00) 4 x RS-232 (2x5 pin, P=2.54)	2 x USB 3.2 Gen2 x1 (Type-A) 2 x USB 3.2 Gen1 x1 (Type-A) 4 x USB 2.0 (Type-A) 2 x RS-232/422/485 2 x USB 2.0 (2x4 pin, P=2.54) 4 x RS-232 (2x5 pin, P=2.54)	4 x USB 3.2 Gen2 (Type-A) 2 x USB 3.2 Gen1 (Type-A) 2 x RS-232/422/485 (RAID 0/1/5/10 supported) 4 x USB 2.0 (2x4 pin, P=2.54) 2 x USB 3.2 Gen1 (2 X 10PIN P=2.00 pin wafer) 4 x RS-232 (2x5 pin, P=2.54)	2 x USB 2.0 1 x RS-232/422/485 (RS-485 supports AFC) 2 x USB 3.2 Gen 1 2 x RS-232 2 x USB 3.2 Gen 2 1 x RS-422/485 (2x5 pin, P=2.54) (RS-485 supports AFC) 2 x RS-232 (2x5 pin, P=2.54) 2 x USB 3.2 Gen 1 (2x10 pin, P=2.0) 5 x USB 2.0 (2x4 pin, P=2.54)
Storage Interface	4 x SATA 6Gb/s	4 x SATA 6Gb/s	6 x SATA 6Gb/s (RAID 0/1/5/10 supported)	4 x SATA 6Gb/s (RAID 0/1/5/10 supported)
Audio	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin,P=2.0)	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2 x 5 pin)	Realtek ALC888S HD Audio codec
Digital I/O	12-bit digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin)	12-bit programmable I/O (12-bit GPIO is for programming I/O)	8-bit programmable I/O (8-bit GPIO is for programming I/O)
Power Consumption	3.3V@1.04A, 5V@10.38A, 12V@5.76A, 5VSB@0.39A (Intel® Core™ i9-12900E CPU with 8 GB 3200 MHz DDR4 memory, EuP mode enabled)	3.3V@0.36A, 5V@7.04A, 12V@5.62A, 5VSB@0.7A (Intel® Core™ i7-12700E CPU with two 32 GB 2933 MHz DDR4 memory, EuP mode enabled)	3.3V@0.89A, 5V@10.05A, 12V@6.05A, 5VSB@0.64A (Intel® Core™ i7-12700E CPU with four 16 GB 4800 MHz DDR5 memory, EuP mode enabled)	3.3V@1.36A, 5V@14.16A, 12V@7.5A (Intel® Core™ i9-10900E CPU with four 32 GB 3200 MHz DDR4 memory)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operation Environment	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	**1 x PCIe Gen4 x16 slot **1 x PCIe Gen4 x4 open-end slot 2 x PCIe Gen4 x4 open-end slot 2 x PCIe Gen3 x1 slot 1 x PCI slot 1 x M.2 M key 2242/80 (PCIe Gen3 x4) 1 x M.2 M key 2242/80 (PCIe Gen3 x2)	**1 x PCIe Gen4 x16 1 x PCIe Gen3 x4 open-end 2 x PCIe Gen3 x1 2 X PCI	**2 x PCIe Gen5 x16 slot with x8 Signal **1 x PCIe Gen4 x4 open-end 2 x PCIe Gen4 x4 open-end 2 x PCIe Gen3 x1 2 x M.2 M key 2242/80(PCIe Gen3 x4)	1 x PCIe 3.0 x16 slot 1 x M.2 2230 A key (PCIe 3.0 x1, USB 2.0) 3 x PCIe 3.0 x4 slot 1 x M.2 2242/80 M Key (PCIe 3.0 x4) 3 x PCI slot
CPU Cooler	19100-000323-00-RS 19100-000319-00-RS 19100-000333-00-RS 19100-000326-00-RS 19100-000327-00-RS	19100-000323-00-RS 19100-000319-00-RS 19100-000333-00-RS 19100-000326-00-RS 19100-000327-00-RS	19100-000323-00-RS 19100-000319-00-RS 19100-000333-00-RS 19100-000326-00-RS 19100-000327-00-RS	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10

**Intel® recommends that Alder Lake-S CPU PCIe ports are only used for discrete graphics and storage devices


ATX series

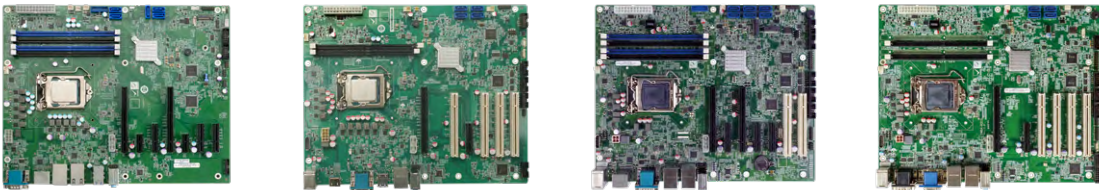

Model	IMBA-Q471	IMBA-H420	IMBA-Q370	IMBA-H310
CPU Socket	LGA1200	LGA1200	LGA1151	LGA1151
CPU Type	10th/11th Generation LGA1200 Intel® Core™ i9/i7/i5/i3, Celeron® and Pentium® processors	10th/11th generation Intel® Core™ i9/i7/i5/i3, Celeron® and Pentium® processor	8th/9th generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processor	8th/9th generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processor
Chipset	Intel® Q470/Q470E	Intel® H420E	Intel® Q370	Intel® H310
Memory	Four 288-pin 2933 MHz dual-channel DDR4 SDRAM unbuffered DIMMs (system max. 128 GB)	Two 288-pin 2933 MHz dual-channel DDR4 SDRAM unbuffered DIMMs (system max. 64GB)	Four 288-pin 2666/2400 MHz dual-channel DDR4 SDRAM unbuffered DIMMs (system max. 64 GB)	Two 288-pin 2666/2400 MHz dual-channel DDR4 SDRAM unbuffered DIMMs (system max. 64 GB)
Display Interface	Triple independent display 1 x VGA 1 x DP 1 x HDMI	Triple display 1 x VGA 1 x internal DP++ 1 x HDMI 1.4	Triple independent display 1 x VGA 1 x DP++ 1 x HDMI 1 x Internal DisplayPort	Triple independent display 1 x DVI-D 1 x VGA 1 x Internal 180° DP
Ethernet	LAN1: Intel® I226-V controller LAN2: Intel® I226-V controller LAN3: Intel® I226-V controller	LAN1: Intel® I226-V GbE controller (colay I226-LM)	LAN1: Intel® I219LM PCIe controller with AMT 11.0 support LAN2: Intel® I210AT PCIe controller	LAN1: Intel® I219LM PCIe controller LAN2: Intel® I210 AT PCIe controller
I/O Interface	2 x USB 3.2 Gen 2 (10Gb/s) (Type-A) 2 x USB 3.2 Gen 1 (5Gb/s) (Type-A) 2 x USB 2.0 (Type-A) 1 x RS-232 6 x USB 2.0 (2x4 pin, P=2.54) 2 x USB 3.2 Gen1 (2x10 pin, P=2.0) 2 x RS-232 (2x5 pin, P=2.54) 1 x RS-422/485 (1x4 pin, P=2.0)	4 x USB 3.1 Gen 1 (5Gb/s) 2 x USB 2.0 1 x RS-232 1 x KB/MS 1 x RS-232/422/485 (2x5 pin, P=2.54) 2 x USB 2.0 (2x4 pin, P=2.54) 4 x RS-232 (2x5 pin, P=2.54)	2 x USB 3.2 Gen 2 (Type-A) 2 x USB 3.2 Gen 1 (Type-A) 1 x PS/2 KB/MS 2 x USB 2.0 1 x RS-232 1 x KB/MS 2 x RS-232/422/485 3 x RS-232 2 x USB 3.2 Gen 1 4 x USB 2.0	4 x USB 3.2 Gen 1 2 x RS-232 2 x USB 2.0 1 x KB/MS 1 x KB/MS (1x6 pin) 2 x USB 2.0 (2x4 pin, P=2.54) 1 x LPT (2x13 pin, P=2.54) 3 x RS-232 (2x5 pin, P=2.54) 1 x RS-232/422/485 (2x5 pin, P=2.54)
Storage Interface	5 x SATA 6Gb/s (RAID 0/1/5/10 supported)	4 x SATA 6Gb/s (no RAID)	6 x SATA 6Gb/s (RAID 0/1/5/10 supported)	4 x SATA 6Gb/s (no RAID)
Audio	Realtek ALC888S HD codec supports 7.1-channel 3 x Audio jacks (line-out, line-in, mic-in) on rear IO 1 x Front audio (2x5 pin)	Realtek ALC888S HD codec 3 x Audio Jack (Line-in, Line-out, Mic-in) on rear IO 1 x Front audio (2x5 pin)	Realtek ALC888S HD Audio codec	
Digital I/O	12-bit programmable I/O (12-bit GPIO is for programming I/O)	Realtek ALC888S HD codec 3 x Audio Jack (Line-in, Line-out, Mic-in) on rear IO 1 x Front audio (2x5 pin)	8-bit programmable I/O (8-bit GPIO is for programming I/O)	8-bit digital I/O (2x5 pin)
Power Consumption	3.3V@1.1A, 5V@3.359A, 12V@2.18A, 5VSB@0.12A (Intel® Core™ i5-10500TE CPU with four 8 GB 2933 MHz DDR4 DIMMs)	3.3V@0.84A, 5V@8.12A, 12V@3.77A, 5VSB@0.0A (Intel® Core™ i5-10500TE CPU with two 32 GB 2933 MHz DDR4 memory, EuP mode enabled)	3.3V@1.65A, 5V@3.4A, 12V@8.58A, 5VSB@3.4A (Intel® Core™ i7-8700K up to 4.60 GHz CPU with 32GB 2600MHz DDR4 memory)	3.3V@0.39A, 5V@2.99A, 12V@3.08A, 5VSB@0.2A (Intel® Core™ i5-8500 up to 3.00 GHz CPU with 20 GB 2400/2133 MHz DDR4 memory)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operation Environment	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing			
Expansion Slot	2 x PCIe Gen3 x16 (x8 signal) 3 x PCIe Gen3 x4 open-end 2 x PCIe Gen3 x1 M.2 M key 2240/2280 (PCIe x2 &SATA signal)	1 x PCIe Gen3 x16 1 x PCIe Gen3 x4 4 x PCI	1 x M.2 A Key 1 x M.2 M Key 2 x PCIe Gen3 x8 3 x PCIe Gen3 x4 2 x PCI	1 x PCIe x16 (Gen3) 1 x PCIe x4 (Gen2) 4 x PCI
CPU Cooler	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10

**Intel® recommends that Alder Lake-S CPU PCIe ports are only used for discrete graphics and storage devices

ATX series

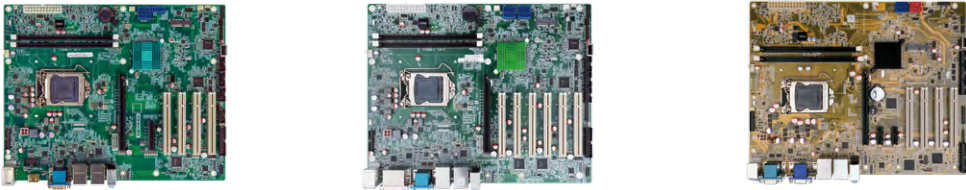

Model	IMBA-H112	IMBA-H110	IMBA-H810
CPU Socket	LGA1151	LGA1151	LGA1150
CPU Type	6th/7th generation Intel® Core™ i7/i5/i3, Celeron® and Pentium® processor	6th/7th generation Intel® Core™ i7/i5/i3, Celeron® and Pentium® processor	4th generation Intel® Core™ i7/i5/i3 Pentium® and Celeron® processor
Chipset	Intel® H110	Intel® H110	Intel® H81
Memory	2 x 288-pin 2133 MHz dual-channel DDR4 SDRAM unbuffered DIMMs (system max. 64 GB)	2 x 288-pin 2133 MHz dual-channel DDR4 SDRAM unbuffered DIMMs (system max. 64 GB)	2 x 240-pin 1333/1600 MHz dual-channel DDR3 SDRAM unbuffered DIMM (system max. 16 GB)
Display Interface	Dual independent display support 1 x VGA 1 x HDMI 1 x iDP interface	Dual independent display support 1 x DVI-I 1 x HDMI 1 x iDP interface	Dual independent display support 1 x DVI-D 1 x VGA 1 x iDP interface
Ethernet	LAN1: Intel® I219V PHY LAN2: Intel® I211 PCIe controller	LAN1: Intel® I219V PHY LAN2: Intel® I211 PCIe controller	LAN1: Intel® I217-LM with Intel® AMT 9.0 support LAN2: Intel® I211-AT PCIe controller
I/O Interface	4 x USB 3.2 Gen 1 Type A 2 x RS-232 1 x RS-232 1 x KB/MS 1 x RS-232/422/485 1 x LPT 1 x internal USB 2.0 (type A) 4 x RS-232 2 x USB 2.0 1 x KB/MS	1 x KB/MS 4 x USB 3.2 Gen 1 Type A 2 x USB 2.0 2 x RS-232 2 x RS-232 1 x KB/MS 2 x RS-232 1 x LPT 2 x USB 2.0 1 x RS-232/422/485 1 x internal USB 2.0 (type A)	1 x KB/MS 2 x USB 2.0 2 x RS-232 2 x USB 3.2 Gen 1 Type A 1 x KB/MS 1 x internal USB 2.0 (180° Type-A) 1 x LPT 3 x RS-232 1 x RS-422/485 4 x USB 2.0
Storage Interface	3 x SATA 6Gb/s	4 x SATA 6Gb/s	2 x SATA 3Gb/s 2 x SATA 6Gb/s
Audio	Realtek ALC888S HD Audio codec supports 7.1-channel	Realtek ALC888S HD Audio codec supports 7.1-channel 3 x Audio jacks (line-out, line-in, mic-in) on rear IO 1 x Front audio (2x5 pin)	Realtek ALC888S HD Audio codec supports 7.1-channel 3 x Audio jacks (line-out, line-in, mic-in) on rear IO 1 x Front audio (2x5 pin)
Digital I/O	8-bit programmable I/O (8-bit GPIO is for programming I/O)	8-bit digital I/O (2x5 pin)	8-bit digital I/O (2x5 pin)
Power Consumption	3.3V@1.53A, 5V@2.95A, 12V@8.38A, 5VSB@3.2A (4.0 GHz Intel® Core™ i7-6700K CPU with (two 8 GB) 2133 MHz DDR4 memory)	3.3V@1.53A, 5V@2.95A, 12V@8.38A, 5VSB@3.2A (Intel® Core™ i7 6700K 4.0GHz CPU with 16GB (two 8GB) 2133 MHz DDR4 memory)	3.3V@0.83A, 5V@2.2A, 12V@3.88A, 5VSB@0.3A (Intel® Core™ i7-4770K 3.90 GHz CPU with 8 GB (two 4 GB) 1333 MHz DDR3 memory)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset		
Operation Environment	Temperature Range: -20°C ~ 60°C (-4°F ~ 140°F) Relative Humidity: 5% ~ 95%, non-condensing		
Expansion Slot	1 x Full-size PCIe Mini card (support mSATA) 1 x PCIe x16 (Gen3) 1 x PCIe x4 (Gen3) 4 x PCI	1 x Full-size PCIe Mini card (support mSATA) 1 x PCIe x16 (Gen3) 6 x PCI	1 x PCIe x 16 2 x PCIe x 1 4 x PCI 1 x PCIe Mini (support mSATA)
CPU Cooler	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	CF-115XA-R10 CF-115XE-R10

microATX series




Model	IMB-ARL-Q870	IMB-AM5 / IMB-RZ7000	IMB-V3000
CPU Socket	LGA1851 socket	AMD Socket AM5	On board
CPU Type	High-Performance Intel® Core™ Ultra Processors (Series 2)	AMD Ryzen™ 7000&8000G PHX1&9000 Series Desktop Processors (up to 170W TDP CPU)	AMD V3000 Series Processors TDP 15W
Chipset	Intel® Q870	N/A	SoC
Memory	Four 288-pin 6400 MHz Dual-Channel DDR5 CUDIMMs supported up to 192GB (ECC&non-ECC support)	Four 288-pin 5200 MHz Dual-Channel DDR5 SDRAM Unbuffered DIMMs supported (system max. 192GB)	Two 288-pin 4800 MHz Dual-Channel DDR5 SDRAM Unbuffered DIMMs (system max. 96GB)
Display Interface	Quad independent display 1 x DP1.4 (up to 4K@60Hz) 1 x HDMI 2.0(up to 4K@60Hz) 1 x USB4 (up to 4K@60Hz) 1 x DP1.4 (up to 4K@60Hz) internal	Triple independent display 1 x DP 2 x HDMI	-
Ethernet	LAN1: Intel® I226-LM 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller LAN3: Intel® I226V 2.5GbE controller	LAN1: Intel® I226-V 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller	1 x 10G SFI (SFP+) 1 x 10GBASE-T (RJ45)
I/O Interface	6 x USB 3.2 Gen2 (Type-A) (10Gb/s) 2 x RS-232/422/485 (RS-485 support AFC) 4 x USB 2.0 (2x4 pin, P=2.54) 2 x USB 3.2 Gen1 (2 X 10PIN P=2.00 pin wafer) (5Gb/s) 4 x RS-232 (2x5 pin, P=2.54)	2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 4 x USB 3.2 Gen1 (Type-A) (5Gb/s) 1 x RS-232/422/485 (RS-485 support AFC) 1 x RS-232/422/485 (RS-485 support AFC) (2x5 pin, P=2.54) 4 x RS-232 (2x5 pin, P=2.54) 4 x USB2.0 (2x4 pin, P=2.54)	2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 4 x USB 2.0 (Type-A) 2 x RS-232/422/485 (RS-485 support AFC) 1 x RJ45 for iRIS2-2600 (F830) 4 x RS-232 (2x5 pin, P=2.54)
Storage Interface	4 x SATA 6Gb/s (RAID 0/1/5/10 supported)	4 x SATA 6Gb/s	2 x SATA 6Gb/s (RAID 0/1 supported)
Audio	Realtek ALC888S HD codec 1 x Audio Jack (Line-in, Line-out, Mic-in) on rear IO 1 x Analog audio (2x5 pin)	Realtek ALC888S HD Audio codec supports 7.1-channel 3 x Audio jacks (line-out, line-in, mic-in) on rear IO 1 x Front audio (2x5 pin)	-
Digital I/O		12-bit digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin)
Power Consumption	TBD	3.3V@1.66A, 5V@9.29A, 12V@16.33A, 5VSB@0.07A (AMD Ryzen 9 7950X 170W with four Transcend JM5600ALE-16GB memory)	3.3V @ 0.63A, 5V @ 2.45A, 12V @ 4.15A, 5VSB @ 0.32A (AMD embedded v3c48 processor with DDR5 4800MT/s U-DIMM 32GB memory, EuP mode enabled)
Watchdog Timer	Software Programmable support 1~255 sec. System reset		
Operation Environment	Temperature Range: -10°C ~ 60°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x PCIe x16 with Signal Gen5 2 x PCIe x4 open-end Gen4 1 x PCIe x4 Gen4 1 x M.2 M Key (2280, PCIe x4) NVMe support 1 x M.2 M Key (2280, PCIe x2) NVMe support 1 x M.2 B key for IRIS2-2600	1 x PCIe x16 (Slot1) with x8 Signal Gen4 2 x PCIe x4 open-end (Slot3&4) Gen4 (slot3 will disable with Ryzen8000G PHX1) 1 x PCIe x1 (Slot 2,PCIe Gen4 x1 signal) 1 x M.2 M Key (2242/2280, PCIe x4) NVMe support (disable with Ryzen8000G PHX1) 1 x M.2 M Key (2242/2280, PCIe x2) NVMe support (NVME RAID 0/1 support)	1 x PCIe x16 (Slot1) with x8 Signal Gen4 1 x PCIe Gen4 x4 open-end 2 x PCIe Gen4 x1 1 x M.2 M Key (2242/2280, PCIe Gen4 x1) NVMe support 1 x M.2 B Key (2242/2280, PCIe Gen4 x1) NVMe support (IPMI)
CPU Cooler	-	19100-000344-00-RS 19100-000345-00-RS 19100-000348-00-RS 19100-000338-00-RS	-

microATX series



Model	IMB-MTL	IMB-Q470	IMB-H420
CPU Socket	On board	LGA1200	LGA1200
CPU Type	High-Performance Intel® Core™ Ultra Processors (Series 1)	10th/11th Gen Intel® Core™ i9/i7/i5/i3, Pentium® or Celeron® processor up to 125W TDP	10th/11th Gen Intel® Core™ i9/i7/i5/i3, Celeron® and Pentium® processor up to 65W
Chipset	SoC	Intel® Q470/Q470E	Intel® H420/H420E
Memory	Two 262-pin 5600 MHz DDR5 SO-DIMM (system max. 96GB)	Two 288-pin 2933 MHz unbuffered DDR4 SDRAM DIMMs supported (system max. 64GB)	Two 288-pin 2933 MHz dual-channel unbuffered DDR4 SDRAM DIMMs supported (system max. 64GB)
Display Interface	Quad independent display 1 x HDMI 1 x DP 1 x USB4 1 x IEI iDPM	Triple display support 1 x VGA 1 x DVI-D 1 x Internal DP	Triple display support 1 x VGA 1 x DVI-D 1 x Internal DP
Ethernet	LAN1: Intel® I226LM 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller LAN3: For IPMI	LAN1: Intel® I219-LM GbE controller LAN2: Intel® I226-V controller	LAN1: Intel® I226-V controller LAN2: Intel® I226-V controller
I/O Interface	2 x USB 2.0 (2x4 pin, P=2.54) 4 x RS-232 (2x5 pin, P=2.0) 2 x RS-232/422/485 (2x5 pin, P=2.0) 2x USB 3.2 Gen 2 (10Gb/s) 4 x USB 2.0	8 x USB 3.2 Gen1 6 x USB 2.0 1 x KB/MS 10 x RS-232 (2 x 2 *20-pin, 2 x 2*5 pin, P=2.54) 1 x LPT (2*13 pin)	8 x USB 3.2 Gen1 6 x USB 2.0 1 x KB/MS 10 x RS-232 (2 x 2 *20 pin, 2 x 2*5 pin, P=2.54) 1 x LPT (2*13 pin)
Storage Interface	2 x SATA 6Gb/s	4 x SATA 6Gb/s	4 x SATA 6Gb/s
Audio	Realtek ALC888S HD Audio codec 1 x Audio Jack (Line-out, Mic-in) 1 x Analog audio (2x5 pin)	Realtek ALC888S HD Audio codec 3 x Audio jack (Line-in, Line-out, Mic-in) 1 x Analog audio (2x5 pin)	Realtek ALC888S HD codec 3 x Audio jack (Line-in, Line-out, Mic-in) on rear IO 1 x Front audio (2x5 pin)
Digital I/O	12-bit digital I/O (2x7 pin)	8-bit Digital I/O (2x5 pin)	8-bit Digital I/O (2x5 pin)
Power Consumption	TBD	3.3V@1.13A, 5V@10.14A, 12V@11.86A, 5VSB@0.23A (11th Gen.Intel® Core® i9-11900K 3.50 GHz 125W CPU with 32GB 2933MHz DDR4 memory, EUP enabled) 3.3V@1.16A, 5V@10.45A, 12V@5.93A, 5VSB@0.26A (10th Gen.Intel® Core® i9-10900E 2.80 GHz 65W CPU with 32GB 2933MHz DDR4 memory, EUP enabled)	3.3V@1.59A, 5V@10.18A, 12V@6.84A, 5VSB@0.23A (10th Gen. Intel® Core® i9-10900E 2.80 GHz 65W CPU with 32GB 2933MHz DDR4 memory, EUP enabled)
Watchdog Timer	Software Programmable support 1~255 sec. System reset		
Operation Environment	Temperature Range: -10°C ~ 60°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x PCIe Gen5 x8 Slot 3 x PCIe Gen4 x4 1 x M.2 B key 3080 (for IRIS2-2600) 1 x M.2 M key 2280 (PCIe Gen4 x2)	1 x PCIe Gen3 x16 slot 2 x PCIe Gen3 x4 slot 1 x M.2 B key 2242/2280 (PCIe Gen3 x2) 1 x M.2 M key 2242/2280 (PCIe Gen3 x4)	1 x PCIe Gen3 x16 slot 1 x PCIe Gen3 x1 slot 1 x M.2 M key 2242/80 (PCIe Gen3 x2)
CPU Cooler	-	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10

microATX series

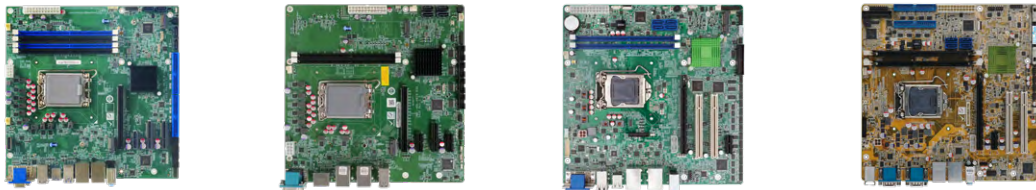

Model	IMB-ADL-Q670	IMB-ADL-H610	IMB-H110	IMB-H810
CPU Socket	LGA1700	LGA1700	LGA1151	LGA1150
CPU Type	12th/13th/14th generation Alder Lake-S/Raptor Lake-S Intel® Core™ i9/i7/i5/i3/Pentium®/Celeron® Processor, up to 125W TDP	12th/13th/14th generation Alder Lake-S/Raptor Lake-S Intel® Core™ i9/i7/i5/i3/Pentium®/Celeron® Processor (up to 65W TDP CPU)	6th/7th generation Core™ i7/i5/i3, Pentium® or Celeron® processor	Intel® Core™ i7/i5/i3, Pentium®, Celeron® processor
Chipset	Intel® Q670/Q670E	Intel® H610/H610E	Intel® H110	Intel® H81
Memory	Four 288-pin 3200 MHz Dual-Channel DDR4 SDRAM Unbuffered DIMMs supported (system max. 128GB)	Two 288-pin 3200 MHz dual-channel DDR4 SDRAM unbuffered DIMMs supported (system max. 64GB)	Two 288-pin 2133 MHz dual-channel DDR4 SDRAM unbuffered DIMMs supported (system max. 64GB)	Two 240-pin 1600/1333 MHz dual-channel DDR3 & DDR3L SDRAM unbuffered DIMMs (system max. 16 GB)
Display Interface	Triple independent display 1 x VGA 1 x DVI-I 1 x Internal DP++	Triple independent display 1 x DP 1.4a 1 x HDMI 2.0b 1 x iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)	Dual independent display support 1 x VGA 1 x DVI-I 1 x 18/24-bit dual-channel LVDS 1 x iDP	Triple display support 1 x VGA1 1 x VGA2 1 x iDP Interface
Ethernet	LAN1: Intel® I226LM 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller	LAN1: Intel® i219 LM controller LAN2: Intel® I226V 2.5GbE controller	LAN1: RTL 8111GN controller LAN2: RTL 8111GN controller	LAN1: Intel® I217LM LAN2: Intel® I210-AT PCIe controller with NCSI support
I/O Interface	4 x USB 3.2 Gen2 (Type A) 6 x USB 3.2 Gen1 (Type A) 4 x USB 2.0 (Type A) 2 x RS-232/422/485 (2x5 pin, P=2.54) 8 x RS-232 (2x20 pin, P=2.54)	2 x USB 3.2 Gen2 x1 (Type-A) (10Gb/s) 2 x USB 3.2 Gen1 x1 (Type-A) (5Gb/s) 4 x USB 2.0 (Type-A) 2 x RS-232/422/485 (RS-485 support AFC) 2 x USB 2.0 (2x4 pin, P=2.54) 4 x RS-232 (2x5 pin, P=2.54)	1 x KB/MS (1x6 pin) 2 x RS-232/422/485 (2x5 pin, P=2.0) 1 x LPT (2x13 pin, P=2.54) 2 x USB 2.0 (2x4 pin, P=2.0) 10 x RS-232 (2x5 pin, P=2.0)	1 x KB/MS 2 x USB 2.0 2 x RS-232 2 x USB 3.2 Gen 1 Type A 1 x LPT pin header 1 x RS-422/485 (pin header) 8 x RS-232 pin header 8 x USB 2.0 pin header
Storage Interface	4 x SATA 6Gb/s (RAID 0/1/5/10 supported)	4 x SATA 6Gb/s	4 x SATA 6Gb/s (RAID 0/1 supported)	2 x SATA 6Gb/s 2 x SATA 3Gb/s (AHCI supported)
Audio	Realtek ALC888S HD Audio codec supports 7.1-channel 3 x Audio jacks (line-out, line-in, mic-in) on rear IO 1 x Front audio (2x5 pin)	1 x iAUDIO, supports IEI AC-KIT-888S Audio Kit (2x5 pin)	Realtek ALC888S HD Audio codec supports 7.1-channel 3 x Audio jacks (line-out, line-in, mic-in) on rear IO 1 x Front audio (2x5 pin)	Realtek ALC888S HD Audio codec
Digital I/O	1 x 12-bit digital I/O (2x7 pin)	1 x 12-bit digital I/O (2x7 pin)	8-bit programmable digital I/O	N/A
Power Consumption	3.3V@1.36A, 5V@11.85A, 12V@5.75A, 5VSB@0.38A (Intel® Core™ i9-12900E CPU with two 32 GB 3200 MHz DDR4 memory, EuP mode enabled)	3.3V@0.35A, 5V@7.54A, 12V@5.75A, 5VSB@0.96A (Intel® Core™ i9-12900E CPU with 8 GB 3200 MHz DDR4 memory, EuP mode enabled)	3.3V@ 0.93A, 5V@2.99A, 12V@6.88A, 5VSB@0.02A (Intel® Core™ i7-6700K 4.0GHz CPU with 16GB (two 8GB) 2133 MHz DDR4 memory)	3.3V@0.64A, 5V@4.20A, 12V@0.14A, Vcore_12V@3.88A, 5VSB@0.20A (Intel® Core™ i7-4770K 3.90 GHz CPU with 8 GB two 1333 MHz 4 GB DDR3 memory)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operation Environment	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing		Temperature Range: -20°C ~ 60°C (-4°F~140°F) Relative Humidity: 5% ~ 95% non-condensing	
Expansion Slot	*1 x PCIe Gen4 x16 with x16 Signal *1 x PCIe Gen4 x4 open-end 1 x PCIe Gen4 x4 open-end 1 x PCIe Gen3 x1 1 x M.2 M key 2242/80(PCle Gen3 x4) 1 x M.2 M key 2242/80(PCle Gen3 x2)	*1 x PCIe Gen4 x16 Slot with x16 Signal 1 x PCIe Gen3 x4 open-end 2 x PCIe Gen3 x1 1 x M.2 M Key 2280 (PCle x1)	1 x PCIe x16 (Gen3) 1 x Full-size PCIe Mini card 1 x PCIe x1 (Gen2) 2 x PCI	1 x PCIe x16 (Gen 3) 1 x PCIe x1 2 x PCI
CPU Cooler	19100-000319-00-RS 19100-000326-00-RS 19100-000327-00-RS 19100-000328-00-RS	19100-000323-00-RS	CF-115XA-R10 CF-115XE-R10	CF-115XA-R10 CF-115XE-R10

*Intel® recommends that Alder Lake-S CPU PCIe ports are only used for discrete graphics and storage devices

Mini-ITX series



Model	KINO-AM5	KINO-MPHX	KINO-ADL-N KINO-ASL	KINO-ADLPS	KINO-EHL2
CPU Socket	AMD AM5	On Board	On Board	LGA1700	On Board
CPU Type	AMD Ryzen™ 7000&8000G PHX1&9000 Series Desktop Processors (up to 65W TDP CPU)	AMD Ryzen™ 7040&8040 Series	Intel® Atom™ / Pentium® / Celeron® processor	Intel® Alder Lake-PS/ Raptor Lake CPU (15~45W)	Intel® Elkhart Lake Processor Intel® Celeron® J6412 on-board SoC
Chipset	N/A	SoC	SoC	SoC	SoC
Memory	Two 262-pin 5200 MHz Dual-Channel DDR5 SDRAM Unbuffered DIMMs supported (system max. 96GB)	Two 262-pin 5600 MHz Dual-Channel DDR5 SO-DIMM supported (system max. 96GB)	1 x 262-pin 4800 MHz DDR5 SO-DIMM (system max. 16GB, support IBECC)	Two 3200 MHz DDR4 SO-DIMMs	One 260-pin 3200 MHz DDR4 SO-DIMM (system max. 16GB)
Display Interface	1 x DP 1.4 2 x HDMI 1.4	2 x USB4 1 x HDMI 1.4 1 x iDPM 3040 slot (only for IEI iDPM module)	2 x HDMI 1.4 1 x DP 1.4	1 x DP 1.4 1 x HDMI 2.0 1 x iDPM support IEI eDP/LVDS/VGA module	Triple Independent Displays 1 x HDMI 1.4 1 x DP 1.4 1 x IEI iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)
Ethernet	LAN1: Intel I226V 2.5GbE controller LAN2: Intel I226V 2.5GbE controller	LAN1: REALTEK RTL8125B-CG 2.5GbE controller LAN2: REALTEK RTL8125B-CG 2.5GbE controller LAN3: REALTEK RTL8125B-CG 2.5GbE controller	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller Support TSN (x7000 Series)	LAN1: Intel® I226-V 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller	LAN1: Intel® I226-V 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller
I/O Interface	2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 4 x USB 3.2 Gen1 (Type-A) (5Gb/s) 1 x RS-232/422/485 (2x5 pin, P=2.0) 2 x RS-232/422/485 (2x5 pin, P=2.0) 3 x RS-232 (2x5 pin, P=2.0) 4 x USB 2.0 (2x4 pin, P=2.0)	2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 4 x USB 3.2 Gen1 (Type-A) (5Gb/s) From PCIe to USB Bridge EJ188 2 x RS-232/422/485 (2x5 pin, P=2.0) 2 x USB 2.0 (2x4 pin, P=2.0)	2 x USB 3.2 Gen 2 (10Gb/s) 2 x USB 2.0 2 x USB 2.0 (2x4 pin, P=2.0) 1 x USB 3.2 (Type A, 180°) (Only embedded CPU) 2 x RS-232/422/485 (2x5 pin, P=2.0) 4 x RS-232 (2x5 pin, P=2.0)	2 x RS232/422/485 via DB-9 (RS-485 support AFC) 2 x USB 2.0 (Type A) 2 x USB 3.2 Gen 2 (Type A) (10Gb/s) 2 x USB 3.2 Gen 2 (Type A) (10Gb/s) 2 x USB 2.0 (2 x 4 pin, P=2.0) 4 x RS-232 (2 x 5 pin, P=2.0)	2 x USB 3.2 Gen2(10Gb/s) (USB Type A) 2 x USB 2.0 (USB Type A) 2 x RS-232 4 x USB 2.0 (2x4 pin, P=2.0) 2 X RS-232/422/485 (2x5 pin,P=2.0) 2 X RS-232 (2x5 pin,P=2.0)
Storage Interface	2 x SATA 6Gb/s	2 x SATA 6Gb/s	2 x SATA 6Gb/s	2 x SATA 6Gb/s	2 x SATA 6Gb/s
Audio	Realtek ALC888S HD Audio codec 3 x Audio jack (Line-in, Line-out, MIC-in)	Realtek ALC888S HD Audio codec 2 x Audio jack (Line-out, Mic-in) 1 x Front audio (2x5 pin)	Realtek ALC888S HD Audio codec 1 x Audio Jack (line-out/MIC-in) on rear IO 1 x Front audio (2x5 pin)	IAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	Realtek ALC888S HD Audio codec 3 x Audio Jack (Line-in, Line-out, Mic-in) 1 x Analog audio (2x5 pin)
Digital I/O	12-bit digital I/O (2x7 pin, P=2.0)				
Power Consumption	12V@13.60A (AMD Ryzen™9 7900 @3.7GHz CPU with Apacer D22.35305H.001 DDR5 5600 32G memory)	12V@11.599A (AMD Ryzen 9 8945HS CPU with 32GB DDR5 5600 memory)	12V@4.304A, 19V@2.744A, 24V@2.241A, 28V@1.943A (Intel® N97 @2.00GHz CPU with Innodisk M5S0-AGS2NCVP 4800 16GB memory, max. loading, EuP mode enabled)	12V@2.59A (Intel® Core i7-12700HL 2.3GHz 45W CPU with 32GB 3200MHZ DDR4 memory, max. loading, EuP mode enabled)	12V@3.23A, 19V@2.15A, 24V@1.74A, 28V@1.53A (Intel® Celeron® J6412 2.0GHz with 32GB 3200MHz DDR4 memory and EUP enabled)
Watchdog Timer	Software Programmable support 1~255 sec. System reset				
Operation Environment	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x PCIe Gen4 x16 (Slot1) with x16 Signal (Ryzen8000G PHX1 only X8 Signal, PHX2 only X4 Signal) 1 x 2280 M.2 M key (PCle Gen4 X 4) 1 x 2230 M.2 A key (PCle Gen3 x1 &USB 2.0) (A key will disable with Ryzen8000G PHX2)	1 x PCIe x16 (Slot1) with x8 Signal Gen4 1 x M.2 M key (2242/80,PCle Gen4 X 4) 1 x M.2 A key (2230 ,PCle Gen4 x1 &USB 2.0)	1 x PCIe x4 Slot Open-ended(PCle Gen3 x1 signal) 1 x M.2 A Key 2230 for WIFI & BT (PCle Gen3 x1 & USB 2.0) 1 x M.2 M key 2242/2280 (PCle Gen3 x1)	1 x PCIe Gen3 x4 (x4 & x2 +x2 & x2 + x1 + x1) 1 x M.2 A Key for WIFI & BT 2230 (PCle Gen3 x1 & USB2.0) 1 x M.2 M Key 2242/3080 (PCle Gen4 x4)	1 x PCIe x4 Slot Open-ended (PCle Gen3 x1 signal) 1 x M.2 A key 2230 (PCle Gen3 x1 & USB 2.0) 1 x M.2 B key 3042/3052//2280 (PCle Gen3 x2 & USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key
CPU Cooler	19100-000344-00-RS 19100-000345-00-RS 19100-000348-00-RS 19100-000338-00-RS	-	-	19100-000323-00-RS 19100-000319-00-RS	-


Mini-ITX series



Model	KINO-EHL	KINO-DBT	KINO-ADL-H610	KINO-ADL-H611
CPU Socket	On Board	On board	LGA1700	LGA1700 socket
CPU Type	Intel® Elkhart Lake Processor	Intel® Atom®/Celeron® on board SoC (Code name: Bay Trail)	12th/13th/14th generation Alder Lake-S/ Raptor Lake-S Intel® Core™ i9/i7/i5/i3/ Pentium®/Celeron® Processor (up to 65W TDP CPU)	12th/13th/14th generation Alder Lake-S/ Raptor Lake-S Intel® Core™ i9/i7/i5/i3/ Pentium®/Celeron® Processor (up to 65W TDP CPU)
Chipset	SoC	SoC	Intel® H610/H610E	Intel® H610/H610E
Memory	Onboard LPDDR4x-3200MHz 8GB (system max. 16GB)	Two 204-pin 1066/1333 MHz dual-channel unbuffered DDR3L SDRAM SO-DIMM support up to 8 GB (J1900) One 204-pin 1066/1333 MHz dual-channel unbuffered DDR3L SDRAM SO-DIMM supports up to 4 GB (N2807)	Two 260-pin 3200 MHz dual-channel DDR4 SDRAM unbuffered SO-DIMMs supported (system max. 64GB)	Two 260-pin 3200 MHz Dual-Channel DDR4 SDRAM Unbuffered DIMMs supported up to 64GB
Display Interface	Triple independent display 1 x HDMI 1.4 1 x DP 1.4 1 x IEI iDPM 3040 slot (only for IEI eDP/ LVDS/VGA module)	1 x VGA 1 x DVI-D 1 x iDP interface for HDMI, LVDS, VGA, DVI, DP	Triple independent display 1 x DP 1.4 1 x HDMI 2.0 1 x IEI iDPM 3040 slot (only for IEI eDP/ LVDS/ VGA module)	Triple independent display 1 x DP 1.4a (up to 4K @60Hz) 1 x HDMI 2.0b (up to 4K @60Hz) 1 x HDMI 2.0b (up to 4K @60Hz)
Ethernet	LAN1: Intel® I226-V 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller	Dual LAN: Realtek RTL8111HN PCIe controller	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller LAN3: Intel® I226V 2.5GbE controller LAN4: Intel® I219 LM 1GbE controller
I/O Interface	2 x USB 3.2 Gen 2 (10Gb/s) (USB Type A) 2 x USB 2.0 (USB Type A) 2 x RS-232 4 x USB 2.0 (2x4 pin, P=2.0) 4 X RS-422/485 (1x4 pin, P=2.0)	2 x RS-232 2 x USB 2.0 2 x USB 3.2 Gen 1 Type A 1 x KB/MS pin header 1 x RS-422/485 pin header 3 x RS-232 pin header 4 x USB 2.0 pin header	2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 2 x USB 3.2 Gen1 (Type-A) (5Gb/s) 2 x USB 2.0 (Type-A) 2 x RS-232/422/485 (RS-485 support AFC) 2 x USB 2.0 (2x4 pin, P=2.0) 2 x RS-232/422/485 (2x5 pin, P=2.0) 4 x RS-232 (2x5 pin, P=2.0)	2 x USB 3.2 Gen2 x1 (Type-A) (10Gb/s) 2 x USB 3.2 Gen1 x1 (Type-A) (5Gb/s) 2 x USB 2.0 (Type-A) 2 x USB 2.0 (2x4 pin, P=2.0) 2 x RS-232/422/485 (2x5 pin, P=2.0)
Storage Interface	1 x SATA 6Gb/s	2 x SATA 3Gb/s 1 x microSD slot (E38xx sku only)	2 x SATA 6Gb/s	2 x SATA 6Gb/s
Audio	iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin, P=2.0)	Realtek ALC888S HD Audio codec	iAUDIO, supports IEI AC-KIT-888S Audio Kit (2x5 pin)	Realtek ALC888S HD codec 1 x Audio Jack (Line-in, Line-out, Mic-in) on rear IO 1 x Analog audio (2x5 pin)
Digital I/O	12-bit DIO (2x7 pin)	8-bit programmable digital I/O	12-bit digital I/O (2x7 pin, P=2.0)	
Power Consumption	12V@2.78A (Intel® Celeron® J6412 2.0GHz with 8GB 3200MHz LPDDR4X memory and EUP enabled)	12V@1.64A (Intel® Celeron® J1900 CPU with 4 GB 1333 MHz DDR3L memory)	3.3V@0.96A, 5V@6.49A, 12V@5.95A, 5VSB@1.05A (Intel® Core™ i9-12900E CPU with two 16 GB 3200 MHz DDR4 memory, max. loading, EuP mode enabled)	TBD
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operation Environment	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -20°C ~ 60°C (-4°F ~ 140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x PCIe x4 slot, open-ended (PCIe Gen3 x1 signal) 1 x M.2 A key 2230 (PCIe Gen3 x1 & USB 2.0) 1 x M.2 B key (3042/3052/2280) (PCIe x2 & USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key	1 x Full-size PCIe Mini card slot (support mSATA) 1 x PCIe x4 slot (with PCIe x1 signal)	**1 x PCIe x16 (Slot1) with x16 Signal Gen4 1 x M.2 M key 2242/2280 (PCIe Gen3 x4) 1 x M.2 A Key 2230 (PCIe Gen3 x1&USB 2.0)	**1 x PCIe x16 (Slot1) with x16 Signal Gen4 1 x M.2 M key (2280,PCIe Gen3 X 4) 1 x M.2 A key(2230 ,PCIe Gen3 x1 &USB 2.0) for wifi/BT
CPU Cooler	Cooler/Heatsink	Heatsink	19100-000323-00-RS 19100-000319-00-RS 19100-000333-00-RS	19100-000323-00-RS 19100-000319-00-RS 19100-000333-00-RS 19100-000326-00-RS

**Intel® recommends that Alder Lake-S CPU PCIe ports are only used for discrete graphics and storage devices

Mini-ITX series

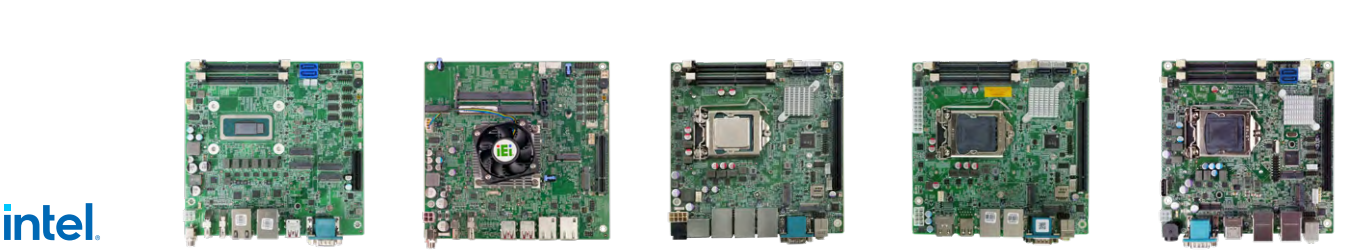

Model	KINO-ADL-P	KINO-TGL-U	KINO-DH420	KINO-AH420	KINO-DH310
CPU Socket	On Board	On Board	LGA1200	LGA1200	LGA1151
CPU Type	12/13th Gen. Intel® mobile Alder Lake-P on-board processor	11th Gen. Intel® mobile Tiger Lake-UP3 SoC	10th Generation Core™ i9/i7/ i5/i3, Celeron® and Pentium® processor	10th Generation Core™ i9/i7/ i5/i3, Celeron® and Pentium® processor	8th/9th generation Intel® Core™ i9/i7/i5/i3, Pentium® or Celeron® processor (35W/65W)
Chipset	SoC	SoC	Intel® H420E	Intel® H420/H420E	Intel® H310
Memory	Two 260-pin 3200 MHz DDR4 SO-DIMM (system max. 64GB)	Two 260-pin 3200 MHz DDR4 SO-DIMM (system max. 64GB)	Two 260-pin 2933 MHz dual-channel DDR4 SO-DIMMs (system max. 64GB)	Two 260-pin 2933 MHz Dual-Channel DDR4 SO-DIMMs (system max. 64GB)	Two 260-pin 2666/2400 MHz Dual-channel DDR4 SDRAM Unbuffered SO-DIMM slots
Display Interface	Triple independent display 1 x HDMI 1.4 1 x DP 1.4 1 x IEI iDPM 3040 slot (only for IEI eDP/ LVDS/ VGA module)	Triple independent display 1 x HDMI 1.4 1 x DP 1.4 1 x IEI iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)	Dual independent display 1 x DP 1.4 1 x HDMI	Dual independent display 2 x HDMI (up to 4096 x 2160@30Hz)	Dual independent display 2 x HDMI 1 x Internal DisplayPort (180°)
Ethernet	LAN1: Intel® I226LM 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller LAN3: Intel® I226V 2.5GbE controller	LAN1: Intel® I226-V controller LAN2: Intel® I226-V controller	LAN1: Intel® I226V GbE controller LAN2: Intel® I226V GbE controller LAN3: Intel® I226V GbE controller	LAN1: Intel® I226-V 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller	LAN1: Realtek RTL8111H PCIe GbE controller LAN2: Realtek RTL8111H PCIe GbE controller
I/O Interface	4 x USB 3.2 Gen 2 (10Gb/s) 2 x RS-232/422/485 4 x USB 2.0 (2x4 pin, P=2.0) 4 x RS-232 (2x5 pin, P=2.0)	4 x USB 3.2 Gen 2 (10Gb/s) 1 x RS-422/485 (1x4 pin, P=2.0) (RS-485 support AFC) 2 x USB 2.0 (2x4 pin, P=2.0) 5 x RS-232 (2x5 pin, P=2.0)	2 x RS-232 2 x USB 2.0 4 x USB 3.2 Gen 1(5Gb/s) 1 x RS-232 (2x5 pin, P=2.0) 1 x RS-422/485 (1x4 pin, P=2.0) 2 x USB 2.0 (2x4 pin, P=2.0)	2 x RS-232 (DB-9) 2 x USB 2.0 (Type-A) 4 x USB 3.2 Gen 1 (5Gb/s) (Type-A) 1 x RS-232 (2x5 pin, P=2.0) 1 x RS-422/485 (1x4 pin, P=2.0) 2 x SATA 6Gb/s (No RAID) 2 x USB 2.0 (2x4 pin, P=2.0)	4 x USB 3.2 Gen 1 Type A 2 x RS-232 1 x KB/MS 1 x RS-422/485 1 x RS-232 4 x USB 2.0
Storage Interface	2 x SATA 6Gb/s	2 x SATA 6Gb/s with 5V SATA power connector	2 x SATA 6Gb/s (No RAID)	2 x SATA 6Gb/s (No RAID)	2 x SATA 6Gb/s
Audio	iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	Realtek ALC888S HD codec 2 x Audio Jack (Line-out, Mic-in) 1 x Front Audio (2x5 pin, P=2.54)	Realtek ALC888S HD codec 2 x Audio Jack (Line-out, Mic-in) 1 x Front Audio (2x5 pin, P=2.54)	Realtek ALC888S HD Audio codec 2 x Audio Jack (Lin-out, Mic-in) 1 x Front audio (2x5 pin)
Digital I/O	12-bit digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin, P=2.0)	8-bit digital I/O connector (2x5 pin)	8-bit digital I/O connector (2x5 pin)	8-bit programmable digital I/O
Power Consumption	12V@5.09A, 19V@3.25A, 24V@2.58A, 28V@2.23A, (12 th Gen Intel® Core™ i7-1270PE CPU with 32 GB 3200 MHz DDR4 memory, max. loading, EuP mode disabled)	9V@9.19A, 12V@7.768A, 28V@3.119A, 36V@2.459A (Intel® Core™ i7-1185G7E CPU and one 8 GB 2933 MHz DDR4 SO-DIMM)	12V@12.408A (Intel® CoreTM i9-10900E CPU with two 32 GB 2933 MHz DDR4 memory, EuP/ErP mode disabled)	3.3V@0.81A, 5V@7.15A, 12V@4.28A, 5VSB@0.16A (Intel® Core™ i9-10900E CPU with two 32 GB 3200 MHz DDR4 memory, EuP mode enabled)	12V@11.32A (Intel® Core™ i7-8700 up to 4.60 GHz CPU with two 8GB 2666MHz DDR4 memory)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset				
Operation Environment	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing				
Expansion Slot	1 x PCIe Gen3 x4 Slot Open-ended 1 x M.2 E Key for WIFI & BT 2230(PCIe Gen3 x1 & USB 2.0) 1 x M.2 B key 3042 (PCIe Gen3 x2/USB2.0) 1 x M.2 M key 2280 (PCIe Gen3 x4)	1 x M.2 A key 2230 (PCIe Gen3 x1 & USB 2.0 signal) 1 x M.2 M key 2242/2280 (PCIe Gen3 x2 signal)	1 x PCIe Gen3 x16 1 x M.2 A key (2230) (PCIe Gen 3 x1/USB 2.0) 1 x M.2 B key (3042/52/2242/80) w/ SIM holder (PCIe Gen 3 x2 / USB 2.0)	1 x PCIe Gen3 x16 1 x M.2 A key (2230) (PCIe Gen 3 x1/USB 2.0) 1 x M.2 B key (3042/3052/2242/2280) (PCIe Gen 3 x2 /USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key	1 x PCIe x16 (2280, Gen2 PCIe x2 only) 1 x M.2 A Key (2230, PCIe x1 & USB 2.0)
CPU Cooler	Cooler/Heatsink	Cooler/Heatsink	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10


Mini-ITX series



Model	KINO-DH110	KINO-DH810	KINO-KX	KALI-ADL-Q670
CPU Socket	LGA1151	LGA1150	On Board	LGA1700 socket
CPU Type	6th/7th generation Intel® Core™ i7/i5/i3 Pentium® and Celeron® processor	4th generation LGA1150 Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor supported	Zhaoxin Kaixian KX-6000 series 8-core processor Zhaoxin KX-U6580/U6780A on-board SoC	12th/13th/14th generation Intel® Core™ i9/i7/i5/i3/Pentium®/Celeron® Processor (up to 125W TDP CPU)
Chipset	Intel® H110	Intel® H81	Zhaoxin ZX-200	Intel® Q670
Memory	Two 260-pin 2133MHz dual-channel DDR4 SDRAM unbuffered SO-DIMM (system max. 32GB)	Two 204-pin 1600/1333 MHz dual-channel DDR3 & DDR3L SDRAM unbuffered DIMMs (system max. 16 GB)	2 x 260-pin 2666 MHz dual-channel DDR4 SDRAM SO-DIMMs (system max. 64 GB)	Four 288-pin 5200 MHz Dual-Channel DDR5 UDIMMs supported up to 192GB
Display Interface	Dual independent display 1 x DP++ 1 x HDMI 1 x iDP interface for HDMI, LVDS, VGA, DVI, DP	Dual display supported 1 x VGA 1 x DVI-I 1 x iDP interface for HDMI, LVDS, VGA, DVI, DP	Dual independent display 1 x VGA 1 x DVI-I	Double independent display 1 x DP 1.4a (up to 4K @60Hz) 1 x HDMI 2.0b (up to 4K @60Hz)
Ethernet	LAN1: Intel® I219LM PCIe controller LAN2: Intel® I211 PCIe controller	Dual LAN: Intel® I211-AT PCIe controller	LAN1: Realtek RTL8111H PCIe GbE controller LAN2: Realtek RTL8111H PCIe GbE controller	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller
I/O Interface	4 x USB 3.2 Gen 1 Type A 1 x RS-232/422/485 1 x KB/MS (1x6 pin) 2 x RS-232 (2x5 pin, P=2.0) 4 x USB 2.0 (2x4 pin, P=2.0)	2 x USB 2.0 2 x USB 3.2 Gen 1 Type A 2 x RS-232 1 x KB/MS (1x6 pin) 1 x RS-422/485 (1x4 pin, P=2.0) 4 x USB 2.0 (2x4 pin, P=2.0) 3 x RS-232 (2x5 pin, P=2.0)	10 x USB 2.0 4 x USB 3.2 Gen 1 (5Gb/s) 1 x KB/MS 2 x RS-232 (2x5 pin, P=2.0) 8 x RS-232 (2x20 pin, P=2.0)	4x USB 3.2 Gen2 (Type-A) (10Gb/s) 2 x USB 2.0 (Type-A) 2 x RS-232/422/485 (RS-485 support AFC) 2 x USB 3.2 Gen1 (2 X 10PIN P=2.00 pin wafer) (5Gb/s) 2 x USB 2.0 (pin header)
Storage Interface	2 x SATA 6Gb/s	2 x SATA 6Gb/s with SATA power connector	4 x SATA 6Gb/s	4 x SATA 6Gb/s
Audio	Realtek ALC888S HD Audio codec supports 7.1-channel 2 x Audio jacks (line-out, mic-in) on rear IO 1 x Front audio (2x5 pin)	Realtek ALC888S HD Audio codec 2 x Audio jacks (line-out, mic-in) on rear IO 1 x Front audio (2x5 pin)	Realtek ALC888S HD Audio codec	Realtek ALC888S HD codec 1 x Audio Jack (Line-out, Mic-in) on rear IO 1 x Analog audio (2x5 pin)
Digital I/O	8-bit digital I/O (2x5 pin)	8-bit digital I/O (2x5 pin)	N/A	
Power Consumption	12V@12.16A (3.4GHz Intel® Core™ i7-6700 with two 8GB 2133MHz 16GB DDR4 memory)	12V@6.03A (Intel® Core™ i7-4770K 3.90 GHz CPU with two 1333 MHz 4 GB DDR3 memory)	12V@3.38A, 3.3V@0.62A, 5V@9.81A, 5VSB@0.03A (Zhaoxin KX-U6580 2.5 GHz CPU with 8 GB 2400 MHz DDR4 memory)	TBD
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operation Envirnment	Temperature Range: -20°C ~ 60°C (-4°F ~ 140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -20°C ~ 60°C (-4°F ~ 140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x Full-size PCIe Mini card slot (PCIe & USB) 1 x M.2 B key (SATA) 1 x PCIe x16 slot (Gen2)	1 x PCIe x1 slot 1 x Full-size PCIe Mini card slot (support mSATA)	1 x PCIe x16 slot (x8 Gen3 signal) 1 x Full-size PCIe Mini Slot	1 x PCIe x16 (Slot1) with x16 Signal Gen4 1 x M.2 M Key PCIE X4 gen4 2280
CPU Cooler	CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10	Cooler	19100-000323-00-RS 19100-000319-00-RS 19100-000333-00-RS 19100-000326-00-RS


Extended-ITX

4" EPIC series



Model	NANO-ADL-P	NANO-EHL	NANO-ULT3	NANO-BT
CPU Socket	On board	On board	On board	On board
CPU Type	12th/13th Gen. Intel® mobile Alder Lake-P/Raptor Lake-P on-board SoC	Intel® Elkhart Lake Processor Intel® Celeron® J6412 on-board SoC (up to 2.6GHz, quad-core, 1.5M Cache, TDP=10W)	Intel® Core™ i7/i5/i3, Celeron® ULT processor	Intel® Atom® E3827 on-board SoC Intel® Atom® E3826 on-board SoC Intel® Atom® E3815 on-board SoC Intel® Celeron® J1900 on-board SoC Intel® Celeron® N2807 on-board SoC
Chipset	SoC	SoC	SoC	SoC
Memory	On-board LPDDR4x 3200 MHz 8GB (system max. 32GB)	On-board Dual channel LPDDR4x 8GB (system max. 16GB)	Two 260-pin 2133/1867 MHz dual-channel DDR4 SO-DIMMs (system max. 32 GB)	One 204-pin 1333/1066 MHz single-channel DDR3L SO-DIMM (system max. 8 GB)
Display Interface	Quadruple independent display 2 x HDMI 1.4 1 x DP 1.4 1 x iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)	Triple Independent Display 1 x HDMI 1.4 1 x DP 1.4 1 x iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)	Triple independent display 2 x HDMI 1 x 18/24-bit dual-channel LVDS 1 x iDP interface	Dual display supported 1 x VGA 1 x HDMI 1 x 18/24-bit dual-channel LVDS
Ethernet	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller (Colay with I226-LM)	LAN1: Intel® I226-V 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller	LAN1: Intel® I219-LM PHY with Intel® AMT 11.0 supported LAN2: Intel® I211-AT PCIe GbE controller	NANO-BT-i1 LAN1: Intel® I210-AT PCIe controller with NCSI support LAN2: Intel® I210-AT PCIe controller » NANO-BT-E38XX1W2 LAN1: Intel® I210-IT PCIe controller with NCSI support LAN2: Intel® I210-IT PCIe controller
I/O Interface	4 x USB 2.0 (2x4 pin, P=2.0) 2 x RS-232/422/485 (2x5 pin, P=2.0) 4 x RS-232 (2x5 pin, P=2.0)	2 x USB 3.2 Gen2 2 x USB 2.0 2 x USB 2.0 (2x4 pin, P=2.0) 4 x RS-232 (2x5 pin, P=2.0) 2 x RS-232/422/485 (2x5 pin, P=2.0)	4 x USB 3.2 Gen 1 1 x USB 2.0 (180° Type-A) 1 x KB/MS (1x6 pin) 2 x USB 2.0 (2x4 pin, P=2.0) 1 x RS-232/422/485 (2x5 pin, P=2.0) 2 x RS-232 (2x5 pin, P=2.0)	1 x PS/2 KB/MS 1 x USB 2.0 (180° Type-A) 1 x USB 3.2 Gen 1 (5Gb/s) 1 x RS-422/485 (1x4 pin, P=2.0) 2 x USB 2.0 (2x4 pin, P=2.0) 3 x RS-232 (2x5 pin, P=2.0)
Storage Interface	1 x SATA 6Gb/s	1 x SATA 6Gb/s with 5V SATA power connector 1 x iSATA	2 x SATA 6Gb/s with 5V SATA power connector 1 x 8 GB eMMC (optional)	2 x SATA 3Gb/s with 5V SATA power connector
Audio	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	Realtek ALC888S HD Audio codec 1 x Front audio (2x5 pin)	Realtek ALC888S HD Audio codec 1 x Front audio (2x5 pin)
Digital I/O	12-bit Digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin)	8-bit programmable digital I/O	8-bit digital I/O (2x5 pin)
Power Consumption	12V@4.62A (12 th Gen Intel® Core™ i7-1265UE CPU with 8 GB 3200 MHz LPDDR4x memory, max. loading, EuP mode enabled)	12V@2.75A (Intel® Celeron® J6412 CPU with 8 GB 3200 MHz LPDDR4x memory, max. loading, EuP mode disabled)	12V@2.48A (Intel® Core™ i3-6100U CPU with two 8 GB memory)	12V@1.52A (Intel® Atom® Processor J1900 CPU with one 8 GB 1333 MHz DDR3L memory)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operating Environment	Temperature Range: -10°C ~ 65°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 65°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -20°C ~ 60°C (-4°F ~ 140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -20°C ~ 60°C (-4°F ~ 140°F) NANO-BTW2: -40°C ~ 85°C (-40°F ~ 185°F) Relative Humidity: 5% ~ 95% non-condensing
Expansion Slots	1 x M.2 A Key for Wi-Fi & BT 2230 (PCIe Gen3 x 1 & USB 2.0) 1 x M.2 B-key 3042/2280 (PCIe Gen3 x2 & USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key 1 x PCIe x4 slot(PCIe x4 signal, x4 or x2+x2 or x1+x1+x1)	1 x M.2 B Key 2242/2280 (PCIe Gen3 x2 & USB2.0) 1 x M.2 A Key 2230 (PCIe Gen3 x1 & USB2.0) 1 x PCIe x4 slot (PCIe Gen3 x2 signal) (x2 or x1+x1)	1 x Full-size PCIe Mini card slot (with SIM holder & mSATA support) 1 x Half-size PCIe Mini card slot	1 x Full-size PCIe Mini card slot (support mSATA co-lay SATA port 2) 1 x PCI-104 slot (PCI signal) 1 x microSD slot (E38XX SKU only)
CPU Cooler	Heat Spreader	Heat Spreader	Heat Spreader	Heatsink

3.5" SBC series

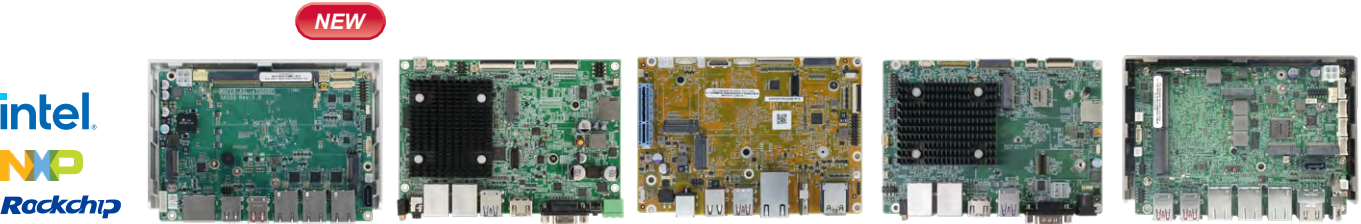

Model	WAFER-ASL	WAFER-IMX8MP	WAFER-RK3588	WAFER-RK3568	WAFER-TGL-U
CPU Socket	On board	On board	On board	On board	On board
CPU Type	Intel® Amston Lake Atom™ x7000 series SOC processor	NXP i.MX 8M Plus Quad (Quad-core Cortex-A53 up to 1.8 GHz)	Rockchip RK3588 (Quad core Cortex A76 + Quad core Cortex A55)	Rockchip RK3568 (Quad-core Cortex-A55 up to 2.0Ghz)	11th Gen. Intel® mobile Tiger Lake-UP3 SoC
Chipset	SoC	SoC	SoC	SoC	SoC
Memory	One 262-pin DDR5 4800 SO-DIMM, Up to 16GB	4 GB LPDDR4-3200 (system max. 8GB)	On-board 8GB LPDDR4x	2GB/4GB LPDDR4/4x (system max. 8GB) (the 2GB sku only supports Linux)	One 260-pin 3200 MHz DDR4 SO-DIMM (system max. 32GB)
Display Interface	Double Independent Displays 2 x HDMI 2.0 (up to 4096 x 2160 @ 60Hz) 1 x DP 1.4 (up to 4096 x 2160 @ 60Hz)	1 x MIPI DSI 4 lanes (40-pin 0.5mm FPC 90°)	1 x MIPI DSI / 1 x LVDS out	1 x HDMI 2.0 Type A, up to 4K 1 x MIPI DSI, 4-lane (40-pin 0.5mm FPC 90°) 1 x eDP 1.3 (30-pin 0.5mm FPC 90°)	Four Independent Displays 2 x HDMI 1.4 1 x DP 1.4 1 x IEI iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)
Ethernet	3 x Intel® i226-IT 2.5 GbE LAN	LAN1: Motorcomm YT8521S 1GbE controller LAN2: Motorcomm YT8521S 1GbE controller	LAN1: Realtek RTL8125B 2.5GbE controller LAN2: Motorcomm YT8521SC 1GbE controller	2 x 1GbE RJ45 by YT8521	LAN1: Intel®I226-V 2.5GbE (I226-LM for i5/i7 SKU) LAN2: Intel®I226-V 2.5GbE LAN3: Intel®I226-V 2.5GbE
I/O Interface	2 x USB 3.2 Gen 2 2 x USB 2.0 2 x USB 2.0 (2x4 pin, P=2.0) 2 x RS-232/422/485 (1x9 pin, P=1.25)	2 x GbE RJ45 2 x USB 5Gbps Type A 1 x Full RS-232/422/485 (DB9 Port) 1 x RS-232/RS-485 (2x3 pin header) 1 x I²C (for Touch, 8-pin 2.0mm FPC) 8-bit GPIO (4 in / 4 out, pin header)	1 x GbE LAN 1 x 2.5 GbE LAN 1 x USB 3.2 Gen 1 Type C with DP (OS update) 1 x USB 3.2 Gen 1 Type A 2 x USB 2.0 Type A UART (2x9 pin header) 1 x DC jack	1 x DB9 port 2 x RS-232/RS-485 2 x 1GbE RJ45 by YT8521 2 x USB 3.0 Type A 3 x USB 2.0 (2x4 pin, P=2.0) 1 x MIPI CSI, 4 lanes 1 x I2C Connector for TP 1 x Console port 1 x M.2 B Key	4 x USB 3.2 Gen 2 (10Gb/s) 2 x USB 2.0 pin header (P=2.0) 2 x RS-232/422/485 (2x5 pin, P=2.0) 1 x RS-232 (2x5 pin, P=2.0)
Storage Interface	1 x SATA 6Gb/s with 5V SATA power connector	16GB eMMC NAND flash, up to 128GB	32GB of eMMC NAND Flash 1 x SATA up to 6Gb/s	1 x microSD Slot	1 x SATA 6Gb/s
Audio	1 x iAUDIO Support IEI AC-KIT-888s (2x5 pin, P=2.0)	1 x 3.5mm Audio Jack (Mic-in & Line out)	Pin header to Mic-in / line-out jack	1 x Line out + Mic, 2x3 pin header 1 x 2-pin socket for speaker (1 x 1.3W) 1 x MIC (Wire to Board, WAFER, 1x2 pin, DIP, 180°P=1.25mm)	1 x iAUDIO (2x5 pin) supporting IEI AC-KIT-888S kit
Digital I/O	12-bit digital I/O (2x7 pin)	8-bit GPIO (4 in / 4 out, pin header)	14-bit DIO (7 in / 7 out, pin header)	14-bit GPIO 7 in / 7 out, 2x8 pin header	12-bit digital I/O (2x7pin)
Power Consumption	12V@4.163A; 19V@2.618A; 24V@2.057A; 28V@1.771A (Intel® Atom(TM) x7835RE with 16 GB 4800 MHz LPDDR5 memory, max. loading, EuP mode disabled)	Maximum 36W	-	12V DC IN	12V@4.0A (11th Gen Intel® Core™ i5-1145G7E 2.6GHz with 8GB 3200MHz DDR4 memory and EUP enabled)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset				
Operating Environment	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 70°C (32°F ~ 158°F) Relative Humidity: 10% ~ 99%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Operating Temperature: 0°C ~ 60°C with air flow Storage Temperature: -20°C ~ 70°C	Operating Temperature: 0°C ~ 60°C with air flow Storage Temperature: -20°C ~ 70°C
Expansion Slot	1 x M.2 A Key 2230 (PCIe Gen3 x1 & USB 2.0) 1 x M.2 M Key 2280 (PCIe Gen3 x2)	1 x PCIe Gen3 x1	1 x PCIe 3.0 x2 1 x M.2 2230/2280 B/M key (PCIe 3.0 x2) 1 x M.2 2230 A/E key (PCIe 2.0 x1)		1 x M.2 A key 2230 (PCIe Gen3 x1/USB 2.0 signal) 1 x M.2 B key 3052/2242 (PCIe Gen3 x2/USB 2.0 signal) 1 x On-board SIM card socket (hinge type) for M.2 B key
CPU Cooler	Heat Spreader	Heatsink	Heat Spreader	Heatsink	Heat Spreader

3.5" SBC series



Model	WAFER-ADL-P	WAFER-ADL-N	WAFER-EHL	WAFER-EHL2
CPU Socket	On board		On board	On board
CPU Type	12th/13th Gen. Intel® Alder Lake-P/ Raptor Lake-P on board SoC	Intel® Alder Lake-N/Amston Lake on-board SoC	Intel® Atom® x6000 series / Pentium® / Celeron® processor (Elkhart Lake platform)	Intel® Atom™ x6000 series / Pentium® / Celeron® processor (Elkhart Lake platform)
Chipset	SoC	SoC	SoC	SoC
Memory	On-board LPDDR4x 3200 MHz 8GB (system max.32G)	Dual channel on-board LPDDR5 8GB pre-installed (system max.16GB)	On-board LPDDR4x 8GB (system max.16GB) GB*	On-board LPDDR4x 3200 MHz 8GB (system max. 16GB)
Display Interface	Quadruple independent display 2 x HDMI 1.4a 2 x DP 1.4a	Triple Independent Displays 1 x HDMI 2.0 1 x DP 1.4a 1 x IEI iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)	Triple independent display 1 x HDMI 1.4 1 x DP 1.4 1 x IEI iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)	Triple Independent Displays 1 x HDMI 1.4a 1 x DP 1.4a 1 x IEI iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)
Ethernet	LAN1: Intel®I226V 2.5GbE controller LAN2: Intel®I226V 2.5GbE controller (Colay with I226-LM)	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller	LAN1: Intel® I226-V 2.5GbE LAN LAN2: Intel® I226-V 2.5GbE LAN	LAN1: Intel® I226-V 2.5GbE LAN2: Intel® I226-V 2.5GbE
I/O Interface	4 x USB 2.0 (2x4 pin, P=2.0) 2 x RS-232/422/485 (2x5 pin, P=2.0) 4 x RS-232 (2x5 pin, P=2.0)	2 x USB 3.2 Gen 2 2 x USB 2.0 2 x USB 2.0 (2x4 pin, P=2.0) 2 x RS-232/422/485 (1x9 pin, P=1.25)	2 x USB 3.2 Gen 2 4 x USB 2.0 (2x4 pin, p=2.0) 2 x RS-232/422/485 (1x9 pin, P=1.25)	2 x USB 3.2 Gen 2 4 x USB 2.0 2 x RS-232/422/485 (1x9 pin, P=1.25) 4 x RS-232 (1x9 pin, P=1.25)
Storage Interface	1 x SATA 6Gb/s	1 x SATA 6Gb/s	1 x SATA 6Gb/s	1 x SATA 6Gb/s with 5V SATA power connector onboard eMMC (optional up to 256G)
Audio	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)
Digital I/O	12-bit Digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin)
Power Consumption	12V@2.83A (12th Gen Intel® Core™ i7-1265UE CPU with 8 GB 3200 MHz LPDDR4x memory, max. loading, EuP mode enabled)	12V@3.21A (Intel® Processor N97 with 8 GB 4800 MHz LPDDR5 memory, max. loading, EuP mode disabled) 12V@2.67A (Intel® Processor N200 with 8 GB 4800 MHz LPDDR5 memory, max. loading, EuP mode disabled)	12V@3.14A (Intel® Celeron® J6412 2.0GHz with on-board 8GB LPDDR4 memory and EUP enabled)	12V@3.24A (Intel® Celeron® J6412 2.0GHz with on-board 8GB 3200MHz LPDDR4 memory and EUP enabled)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operating Environment	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 65°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 65°C Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x M.2 A Key 2230 for WIFI & BT (PCIe Gen3 x1 & USB 2.0) 1 x M.2 M Key 2242/80 (PCIe Gen3 x4) 1 x M.2 B Key 3042 (PCIe x2 & USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key 1 x PCIe Gen3 x4 (x4 & x2+x2)	1 x M.2 A Key 2230 (PCIe Gen3 x1 & USB 2.0) 1 x M.2 M Key 2280 (PCIe Gen3 x1) 1 x PCIe Gen3 x4 Slot (x2 signal)	1 x M.2 A key 2230 (PCIe Gen3 x1 & USB 2.0) 1 x M.2 B key 2242/3042 (PCIe Gen3 x2 & USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key 1 x PCIe x4 slot (PCIe Gen3 x2 signal) (x2 or x1+x1)	1 x M.2 A Key 2230 (PCIe Gen3 x1 & USB 2.0) 1 x M.2 B key 2242/3042 (PCIe Gen3 x2 & USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key 1 x PCIe x4 slot (PCIe Gen3 x2 signal) (x2 or x1+x1)
Recommended CPU Cooler	Heat Spreader	Heat Spreader	Heat Spreader	Heat Spreader


*Please contact the sales for different memory configurations

3.5" SBC series



Model	WAFAER-EHL-x6000	WAFAER-JL	WAFAER-AL	WAFAER-BT
CPU Socket	On board	On board	On board	On board
CPU Type	Intel® Elkhart Lake Atom™ x6000 series / Pentium® / Celeron® processor	Intel® Celeron® N5105 on-board SoC (up to 2.90GHz, Quad-core, 4M Cache, TDP=10W)	Intel® Pentium® N4200 on-board SoC Intel® Celeron® N3350 on-board SoC	Intel® Celeron® J1900 on-board SoC Intel® Celeron® N2930 on-board SoC Intel® Celeron® N2807 on-board SoC
Chipset	SoC	SoC	SoC	SoC
Memory	On-board LPDDR4x 8GB	One 260-pin 2933 MHz DDR4 SO-DIMM (system max. 16GB)	One 204-pin 1866/1600 MHz single-channel DDR3L SO-DIMM (system max. 8 GB)	One 204-pin 1066/1333 MHz dual-channel DDR3L SO-DIMMs (system max. 8 GB)
Display Interface	Triple Independent Displays 1 x HDMI 1.4 1 x DP 1.2 1 x IEI iDPM 3040 slot (only for IEI eDP/LVDS/VGA Module)	Dual independent display 1 x DP 1.4 1 x HDMI 1.4	Triple independent display 1 x VGA 1 x DP++ 1 x 18/24-bit dual-channel LVDS 1 x iDP	Dual independent display 1 x VGA 1 x 24-bit dual-channel LVDS connector 1 x iDP interface for HDMI, LVDS, VGA, DVI, DP
Ethernet	LAN1: Intel® I225-IT/ I226-IT 2.5GbE controller LAN2: Intel® I225-IT/ I226-IT 2.5GbE controller	3 x Intel® I226-V 2.5GbE controller	2 x PCIe GbE LAN Realtek RTL8111 Controller	LAN1: Intel® I210-AT PCIe controller with NCSI support LAN2: Intel® I211-AT PCIe controller
I/O Interface	2 x USB 3.2 Gen 2 4 x USB 2.0 (2*4 pin, P=2.0) 2 x RS-232/422/485 (1x9 pin, P=1.25)	2 x RS-232 pin header 2 x USB 2.0 pin header 2 x USB 3.2 Gen 2	2 x USB 3.2 Gen 2 2 x USB 2.0 (2x4 pin, P=2.0) 2 x RS-232 (1x9 pin, P=1.25)	1 x RS-232 1 x USB 2.0 1 x USB 3.2 Gen 1 1 x KB/MS (1x6 pin) 1 x RS-422/485 (1x4 pin, P=2.0) 4 x USB 2.0 (2x4 pin, P=2.0) 2 x RS-232 (2x5 pin, P=2.0)
Storage Interface	1 x SATA 6Gb/s with 5V SATA power connector	1 x SATA 6Gb/s	2 x SATA 6Gb/s with 5V SATA power connector	2 x SATA 3Gb/s with 5V SATA power connector (no RAID)
Audio	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)		Realtek ALC888S HD Audio codec 1 x Front audio (2x5 pin)	Realtek ALC888S HD Audio codec 1 x Front audio (2x5 pin)
Digital I/O	8-bit digital I/O (2x5 pin)	12-bit digital I/O (2x7 pin)	8-bit digital I/O (2x5 pin)	8-bit digital I/O (2x5 pin)
Power Consumption	12V@3.34A, 19V@2.16A, 24V@1.79A, 28V@1.52A (Intel® Atom x6211E 1.3GHz with 8GB 3200MHz DDR4 memory and EUP enabled)	12V@2.45A (Intel® Pentium® Silver N6000 3.30 GHz TDP 6W with one 16GB 2933MHz DDR4 SO-DIMM)	12V@2.57A (Intel® Pentium® N4200 up to 2.5GHz with 8GB DDR3L memory)	12V@1.45A (Intel® Celeron® Processor J1900 CPU with one 8 GB 1333 MHz DDR3L memory)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operating Environment	Temperature Range: -20°C ~ 85°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -20°C ~ 70°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -20°C ~ 60°C Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x M.2 A Key 2230 1 x M.2 B Key 3042	1 x M.2 A key 2230 1 x M.2 B key 3042/2280 1 x On-board SIM card socket for M.2 B key	1 x Full/Half-size PCIe Mini slot 1 x Full/Half-size PCIe Mini slot	1 x Full-size PCIe Mini card slot 1 x Half-size PCIe Mini card slot
Recommended CPU Cooler	Heat Spreader	Heat Spreader	Heatsink	Heat Spreader


2.5" Pico-ITX/ PC/104-Plus series

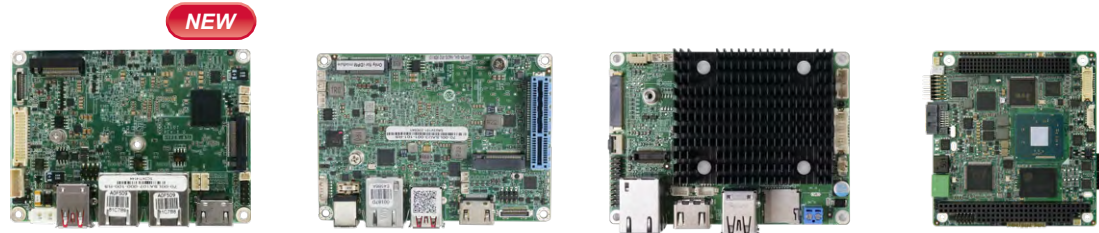

Model	HYPER-ASL	HYPER-EHL	HYPER-RK3566	PM-BT
CPU Socket		On board		On board
CPU Type	Intel® Alder Lake-N/Amston Lake series processor.	Intel® Atom™ x6000 series / Pentium® / Celeron® processor (Elkhart Lake platform)	Rockchip RK3566 (Quad-code Cortex-A55 Up to 1.8Ghz)	Intel® Celeron® J1900 on-board SoC
Chipset	SoC	SoC	SoC	SoC
Memory	Dual channel on-board LPDDR5 8G pre-installed (system max.16GB)	LPDDR4x-3200 MHz 4GB (system max. 8GB)	2/4GB LPDDR4/4X,Up to 8GB**1	One 204-pin 1333/1066 MHz DDR3L SO-DIMM (system max. 8 GB)
Display Interface	1 x HDMI 1.4 (4K @ 30Hz) 1 x LVDS: 24-bit dual-channel, up to 1920 x 1200	1 x HDMI 1.4 1 x IEI iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)	1 x HDMI 2.0 output port 1 x LVDS port 1 x MIPI DSI, 4 lanes**2	Dual independent display 1 x VGA 1 x 18/24-bit single-channel LVDS (2x10 pin)
Ethernet	LAN1: Intel® I226-V 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller	LAN1: Intel® I226-V 2.5GbE controller	1 x 1GbE RJ45 by YT8521	GbE by Intel® I210 Ethernet PHY
I/O Interface	2 x USB2.0 (2x4 pin, P=2.0) 1 x RS-232/422/485 (1x9 pin, P=1.25)	2 x USB 3.2 Gen2 2 x USB 2.0 (2x4 pin, P=2.0) 1 x RS-232/422/485 (1x9 pin, P=1.25)	2 x RS-232+RS-485 (2x5 pin) 1 x USB 3.0 3 x USB 2.0 1 x HDMI 2.0 Type A 1 x LVDS 1 x MIPI DSI, 4 lanes	3 x USB 2.0 (1x4 pin, P=1.25) 2 x RS-232/422/485 (2x5, P=2.0)
Storage Interface	1 x iSATA 6Gb/s	1 x iSATA 6Gb/s	1 x microSD slot	1 x SATA 3Gb/s with 5V SATA power connector On-board SSD (optional, support by request)
Audio	1 x iAUDIO	N/A	1 x 2PIN socket for speaker (1.3W); WAFAER 1*2 with frame; SMD; 2PIN;180°; P=1.25mm 1 x 2PIN socket for MIC, Connectors; Wire toBoard; WAFAER 1*2PIN; DIP; 2PIN; 180°; P=1.25mm	N/A
Digital I/O		8-bit DIO (1x10 pin, P=1.25)	8-bit GPIO	8-bit digital I/O (2x5 pin, P=2.0)
Power Consumption	12V@2.724A (Intel® Alder Lake-N N97 with 8 GB 4800 MHz LPDDR5 memory, max. loading, EuP mode disabled)	12V@ 2.07A (Intel® Celeron® J6412 CPU with 4 GB 3200 MHz LPDDR4x memory, max. loading, EuP mode enabled)	TBD	5V@1.70A (Intel® Celeron® J1900 CPU with 8GB memory)
Watchdog Timer	Software programmable and supports 1~255 sec. system reset			
Operating Environment	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Operating Temperature: 0°C ~ 60°C (32°F-140°F) Storage Temperature: -20°C ~ 70°C	Temperature Range: -20°C ~ 60°C (-4°F ~ 140°F) Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x M.2 A Key 2230 (PCIe Gen3 x1 & USB2.0) 1 x M.2 M Key 2242 (PCIe Gen3 x2)	1 x M.2 M Key 1 x PCIe x4 slot	1 x board to board connector (Only supports IEI wireless modules)	1 x Full-size PCIe Mini slot (support mSATA) 1 x PC/104-Plus (ISA+PCI)
CPU Cooler		Heat Spreader	Heatsink	Heatsink

**1 2GB memory and 16GB storage only support Linux
**2 Android OS Supports Dual-screen display of the same content, Debian os supports single-screen display


COM-HPC series

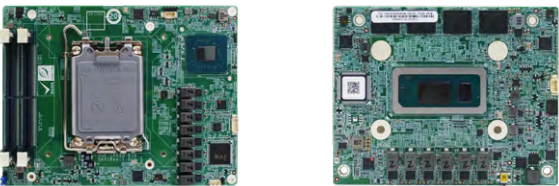

Model	HUK-R680	HUK-AADLP
Form factor	COM-HPC	COM-HPC Client Size A
CPU	Intel® Alder Lake-S/Raptor Lake-S/Raptor Lake-S Refresh LGA1700 Desktop CPU (TDP up to 65W)	Intel® Alder Lake-P/Raptor Lake-P on-board SoC
Chipsets	R680E	SoC
BIOS	UEFI BIOS	AMI UEFI BIOS
Graphics Engine	Intel® Gen12 UHD Graphics	Intel® Gen12 UHD Graphics
Memory	2 x 262-pin DDR5 5600MHz SO-DIMM sockets (up to 96GB)	Onboard LPDDR5x-4800MHz 16GB, up to 32GB
Display	Quadruple independent display signals to baseboard 3 x DDI 1 x eDP	Quadruple independent display signals to baseboard 3 x DDI 1 x eDP
LAN	1 x PCIe 2.5 GbE with Intel i226-V signal to baseboard 1 x PCIe 2.5 GbE with Intel i226-LM signal to baseboard	2 x PCIe 2.5 GbE with Intel i226-LM/i226-V signal to baseboard
I/O Interface	USB and UART signals to the baseboard 8 x USB 2.0 4 x USB 3.2 Gen2 2 x UART	USB and UART signals to the baseboard: 8 x USB 2.0 4 x USB 3.2 Gen2 2 x UART
Storage	2 x SATA signals to the baseboard	2 x SATA signals to the baseboard
Expansion	PCIe signals to the baseboard 1 x PCIe Gen5 x16 4 x PCIe Gen4 x4 1 x PCIe Gen3 x4 6 x PCIe Gen3 x1	PCIe signals to the baseboard: 3 x PCIe Gen3 x4 2 x PCIe Gen3 x1
Front panel	Front panel signal to baseboard	Front panel signal to baseboard
Audio	1 x HD Audio signal to baseboard 1 x Soundwire Audio/I2S Audio signal to baseboard	1 x HD audio signal to baseboard
eSPI	1 x eSPI signal to baseboard	1 x eSPI signal to baseboard
DMIC	2 x DMIC signal to baseboard	2 x MIPI-CSI signal to baseboard
SMBus	1 x 4-pin wafer signal to baseboard	1 x 4-pin wafer signal to baseboard
I²C	1 x 4-pin wafer signal to baseboard	1 x 4-pin wafer signal to baseboard
GPIO	12-bit GPIO signal to baseboard	12 Bit GPIO signal to baseboard
TPM	Onboard TPM2.0	TPM2.0
Power Input	ATX 12V Power Supply	ATX 12V Power Supply
Dimensions	160 x 120mm	95 x 120mm
Operating Temperature	-10°C ~ 60°C	-10°C ~ 60°C
Operating Humidity	5%~95% (non-condensing)	5%~95% (non-condensing)
Certification	CE/FCC compliant	

Model	HUK-DB
Compatible Models	COM-HPC Size A Module (95 x 120mm), B Module (120 x 120mm) and C Module (120 x 160mm)
Display	1 x eDP 1 x HDMI 1.4 up to 4096 x 2304 @30Hz 2 x DP 1.2 up to 4096 x 2304 @60Hz
Ethernet	2 x RJ45 (2.5GbE)
External I/O	6 x RS-232 1 x Front panel (2x7 pin, power LED, HDD LED, speaker/buzzer, power button, reset button)
Internal I/O	1 x General Purpose SPI Port (2 x4 pin, P=2.0) 1 x 12-bit DIO (2x7 pin, P=2.54) 2 x SATA 6Gb/s
Expansion	1 x PCIe Gen5 x16 4 x PCIe Gen4 x4 1 x PCIe Gen3 x4 1 x PCIe Gen3 x4 (x2 signal) 1 x M.2 M Key 2242/2280 (PCIe Gen3 x2) 1 x M.2 A Key 2230 (USB2.0&PCIe Gen3 x2)
MIPI	2 x MIPI CSI
Audio	1 x Realtek ALC888S HD codec / 1 x I2S Audio (Line-in, Line-out, Mic) 1 x Soundwire Audio (2 x 4 pin header) 2 x DMIC connector
Front Panel	1 x Front_Panel (2*7 pin) (Power LED, HDD LED, Speaker (Buzzer), Power Button, Reset Button)
I²C	2 x 4-pin wafer
SMBus	1 x 4-pin wafer
Fan Connector	1 x System fan connector (1x4 pin)
Power Supply	12V DC Input
Temperature	-10°C ~ 60°C
Humidity	5% ~95 non-condensing
Dimensions	315mm x 190mm
Certification	CE/FCC compliant

COM Express series

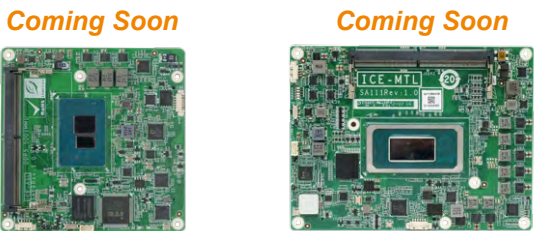

Model	ICE-ASL	ICE-MTL
COM Express Size	Basic: 95 x 95 mm	Basic: 125 x 95 mm
CPU	Intel® Processor N-series N97 SoC Processor Intel® Processor N-series N200 SoC Processor	14th Gen. Intel® mobile Meteor Lake-H on-board processor Intel® Core™ Ultra 5-125U Intel® Core™ Ultra 7-155U Intel® Core™ Ultra 5-125H Intel® Core™ Ultra 7-155H
Memory	1 x DDR5 4800 SO-DIMM, Up to 16GB	2 x 262pin DDR5 5600MHz SODIMM up to 96GB
BIOS	UEFI BIOS	UEFI BIOS
Graphic Engine	Intel® UHD Graphics	Intel® New Xe LPG Graphics
Display Output	Triple independent display signals to baseboard 1 x LVDS: 1920 x 1200 1 X DP 1.4a:up to 4096 x 2160 @ 60 Hz 1 X HDMI 1.4b: Up to 3840 x 2160 @ 30 Hz	Quad independent display signals to baseboard 1 x LVDS: 1920 x 1200 or 1 x eDP:4K@ 60 Hz 2 X USB4 :up to 4K @ 60 Hz 1 X HDMI 1.4: Up to 4K@ 30 Hz
Ethernet	1 x PCIe 2.5 GbE with Intel i225-V signal to baseboard	1 x PCIe 2.5 GbE with Intel i226-LM signal to baseboard
I/O Interface	2 x UART signal to baseboard 8 x USB 2.0 signal to baseboard 2 x USB 3.2 Gen2 signal to baseboard (with 2 x USB 2.0)	8 x USB 2.0 signal to baseboard 2 x USB 3.2 Gen2 signal to baseboard 2 x UART signal to baseboard
Audio	1 X HD Audio signal to baseboard	1 X HD Audio signal to baseboard
Memory	1 x SATA 6Gb/s signal to base board onboard eMMC optional (up to 256G)	2 x SATA 6Gb/s signal to base board onboard NVMe SSD 128/256GB optional (up to 1T)
I²C	1 x 4-pin wafer signal to baseboard	1 x 4-pin wafer signal to baseboard
LPC	1 x LPC signal to baseboard	1 x LPC signal to baseboard
Expansion	5 x PCIe Gen3 x1 signal to baseboard	1 x PCIe Gen5 x8 signal to baseboard 4 x PCIe Gen4 x4 signal to baseboard
Watchdog Timer	software programmable support 1~255 sec. System reset	software programmable support 1~255 sec. System reset
TPM	TPM2.0	TPM2.0
Power Supply	12 V DC input	12 V DC input
Operating Temperature	-10°C~60°C	-10°C~60°C
Operating Humidity	5%~95% (non-condensing)	5%~95% (non-condensing)
Safety	CE/FCC compliant	CE/FCC compliant

Model Name	ICE-CB-T6A
Form Factor	Micro ATX form factor baseboard
Display Output	1 x LVDS: 1920 x 1200 or 1 x eDP:4K @ 60 Hz 1 X HDMI 2.0: Up to 4K@ 60 Hz 2 X USB4: up to 4K @ 60 Hz
Ethernet	1 x RJ45
I/O Interface	4 x USB 3.2 Gen2 Type A 2 x RS-232/422/485 DB-9 6 x RS-232 pin header (2*5 pin,P=2.0) 2 x USB 2.0(2 x 4 pin,P=2.0) 1 x CAN
Storage	4 x SATA 6Gb/s
Expansion	1 x PCIe Gen5 x16 slot (x8 signal) 3 x PCIe Gen4 x4 slot 1 x M.2 M key
Front panel	1 x Front panel (2x7 pin, power LED, HDD LED, speaker/buzzer, power button, reset button)
Audio	Line-in, Line-out, Mic
SMBus	1 x SMBus (1x4 pin)
I2C	1 x I²C (1x4 pin)
GPIO	1 x DIO (2 x 5 pin)
FAN	1 x SYS Fan connector
CHASSIS OPEN	1 x Chassis intrusion (1x2 pin)
Power Supply	ATX/AT Power Supply 24+4 pins
Operating Temperature	0°C~60°C
Storage Temperature	-30°C~70°C
Operating Humidity	5%~95% (non-condensing)
Diemension	244 mm x 244 mm
Safety	CE/FCC compliant

Qseven™ series



Model	iQ7-ASL	iQ7-EHL
Size	QSeven 2.1	QSeven 2.1
CPU	Intel® Processor N-series N97 SoC Processor	Intel® Celeron® J6412 on-board SoC (up to 2.6GHz, quad-core, 1.5M Cache, TDP=10W)
Memory	Dual channel LPDDR5 8G preinstalled(system max.16G)	On-board LPDDR4x 3200 MHz 8GB (system max. 16GB)
BIOS	UEFI BIOS	UEFI BIOS
Graphics Engine	Intel® UHD Graphics	Intel® UHD Graphics
Display Interfaces	Double independent diplay signal to baseboard 1 x HDMI 1.4a: up to 4096 x 2160 @30Hz 1 x LVDS: 1920 x 1200 @ 60Hz or eDP: 4096 x 2160 @ 60Hz	Dual independent display signal to baseboard 1 X DP 1.4a: up to 4096 x 2160 @ 60 Hz 1 X LVDS: 1920 x 1200 @ 60Hz or eDP: 4096 x 2160 @ 60Hz
Ethernet	1 x PCIe 2.5 GbE with Intel i225-LM signal to baseboard	1 x PCIe 2.5 GbE with Intel I225-V signal to baseboard
I/O Interface	2 x USB 3.2 Gen2(10 Gb/s) signal to baseboard 6 x USB 2.0 signal to baseboard	2 x USB 3.2 Gen2 (10 Gb/s) signal to baseboard 6 x USB 2.0 signal to baseboard
Audio	HDA signal to baseboard	HDA signal to baseboard
Storage	1 x HDA signal to baseboard	2 x SATA 6Gb/s signal to baseboard on board eMMC optional (up to 256GB)
Expansion	4 x PCIe Gen3 x1 signal to baseboard	4 x PCIe Gen3 x1 signal to baseboard
UART	1 x UART signal to baseboard	UART signal to baseboard
SDIO	1 x SDIO signal to baseboard	SDIO signal to baseboard
LPC	1 x LPC signal to baseboard	LPC signal to baseboard
TPM	TPM 2.0	Intel PTT
I²C	1 x I2C signal to baseboard	I²C signal to baseboard
Watchdog Timer	Software Programmable support 1~255 sec system reset	Software Programmable support 1~255 sec system reset
Power Supply	5V DC	5V DC
CAN	1 x CAN Bus signal to baseboard	1 x Fan control signal to baseboard
Temperature	-10°C ~ 60°C	-10°C ~ 60°C (14°F-140°F)
Humidity	5% ~95 non-condensing	5% ~95 non-condensing
Dimensions	70 mm x 70 mm	70 mm x 70 mm
Safety	CE/FCC compliant	CE/FCC compliant

Model	iQ7-CB
Size	Baseboard for QSeven Rev.2.1 module
Display Interfaces	1 X DP 1.4a 1 x18/24-bit dual-channel LVDS
Audio	Realtek ALC888S HD codec (Line-in, Line-out, Mic)
Expansion	1 x PCIe x1 1 x M.2 2230 A key for Wi-Fi & BT (PCIe Gen3 x1 / USB 2.0 signal) 1 x M.2 3042 B key (PCIe Gen3 x2/ USB 2.0 signal) 1 x On-board SIM card socket for M.2 B key
Internal I/O Interface	2 x SATA connector 1 x SD card socket 1 x RS-232 pin header (2x5, P= 2.54)
Rear I/O Interface	2 x USB 3.2 Gen1 (5 Gb/s) 2 x RS-232 1 x RJ45 (2.5GbE) 3 x Audio Jack (Line-in, Line-out, Mic) 2 x USB 2.0
Front Panel	1 x Front panel (2x7 pin) (power LED, HDD LED, speaker/buzzer, power button, reset button)
I²C	1 x 4-pin wafer
SMBus	1 x 4-pin wafer
Power Supply	12V DC Input
Fan Connector	1 x System fan connector (1x4 pin)
Temperature	-10°C ~ 60°C (14°F-140°F)
Humidity	5% ~95 non-condensing
Dimensions	170 mm x 170 mm
Safety	CE/FCC compliant

iSMC series



Model	iSMC-ASL	iSMC-EHL
Size	SMARC 2.1	
CPU	Intel® Processor N-series N97 SoC Processor	Intel® Celeron® J6412 on-board SoC Intel® Celeron® x6413E on-board SoC
Memory	Dual channal LPDDR5 8G preinstalled(system max.16G)	On-board LPDDR4x 3200 MHz 8GB (system max. 16GB)
BIOS	UEFI BIOS	UEFI BIOS
Graphics Engine	Intel® UHD Graphics	Intel® UHD Graphics
Display Interfaces	Triple independent display signals to baseboard 1 X DP 1.4a:up to 4096 x 2160 @ 60 Hz 1 X HDMI 1.4b: Up to 3840 x 2160 @ 30 Hz 1 x LVDS: 1920 x 1200 @ 60Hz or 1 x eDP: 4096 x 2160 @ 60Hz	Triple independent display signals to baseboard 1 X DP 1.4a:up to 4096 x 2160 @ 60 Hz 1 X HDMI 1.4b: Up to 3840 x 2160 @ 30 Hz 1 x LVDS: 1920 x 1200 @ 60Hz or 1 x eDP: 4096 x 2160 @ 60Hz
Ethernet	2 x PCIe 2.5 GbE with Intel I225-V signal to baseboard	2 x PCIe 2.5 GbE with Intel I225-V signal to baseboard
I/O Interface	2 x USB 3.2 Gen 2 signal to baseboard 6x USB 2.0 signal to baseboard	
Audio	1 x HDA signal to baseboard Support 7.1-channel HD Audio by Realtek ALC888S	1 x HDA signal to baseboard Support 7.1-channel HD Audio by Realtek ALC888S
Storage	1 x SATA 3.0 signal to baseboard onboard eMMC optional (up to 256G)	1 x SATA 6Gb/s signal to baseboard on board eMMC optional (up to 256G)
Expansion	4 x PCIe Gen3 x1 signal to baseboard	4 x PCIe Gen3 x1 signal to baseboard eSPI signal to baseboard
UART	4 x UART signal to baseboard	2 x UART signal to baseboard
SDIO	1 x 4-bit SDIO signal to baseboard	1 x 4-bit SDIO signal to baseboard
eSPI	eSPI signal to baseboard	
TPM	TPM 2.0	Intel® PTT
I²C	4 x 4-pin wafer signal to baseboard	4 x 4-pin wafer signal to baseboard
I²S	1 x 4-pin wafer signal to baseboard	1 x 4-pin wafer signal to baseboard
SMBus	1 x 4 pin wafer signal to baseboard	1 x 4 pin wafer signal to baseboard
Watchdog Timer	Software Programmable support 1~255 sec system reset	Software Programmable support 1~255 sec system reset
Power Supply	5V DC	5V DC
Operating Temperature	-10°C ~ 60°C (14°F-140°F)	-10°C ~ 60°C (14°F-140°F)
Humidity	5% ~95 non-condensing	5% ~95 non-condensing
Dimensions	82 mm x 50 mm	82 mm x 50 mm
Certification	CE/FCC Compliant	CE/FCC Compliant

Model	iSMC-CB
Display Interfaces	Triple independent display 1 X DP 1.4a: up to 4096 x 2160 @ 60 Hz 1 X HDMI 1.4b: Up to 3840 x 2160 @ 30 Hz 1 x LVDS: 1920 x 1200 @ 60Hz or 1 x eDP: 4096 x 2160 @ 60Hz
Ethernet	LAN1: Intel® I225V 2.5GbE LAN2: Intel® I225V 2.5GbE
Audio	Realtek ALC888S HD Audio codec (Line-out, Mic in)
Expansion	1 x PCIe Gen3 x4
Rear I/O Interface	2 x USB 3.2 Gen 2 2 x USB 2.0 1 x RS-232/422/485
Internal I/O	1 x SATA 6Gb/s 1 x SD slot 1 x RS-232/422/485 pin header (1x9 pin, P=1.25)
DIO	1 x 6-bit GPIO (2x4 pin)
CAN	2 x CAN Bus pin header (2x3 pin, P=2.54)
I²C/SMBus	4 x I²C (1 x 4 pin) 1 x SMBus (1 x 4 pin)
Front Panel	1 x Front Panel (2x7 pin) (Power LED, HDD LED, Speaker(Buzzer), Power Button, Reset Button)
Power Supply	1 x 12V DC jack Φ5.4 1 x Internal power connector (2x2 pin)
Operating Temperature	-10°C ~ 60°C (14°F-140°F)
Storage Temperature	-30°C ~ 70°C
Humidity	5% ~95 non-condensing
Dimensions	170 mm x 170 mm
Certification	CE/FCC Compliant


PICMG 1.3 Full-Size SBC series



Model	SPCIE-C246	PCIE-AM5	PCIE-RPL-Q670	PCIE-Q470
CPU Socket	LGA1151	AMD Socket AM5	LGA1700	LGA1200
CPU Type	Intel® Xeon® E, 8th/9th generation Core™ i9/i7/i5/i3, Pentium®, Celeron® processor	AMD Socket AM5 for AMD Ryzen™ 7000/Ryzen™ 8000 Series Desktop Processors (up to 65W)	LGA1700 socket supports 12th/13th/14th generation Alder Lake-S Intel® Core™ i9/i7/i5/i3/Pentium®/Celeron® Processor (up to 65W)	LGA1200 Intel® 10th/11th Gen. Core™ i9/i7/i5/i3, Pentium®, Celeron® Processor (Support up to 65w) *
Chipset	Intel® C246	AMD B650	Intel® Q670E	Intel® Q470 / Q470E
Memory	Four 288-pin 2666MHz dual-channel DDR4 SDRAM unbuffered DIMMs support up to 128GB ECC & non-ECC	two 288-pin 5200 MHz Dual-Channel DDR5 SDRAM Unbuffered DIMMs, supported up to 64GB	Two 288-pin 5200 MHz Dual-Channel DDR5 SDRAM Unbuffered DIMMs supported up to 96GB	Four 288-pin 2933 MHz dual-channel DDR4 SDRAM Unbuffered DIMMs (system Max. 128 GB)
Display Interface	Dual display supported 1 x HDMI 1 x DP	Dual independent display 1 x HDMI 1.4 (4K @30Hz) 1 x internal DP 1.4 (180°) (4K @60Hz)	Triple independent display 1 x interface DP1.4 ** 1 x interface DP1.4 1 x HDMI 1.4 (up to 4096 x 2304 @30Hz)	1 x HDMI 1.4
Ethernet	LAN1: Intel® I219LM PCIe controller LAN2: Intel® I211AT PCIe controller	LAN1: Intel® I226-V 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller	LAN1: Intel® I226-LM 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller	LAN1: Intel® I226-V 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller
I/O Interface	2 x USB 3.2 Gen 1 (Type-A) 1 x USB 2.0 (Type-A) 1 x KB/MS (1x6 pin) 1 x RS-422/485 (1x4 pin, P=2.0) 2 x USB 3.2 Gen 1 (2x10 pin) 3 x RS-232 (2x5 pin, P=2.54) 6 x USB 2.0 (2x4 pin, P=2.54)	2 x USB 3.2 Gen2 (Type-A) 1 x Type C (10Gb/s) 2 x USB 3.2 Gen1 (2x10 pin P=2.00 pin wafer) (5Gb/s) 1 x USB 3.2 (10Gb/s) (internal Type A) 4x USB 2.0 (2x4 pin, P=2.54) 4 x USB2.0 to the backplane	2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 2 x RS-232/422/485 (2x5 pin, P=2.54) (RS485 support AFC) 4 x USB 2.0 to backplane 1 x USB 3.2 Gen2 (Type A 180°) 4 x USB 3.2 Gen1 (2x10 pin, P=2.00 pin wafer) (5Gb/s) 2 x RS-232 (2x5 pin, P=2.54)	2 x USB 3.2 Gen 1 (Type-A) 1 x USB 3.2 Gen 2 (Type-C) (RS485 support AFC) 6 x USB 2.0 pin header 2 x USB 3.2 Gen 1 pin header 1 x Internal USB 3.2 Gen 1 (Type-A 180°) 2 x RS-232 pin header 2 x RS-422/485 pin header
Storage Interface	6 x SATA 6Gb/s (RAID 0/1/5/10 supported)	4 x SATA 6Gb/s (RAID 0/1/10 supported)	4 x SATA 6Gb/s (RAID 0/1/5/10 supported)	4 x SATA 6Gb/s (RAID 0/1/5/10 supported)
Audio	Supports by IEI AC-KIT-888S-R10 audio kit	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2x5 pin)	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2 x 5 pin)	Supports by IEI AC-KIT-888S-R10 audio kit
Digital I/O	8-bit digital I/O (2x5 pin)	1 x 12-bit digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin)
Power Consumption	5V@3.12A, 12V@6.85A, 3.3V@1.13A, 5VSB@0.15A (4.0 GHz Intel® Core™ i7-8700K CPU with four 16 GB 2666 MHz DDR4 memory)	TBD	3.3V@2.39A, 5V@9.68A, 12V@6.56A, 5VSB@0.35A (Intel® Core™ i9-12900 CPU with 16 GB 5600 MHz DDR5 memory, EuP mode disabled)	3.3V@1.04A, 5V@8.61A, 12V@12.33A (Intel® Core™ i9-11900K CPU with 4 GB 3200 MHz DDR4 memory)
Watchdog Timer	Software programmable supports 1~255 sec. system reset			
Operation Environment	Temperature Range: -20°C ~ 60°C (-4°F ~ 140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: 0°C ~ 60°C (32°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x M.2 M key (2280, PCIe Gen3 x4) 1 x PCIe x16 & 4 x PCIe x1 signal via golden finger 4 x PCI signal via golden finger	1 x PCIe Gen3 x16 signal via golden finger (Support x16, or x8 + x8, or x4 + x4 + x4 + x4) 4 x PCIe Gen3 x1 signal via golden finger (support1 x4, or 4 x1) 4 x PCI signal via golden finger 1 x M.2 M Key slot (2242/2280, PCIe Gen4 x4) NVMe support	1 x M.2 M Key (2242/2280, PCIe Gen3 x4) NVMe support 1 x PCIe Gen3 x16 & 4 x PCIe Gen3 x1 signal via golden finger 4 x PCI signal via golden finger	1 x M.2 A Key 2230 (PCIe Gen3 x2 & USB 2.0) 1 x M.2 B Key 3042/3052/2280 (PCIe Gen3 x2 & USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key 1 x M.2 M Key 2242/2280 (PCIe Gen3 x4)
CPU Cooler	CF-1150SA-R10 CF-1150SB-R11 CF-1150SC-R20 CF-1150SE-R11	19100-000344-00-RS	19100-000323-00-RS 19100-000319-00-RS 19100-000333-00-RS	CF-1150SA-R10 CF-1150SB-R11 CF-1150SC-R20 CF-1150SE-R11


**The DP interface is not plugged in. If needed, MOQ is 100.

PICMG 1.3 Full-Size SBC series

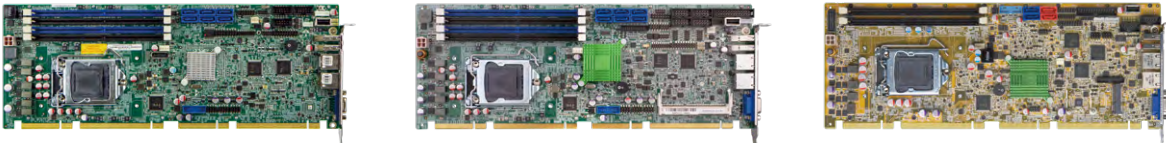


Model	PCIE-Q370	PCIE-Q170	PCIE-H810
CPU Socket	LGA1151	LGA1151	LGA 1150
CPU Type	8th/9th generation Intel® Core™ i9/i7/5/i3, Pentium®, Celeron® processor	6th/7th generation Intel® Core™ i9/i7/5/i3, Pentium®, Celeron® processor	4th/5th generation Intel® Core™ i9/i7/5/i3, Pentium®, Celeron® processor
Chipset	Intel® Q370	Intel® Q170	Intel® H81
Memory	Four 288-pin 2666MHz dual-channel DDR4 SDRAM unbuffered DIMMs (system max. 64 GB)	Four 288-pin 1866/2133 MHz dual-channel non-ECC unbuffered DDR4 DIMMs (system max. 64 GB)	Two 240-pin 1600/1333 MHz dual-channel DDR3 & DDR3L SDRAM unbuffered DIMMs (system max. 16 GB)
Display Interface	Dual display supported 1 x VGA 1 x DP PCIe-Q370-HDMI: 1 x HDMI 1 x DP	Dual display supported 1 x VGA 1 x iDP interface	Dual display supported 1 x VGA 1 x iDP interface
Ethernet	LAN1: Intel® I219LM PCIe controller LAN2: Intel® I211-AT PCIe controller	LAN1: Intel® I219LM PCIe controller LAN2: Intel® I210 PCIe controller	LAN1: Realtek RTL8111E PCIe controller LAN2: Realtek RTL8111E PCIe controller
I/O Interface	2 x USB 3.2 Gen 2 (Type-A) 1 x USB 2.0 (Type-A) 1 x KB/MS (Type-A) 1 x RS-422/485 pin header 2 x USB 3.2 Gen 1 pin header 3 x RS-232 pin header 6 x USB 2.0 pin header	2 x USB 3.2 Gen 1 (Type-A) 1 x KB/MS pin header 1 x LPT pin header 1 x USB 2.0 (interface Type-A) 2 x USB 3.2 Gen 1 pin header 2 x RS-232/422/485 pin header 2 x RS-232 pin header 6 x USB 2.0 pin header	2 x USB 2.0 (Type-A) 1 x KB/MS pin header 1 x LPT pin header 1 x RS-422/485 pin header 1 x USB 2.0 (interface Type-A) 2 x RS-232 pin header 2 x USB 3.2 Gen 1 pin header 4 x USB 2.0 (Golden finger) 4 x USB 2.0 pin header
Storage Interface	6 x SATA 6Gb/s (RAID 0/1/5/10 supported)	6 x SATA 6Gb/s (RAID 0/1/5/10 supported)	2 x SATA 3Gb/s 2 x SATA 6Gb/s
Audio	Supports by IEI AC-KIT-888S-R10 audio kit	Supports by IEI AC-KIT-888S-R10 audio kit	Supports by IEI AC-KIT-888S-R10 audio kit
Digital I/O	8-bit programmable digital I/O		
Power Consumption	5V@3.12A, 12V@6.85A, 3.3V@1.13A, 5VSB@0.15A (Intel® Core™ i7-8700K 4.0 GHz CPU with four 16 GB 2666 MHz DDR4 memory)	5V@3.12A, 12V@6.85A, 3.3V@1.13A, 5VSB@0.15A (Intel® Core™ i7-6700K 4.0GHz CPU with 64GB (four 16GB) 2133 MHz DDR4 memory)	5V@3.41A, 12V@0.35A, Vcore_12V@7.52A, 3.3V@1.41A, 5VSB@0.12A (Intel® Core™ i7-4770K 3.90 GHz CPU with 8 GB (two 4 GB) 1333 MHz DDR3 memory)
Watchdog Timer	Software programmable supports 1~255 sec. system reset		
Operation Environment	Temperature Range: -20°C ~ 60°C (-4°F ~ 140°F) Relative Humidity: 5% ~ 95%, non-condensing		
Expansion Slot	1 x M.2 M key 1 x PCIe x16 & 4 x PCIe x1 signal via golden finger 4 x PCI signal via golden finger	1 x PCIe x16 & 4 x PCIe x1 signal via golden finger 4 x PCI signal via golden finger 1 x Full/Half-size PCIe Mini card slot	1 x PCIe x16 & 4 x PCIe x1 signal via golden finger 4 x PCI signal via golden finger 1 x Full/Half-size PCIe Mini card slot (support mSATA)
CPU Cooler	CF-1150SA-R10 CF-1150SB-R11 CF-1150SC-R20 CF-1150SE-R11	CF-1150SA-R10 CF-1150SB-R11 CF-1150SC-R20 CF-1150SE-R11	CF-1150SA-R10 CF-1150SB-R11 CF-1150SC-R20 CF-1150SE-R11

PICMG 1.3 Half-Size SBC series



Model	HPCIE-RPL-Q670	HPCIE-Q470
CPU Socket	LGA1700	LGA1200
CPU Type	12th/13th/14th generation Alder Lake-S Intel® Core™ i9/i7/i5/i3/Pentium®/ Celeron® Processor (up to 65W)	10th/11th Gen Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processor (up to 65W)
Chipset	Intel® Q670E	Intel® Q470 / Q470E
Memory	Two 262-pin 5200 MHz dual-channel DDR5 SO-DIMMs supported (system max. 64GB)	Two 260-pin 2933 MHz dual-channel DDR4 SO-DIMMs (system max. 64GB)
Display Interface	1 x DP 1 x HDMI	1 x HDMI 1.4
Ethernet	LAN1: Intel® I226-LM 2.5GbE controller LAN2: Intel® I226-V 2.5GbE controller	LAN1: Intel® I225V/I226V 2.5GbE controller LAN2: Intel® I225V/I226V 2.5GbE controller
I/O Interface	2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 2 x RS-232/422/485 (2x5 pin, P=2.00) (RS-485 support AFC) 4 x USB 2.0 (2x4 pin, P=2.54) 1 x USB 3.2 Gen2 (Type A 180°) 2 x USB 3.2 Gen1 (2 X 10PIN P=2.00 pin wafer) (5Gb/s)	2 x USB 3.2 Gen 1 Type-A 1 x USB 3.2 Gen 2 Type-C 2 x USB 2.0 pin header 2 x RS-232/422/485 pin header
Storage Interface	2 x SATA 6Gb/s (RAID 0/1 supported)	2 x SATA 6Gb/s (RAID 0/1 supported)
Audio	1 x iAUDIO, support IEI AC-KIT-888S Audio Module (2 x 5 pin)	1 x iAUDIO, support IEI AC-KIT-888S audio kit (2 x 5 pin)
Digital I/O	12-bit digital I/O (2x7 pin)	12-bit digital I/O (2x7 pin)
Power Consumption	TBD	3.3V@0.11A, 5V@1.12A, 12V@13.31A, 5VSB@0.15A (Intel® Core™ i9-11900K CPU with 4 GB 3200 MHz DDR4 memory)
Watchdog Timer	Software programmable supports 1~255 sec. system reset	
Operation Environment	Temperature Range: -10°C ~ 60°C Relative Humidity: 5% ~ 95%, non-condensing	Temperature Range: -10°C ~ 60°C (14°F-140°F) Relative Humidity: 5% ~ 95%, non-condensing
Expansion Slot	1 x M.2 M Key (2242, PCIe Gen3 x4) NVMe support 1 x PCIe Gen3 x16 & 4 x PCIe Gen3 x1 signal via golden finger	16-lanes PCIe via golden finger 4-lanes PCIe via golden finger 1 x M.2 (A Key) 1 x M.2 (M Key)
CPU Cooler	19100-000323-00-RS 19100-000319-00-RS 19100-000333-00-RS	CF-115XA-R10 CF-1156C-R20 CF-1156D-R30 CF-115XE-R10


PICMG 1.3 Passive Backplane





Backplane	Model	HPXE2-5S1	HPXE2-8S1
Total Slot		5	8
Expansion Slots	PCIe x16	1 (Gen 3.0)	-
	PCIe x8	-	2 (Gen 3.0)
	PCI	2	4
PSU Type		24+4-pin ATX	24+4-pin ATX
Chassis Option		PR-1500G	PAC-125G
		N/A	RACK-3000G RACK-360G
Note		ATX power	ATX power

PAC series wall-mount chassis 4U/5U rack-mount chassis 1U/2U rack-mount chassis

Server Grade SBC Backplane



Backplane		SPE-6S	SPE-9S
Total	Slot	6	7
PCIe	x8	-	1 (x16 connector) (Gen 3.0)
	x4	5 (Gen 3.0)	3 (Gen 3.0)
	PCI	-	3
PSU Type		24+4-pin ATX	24+4-pin ATX
Chassis Option		PAC-106G PAC-1000G	PAC-125G



Backplane		SPXE-11S	SPXE-14S
Total	Slot	11	14
PCIe	x8	-	1 (x16 connector) (Gen 3.0)
	x4	6 (x16 connector) (Gen 3.0)	-
	x1	-	12 (x4 connector) (Gen 3.0)
	PCI	4	-
PSU Type		24+8-pin ATX	24+8-pin ATX
Chassis Option		RACK-305G RACK-360G RACK-3000G	RACK-305G RACK-360G RACK-3000G

PAC series wall-mount chassis 4U/5U rack-mount chassis 1U/2U rack-mount chassis


PICMG 1.3 Passive Backplane



PICMG 1.3 (PCIe+PCI)			Model	PE-2SD1	PE-4S	PE-5S
Total Slot				2	4	5
Expansion Slots		PCIe Slots	x16 *	1 (Gen 2.0)	1	1 (Gen 2.0)
			x4	-	1	1 (Gen 2.0)
		PCI Slots	-	1	2	
USB Connectors by Pin Header				4	4	4
PSU Type				24+4-pin ATX	24+4-pin ATX	24+4-pin ATX
Chassis				RACK-1150-PE	N/A	N/A
Note				1U Type		



PICMG 1.3 (PCIe+PCI)		Model		PE-5S2	PE-6S	PE-6S2
Total Slot				5	6	6
Expansion Slots	PCIe Slots	x16 *	1 (Gen 2.0)	1 (Gen 2.0)	1 (Gen 2.0)	
		x4	-	-	1 (Gen 2.0)	
	PCI Slots	x1	3 (Gen 2.0)	2 (Gen 2.0)	-	
		-	-	2	3	
USB Connectors by Pin Header				4	4	4
PSU Type				24+4-pin ATX	24+4-pin ATX	24+4-pin ATX
Chassis				N/A	RACK-305G RACK-360G RACK-3000G PAC-1700G PAC-125 G	PAC-106G PAC-1000G
Note						

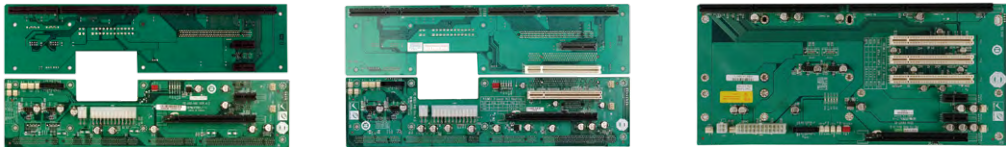


PICMG 1.3 (PCIe+PCI)		Model	PE-6SD	PE-6SD3	PE-7S
Total Slot			5	5	7
Expansion Slots	PCIe Slots	x16 *	1 (Gen 2.0)	1 (Gen 2.0)	1 (Gen 2.0)
		x4	-	1 (Gen 2.0)	-
		x1	3 (Gen 2.0)	-	2 (Gen 2.0)
	PCI Slots		-	2	3
USB Connectors by Pin Header			4	4	4
PSU Type			24+4-pin ATX	24+4-pin ATX	24+4-pin ATX
Chassis			N/A	N/A	PAC-1700G
Note			2U Type	2U Type	

PAC series wall-mount chassis 4U/5U rack-mount chassis 1U/2U rack-mount chassis

*When using a PCIe x16 add-on card, the length of the card must not exceed 167mm or 6.57 inches.

PICMG 1.3 Passive Backplane

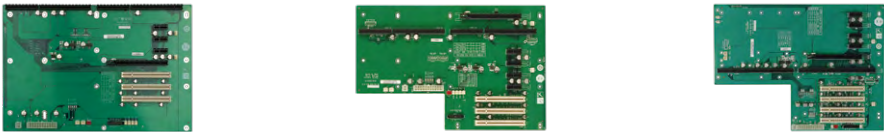

PICMG 1.3 (PCIe+PCI)		Model		PE-8S	PE-9S	PE-10S
Total Slot				8	9	10
Expansion Slots	PCIe Slots	x16 *	1 (Gen 2.0)	1 (Gen 2.0)	1 (Gen 2.0)	
		x1	3 (Gen 2.0)	4 (Gen 2.0)	4 (Gen 2.0)	
	PCI Slots		3	3	4	
USB Connectors by Pin Header				4	4	4
PSU Type				24+4-pin ATX	24+4-pin ATX	24+4-pin ATX
Chassis				PAC-125G	N/A	RACK-305G / RACK-360G / RACK-3000G



PICMG 1.3 (PCIe+PCI)		Model		PE-10S2	PXE-13S	PXE-14S1
Total Slot				10	13	14
Expansion Slots	PCIe Slots	x16 *	1 (Gen 2.0)	1 (Gen 3.0)	1 (Gen 3.0)	
		x1	4 (Gen 2.0)	3 (Gen 3.0)	0	
	PCI Slots		4	8	12	
USB Connectors by Pin Header				4	4	0
PSU Type				24+4-pin ATX	24+4-pin ATX	24+4-pin ATX
Chassis				RACK-3000G / RACK-305G / RACK-360G	RACK-3000G / RACK-305G / RACK-360G	RACK-3000G / RACK-305G / RACK-360G
Note				PCIe to PCI Bridge Backplane		

*When using a PCIe x16 add-on card, the length of the card must not exceed 167mm or 6.57 inches. PAC series wall-mount chassis 4U rack-mount chassis

PCISA Half-Size SBC Backplane

Supports PCI and ISA slot on one backplane (for half-size PCISA series single board computers)

The advantages of using the PCISA card are numerous:

- 1. Supports standard PISA version 1.0 slot on the IP/IPX series passive backplane.
- 2. Compatible with all available PCI/ISA cards. IP/IPX backplane is also integrated with the PCISA series card slot.



Model	IP-3S	IP-5SA2
Total Slot	3	5
PCI Slot	2	4
PSU Type	AT	ATX
Chassis	PAC-53GH	PR-1500G



Model	IP-6S	IP-6SA	IP-10S
Total Slot	6	6	10
PCI Slot	3	3	4
ISA Slot	2	2	5
PSU Type	AT	ATX	ATX/AT
Chassis	PAC-1000G	PAC-106G / PAC-1000G	PAC-125G


PAC series wall-mount chassis 4U rack-mount chassis

PCI/PX Backplane

PICMG 1.0 Full-Size SBC Backplane

Supports PCI and ISA slot on one backplane!
For PICMG 1.0 Single Board Computer

- The advantages of using the PICMG 1.0 card are numerous:
- 1. Supports standard PICMG version 1.0 slot on the PCI/PX series passive backplane
 - 2. Compatible with all available PCI/ISA cards. PCI/PX backplane is also integrated with the card slot

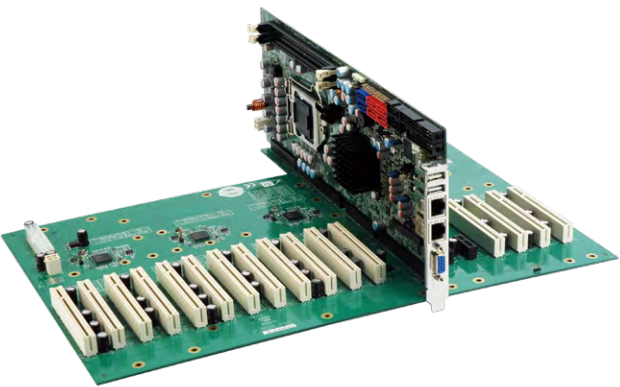

Model	PCI-5S2A-RS-R40 PCI-5S2-RS-R40	PCI-6S-RS-R40	PCI-7S-RS-R41
Total Slot	5	6	7
PCI Slot	4	4	4
ISA Slot	1	2	3
PSU Type	ATX/AT	ATX/AT	ATX/AT
Chassis	N/A	PAC-106G PAC-1000G	PAC-1700G



Model	PCI-10S-RS-R41	PCI-12S-RS-R40	PCI-14S-RS-R40
Total Slot	10	12	14
PCI Slot	4	4	4
ISA Slot	5	7	9
PSU Type	ATX/AT	ATX/AT	ATX/AT
Chassis	PAC-125G	RACK-3000G	N/A



Model	PCI-5SD6-RS-R40	PCI-6SD-RS-R40
Total Slot	6	6
PCI Slot	L2+R2	L1+R1
ISA Slot	-	L1+R1
PSU Type	ATX	ATX
Chassis	RACK-220G	RACK-220G


PAC series wall-mount chassis 4U/5U rack-mount chassis 1U/2U rack-mount chassis

PCISA Half-Size SBC



Model	PCISA-BT
SoC	Intel® Atom® E3845 on-board SoC (1.91GHz, quad-core, 2MB cache, TDP=10W) Intel® Atom® E3825 on-board SoC (1.33GHz, dual-core, 1MB cache, TDP=6W) Intel® Atom® E3815 on-board SoC (1.46GHz, single-core, 512KB cache, TDP=5W)
Memory	One 204-pin 1333/1066 MHz single-channel DDR3L SDRAM unbuffered SO-DIMM slot supports up to 8GB
Graphics Engine	Intel® HD Graphics Gen 7 Engines with 4 execution units, supporting DX11.1, OpenGL 4.2 and OpenCL1.2
Display Output	Dual independent display 1 x VGA 1 x 18/24-bit dual-channel LVDS (optional, MOQ: 100 pcs/lot) 1 x iDP interface for HDMI, LVDS, VGA, DVI, DP
Ethernet	LAN1: Intel® I211-AT PCIe controller LAN2: Intel® I211-AT PCIe controller
IO Interface	1 x USB 2.0 1 x USB 3.2 Gen 1 (5Gb/s) 1 x KB/MS (1x6 pin) 1 x USB 2.0 (180° Type-A) 1 x LPT (2x13 pin) 2 x RS-232 (2x5 pin, P=2.54) 1 x mSATA 2 x SATA 3Gb/s 1 x RS-422/485 (1x4 pin, P=2.0) 4 x USB 2.0 (2x4 pin, P=2.54)
Audio	Support 7.1 channel HD Audio by IEI AC-KIT-888S-R10 kit 1 x Front Audio (2x5 pin)
TPM	1 x TPM (2x10 pin)
SMBus	1 x SMBus (1x4 pin)
I²C	1 x I²C (1x4 pin)
Infrared Interface	1 x Infrared interface (1x5 pin)
Expansion	1 x microSD socket 1 x PCIe Mini slot PCI and ISA signal via golden finger
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Digital I/O	8-bit digital I/O (2x5 pin)
Fan Connector	1 x CPU smart fan (1x4 pin) 1 x System smart fan (1x3 pin)
Power Supply	5V/12V, AT/ATX support
Power Consumption	5V@1.55A, 12V@0.74A (Intel® Atom® E3845 1.91GHz CPU with one 8 GB 1333 MHz memory)
Operating Temperature	-20°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Dimensions	185 mm x 128 mm
Weight	GW: 1000g / NW: 250g
compliant	CE/FCC compliant

PICMG 1.0 Full-Size SBC

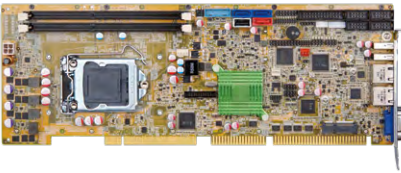

Model	WSB-H810
CPU	4th generation LGA 1150 Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor supported
Chipset	Intel® H81
Memory	Two 240-pin 1600/1333 MHz dual-channel DDR3 & DDR3L SDRAM unbuffered DIMMs support up to 16 GB
BIOS	UEFI
Graphics Engine	Intel® HD Graphics Gen 7.5 supports DX11.1 and OpenCL 1.2, OpenGL 3.2/ Full MPEG2, VC1, AVC Decode
Display Output	Dual independent display 1 x VGA (up to 1920x1200@60 Hz) 1 x iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160@60 Hz)
Ethernet	LAN1: Intel® I217-LM Ethernet controller LAN2: Intel® I211-AT Ethernet controller
Audio	IEI AC-KIT-888S-R10 7.1-channel HD Audio kit via the on-board 10-pin header connector
IO Interface	1 x KB/MS (1x6 pin) 2 x SATA 6Gb/s 1 x LPT (2x13 pin) 2 x USB 3.2 Gen 1 (5Gb/s) (2x10 pin) 1 x RS-422/485 (1x4 pin, P=2.0) 4 x RS-232 (2x5 pin, P=2.54) 1 x USB 2.0 (180° Type-A) 4 x USB 2.0 (2x4 pin, P=2.54) 1 x SATA 3Gb/s (AHCI supported, no RAID)
Front Panel	1 x Front panel (2x7 pin, power LED, HDD LED, speaker, power button, reset button)
LAN LED	2 x LAN LED (1x2 pin)
Digital I/O	8-bit digital I/O (2x5 pin)
TPM	1 x TPM (2x10 pin)
SMBus	1 x SMBus (1x4 pin)
I²C	1 x I²C (1x4 pin)
Infrared Interface	1 x Infrared Interface (1x5 pin)
Expansion	1 x Full-size PCIe Mini card slot (support mSATA) PCI and ISA signal via golden finger
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Fan Connector	1 x CPU smart fan (1x4 pin) 1 x System smart fan (1x3 pin)
Power Supply	5V/12V, AT/ATX support
Power Consumption	5V@3.4A, 12V@0.36A, Vcore_12V@7.48A, 3.3V@1.42A, 5VSB@0.13A (Intel® Core™ i7-4770K 3.90 GHz CPU with 8 GB (two 4 GB) 1333 MHz DDR3 memory)
Operating Temperature	-20°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Operating Humidity	5% ~ 95%, non-condensing
Dimensions	338 mm x 122 mm
Weight	GW: 1000g / NW: 260g
compliant	CE/FCC compliant

PoE Cards



Model	GPOE-2P2	GPOE-4P2	GPOE-2P	GPOE-4P	GPOE-6P
Interface	PCI Express® x1	PCI Express® x4	PCI Express® x1	PCI Express® x1	PCI Express® x4
Ethernet	Intel® I226-V controller 9kB jumbo frame IEEE 802.3at, IEEE1588	Intel® I226-V controller 9kB jumbo frame IEEE 802.3at, IEEE1588	Intel® I210 controller 9kB jumbo frame IEEE 802.3az, IEEE1588	Intel® I210 controller 9kB jumbo frame IEEE 802.3az, IEEE1588	6 x Intel® i211AT controller 9kB jumbo frame
Fan	-	-	-	-	One 1x4 pin fan
Power Input	12~24V DC input 1 x Internal DC input (2x3 pin) 1 x External DC Jack (Φ2.1/Φ5.5) **Caution! Choose one input only at a time	Support 12V~24V DC input power 1 x Internal DC input (1x4 pin) 1 x Internal DC input (2x3 pin) 1 x Internal DC input (2x3 pin) **Caution! Choose one input only at a time	12~24V DC input 1 x Internal DC input (1x4 pin) 1 x External DC Jack (Φ2.1/Φ5.5) **Caution! Choose one input only at a time	12~24V DC input 1 x Internal DC input (1x4 pin) 1 x Internal DC input (2x3 pin) **Caution! Choose one input only at a time	12~24V DC input 1 x Internal DC input (2x3 pin)
PoE Capability	IEEE 802.3at 30W / 52V DC per port (Support for total 60 watts under full load)	LAN3/LAN4 support: IEEE 802.3af with 15.4W / 52V per port LAN1/LAN2 support: IEEE 802.3at with 30W / 52V per port (Support for total 90 watts under full load)	IEEE 802.3at 30W / 52V DC per port (Support for total 60 watts under full load)	Standard mode: IEEE 802.3af with 15.4W / 52V per port Dual port mode: IEEE 802.3at with 30W / 52V per port (Support for total 90 watts under full load)	IEEE 802.3at with 30W / 52V per port IEEE 802.3bt with 90W / 52V per port (Support for total 180 watts under full load)
Operating Temperature	0°C ~ 60°C	0°C ~ 60°C (0 ~ 60 watts) 0°C ~ 50°C (60 ~ 90 watts)	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C
Storage Temperature	-10°C ~ 70°C	-10°C ~ 70°C	-10°C ~ 70°C	-10°C ~ 70°C	-10°C ~ 70°C
Operating Humidity	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing
Dimensions	130 mm x 69 mm	158 mm x 69 mm	130 mm x 65 mm	160 mm x 65 mm	169.44 mm x 106.65 mm
Weight	110g	110g	110g	110g	286g
Compliant	CE/FCC	CE/FCC	CE/FCC	CE/FCC	CE/FCC

iRIS Cards



Model	iRIS2-2600	iRIS2-2620
IPMI 2.0 Based Management	BMC stack with a full IPMI 2.0 implementation Customizable sensor management	
Hardware Health Monitor	System/CPU temperature Fan speed Voltage	Chassis intrusion Power supply failed FRU (Field Replaceable Unit)
Event Log	BIOS event Hardware health monitor event Sensor readings	
Hardware Status	Sensors	
LDAP Support	Direct LDAP support from the device Open LDAP (Generic LDAP) supported	
Media Redirection	Virtual Media allows users to remotely mount given ISO/IMG drive images through BMC to Server Completely secured (Authenticated or Encrypted) remote KVM or virtual media	Virtual Media allows users to remotely mount given ISO/IMG drive images through BMC to Server
Remote Power Control	Remote power control Keyboard, Video & Mouse (KVM) over IP (iRIS2-2600 only) Serial over LAN (SOL)	Remote power control Serial over LAN (SOL)
User Management	IPMI based user management Added security with SSL (HTTPS)	Multiple user permission level Multiple user profiles
Web-based Configuration	Full configuration using web UI Fail-safe firmware upgrade Multi-language support in Web interface with English as the currently supported language	
Dimension (LxWxH)	30mm x 80mm x 7.6mm	30mm x 80mm x 7.6mm
Weight	18g	18g

Industrial I/O Expansion Module



Model	iM2-UART-4P	iM2-CAN-2P	iM2-DLAN
Form Factor	M.2 B Key + M Key card	M.2 B Key + M Key card	M.2 B Key + M Key card
Input Interface	M.2 B/M key 2280 (PCIe Gen3 x1 signal)	M.2 B/M key 3042 (PCIe Gen3 x1 signal)	M.2 B/M key 3042 (PCIe Gen3 x2 signal)
main IC	Fintek F81504	Fintek F81601	LAN1: Intel® I226-V controller LAN2: Intel® I226-V controller
Buffer/Transceiver Series	Fintek F81439	Chipanalog CA-IS3062	-
Speed	-	-	100/1000/2500 Mbps
I/O	4 x RS-232/422/485 pin header (2x5 pin, P=2.0)	2 x CANBus 2.0 B ports	2 x RJ-45 2 x 14-pin LAN port
Operating Temperature	-10°C ~ 65°C	-10°C ~ 65°C	-10°C ~ 65°C
Storage Temperature	-30°C ~ 70°C	-30°C ~ 70°C	-30°C ~ 70°C
Operating Humidity	5% ~95%, non-condensing	5% ~95%, non-condensing	5% ~95%, non-condensing
Dimension	22mm x 80mm	30mm x 42mm	30mm x 42mm
Weight	GW: 100g / NW: 50g	GW: 100g / NW: 50g	GW: 100g / NW: 50g
Safety	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant




Model	IPCIE-USB4-2P	IPCIE-UART-2D2P	IPCIE-UART-2D	IPCIE-UART-4D	IPCIE-CAN-2D
Form Factor	PCIe Gen4 x4	PCI Express® x1	PCI Express® x1	PCI Express ® x1 (Gen3)	PCI Express® x1
main IC	-	Fintek F81504	Fintek F81504	Fintek F81504	Fintek F81601
Buffer/Transceiver Series	-	Fintek F81439	-	-	-
Protocol	-	-	-	-	CAN 2.0 A/B
CAN Transceiver IC	-	-	-	-	Chipanalog CA-IS3062
I/O	2 x USB4 TYPE-C (Max.40Gbps)	2 x RS-232/422/485 (DB9) 2 x RS-232/422/485 (2x5 pin, P=2.0)	2 x RS-422/485 (DB-44)	4 x RS-422/485 (DB-44)	2 x DB9 (CAN 2.0B port with isolation)
Operating Temperature	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C
Storage Temperature	-20°C ~ 70°C	-30°C ~ 70°C	-30°C ~ 70°C	-30°C ~ 70°C	-30°C ~ 70°C
Operating Humidity	5% ~95%, non-condensing	5% ~95%, non-condensing	5% ~95%, non-condensing	5% ~95%, non-condensing	5% ~95%, non-condensing
Dimension	70mm x 90mm	70mm x 90mm	105.1mm x 68.9 mm	105.1mm x 68.9 mm	70mm x 90mm
Weight	GW: 120g / NW: 80g	GW: 120g / NW: 80g	GW: 120g / NW: 80g	GW: 120g / NW: 80g	GW: 120g / NW: 80g
Safety	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant

Industrial I/O Expansion Module




Model	AC-KIT-888S	AC-KIT2-888S
Features	- Realtek ALC888S HD Audio codec IC supported - Five audio jacks for microphone, 7.1+2-channel high definition audio input and output - High performance 7.1+2-channel high definition audio board provides 7.1-channel sound playback and multiple streaming through the front panel stereo outputs - Digital to Analog Converter (DAC) with 97dB Signal to Noise Ratio (SNR) - Analog to Digital Converter (ADC) with 90dB Signal to Noise Ratio (SNR) - All the Digital to Analog Converter (DAC) supports 44.1k/48k/96k/192kHz sampling rate - All the Analog to Digital Converter (ADC) supports 44.1k/48k/88.2k/96k/192kHz sample rate - Driver supports Windows® 2000/2003/XP/Vista/7/10 (32/64 bits) and Linux (Ubuntu or Debian) - CE/FCC compliant	- Realtek ALC888S HD Audio codec IC supported - Two audio jacks for mic in and line out - Driver supports Windows® 2000/2003/XP/Vista/7/10(32/64 bits) and Linux (Ubuntu or Debian) - CE/FCC compliant

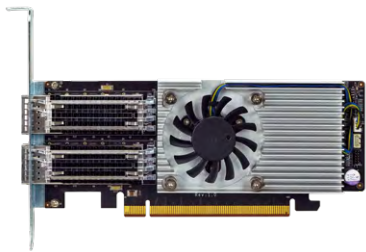


Model	LAN-100G2SF-E810
Form Factor	Low profile PCI Express® add-on card
NIC	Intel® E810
LAN Interface	QSFP28
Speed	100GbE
LAN Ports	2 x LAN ports
Host Interface	1 x PCIe Gen4 x16
Storage Temperature	-20°C ~ 75°C (-4°F ~ 167°F)
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	5% ~ 95% RH, Non-condensing
Dimensions (mm)	165.50 (L) x 77.8 (W) x 44.2 (H)
Safety	RoHS compliant

Industrial I/O Expansion Module



Model	iUCOM-2D	iUCOM-4R	iUCOM-4D	iUA-CM6533
Input Interface	USB 2.0 (1x4 pin, P=2.0)	USB 2.0 (1x4 pin, P=2.0)	USB 2.0 (1x4 pin, P=2.0)	USB 2.0 (1x4 pin, P=2.0)
Converter IC	WCH CH342	WCH CH344	WCH CH344	CM6533
Buffer/Transceiver Series	F81435	Fintek 81435	Fintek 81435	-
I/O	2 x RS-232/422/485 (DB-9)	4 x RS-232/422/485 (RJ-45)	4 x RS-232/422/485 (DB-9)	1 x Mic in (audio jack) 1 x Speaker out (audio jack) 2 x Speaker out (4-pin, P=1.25mm) (1.5W amplifier)
Operating Temperature	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C
Operating Humidity	10% ~ 95%, non-condensing	10% ~ 95%, non-condensing	10% ~ 95%, non-condensing	10% ~ 95%, non-condensing
Dimensions (LxW)	65mm x 35mm	95mm x 40mm	140mm x 35mm	44mm x 24mm

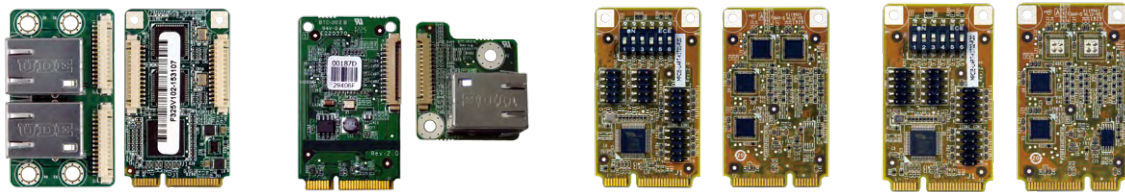

Model	MPCIE-DLAN	MPCIE-LAN	MPCIE-UART-KIT01	MPCIE-UART-KIT02
Form Factor	PCI Express Mini card	PCI Express Mini card	PCI Express Mini card	PCI Express Mini card
BIOS	UEFI BIOS	-	-	-
Ethernet Controller	Dual Intel® I210-IT	Realtek RTL8111E	Fintek F81504	Fintek F81504
Speed	10/100/1000Mbps	10/100/1000Mbps	-	-
Buffer/Transceiver Series	-	-	F81439	F81439
External Connector	2 x 8-pin RJ-45	1 x 8-pin RJ-45	4 x RS-232/422/485 connector (2x5 pin)	2 x RS-232/422/485 (2x5 pin header) 2 x 8-bit GPIO (2x5 pin header)
Power Supply	On board 3.3V	On board 3.3V	-	-
Compatible OS	Windows XP/Server 2003/ Server 2008/ Vista/ 7 /8.1/10 Linux kernel version 2.6.32 or later	Windows 2000/ XP/ Server 2003/ Server 2008/ Vista/ 7 Linux kernel version 2.6.32 or later	-	-
Operating Temperature	-10°C ~ 70°C	-10°C ~ 70°C	0°C ~ 60°C	0°C ~ 60°C
Operating Humidity	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing
Dimensions (LxW)	51 mm x 30 mm	51 mm x 30 mm	51 mm x 30 mm	51 mm x 30 mm
Weight	55g	70g	GW: 100g / NW: 50g	GW: 100g / NW: 50g
Safety	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant

Trusted Platform Module

Wi-Fi Module



Model	TPM-IN03
Interface	SPI interface
Solution	Infineon SPI TPM 2.0 with SLB9670VQ2.0 FW7.85
Management Tool Function	1. TPM management 2. File & Folder En/De-cryption 3. Personal secure drive 4. Secure email 5. Key transferring 6. Security policy configuration 7. SPI interface
Market Segment	Complete TPM 2.0 function
OS Support	Windows® & Linux
Operating Temperature	0°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Operating Humidity	5% ~ 95%, non-condensing
Dimensions (LxW)	26mm x 18mm




Model	EMB-WIFI-KIT
Standard	IEEE 802.11a/b/g/n/ac, Wi-Fi compliant / Bluetooth 4.0 Standard
Major Chipset	Realtek RTL8821AE
Antenna	2x standard U.FL Connector
Frequency Range	Wi-Fi: 2.4GHz/5GHz, BT: 2402MHz~2483MHz
Modulation	Wi-Fi: 802.11a/g/n/ac: OFDM 802.11b: CCK(11, 5.5Mbps), DQPSK(2Mbps), BPSK(1Mbps)
Receive Sensitivity	Wi-Fi: 802.11a: less than -65 dBm (54M) 802.11b: less than -76 dBm (11M) 802.11g: less than -65 dBm (54M) 802.11n @2.4GHz: less than -64 dBm (HT20 MCS7) 802.11n @2.4GHz: less than -61 dBm (HT40 MCS7) 802.11n @5GHz: less than -64 dBm (HT20 MCS7) 802.11n @5GHz: less than -61 dBm (HT40 MCS7) 802.11ac @5GHz: less than -51 dBm (VHT80 MCS9) BT: BER < 0.1% (Anritsu 8852B Tx -70 dBm)
Driver Support	Windows 7/8/10, Linux kernel 3.18
Temperature	0°C ~ 70°C
Dimensions	29.85mm x 26.65mm x 1.5mm
Weight	NW: 3.28g

Converter Board



Model	SACFA-KIT01
CFAST™ socket	
7-pin SATA data connector, and a female 17-pin power CFAST™ connector	



Model	SAIDE-KIT01
CF Type II socket	
40-pin IDE connector (master mode)	
4-pin 5V input connector	
Power/5V/HDD LED indicator	
Support one IDE device or one CF	

Display Expansion Modules



Model	iDPM-HDM	iDPM-LVDS	iDPM-eDP	iDPM-DP	iDPM-VGA	iUDP-HDMI-2P
Form Factor	iDPM 2240 slot (IEI-defined B key)	iDPM 3040 slot (IEI-defined B key)	iDPM 2240 slot (IEI-defined B key)	iDPM 2240 slot (IEI-defined B key)	iDPM 2240 slot (IEI-defined B key)	USB to display Module
Display Output	1 x HDMI	1 x LVDS 24-bit dual-channel	1 x eDP connector (1x40 pin)	1 x DP	1 x VGA pin-header	2 x HDMI
Display IC	CHRONTEL-CH7525A-BF-Fw1.8.10	Chrontel - CH7511B (DP to LVDS)	-	-	Lontium LT8711	DL-6950 (USB to 2 port HDMI)
Power	On-board 3.3V ~ 12V	On-board 3.3V ~ 12V	On-board 3.3V ~ 12V	On-board 3.3V ~ 12V	On-board 3.3V ~ 12V	On-board 3.3V ~ 12V
Operating Temperature	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C
Operating Humidity	5% ~ 95, non-condensing	5% ~ 95, non-condensing	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing	5% ~ 95%, non-condensing
Dimensions (LxW)	22 mm x 40 mm	40 mm x 30 mm	40 mm x 22 mm	22 mm x 40 mm	40mm x 22mm	72mm x 92mm
Safety	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant	CE/FCC compliant



Model	DP-LVDS	DP-DVI	DP-HDMI
Display Input	1 x IEI iDP connector	1 x IEI iDP connector	1 x IEI iDP connector
Display Output	1 x LVDS 24-bit dual-channel	1 x DVI	1 x HDMI 1.3a
Display IC	Chrontel - CH7511B (DP to LVDS)	Parade - PS161 (DP to HDMI / DVI)	IC: Parade - PS161 (DP to HDMI 1.3a)
Temperature	-10°C ~ 60°C	-10°C ~ 60°C	-10°C ~ 60°C
Humidity	5% ~ 95 non-condensing	5% ~ 95 non-condensing	5% ~ 95 non-condensing
Dimensions	60 mm x 50 mm	50 mm x 50 mm	50 mm x 50 mm




Model	LVDS-VGA
Resolution adjusted by BIOS	Support 1024x768, 800x600, 640x480
Provide 2nd VGA option for dual VGA display	
18-bit LVDS to VGA converter board	

PCIe Expansion Riser Cards for IEI 2.5"/3.5"/4" SBC


IEI's latest 2.5"/3.5"/4" SBCs feature a PCIe x4/x2 slot, which is a new design for IEI compact single board computer to expand functionality providing easy integration of PoE, video capture or I/O cards with a compatible riser card.

Outwards-facing PCIe Expansion

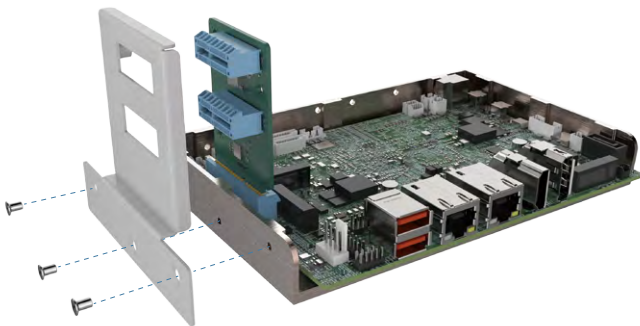

Although may take up more space, the outwards-facing expansion slot can help enhance the airflow and heat transfer within the system. It is ideal for the chassis that is wide enough for the expansion card to be placed.

Inwards-facing PCIe Expansion

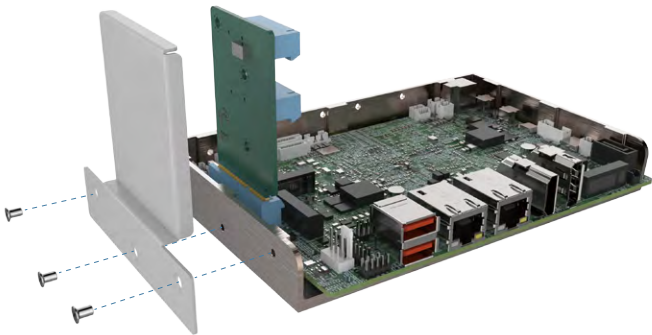


The inwards-facing expansion slot is suitable for installation where space is limited. With higher height to increase spacing between boards, the riser card slot ensure efficient heat dissipation for space-constrained applications.



Motherboard	Riser Card	Description of Riser Card
WAFER-EHL-J6412C	NWR-L2S-R10	PCIe x2 to two PCIe x1, on the left side
	NWR-R2S-R10	PCIe x2 to two PCIe x1, on the right side
NANO-EHL-J6412C	NWR-L2S-N-R10	PCIe x2 to two PCIe x1, the left side
	NWR-R2S-N-R10	PCIe x2 to two PCIe x1, on the right side
HYPER-EHL	HPR-L2S-R10	PCIe x4 to two PCIe x2 riser card, on the left side
	HPR-L4S-R10	PCIe x4 to four PCIe x1, on the left side
	HPR-R2S-R10	PCIe x4 to two PCIe x2, on the right side
	HPR-R4S-R10	PCIe x4 to four PCIe x1, on the right side
WAFER-ADL-P	NWR2-L2S-R10	PCIe x4 to two PCIe x2, on the left side
	NWR2-R2S-R10	PCIe x4 to two PCIe x2, on the right side
NANO-ADL-P	NWR2-L2S-N-R10	PCIe x4 to two PCIe x2, on the left side
	NWR2-R2S-N-R10	PCIe x4 to two PCIe x2, on the right side
	NWR-L3S-N-R10	PCIe x3 to three PCIe x1, on the left side
	NWR-R3S-N-R10	PCIe x3 to three PCIe x1, on the right side

PCIe Expansion Riser Cards for IEI 2.5"/3.5"/4" SBC

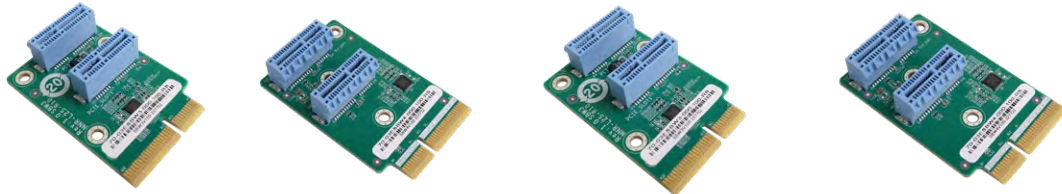

Model	NWR-L2S-R10	NWR-R2S-R10	NWR-L2S-N-R10	NWR-R2S-N-R10
Input	PCIe x2	PCIe x2	PCIe x2	PCIe x2
Output	Two PCIe x1	Two PCIe x1	Two PCIe x1	Two PCIe x1
Temperature	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C
Humidity	5 ~ 95% non-condensing	5 ~ 95% non-condensing	5 ~ 95% non-condensing	5 ~ 95% non-condensing
Direction	Left side	Right side	Left side	Right side
Dimensions	40 mm x 60 mm	40 mm x 65 mm	40 mm x 60 mm	40 mm x 65 mm
Applicable Motherboards	WAFER-EHL-J6412C		NANO-EHL-J6412C	



Model	HPR-L2S-R10	HPR-L4S-R10	HPR-R2S-R10	HPR-R4S-R10
Input	PCIe x4	PCIe x4	PCIe x4	PCIe x4
Output	Two PCIe x2	Four PCIe x1	Two PCIe x2	Four PCIe x1
Temperature	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C
Humidity	5 ~ 95% non-condensing	5 ~ 95% non-condensing	5 ~ 95% non-condensing	5 ~ 95% non-condensing
Direction	Left side	Left side	Right side	Right side
Dimensions:	50 mm x 58 mm	44 mm x 90 mm	43 mm x 60 mm	43 mm x 83 mm
Applicable Motherboards	HYPER-EHL			



Model	NWR2-L2S-N-R10	NWR2-R2S-N-R10	NWR-L3S-N-R10	NWR-R3S-N-R10	NWR2-L2S-R10	NWR2-R2S-R10
Input	PCIe x4	PCIe x4	PCIe x4	PCIe x4	PCIe x4	PCIe x4
Output	Two PCIe x2	Two PCIe x2	Three PCIe x1	Three PCIe x1	Two PCIe x2	Two PCIe x2
Temperature	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C	0°C ~ 60°C
Humidity	5 ~ 95% non-condensing	5 ~ 95% non-condensing	5 ~ 95% non-condensing	5 ~ 95% non-condensing	5 ~ 95% non-condensing	5 ~ 95% non-condensing
Direction	Left side	Right side	the left side	the right side	Left side	Right side
Dimensions:	55 mm x 60 mm	55 mm x 60 mm	40 mm x 100 mm	40 mm x 100 mm	55 mm x 60 mm	55 mm x 60 mm
Applicable Motherboards	NANO-ADL-P			WAFER-ADL-P		

Embedded Systems



IEI embedded system solutions, powered by Intel® Core™ Ultra- and Intel Atom® processors, deliver high-performance computing with advanced AI acceleration, efficient power management, and PCIe Gen4 support for GPU and accelerator card expansion. Featuring enhanced multi-core processing, DDR5 memory, and modular scalability, they ensure reliable operation for mission-critical applications.

Innovative Design with Rapid Configuration

DRPC Series
Fanless
Embedded Systems

TANK Series
High-Performance
Embedded Systems

ulBX Series
Compact
Embedded Systems

SWBOX Series
IP69K Stainless Steel
Embedded Systems

Food & Beverage

3D Vision-Guided Robots

Maritime


Machine Vision System
for Inspection

AI Inference

Highlights



- Versatile Platform Options**
- Intel® Core™ Ultra and Atom processors
 - Multiple form factor options



- Rich I/O and Expansion**
- Application-specific connectors
 - Modular, scalable design
 - Wide DC Voltage Input



- Ruggedized Design for Harsh Environments**
- Wide operating temperature
 - Shock and vibration resistant
 - Heavy-duty metal enclosure, corrosion-resistant



- High-Performance Storage & Compute Expansion**
- Scalable NVMe & SATA Storage
 - GPU Support

SWBOX-ASL

IP69K STAINLESS STEEL EMBEDDED SYSTEM

IP69K-rated box computers are engineered for environments requiring rigorous hygiene and protection against high-pressure, high-temperature washdowns.



Fanless



Anti-Corrosion



-20°C~60°C



M12 Connector



NEW



Intel® Atom® X7433RE
and X7835RE Processors

TANK series

High-Performance Embedded Systems

TANK series is designed for automation, vision inspection, and monitoring, delivering high-performance computing, GPU support, and flexible expansion for edge AI applications.



Model			TANK-XM813	TANK-XM812
Chassis	Color		Black C	Black C
	Dimensions (WxDxH) (mm)		230.6 x 256.04 x 76.2	230.6 x 256.04 x 76.2
	System Fan		Fanless	Fanless
	Chassis Construction		Extruded aluminum alloys	Extruded aluminum alloys
Motherboard	CPU		Intel® Core™ Ultra Processors (Series 2)/(35/65W TDP) Intel® Core™ Ultra 5 245T (up to 5.1 GHz, 14-core, TDP 35W) Intel® Core™ Ultra 5 245 (up to 5.1 GHz, 14-core, TDP 65W) Intel® Core™ Ultra 7 265T (up to 5.3 GHz, 20-core, TDP 35W) Intel® Core™ Ultra 7 265 (up to 5.3 GHz, 20-core, TDP 65W) Intel® Core™ Ultra 9 285T (up to 5.4 GHz, 24-core, TDP 35W) Intel® Core™ Ultra 9 285 (up to 5.6 GHz, 24-core, TDP 65W)	AMD Ryzen™ 7000/8000 Series AM5 Processor AMD Ryzen™ 7 8700G 4.2GHz (up to 5.1GHz, 8-core, 65W) AMD Ryzen™ 5 8600G 4.3GHz (up to 5.0GHz, 6-core, 65W)
	Chipset		W880	B650
	System Memory		2 x SO-DIMM DDR5 5600 (16GB pre-installed) (up to 96GB)	2 x SO-DIMM DDR5 5200 (8GB pre-installed) (up to 64GB)
Storage	Hard Drive		2 x 2.5" SATA 6Gb/s HDD/SSD bay	2 x 2.5" SATA 6Gb/s HDD/SSD bay
I/O Interfaces	USB		7 x USB 3.2 Gen 2 (10Gb/s)	6 x USB 3.2 Gen 2 (10Gb/s)
	Ethernet		1 x 2.5 GbE by Intel® I226LM controller 1 x 2.5 GbE by Intel® I226-V controller	2 x 2.5 GbE by Intel® I226-V controller
	COM Port		2 x RS-232/422/485, 4 x RS-232	2 x RS-232/422/485, 4 x RS-232
	Digital I/O		12-bit (6-in/6-out) DB15	12-bit (6-in/6-out) DB15
	Display		1 x DP++, 1 x HDMI™, 1 x USB4 (Display+USB 3.2 Gen2)	1 x DP++, 1 x HDMI™ 2 x USB Type-C (Display + USB 3.2 Gen2)
	Audio		1 x MIC 1 x Line out	1 x MIC 1 x Line out
	TPM		1 x Intel TPM 1 x 20pin TPM connector (Optional TPM-IN03 module)	1 x 20pin TPM connector (Optional TPM-IN03 module)
Expansions	M.2		1 x 2280 M-key (PCIe Gen4 x4) 1 x 2230 A-key (USB+PCIe Gen3 x1, supports vPRO)	1 x 2280 M-key (PCIe Gen4 x4) 1 x 2230 A-key (USB+PCIe Gen3 x1)
	Backplane		Optional	Optional
Power	Power Input		12 ~ 28V DC	12 ~ 28V DC
	Power Consumption		12V @ 10.3A (Intel® Ultra 9 285 with 16GB memory)	12V @ 7.35A (AMD Ryzen™ 7 8700G with 8GB memory)
Reliability	Mounting		Wall mount	Wall mount
	Operating Temperature		-20°C ~ 60°C with air flow (CPU TDP35W &SSD) -20°C ~ 50°C with air flow (CPU TDP65W &SSD), 10% ~ 95% non-condensing	-20°C ~ 60°C (CPU TDP35W &SSD) -20°C ~ 50°C (CPU TDP65W &SSD), 10% ~ 95% non-condensing
	Operating Shock		IEC68-2-27 half-sine, 5 G,11ms,100 shocks (SSD)	IEC68-2-27 half-sine, 5 G,11ms,100 shocks (SSD)
	Operating Vibration		Random Vibration Mode, MIL-STD-810H 514.8C-I (SSD)	Random Vibration Mode, MIL-STD-810H 514.8C-I (SSD)
	Weight (Net/Gross)		3.33 / 3.7 kg	TBD
	Safety/EMC		CE/FCC	CE/FCC
OS	Supported OS		Windows 10 / Windows 11 IoT Enterprise/ Linux	

GPOE-XM81-8P



Specifications

- Interface: 8 x PCI Express® x1
- Ethernet: 8 x Intel® I225-V controller
- PoE Capability
- IEEE 802.3at with 30W / 52V per port (Total power 60W)
- Operating Temperature: 0°C ~ 60°C
- Operating Humidity: 5% ~ 95%, non-condensing
- CE/FCC compliant

TXIOB-XM81-A



Specifications

- 1 x Full-Size Mini PCIe (PCIe Gen3 x1 & USB2.0)
- 1 x M.2 A Key 2230 (PCIe Gen3 x1 & USB2.0)
- 1 x M.2 B Key (M.2_B1) 3042/52/80 (PCIe Gen3x1 & USB3.2)
- 1 x M.2 B Key (M.2_B2) 3042/52/80 (PCIe Gen3 x2)
- 3 x On-board SIM card socket (hinge type) for M.2 B key &Mini PCIe
- Operating Temperature: 0°C ~ 60°C
- Operating Humidity: 5% ~ 95%, non-condensing
- Dimensions (LxW): 131.22 mm x 170.94 mm
- CE/FCC compliant

SF-TANK-XM81

Specifications

- Expansion fan module
- Material: Heavy duty metal
- Color: Black
- Fan Dimensions (mm): 80 x 80 x 15
- Bearing Type: Two ball bearing
- Fan Speed (RPM): 3800
- Noise Level (dBA): 40
- Air Flow (CFM): 35.77
- Life Expectancy (hrs): 6500



TANK series



Model			TANK-XM811	TANK-XM810
Chassis	Color		Black C	Black C
	Dimensions (WxDxH) (mm)		230.6 x 256.04 x 76.2	230.6 x 256.04 x 76.2
	System Fan		Fanless	Fanless
	Chassis Construction		Extruded aluminum alloys	Extruded aluminum alloys
Motherboard	CPU		12th/13th/14th Gen Intel® Core™ CPU 35/65W TDP Intel® Core™ i5-12500TE 1.9 GHz (up to 4.3 GHz, 6-core, 35W TDP) Intel® Core™ i7-12700TE 1.4 GHz (up to 4.6 GHz, 12-core, 35W TDP) Intel® Core™ i9-12900TE 1.1 GHz (up to 4.8 GHz, 16-core, 35W TDP)	10/11th Gen Intel® Core™ CPU TDP 35/65W Intel® Core™ i3-10100TE 2.3 GHz (up to 3.6 GHz, quad-core, 35W TDP) Intel® Core™ i3-10320 3.8 GHz (up to 4.6 GHz, quad-core, 65W TDP) Intel® Core™ i5-10500TE 2.3 GHz (up to 3.7 GHz, 6-core, 35W TDP) Intel® Core™ i5-10500 3.1 GHz (up to 4.5 GHz, 6-core, 65W TDP) Intel® Core™ i7-10700TE 2.0 GHz (up to 4.4 GHz, 8-core, 35W TDP) Intel® Core™ i7-10700E 2.9 GHz (up to 4.5 GHz, 8-core, 65W TDP)
	Chipset		R680E	Q470/Q470E
	System Memory		2 x SO-DIMM DDR4 3200 MHz (8GB pre-installed) (up to 64GB)	
Storage	Hard Drive		1 x 2.5" SATA 6Gb/s HDD/SSD bay	1 x 2.5" SATA 6Gb/s HDD/SSD bay
I/O Interfaces	USB		8 x USB 3.2 Gen 2 (10Gb/s)	6 x USB 3.2 Gen 2 (10Gb/s) 2 x USB 2.0
	Ethernet		1 x 2.5 GbE by Intel® I226LM controller 1 x 2.5 GbE by Intel® I226-V controller	2 x 2.5 GbE by Intel® I226-V(colay I226LM) controller
	COM Port		2 x RS-232/422/485, 4 x RS-232	
	Digital I/O		12-bit Digital I/O (6-in/6-out) DB15	
	Display		1 x DP++ 1 x HDMI	
	Wireless		1 x 802.11a/b/g/n/ac (optional)	N/A
	TPM		Support Intel® PTT function	Support Intel® PTT function
Expansions	PCIe Mini		Optional	
	M.2		1 x 2280 M-key (PCIe x4) 1 x 2230 A-key (USB+PCIe x1, supports vPRO)	2 x 2280 M-key (PCIe Gen3 x2) bay (RAID 0/1 support)
	Backplane		Optional	
Power	Power Input		12 ~ 28V DC	12 ~ 28V DC
	Power Consumption		12V @ 8.8A (Intel® Core™ i9-12900TE with 16GB memory)	12V @ 8A (Intel® Core™ i9-10900TE with 8GB memory)
Reliability	Mounting		Wall mount	
	Operating Temperature		-20°C ~ 60°C with air flow (CPU TDP35W &SSD) -20°C ~ 50°C with air flow (CPU TDP65W &SSD), 10% ~ 95% non-condensing	
	Operating Shock		Half-sine wave shock 5G, 11ms 100 shocks per axis (SSD)	
	Operating Vibration		MIL-STD-810G 514.6C-1 (with SSD)	
	Weight (Net/Gross)		3.33 kg/3.7 kg	3.2 kg/3.5 kg
	Safety/EMC		CE, FCC, UKCA	
OS	Supported OS		Windows® 10/11 IoT Enterprise/ Linux	

TANK series



Chassis Name	TXC-XM81-3S		TXC-XM81-4S		
Backplane Name	TXCBP-XM81-2A	TXCBP-XM81-2B	TXCBP-XM81-4A	TXCBP-XM81-4B	TXCBP-XM81-4C
					
Slot 1	PCIe Gen4 x16	PCIe x16 (PCIe Gen4 x8 Signal)	PCIe Gen4 x16	PCIe x16 (PCIe Gen4 x8 Signal)	PCIe Gen4 x16
Slot 2	N/A	N/A	PCIe Gen3 x1	PCIe Gen3 x4	PCIe Gen3 x4
Slot 3	PCIe Gen3 x4	PCIe x16 (PCIe Gen4 x8 Signal)	PCIe Gen3 x4	PCIe x16 (PCIe Gen4 x8 Signal)	PCI
Slot 4	N/A	N/A	PCIe Gen3 x4	PCIe Gen3 x4	PCI
System Fan (Chassis)	1 x 5cm (RS5015B12VH, 6000rpm, 35db) 1 x 5cm (Optional)		1 x 8cm (FD1280, 3800rpm, 40db)		
System Fan (Backplane)	1 x 4-pin (1x4)	2 x 4-pin (1x4)	2 x 4-pin (1x4)	2 x 4-pin (1x4)	1 x 4-pin (1x4)
Power Connector (Backplane)	N/A	N/A	1 x 8-pin (2x4)	1 x 8-pin (2x4)	N/A
Max. Length of Add-on Card (mm)	223.18		224.40		
Additional Power Board	N/A		IDD-X1228150 (adds a terminal block on rear I/O)		
Dimension (W x H x D) (mm)	230.6 x 69.16 x 255		230.6 x 100 x 255		
With Host Dimension (W x H x D) (mm)	230.6 x 137.86 x 255		230.6 x 168.5 x 255		



Chassis Name	TXC-XM81-G1	TXC-XM81-G2
Backplane Name	TXCBP-XM81-4A	TXCBP-XM81-G2
		
Slot 1	PCIe Gen4 x16	PCIe x16 (PCIe Gen4 x8 Signal)
Slot 2	PCIe Gen3 x1	N/A
Slot 3	PCIe Gen3 x4	PCIe x16 (PCIe Gen4 x8 Signal)
Slot 4	PCIe Gen3 x4	N/A
Slot 5	N/A	PCIe Gen3 x4
Slot 6	N/A	PCIe Gen3 x4
System Fan (Chassis)	1 x 8cm (FD1280, 3800rpm, 40db)	
System Fan (Backplane)	2 x 4-pin (1x4)	2 x 4-pin (1x4)
Power Connector (Backplane)	1 x 8-pin (2x4)	1 x 8-pin (2x4)
Max. Length of Add-on Card (mm)	339.8	
Additional Power Board	IDD-X1228150 (adds a terminal block on rear I/O)	
Dimension (W x H x D) (mm)	230.6 x 166.3 x 370.4	230.6 x 207.1 x 370.4
With Host Dimension (W x H x D) (mm)	230.6 x 168.7 x 370.4	230.6 x 209.86 x 370.4

TANK series



Model		TANK-8700-MPHX	TANK-870-Q170
Chassis	Color	Black C + Iron Gray	Black C + Silver
	Dimensions (WxDxH) (mm)	254.4 x 212.5 x 127.2	2-slot: 121.5 x 255.2 x 205 4-slot: 154.8 x 255.2 x 205
	System Fan	Fan	Fanless
	Chassis Construction	Extruded aluminum alloys	Extruded aluminum alloys
Motherboard	CPU	AMD Ryzen™ 7000/8000 Series Processor AMD Ryzen™ 5 7640U 3.5 GHz, (up to 4.9 GHz, 6 Core, TDP 28W) AMD Ryzen™ 7 7840U 3.3 GHz, (up to 5.1 GHz, 8 Core, TDP 28W) AMD Ryzen™ 9 7940HS 4.0 GHz, (up to 5.2 GHz, 8 Core, TDP 54W) AMD Ryzen™ 5 8645HS 4.3 GHz, (up to 5.0 GHz, 6 Core, TDP 45W) AMD Ryzen™ 7 8845HS 3.8 GHz, (up to 5.1 GHz, 8 Core, TDP 45W) AMD Ryzen™ 9 8945HS 4.0 GHz, (up to 5.2 GHz, 8 Core, TDP 45W)	7th Gen Intel® Core™ CPU & Intel® Core™ i7-6700TE 2.4 GHz (up to 3.4 GHz, quad-core, TDP 35) Intel® Core™ i5-6500TE 2.3 GHz (up to 3.3 GHz, quad-core, TDP 35)
	Chipset	SOC	Intel® Q170
	System Memory	2 x SO-DIMM DDR5 5600 (8GB pre-installed) (up to 64GB)	2 x SO-DIMM DDR4 2133 (4GB pre-installed) (up to 32GB)
	IPMI	iRIS Solution	1 x iRIS-2600 (optional)
Storage	Hard Drive	2 x 2.5" SATA 6Gb/s HDD/SSD bay	2 x 2.5" SATA 6Gb/s HDD/SSD bay (RAID 0/1 support)
I/O Interfaces	USB	3 x USB 3.2 Gen2 (Type-A) (10Gb/s) 3 x USB 2.0	4 x USB 3.2 Gen 1 4 x USB 2.0
	Ethernet	2 x 2.5 GbE by Realtek 8125B controller 1 x RJ45 by M.2 IRIS2 Module	2 x RJ-45: LAN1: GbE by Intel® I219LM LAN2 (iRIS): GbE by Intel® I210
	COM Port	2 x RS-422/485 (with 2K isolation) (DB9) 3 x RS-232 (DB9)	2 x RS-232/422/485 with AFC (DB-9) 4 x RS-232 (2 x RJ-45, 2 x DB-9 with 2.5kV isolation)
	Digital I/O	8-bit (4-in/4-out) DB9 (Female)	8-bit Digital I/O (4-in/ 4-out)
	Display	1 x DP++, 1 x HDMI™ 1 x USB4 (Dispaly + USB 3.2 Gen2)	1 x VGA (up to 1920 x 1200@60Hz) 1 x HDMI/DP (up to 3840x2160@30Hz/4096×2304@60Hz) 1 x iDP (optional)
	Audio	1 x Line-out, 1 x Mic-in	1 x Line-out, 1 x Mic-in
	Wireless	optional by M.2 A Key	1 x 802.11 a/b/g/n/ac (optional)
	TPM	1 x 20pin TPM connector (Optional TPM-IN03 module)	1 x TPM 2.0 (2 x 10 pin) (optional)
	PCIe Mini	N/A	1 x Half-size (PCIe/ USB 2.0) 1 x Full-size (PCIe/ USB 2.0/ SATA)
	M.2	1 x M.2 M key (2280, PCIe Gen4 x2) 1 x M.2 A key (2230, PCIe Gen3 x1 & USB 2.0) 1 x M.2 B Key (3042/52/80, support IRIS2)	N/A
	Backplane	1 x PCIe Gen4 x8 1 x PCIe Gen3 x4 1 x PCIe Gen3 x1 (Only support 3A SKU) 1 x PCI (Only support 3B SKU)	2-slot model: 1 x PCIe x16, 1 x PCI 2-slot model: 2 x PCIe x8 4-slot model: 2 x PCIe x8, 2 x PCI, 1 x Full-size PCIe Mini (PCIe/USB 2.0) 4-slot model: 1 x PCIe x16, 3 x PCI, 1 x Full-size PCIe Mini (PCIe/ USB 2.0)
	Power	Power Input: DC Jack: 12 ~ 28V DC Terminal Block: 12 ~ 28V DC (with ACC Mode) Power Consumption: 19V@3.79 A (AMD Ryzen™ 9 7940HS with 8 GB memory) Internal Power Connector: N/A	DC Jack: 9 ~ 36V DC Terminal Block: 9 ~ 36V DC Power Consumption: 19V@3.68 A (Intel® Core™ i7-6700TE with 8 GB memory) 5V@3A or 12V@3A
Reliability	Mounting	Wall mount	Wall mount
	Operating Temperature	Operating Temperature -20°C ~ 60°C Storage Temperature -40°C ~ 85°C, 10% ~ 95%, non-condensing	i7-6700TE: -20°C ~ 45°C with air flow (SSD), 10% ~ 95% non-condensing i5-6500TE: -20°C ~ 60°C with air flow (SSD), 10% ~ 95% non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)
	Operating Vibration	MIL-STD-810G 514.6C-1 (with SSD)	MIL-STD-810G 514.6 C-1 (SSD)
	Weight (Net/Gross)	TBD	2-slot: 4.2 kg/6.3 kg 4-slot: 4.5 kg/6.5 kg
	Safety/EMC	CE, FCC	CE/FCC/KC
OS	Supported OS	Windows® 10/11 IoT Enterprise/ Linux	Microsoft® Windows® 8 Embedded, Microsoft® Windows® Embedded Standard 7 E, Microsoft® Windows® 10 IoT Enterprise

TANK series



Model		TANK-630-EHL
Chassis	Color	Black C
	Dimensions (WxDxH) (mm)	184 x 200.6 x 53
	System Fan	Fanless
	Chassis Construction	Extruded aluminum alloy
Motherboard	CPU	Intel® Celeron® J6412 2.0 GHz (up to 2.6GHz, quad-core, TDP 10W)
	Chipset	SoC
	System Memory	2 x DDR4 3200MHz SO-DIMM (8GB pre-installed) (up to 32GB)
Storage	Hard Drive	1 x 2.5" SATA 6Gb/s HDD/SSD bay
I/O Interfaces	USB	2 x USB 3.2 Gen2 4 x USB 2.0
	Ethernet	3 x 2.5 GbE by Intel® I225-V/I226-V controller
	COM Port	2 x RS-232/422/485 with AFC (DB9) 6 x RS-232 (DB9)
	Display	2 x HDMI 1.4b (up to 4k@30Hz)
	Audio	1 x Line-out, 1 x Mic-in
	Wireless	1 x 802.11a/b/g/n/ac (M.2 A Key optional)
	TPM	1 x TPM (2 x10 pin) Intel PTT
	Other	1 x Power Button with LED, 1 x HDD LED, 1 x AT/ATX Switch, 1 x Reset Button
Expansions	M.2	1 x 2230 A-key (PCIe Gen3 x1/USB 2.0) 1 x 2042/52/80 B-key (SATA/USB 2.0) 1 x 2280 M-key (PCIe Gen3 x2)
Power	Power Input	DC Jack: 12 ~ 28V DC Terminal Block: 12 ~ 28V DC
	Power Consumption	+12V @ 3.36A (Intel® Celeron® J6412 with 8GB memory)
Reliability	Mounting	Wall Mount, VESA 100
	Operating Temperature	-10°C ~ 50°C with 0.7M/S air flow (M.2), 10% ~ 95%, non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)
	Operating Vibration	10-500 Hz, 1.04 Grms, random, 1 hr/axis (SSD)
	Weight (Net/Gross)	2.04 kg / 2.29 kg
	Safety/EMC	CE, FCC, UKCA
OS	Supported OS	Microsoft® Windows® 10/11, Linux

SWBOX series

IP69K Stainless Steel Embedded Systems

The SWBOX series features a sealed IP69K stainless steel design with M12 connectors, built to withstand high-pressure washdowns. Ideal for food, chemical, and pharmaceutical industries, it delivers reliable performance in hygiene-sensitive environments.



NEW

Model		SWBOX-ASL
Chassis	Color	Silver
	Dimensions (WxDxH) (mm)	226.4 x 178.5 x 81
	System Fan	Fanless
	Chassis Construction	304 Stainless Steel Chassis
Motherboard	CPU	Intel® Amston Lake Atom™ x7000 series SOC processor Intel Atom® x7433RE on-board CPU Intel Atom® x7835RE on-board CPU
	Chipset	SoC
	System Memory	1 x SO-DIMM DDR5 5600 (8GB pre-installed) (up to 16GB)
Storage	Hard Drive	1 x 2.5" SATA 6Gb/s HDD/SSD bay
I/O Interfaces	USB	1 x USB3.2 Gen1 by M12 Cconnector (8-pin, X code, Famale) 2 x USB2.0 by M12 Cconnector (8-pin, A code, Famale)
	Ethernet	2 x Intel I226IT 2.5 GbE LAN by M12 Cconnector (8-pin, X code, Famale) 1 x 1G Waterproof Fiber Lan (option)
	COM Port	2 x RS232/422/485 with 2.0 KV isolation by M12 Cconnector (12-pin, A code, Famale)
	Digital I/O	1 x 8Bit GPIO by M12 Cconnector (12-pin, A code, Famale)
	Display Interface	2 x HDMI 1.4b (Waterproof connector, Female)
	TPM	1 x Intel TPM 1 x 20pin TPM connector (Optional TPM-IN03 module)
Expansions	M.2	1 x 2280 M-key (PCIe Gen3 x2) 1 x 2230 A-key (USB+PCIe Gen3 x1 /USB2.0) 1 x 3042/52 B-key (PCIe Gen3 x1 /USB2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key
Power	Power Input	10-28V DC by M12 Cconnector(5-pin, A Code, Male)
	Power Consumption	TBD
Reliability	Mounting	Wall mount
	Operating Temperature	-40°C ~ 70°C (SSD)
	Operating Shock	IEC68-2-27 half-sine, 5 G,11ms,100 shocks (SSD)
	Operating Vibration	Random Vibration Mode, MIL-STD-810H 514.8C-I (SSD)
	Weight (Net/Gross)	TBD
	Safety/EMC	CE, FCC
OS	Supported OS	Windows® 10/11 IoT Enterprise/ Linux

DRPC series

Fanless Embedded Systems

The DRPC series offers an optimal balance of performance and power efficiency in a compact form factor, making it ideal for space-constrained environments such as equipment manufacturing.



Model		DRPC-242-ADL-P-CCS-R10	DRPC-242-ADL-P-i3CS-R10 DRPC-242-ADL-P-Ri3ECS-R10	DRPC-242-ADL-P-i5CS-R10 DRPC-242-ADL-P-Ri5ECS-R10	DRPC-242-ADL-P-i7CS-R10 DRPC-242-ADL-P-Ri7ECS-R10
Chassis	Dimensions	81 mm x 150 mm x 190 mm			
	System Fan	Fanless (Fan optional)			
	Chassis Construction	Extruded Aluminum alloys			
Motherboard	CPU	Intel® Celeron® 7305 (5-core, 15W TDP)	Intel® Core™ i3-1220P (up to 4.4GHz, 10-core, 28W TDP) Intel® Core™ i3-1320PE (up to 4.5GHz, 8-core, 28W TDP)	Intel® Core™ i5-1240P (up to 4.4GHz, 12-core, 28W TDP) Intel® Core™ i5-1340PE (up to 4.5GHz, 12-core, 28W TDP)	Intel® Core™ i7-1260P (up to 4.7GHz, 12-core, 28W TDP) Intel® Core™ i7-1370PE (up to 4.8GHz, 14-core, 28W TDP)
	Chipset	SoC			
	Memory	2 x SO-DIMM slot DDR4 3200 MHz (8 GB pre-installed) (up to 64GB)			
Storage	Hard Drive	1 x 2.5" SATA 6Gb/s SSD bay			
I/O Interfaces	USB	2 x USB 3.2 Gen2 4 x USB 2.0			
	Ethernet	1 x 2.5 GbE by Intel® I225LM/I226LM controller support iAMT 2 x 2.5 GbE by Intel® I225-V/I226-V controller			
	COM	2 x RS-232 (DB9 with 2.5KV isolation) 2 x RS-232 (optional) 2 x RS-422/485 with AFC (DB9 with 2.5KV isolation)			
	DIO	1 x 12-bit (6-in, 6-out)(optional)			
	Display	1 x Lockable HDMI™ 1.4b (up to 4096 x 2160@30Hz) 1 x DP 1.4b (up to 4096 x 2160 @60Hz)			
	TPM	Support Intel PTT			
	Others	1 x Power button, 1 x 2-pin terminal block for remote power button, 1 x Reset button, 1 x AT/ATX switch, 1 x Power LED (green), 1 x HDD LED (yellow), 4-pin external system fan connector			
Expansions	M.2	1 x 2230 A-key (PCIe Gen3 x1/USB 2.0) Support Vpro 1 x 3042/52 B-key (PCIe Gen3 x1/USB 3.2 Gen2/USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key 1 x 2280 M-key (PCIe Gen4 x4)			
	Backplane	1 x PCIe Gen3 x4 (optional)			
Power	Power Input	3-pin terminal block: 12 ~ 28 VDC			
	Internal PWR	4-pin 60W @12V			
	Consumption	12V@4.46A (Intel® Core™ i7-1260P with DDR4 8GB memory)			
Reliability	Mounting	DIN-Rail, Wall Mount			
	Operating Temp	-20°C ~ 60°C with air flow (SSD)			
	Storage Temp	-40°C ~ 85°C			
	Humidity	10% ~ 95%, non-condensing			
	Operating Shock	Half-sine wave shock 5G, 11ms, 3 shocks per axis (SSD)			
	Operating Vibration	10-500 Hz, 1.04 Grms, random, 1 hr/axis (SSD)			
	Weight	1.88 kg / 2.66 kg			
	Safety/EMC	CE, FCC, UKCA			
OS	Supported OS	Microsoft® Windows 10 / 11, Linux			

DRPC series



Model		DRPC-124-EHL	DRPC-140-EHL
Chassis	Color	Black	Black
	Dimensions (WxDxH) (mm)	159 x 132.5 x 35	58.75 x 130 x 174
	System Fan	Fanless	Fanless
	Chassis Construction	Extruded aluminum alloy	Extruded aluminum alloy
Motherboard	CPU	Intel® Celeron® J6412 2.0 GHz (up to 2.6 GHz, quad-core, TDP 10W)	Intel® Celeron® J6412 2.0 GHz (up to 2.6 GHz, quad-core, TDP 10W)
	Chipset	SoC	SoC
	System Memory	LPDDR4X onboard 8GB (max. 16GB)*	1 x SO-DIMM DDR4 3200 (8GB pre-installed) (up to 32GB)
Storage	Hard Drive	1 x 2242 B-key (PCIe Gen3 x2) 1 x 2242 B-key (SATA) 1 x 2280 M-key (PCIe Gen3 x2)	1 x 2.5" SATA 6Gb/s HDD/SSD bay
	eMMC	eMMC 5.1 64GB/128GB (optional)	1 x eMMC 5.1 (optional)*
I/O Interfaces	USB	2 x USB 3.2 Gen2 2 x USB 2.0	4 x USB 3.2 Gen2
	Ethernet	1 x RJ-45 PCIe GbE by I210 controller 3 x RJ-45 PCIe 2.5 GbE by I225-V/I226-V controller	2 x 2.5 GbE by Intel® I225-V/I226-V controller
	COM Port	1 x RS-232/422/485 (DB9) (optional)	4 x RS-232/422/485 (DB-9)
	Digital I/O	-	8-bit Digital I/O (4-in/ 4-out)
	CAN-bus	-	2 x CAN-bus (DB9 with 2.5kV isolation)
	Display	1 x HDMI 1.4B	2 x HDMI (up to 4K@30Hz)
	Wireless	-	1 x 802.11a/b/g/n/ac (optional)
	TPM	Intel PTT	1 x TPM (2 x10 pin) Intel PTT
	Other	1 x Power Button (with LED),1 x Clear CMOS	1 x Power Button, 1 x Reset Button, 1 x AT/ATX Switch, 1 x LED for Power (Green), 1 x LED for HDD (Yellow)
Expansions	M.2	1 x 2242 B-key (PCIe Gen3 x2) 1 x 2242 B-key (SATA) 1 x 2280 M-key (PCIe Gen3 x2)	1 x M.2 A Key 2230 (PCIe Gen3 x1/USB 2.0) 1 x M.2 M Key 2280 (PCIe Gen3 x2)
Power	Power Input	2-pin terminal block: 12-28 VDC	3-pin terminal block: 12-24V DC
	Power Consumption	12V@3.05 (Intel® Celeron® J6412 with 8GB DDR4 Memory)	12V @ 3.36A (Intel® Celeron® J6412 with 8GB memory)
	Remote PWR	-	Terminal Block: 2-Pin
Reliability	Mounting	DIN-Rail, Wall Mount	DIN-Rail, Wall Mount
	Operating Temperature	-10°C ~ 50°C with air flow (M.2), 10% ~ 95%, non-condensing	-20°C ~ 60°C with 0.7M/S air flow (M.2), 10% ~ 95%, non-condensing
	Storage Temperature	-20°C ~ 70°C with air flow (M.2), 10% ~ 90%, non-condensing	-20°C ~ 70°C, 10% ~ 90%, non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (M.2)	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)
	Operating Vibration	MIL-STD-810G 514.6C-1 (M.2)	MIL-STD-810G 514.6C-1 (SSD)
	Weight (Net/Gross)	0.78 kg /1.2 kg	1.39 kg /1.68 kg
	Safety/EMC	CE, FCC, UKCA	CE/ FCC/ UKCA
	Watchdog Timer	Programmable 1 ~ 255 sec/min	Programmable 1~255 sec/min
OS	Supported OS	Microsoft® Windows® 10/11, Linux	Microsoft® Windows® 10/11, Linux

* Based on project discussion, it might have MOQ criteria. Please contact with Sales Account.

DRPC series



Model		DRPC-240-TGL-U	DRPC-130-AL
Chassis	Color	Black	Black
	Dimensions (WxDxH)(mm)	81 x 150 x 190	58.75 x 130 x 174
	System Fan	Fanless	Fanless
	Chassis Construction	Extruded aluminum alloy	Extruded aluminum alloy
Motherboard	CPU	Intel® Core™ i7-1185G7E 1.8 GHz (up to 4.4 GHz, quad-core, TDP 15W) Intel® Core™ i5-1145G7E 1.5 GHz (up to 4.1 GHz, quad-core, TDP 15W) Intel® Celeron® 6305E 1.8 GHz (dual-core, TDP 15W)	Intel® Atom® x5-E3930 1.3 GHz (up to 1.8 GHz, dual-core, TDP 6.5W)
	Chipset	SoC	SoC
	System Memory	2 x SO-DIMM DDR4 3200 MHz (8 GB pre-installed) (up to 64GB)	1 x SO-DIMM DDR3L 1333/1600 (up to 8GB)
Storage	Hard Drive	1 x 2.5" SATA 6Gb/s HDD/SSD bay	1 x 2.5" SATA 6Gb/s HDD/SSD bay 1 x eMMC 5.0 (optional, up to 32GB)*
I/O Interfaces	USB	2 x USB 3.2 Gen 2 2 x USB 2.0	4 x USB 3.2 Gen 1
	Ethernet	1 x 2.5 GbE by Intel® I225LM/I226LM controller 3 x 2.5 GbE by Intel® I225-V/I226-V controller	2 x GbE RJ-45 by Intel® I211
	COM Port	2 x RS-422/485 with AFC (DB-9, with 2.5kV isolation) 2 x RS-232 (DB-9, with 2.5kV isolation)	4 x RS-232/422/485 with AFC (DB9)
	Digital I/O	12-bit Digital I/O (6-in/ 6-out)(optional)	8-bit Digital I/O (4-in/ 4-out)
	CAN-bus	N/A	1 x Port supporting two CAN-bus (DB9 with 2.5kV isolation)
	Display	1 x HDMI (up to 3840 x 2160@30Hz) 1 x DP++ (up to 4096 x 2304@60Hz)	2 x HDMI (up to 3840 x 2160@30Hz)
	Wireless	1 x 802.11a/b/g/n/ac (optional)	1 x 802.11a/b/g/n/ac (optional)
	TPM	Support Intel PTT	1 x TPM 2.0 (2x10 pin) (optional)
	Other	1 x Power button, 1 x Reset button, 1 x AT/ATX switch, 1 x Power LED (green), 1 x HDD LED (yellow), 4-pin external system fan connector	1 x Power button, 1 x Reset button, 1 x AT/ATX switch, 1 x Power LED (green), 1 x HDD LED (yellow)
Expansions	PCIe Mini	N/A	1 x Half-size (PCIe/USB 2.0) 1 x Full-size (PCIe/USB 2.0/SATA)
	M.2	1 x 2230 A-key (PCIe Gen3 x1/USB 2.0) 1 x 3042/52/80 B-key (PCIe Gen3 x1/USB 3.2 Gen1/USB 2.0) 1 x On-board SIM card socket (hinge type) for M.2 B key	N/A
	Backplane	1 x PCIe Gen 3 x4 (optional)	N/A
Power	Power Input	Terminal block: 12 ~ 28V DC	Terminal block: 12 ~ 24V DC
	Power Consumption	12V @ 6.98A (Intel® Core™ i5-1145G7E with 8GB memory)	12V @ 2.88 A (Intel® Atom® x5-E3930 with 4GB memory)
	Remote PWR	2-pin Terminal block	Terminal block: PSON
Reliability	Mounting	DIN-Rail, Wall Mount	DIN-Rail
	Operating Temperature	-20°C ~ 60°C with air flow (SSD), 10% ~ 95% non-condensing	-20°C ~ 60°C with air flow (SSD), 10% ~ 95% non-condensing
	Storage Temperature	-40°C ~ 85°C, 10% ~ 95% non-condensing	-40°C ~ 85°C with air flow (SSD), 10% ~ 95% non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)
	Operating Vibration	MIL-STD-810G 514.6C-1 (SSD)	MIL-STD-810G 514.6C-1 (SSD)
	Weight (Net/Gross)	2.15 / 2.5 kg	1.4 kg / 2.5 kg
	Safety/EMC	CE, FCC, UKCA	CE/ FCC
	Watchdog Timer	Programmable 1 ~ 255 sec/min	Programmable 1 ~ 255 sec/min
OS	Supported OS	Microsoft Windows 10 / Windows 11, Linux	Microsoft® Windows 10, Linux

* Based on project discussion, it might have MOQ criteria. Please contact with Sales Account.

DRPC series



Model		DRPC-W-TGL-U	DRPC-W-JL
Chassis	Color	Black	
	Dimensions (WxDxH)(mm)	176 x 116 x 67.8	176 x 116 x 60.8
	System Fan	Fanless	
	Chassis Construction	Extruded aluminum alloys	
Motherboard	CPU	Intel® Core™ i7-1185G7E 1.8 GHz (up to 4.4 GHz, quad-core, TDP 15W) Intel® Core™ i5-1145G7E 1.5 GHz (up to 4.1 GHz, quad-core, TDP 15W) Intel® Core™ i3-1115G4E 2.2 GHz (up to 3.9 GHz, dual-core, TDP 15W) Intel® Celeron® 6305/6305E 1.8 GHz (dual-core, TDP 15W)	Intel® Celeron® N5105 2.0 GHz (up to 2.9 GHz, quad-core, TDP 10W)
	Chipset	SoC	
	System Memory	1 x DDR4 3200 MHz SO-DIMM (pre-installed 8GB) (up to 32GB)	1 x DDR4 2933 MHz SO-DIMM (pre-installed 8GB) (up to 16GB)
Storage	Hard Drive	1 x 2.5" SATA 6Gb/s HDD bay	
	eMMC	N/A	N/A
	microSD	N/A	N/A
I/O Interfaces	USB	4 x USB 3.2	2 x USB 3.2
	LAN	LAN1: Intel® I225V 2.5GbE (I225-LM for i5/i7 SKU) LAN2/3: Intel® I225V 2.5GbE	3 x 2.5GbE
	COM Port	2 x RS-232/422/485 (optional)	
	Digital I/O	1 x 12-bit digital I/O (optional)	
	Display	1 x DP, 2 x HDMI	1 x DP, 1 x HDMI
	Wireless	Optional	
	TPM	Intel PTT	
	Other	1 x Power button, 1 x Reset button, 1 x Power LED, 1 x HDD LED, 1 x System fan connector, 1 x AT/ATX Switch	1 x Power button, 1 x Reset button, 1 x Power LED, 1 x HDD LED, 1 x System fan connector
Expansions	PCIe Mini	N/A	N/A
	M.2	1 x 2230 M.2 A Key (PCIe Gen3 x1 & USB 2.0) 1 x 3042/3052 M.2 B Key (PCIe Gen3 x2) 1 x On-board SIM card socket (push-push type) for M.2 B key	1 x 2230 M.2 A Key (PCIe Gen3 x1 & USB 2.0) 1 x 2242/2280 M.2 B Key (PCIe Gen3 x2) 1 x On-board SIM card socket (hinge type) for M.2 B key
Power	Power Input	12V DC	
	Power Consumption	12V@4.1A (Intel® i5-1145G7E with 8GB DDR4 memory)	12V@2.45A (Intel® N5105 with 16GB DDR4 memory)
Reliability	Mounting	DIN-Rail	
	Operating Temperature	-20°C ~ 60°C with airflow, 10% ~ 95% non-condensing	
	Storage Temperature	-30°C ~ 85°C, 10% ~ 95% non-condensing	
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis	Half-sine wave shock 5G, 11ms, 100 shocks per axis
	Operating Vibration	10-500 Hz,1.04 Grms, random, 1 hr/axis	10-500 Hz,1.04 Grms, random, 1 hr/axis
	Weight (Net/Gross)	0.98 kg / 1.2 kg	0.91 kg / 1.6 kg
	Safety/EMC	CE/ FCC/UKCA	
	Watchdog Timer	Programmable 1 ~ 255 sec/min	
OS	Supported OS	Microsoft® Windows 10/11, Linux	

DRPC series



Model		DRPC-W-EHL1	DRPC-W-EHL	IDS-330-ADL-P
Chassis	Color	Black	Black	Black
	Dimensions (WxDxH) (mm)	176 x 116 x 60.8	176 x 116 x 60.8	176 x 115.6 x 55.2
	System Fan	Fanless	Fanless	Fanless (Fan optional)
	Chassis Construction	Extruded aluminum alloys	Extruded aluminum alloys	ABS Plastic+Aluminum
Motherboard	CPU	Onboard Intel® Atom® x6000 series / Pentium® / Celeron® processor (Elkhart Lake platform) Intel® Celeron® x6211E on-board SoC (up to 3.0 GHz, dual-core, 1.5M Cache, TDP=6W) Intel® Celeron® x6413E on-board SoC (up to 3.0 GHz, quad-core, 1.5M Cache, TDP=9W) Intel® Celeron® x6425E on-board SoC (up to 3.0 GHz, quad-core, 1.5M Cache, TDP=12W)	Intel® Celeron® J6412 2.0 GHz (up to 2.6 GHz, quad-core, TDP 10W)	Intel® Core™ i5-1235U (up to 4.4GHz, 10-core, 15W TDP) Intel® Core™ i7-1255U (up to 4.7GHz, 10-core, 15W TDP)
	Chipset	SoC	SoC	SoC
	Memory	Onboard LPDDR4x 3200MHz 8GB (up to 16GB)*	Onboard LPDDR4x 3200MHz 8GB (up to 16GB)*	LPDDR4x onboard 8GB (max 16GB)
Storage	HDD Bay	1 x 2.5" SATA 6Gb/s HDD bay	1 x 2.5" SATA 6Gb/s HDD bay	1 x M.2 B key 3042/52/80 with SIM slot (PCIe x1 / USB 2.0 / SATA) 1 x 2280 M-key (PCIe Gen4 x4)
IO Interfaces	USB	2 x USB 3.2 Gen2	2 x USB 3.2	4 x USB 3.2 Gen 2
	LAN	2 x PCIe 2.5GbE with Intel i225-IT	2 x 2.5GbE	2 x 2.5GbE by Intel® I225-V/I226-V (colay I225LM)
	Display	1 x HDMI™ 1.4 (up to 4096 x 2160@30Hz) 1 x DP 1.2 (up to 4096 x 2160@60Hz)	1 x DP 1 x HDMI	4 x HDMI 1.4b with CEC (up to 4096 x 2160@30Hz)
	Others	1 x Power button, 1 x Reset button, 1 x Power LED, 1 x HDD LED, 1 x System fan connector	1 x Power button, 1 x Reset button, 1 x Power LED, 1 x HDD LED, 1 x System fan connector	1 x Power Button, 1 x Reset Button, 1 x AT/ATX switch, 1 x Power LED (green), 1 x HDD LED (yellow)
Internal Expansions	PCIe Mini	N/A	N/A	N/A
	M.2	1 x 2230 M.2 A Key (PCIe Gen3 x2 & USB 2.0) 1 x 3042 M.2 B Key (PCIe Gen3 x2 & USB 2.0)	1 x 2230 M.2 A Key (PCIe Gen3 x1 & USB 2.0) 1 x 3042 M.2 B Key (PCIe Gen3 x2) 1 x On-board SIM card socket (push-push type) for M.2 B key	1 x 2230 E-key (PCIex1/USB2.0) Support Vpro 1 x M.2 B key 3042/52/80 (PCIex1/USB2.0/SATA) 1 x On-board SIM card socket (hinge type) for M.2 B key 1 x 2280 M-key (PCIe Gen4 x4)
Power	Power Input	12V ~ 28V DC input power (AT/ATX mode)	12V DC	DC Jack: 12 VDC
	Power Consumption	28V@1.58A (Intel® Celeron® x6211E With 8GB LPDDR4x Memory)	12V@2.5A (Intel® J6412 With 4GB DDR4 Memory)	12V@4.25A (Intel® Core™ i7-1255U with 8GB DDR4 memory)
Reliability	Mounting	DIN-Rail	DIN-Rail	Wall mount, VESA 75/100
	Operating Temperature	-20°C ~ 70°C with airflow, 10% ~ 95% non-condensing	-20°C ~ 60°C with airflow, 10% ~ 95% non-condensing	-10°C ~ 40°C with air flow, 10% ~ 95%, non-condensing
	Storage Temperature	-30°C ~ 85°C, 10% ~ 95% non-condensing	-30°C ~ 85°C, 10% ~ 95% non-condensing	-20°C ~ 60°C with air flow, 10% ~ 90%, non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis	Half-sine wave shock 5G, 11ms, 100 shocks per axis	Half-sine wave shock 5G, 11ms, 100 shocks per axis
	Operating Vibration	10-500 Hz, 1.04 Grms, random, 1 hr/axis	10-500 Hz, 1.04 Grms, random, 1 hr/axis	10-500 Hz, 1.04 Grms, random, 1 hr/axis
	Weight (Net/ Gross)	0.92 kg / 1.16 kg	0.92 kg / 1.16 kg	0.97 kg / 1.74kg
	Safety/EMC	CE/FCC	CE/FCC/UKCA	CE/ FCC/ UKCA
	Watchdog Timer	Programmable 1 ~ 255 sec/min	Programmable 1 ~ 255 sec/min	Programmable 1~255 sec/min
OS	Supported OS	Microsoft® Windows 10 / Windows 11, Linux	Microsoft® Windows 10 / Windows 11, Linux	Microsoft® Windows® 10/11, Linux

* Based on project discussion, it might have MOQ criteria. Please contact with Sales Account.

uIBX series

Compact Embedded Systems

Ideal for use as IoT gateways, it features a durable metal chassis and an industrial-grade operating temperature range, ensuring consistent, reliable performance in compact and space-constrained environments.



Model		uIBX-260-EHL	uIBX-250-BW
Chassis	Color	Black	Black
	Dimensions (WxDxH) (mm)	137 x 102.8 x 65.8	137 x 102.8 x 52
	System Fan	Fanless	Fanless
	Chassis Construction	Extruded aluminum alloy	Extruded aluminum alloy
Motherboard	CPU	Intel® Celeron® J6412 2.0GHz (up to 2.6GHz, quad-core, TDP 10W)	Intel® Celeron® N3160 1.6 GHz (up to 2.24 GHz, quad-core, TDP 6W)
	Chipset	SoC	SoC
	System Memory	Onboard LPDDR4x 3200MHz 8GB (up to 16GB) ¹	1 x 204-pin DDR3L SO-DIMM slot (2 GB pre-installed, system max: 8GB)
Storage	Hard Drive	1 x 2.5" SATA 6Gb/s HDD/SSD bay	1 x 2.5" SATA 6Gb/s HDD/SSD bay
	eMMC	1 x eMMC (optional) ²	N/A
	Micro SD	N/A	N/A
I/O Interfaces	USB	4 x USB 3.2 Gen2 2 x USB 2.0 (optional) ¹	4 x USB 3.2 Gen 1
	Ethernet	2 x 2.5 GbE by Intel® I225-V/I226-V controller	2 x GbE RJ-45 by Intel® I210
	COM Port	1 x RS-232/422/485 (DB9) 1 x RS-232 (optional)	2 x RS-232/422/485 with AFC (RJ-45)
	Digital I/O	N/A	N/A
	Display	1 x HDMI 1.4b (up to 4k@ 30Hz)	1 x HDMI™ (up to 3840 x 2160@30Hz) 1 x VGA (up to 1920 x 1080@60Hz)
	Audio	N/A	1 x Line-out, 1 x Line-in
	Wireless	1 x 802.11a/b/g/n/ac (M.2 A Key optional)	1 x 802.11a/b/g/n/ac (optional)
	Other	1 x Power Button (with LED), 1 x Reset Button, 1 x AT/ATX switch, 1 x Clear CMOS Button, 1 x HDD LED	1 x Power Button, 1 x Reset Button, 1 x AT/ATX Switch, 1 x LED for HDD (Green)
Expansions	PCIe Mini	N/A	1 x Full-size (PCIe/USB 2.0/SATA)
	M.2	1 x 2230 A-key (PCIe Gen3 x1/USB 2.0) 1 x 2280 M-key (PCIe Gen3 x2)	N/A
Power	Power Input	DC Jack: 12V DC	DC Jack: 12V DC
	Power Consumption	12V@3.6A (Intel® Celeron® J6412 with 8GB DDR4 Memory)	12V @ 2A (Intel® Celeron® N3160 with 2GB memory)
Reliability	Mounting	Wall Mount, VESA 75	Wall-mount/ VESA 75
	Operating Temperature	-10°C ~ 50°C with air flow (M.2), 10% ~ 95%, non-condensing	-20°C ~ 60°C with air flow (SSD), 10% ~ 95% non-condensing
	Storage Temperature	-20°C ~70°C with air flow (M.2), 10% ~ 90%, non-condensing	-20°C ~ 80°C with air flow (SSD), 10% ~ 90% non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)
	Operating Vibration	10-500 Hz, 1.04 Grms, random, 1 hr/axis (SSD)	MIL-STD-810G 514.6C-1 (SSD)
	Weight (Net/Gross)	0.97 /1.74kg	0.47 kg / 1.4 kg
	Safety/EMC	CE/ FCC/ UKCA	CE/ FCC
	Watchdog Timer	Programmable 1~255 sec/min	Programmable 1 ~ 255 sec/min
OS	Supported OS	Microsoft® Windows® 10/11, Linux	Microsoft® Windows 8, Microsoft® Embedded Standard 7 E

¹ USB expansion is applicable only when 2.5-inch hard disk is not installed.
² Based on project discussion, it might have MOQ criteria. Please contact with Sales Account.

FLEX series

Rackmount Computers



Model		FLEX-BX210-Q470
System	CPU	10th/11th Generation Intel® Core™ processor (35W TDP) Intel® Core™ i3-10320 3.8 GHz (up to 4.6 GHz, quad-core, 65W TDP) Intel® Core™ i5-10500TE 2.3 GHz (up to 3.7 GHz, 6-core, 35W TDP) Intel® Core™ i7-10700TE 2.0 GHz (up to 4.4 GHz, 8-core, 35W TDP) Intel® Core™ i9-10900TE 1.8 GHz (up to 4.5 GHz, 10-core, 35W TDP)
	Chipset	Q470/Q470E
	Memory	2 x 288-pin 2933/2666 MHz dual-channel DDR4 unbuffered DIMM supporting up to 64GB
	Graphics Engine	Intel® HD Graphics Gen 9 Engines with Low power 16 execution unit, supports DX2015, OpenGL 5.X and OpenCL2.x, ES 2.0
	Ethernet	LAN1: Intel® I225LM/I226LM controller LAN2/3: Intel® I225-V/I226-V controller
	Storage	4 hot-swappable 2.5" HDD/SSD SATA 6Gb/s bays (support RAID 0/1/5/10), with LED indicators
Wireless Communication	WLAN	802.11ac, 2.4/5 GHz (by M.2 2230 optional)
	Bluetooth	Bluetooth v5.1 (optional)
I/O Interface & Buttons	WWAN and GNSS	M.2 3052 LTE (by M.2 3052 optional)
	I/O Interface & Buttons	1 x DP 1 x HDMI™ 3 x 2.5GbE LAN 6 x USB 3.2 Gen 1 Type-A 2 x RS-232 DB-9 1 x Mic in 1 x Line out 1 x AC inlet 4 x SMA Power button AT/ATX mode switch Reset button
Expansions	TPM	Intel PTT from CPU
	Expansion Slots	2 x PCIe 3.0 x8 2 x PCIe 3.0 x4 1 x M.2 A-Key 2230 (PCIe 3.0 x1 & USB 2.0) 1 x M.2 M-Key 2280 (PCIe 3.0 x4) 1 x M.2 B-Key 3042/3052 (PCIe Gen3 x1 & USB 3.2 Gen1) 1 x On-board SIM card socket (push-push type) for M.2 B key
Thermal	Thermal Solution	3 x System fan, 1 x CPU fan
Power	Power Supply	ATX power supply, AC input - 350W power input - Input: 90VAC ~ 264VAC, 50/60Hz - Output (max.): 3.3V@14A, 5V@16A, 12V@29A, -12V@0.3A
	Watchdog Timer	Software programmable 1 ~ 255 sec/min, system reset :
Construction	Chassis Construction	Metal
	Mounting	Wall mount / Rack mount
	Color	Black
	Dimensions (LxWxH)	357 x 230 x 88 (mm)
Environmental	Weight	4.1 kg/7.2 kg
	Operating Temperature	-10°C ~ 50°C
	Storage Temperature	-20°C ~ 60°C
	Operating Humidity	5% ~ 95%, non-condensing
	Operating Vibration	5~17Hz, 0.1 double amplitude displacement 17 ~ 640Hz 1.5G acceleration peak to peak
	Operating Shock	10G acceleration part to part (11ms)
Safety/EMC	Safety/EMC	CE/FCC

ISDV series

4K Low Latency Pro AV Video Transceiver



Model	ISDV-200CTR
Description	4K HDR SDVoE IP combo transceiver supports 10G copper & fiber
Memory	2 x 128M16 DDR3 onboard
Video Interfaces	HDMI 2.0 supporting all resolutions up to 594MHz 4K60 RGB and 4:4:4 8-bit 4K60 4:2:2 10-bit for broadcast and medical applications 4K60 4:2:0 10-bit and 12-bit HDR
I/O Ports	1 x 1GbE LAN 1 x 10GbE LAN 1 x 10GbE SFP+ 1 x IR in 1 x IR out 1 x HDMI 2.0 in 1 x HDMI 2.0 out 1 x 3.5mm audio-in jack 1 x 3.5mm audio-out jack 4 x HiD 2 x RS-232 6 x LED indicator 1 x Reset button 1 x USB switch
Control Button	2 x Trigger & Tuning: 1 x Reset button, 1 x USB switch
LCD	1 x Monochrome LCD (65 x 15 mm)
Application Mode	Transmitter / Receiver Extension / Switching / Video Wall / Multi Viewer / KVM supported
Dimension (WxDxH)	238 x 166 x 44.5 mm
Weight	1235g
Operating Humidity	20% ~ 95%, non-condensing
Operation Temperature	-20°C ~ 50°C w/o air flow -20°C ~ 60°C w/ air flow
Power	12VDC In, 3.3A
Safety & EMC	CE, FCC, CCC Certificated
Software	Free management software (ISDV Network Video Orchestrator) supported
Supported OS	Microsoft Windows 10 64-bits Microsoft Windows 11 64-bits Linux Ubuntu 18.04 LTS+ QNAP NAS QTS 5

Industrial Chassis

Flexible Industrial Chassis Portfolio for Versatile Integration

IEI offers a comprehensive lineup of industrial computer chassis, ranging from 1U to 5U in both rackmount and wall-mount configurations. Built to support diverse system requirements, these chassis accommodate a wide range of motherboard and SBC form factors, including ATX, MicroATX, Mini-ITX, and full-size or half-size SBCs. With modular power supply options and optimized thermal solutions, IEI chassis ensure reliable performance and seamless integration in demanding industrial environments.

RACK-5000B NEW

5U Rackmount Chassis Empowering Edge AI with NVIDIA RTX 4090 Compatibility



Industrial Chassis Selection Guide

Model No.	Type	Board Type		Max. Slots	Drive Capacity				Fan Spec.					Indicators		Front Panel Control						Back Panel Control		PSU	Dimensions (mm)			Color		
		SBC Slot	Motherboard		5.25" F.P.	3.5" F.P.	2.5" Int	3.5" Int	4 cm	6 cm	8 cm	9 cm	12 cm	Power	HDD	Power	Reset	KB	USB	Keylock	COM	USB	COM		Depth	Height	Width	Black	White	Silver
RACK-5000B NEW	5U		ATX, microATX	7			3	2				4		O	O	O	O		2					PS/2	468.4	201	431	O		
RACK-1150G	1U	PICMG 1.0 full-size/ PICMG 1.3 full-size		3	1			1	3					O	O	O	O		2					1U	449	44	431	O		
RACK-220G	2U	PICMG 1.0 full-size	*microATX, Mini-ITX	6	1	1		1			2			O	O	O	O		2	O				PS/2	487.5	88	431	O	O	
RACK-305G	4U	Full-size	*ATX, microATX, Mini-ITX	14	2	1		1		***2	2			O	O	O	O	O	2	O				PS/2 or mini redundant	413	176	431	O	O	
RACK-360G	4U	Full-size	*ATX, microATX, Mini-ITX	14	2	1		1		***2			1	O	O	O	O	O	2	O				PS/2 or mini redundant	435.5	176	431	O	O	
RACK-3000G	4U	Full-size	*ATX, microATX, Mini-ITX	14	3	2		1		***2	2			O	O	O	O			O				PS/2 or mini redundant	520	176	431	O	O	
RACK-500AI	5U	Full-size		5		1		1			1			O	O	O	O		2					1U	440.2	221.3	110.6	(Navy Blue & Black)		
ECA-310 NEW			microATX	4	1 (ultra slim)		1	1				1		O	O	O	O		2				6	1U FLEX	341	337.5	157			O
ECA-300			ATX, microATX	7	2		1	1						O	O	O	O		2		6			1U	291	162	365			O
ECA-200			microATX	4			1	1						O	O	O	O		2		6			1U	310	162	310	O		
ECA-100			ATX, microATX	7			1	1						O	O	O	O		2			4	2	1U	320	480.5	210		O	
PAC-1000G		Full-size		6	1	1		1			1			O	O	O	O							PS/2	421	176	232	O		
PAC-106G		Full-size		6		1		1			1			O	O	O	O		2					1U	400	175.5	166		O	
PAC-1700G		Full-size		7	1	1		2			1			O	O	O	O							PS/2	433	253.7	192.4	O		
PAC-125G		Full-size		10	2	1		1			1			O	O	O	O		2	O				PS/2	420	176	321		O	
PAC-53GH		Half-size		3			1							O	O	O	O		2					1U	218	200	95		O	
PR-1500G		Half-size		5	◇1	1		1			1			O	O	O	O		2					1U	254	132	286		O	
PAC-700G		Half-size		7	1	△1		1			1			O	O	O	O		2	O				1U	279	176	321	O		

Rackmount chassis
 Full-size wall mount chassis
 Half-size wall mount chassis

* For ATX model
*** Optional fans for ATX model

◇ Slim-type CD-ROM
△ Please refer to datasheet for detail information

Full-Size Rackmount Chassis



Model	RACK-5000B	RACK-360	RACK-3000G	RACK-500AI
Construction	Heavy duty metal	Heavy duty metal	Heavy duty metal	Heavy duty metal
SBC Form Factor	ATX and microATX form factor motherboards	Full-size, slot CPU card	Full-size, slot CPU card	Full-size CPU cards
Drive Bays	2 x 3.5" HDD 3 x 2.5" HDD	Shock-resistant disk drive bay design 3 x 5.25" + 1 x 3.5/2.5" HDD or 2 x 5.25" + 2 x 3.5/2.5" HDD (1 x front accessible)	3 x 5.25" + 1 x front-accessible 3.5" + 2 x 3.5" HDD or 3 x 5.25" + 2 x front-accessible 3.5" + 1 x 3.5" HDD or 3 x 5.25" + 3 x 3.5" HDD	1 x Front-accessible 3.5" 1 x 3.5" HDD
Cooling Fans	4 x System fan (92 x 92 x 38mm)	1 x 12 cm	2 x 8 cm	1 x 8 cm
I/O Ports	2 x USB	2 x USB	N/A	2 x USB
I/O Openings	N/A	2 x COM, 2 x LPT	2 x COM, 2 x LPT, 1 x PS2	1 x LPT, 1 x COM
Expansion Slots	7 slots	14 slots for RACK-360G 7 slots for RACK-360GATX	14 slots for RACK-3000G 7 slots for RACK-3000GATX	5 slots
Indicators	Power, HDD	Power, HDD	Power, HDD	Power, HDD
Button	Power switch, reset button	Power switch, reset button	Power switch, reset button	Power switch, reset button
Operating Temperature	0°C ~ 60°C	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C
Operating Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)	Half-sine wave shock 5G, 11ms, 100 shocks per axis	N/A	N/A
Operating Vibration	MIL-STD-810G 514.6C-1 (SSD)	MIL-STD-810G 514.6C-1	N/A	N/A
Color	Iron gray and black	B: Black/ W: White	Black	Navy blue and black
Weight (Net/Gross)		11 kg/15.4 kg	13 kg/18 kg	6 kg/9 kg
Dimensions (DxWxH)	468.4 x 431 x 201 mm	435.5 mm x 431 mm x 176 mm	520 mm x 431 mm x 176 mm	440.2 mm x 110.6 mm x 221.3 mm
PCIe Expansion Card (GPU/Add-on Cards) Recommendation	N/A	N/A	N/A	Total maximum up to 150W (80W CPU with 16GB memory, 350W ATX Power) Total maximum up to 180W (35W CPU with 16GB memory, 350W ATX Power)



Model	RACK-1150G/1150G-PE	RACK-220G	RACK-305G
Construction	Heavy duty metal	Heavy duty metal	Heavy duty metal
SBC Form Factor	Full-size CPU card	Full-size, slot CPU card	Full-size, slot CPU card
Drive Bays	1 x 5.25" 1 x 3.5" HDD (internal)	1 x 5.25" 1 x 3.5" 1 x 3.5" HDD (internal)	3 x 5.25" + 1 x 3.5" HDD or 2 x 5.25" + 2 x 3.5" HDD or 2 x 5.25" + 1 x 3.5" HDD + 1 x front accessible 3.5" or 2 x 5.25" + 2 x front accessible 3.5"
Cooling Fans	3 x 4 cm	2 x 8 cm	2 x 8 cm
I/O Ports	2 x USB	2 x USB	2 x USB
I/O Openings	1 x COM, 1 x LPT	6 slots	14 slots for RACK-305G 7 slots for RACK-305GATX
Expansion Slots	3 slots/2 slots (PE)	N/A	N/A
Indicators	Power, HDD	Power, HDD	Power, HDD
Button	Power switch, reset button	Power switch, reset button	1 x Power switch, 2 x reset buttons
Operating Temperature	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C
Operating Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
Color	B: Black	Black	W: White/B: Black
Weight (Net/Gross)	7.5 kg/9.5 kg	8.2 kg/12.4 kg	10.4 kg/15 kg
Dimensions (DxWxH)	449 mm x 431 mm x 44 mm	488 mm x 431 mm x 89 mm	413 mm x 431 mm x 176 mm

RACK-1150G and RACK-1151G support processors with a maximum TDP of 31 W only.

Tower Industrial Chassis



Model	ECA-300	ECA-310	ECA-200	ECA-100
Construction	Heavy duty metal	Heavy duty metal	Heavy duty metal	Heavy duty metal
SBC Form Factor	ATX/microATX	microATX	microATX	ATX/microATX
PSU	PS/2 ATX power supply	1U flex power supply	1U flex power supply	1U flex power supply
Drive Bays	2 x 5.25" 1 x 3.5"/2.5" HDD/SSD	1 x 3.5" HDD 1 x 2.5" HDD/SSD	1 x 3.5"/2.5" HDD/SSD Expansion: 1 x 3.5"/2.5" HDD/SSD by the optional ECA-HDD-KIT-R10	1 x 3.5"/2.5" HDD/SSD Expansion: 1 x 3.5"/2.5" HDD/SSD by the optional ECA-HDD-KIT-R10
Cooling Fans	1	1	1	1
I/O Openings	2 x USB, 4 x USB, 2 x COM	2 x USB, 6 x COM	2 x USB, 6 x COM	2 x USB, 6 x COM
Expansion Slots	7	4 slots	4	7
Indicators	1 x Power LED, 1 x HDD LED	1 x Power LED, 1 x HDD LED	1 x Power LED, 1 x HDD LED	1 x Power LED, 1 x HDD LED
Button	1 x Reset button, 1 x Power switch	1 x Reset button, 1 x Power switch	1 x Reset button, 1 x Power switch	1 x Reset button, 1 x Power switch
Installation	Desktop, wall mount	Desktop, wall mount	Desktop, wall mount	Desktop, wall mount
Operating Temperature	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C
Operating Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%	5% ~ 95%
Color	Silver	Silver	Black	Black
Operating Vibration	MIL-STD-810F 514.5C-1	MIL-STD-810F 514.5C-1	MIL-STD-810F 514.5C-1	MIL-STD-810F 514.5C-1
Operating Shock	Half-sine wave 3G, 11ms, 100 shocks per axis	Half-sine wave 3G, 11ms, 100 shocks per axis	Half-sine wave 3G, 11ms, 100 shocks per axis	Half-sine wave 3G, 11ms, 100 shocks per axis
Dimensions (DxWxH)	210 mm x 320 mm x 480.5 mm	157mm x 337.5mm x 341mm	310 mm x 310 mm x 162 mm	365 mm x 291 mm x 162 mm

Full-Size Compact Chassis



Model	PAC-1000G	PAC-106G	PAC-1700G	PAC-125G
Construction	Metal with plastic front panel	Heavy duty metal	Metal with plastic front panel	Heavy duty metal
SBC Form Factor	Full-size, slot CPU card	Full-size, slot CPU card	Full-size, slot CPU card	Full-size, slot CPU card
Drive Bays	1 x Front-accessible 3.5", 1 x 5.25", 1 x 3.5" HDD	1 x Front-accessible 3.5", 1 x 3.5" HDD	1 x front-accessible 3.5", 1 x 5.25", 2 x 3.5" HDD	2 x 5.25", 1 x Front accessible 3.5", 1 x 3.5" HDD
Cooling Fans	1 x 8 cm	1 x 8 cm	1 x 8 cm	1 x 80 mm x 80 mm x 25 mm
I/O Ports	None	2 x USB	None	2 x USB
I/O Openings	1 x LPT, 1 x COM	1 x COM, 1 x LPT	1 x LPT, 2 x COM	1 x LPT, 1 x COM
Expansion Slots	6 slots	6 slots	7 slots	10 slots
Indicators	Power, HDD	Power, HDD	Power, HDD	Power, HDD
Button	Power switch, reset	Power switch, reset	Power switch, reset	Power switch, reset
Operating Temperature	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C
Operating Humidity	10% ~ 90%	10% ~ 60%	10% ~ 90%	10% ~ 90%
Color	B: Black	W: White	B: Black	W: White
Weight (Net/Gross)	5.6 kg/8.8 kg	5.2 kg/7.8 kg	6 kg/8.4 kg	7.2 kg/10.4 kg
Dimensions (DxWxH)	421 mm x 232 mm x 176 mm	400 mm x 166 mm x 175.5 mm	433 mm x 233 mm x 253.7 mm	420 mm x 321 mm x 176 mm

Half-size Compact Chassis



Model	PAC-53H	PR-1500G	PAC-700G
Construction	Heavy duty metal	Heavy duty metal	Heavy duty metal
SBC Form Factor	Half-size CPU card	Half-size CPU card	Half-size CPU card
Drive Bays	1 x 5.25", 1 x 3.5" HDD (internal)	1 x 5.25", 1 x 3.5" HDD (internal)	1 x 5.25", 1 x 3.5" HDD (internal)
Cooling Fans	3 x 4 cm	2 x 4 cm	1 x 8 cm
I/O Ports	2 x USB	2 x USB	2 x USB
I/O Openings	1 x COM, 1 x LPT	1 x COM, 1 x LPT	1 x COM, 1 x LPT
Expansion Slots	3 slots/2 slots (PE)	5 slots	7 slots
Indicators	Power, HDD	Power, HDD	Power, HDD
Button	Power switch, reset button	Power switch, reset button	Power switch, reset button
Operating Temperature	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C
Operating Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
Color	Black	Black	Black
Weight (Net/Gross)	7.5 kg/9.5 kg	7.5 kg/9.5 kg	6 kg/8 kg
Dimensions (DxWxH)	218 mm x 200 mm x 95 mm	254 mm x 132 mm x 286 mm	279 mm x 176 mm x 321 mm

Mini-ITX Motherboard Chassis



Model		EBC-3220	EBC-3100
Platform		Case only	
Chassis	Color	Black	
	Dimensions (WxDxH)	190 x 180 x 55 mm	
	System Fan	1 x 4 cm	
	Chassis Construction	Heavy duty metal	
Motherboard	Motherboard Model	tKINO-BW, KINO-DH810, KINO-DBT, KINO-DH310, KINO-DH110, KINO-TGL-U	
	SBC Size (mm)	Mini-ITX (170 x 170)	
Storage	Hard Drive	1 x 2.5" SATA HDD/SSD drive bay	
	CF Card/CFast	N/A	
	SD Card	Refer to SBC	
I/O Interfaces		PS2 (KB/MS): Refer to SBC	
		USB 3.2 Gen 1: Refer to SBC	
		USB 2.0: Refer to SBC	
		Ethernet: 2	
		COM Port: Refer to SBC	
Expansions	PCIe	N/A	
	PCIe Mini	Refer to SBC	
Power	Power Input	12V DC	
	Power Supply	12V DC	
Reliability	Mounting	VESA 100, wall mount	
	Operating Temperature	-10°C ~ 50°C	
	Operating Shock	Half-sine wave 3G, 11ms 3 shocks per axis	
	Operating Vibration	MIL-STD-810F 514.5C-1	
		1 kg/2 kg	2.5 kg/3.9 kg

Storage Servers

Perform High Reliability with Flexible Scalability

IEI provides high-reliability rackmount enterprise storage servers that support multiple operating systems. Our storage server series, available in 1U and 2U form factors, accommodate 4 to 8 drive bays.

Applications Include:

- Software-defined Storage (SDS)
- Big Data
- Cloud Hosting Workloads
- Backup Server
- Multimedia Server



	GRAND-RE	GRAND-GL
CPU	AMD Ryzen™ Embedded V1500B quad-core 2.2 GHz processor	Intel® Celeron® N5095 4-core/4-thread processor, burst up to 2.9 GHz
Encryption Acceleration	AES-NI	AES-NI
Memory	2 x SO-DIMM DDR4 Maximum 64GB (2 x 32GB)	2 x SO-DIMM (Max. 8GB)
Drive Bay	8 x 3.5"/2.5" SATA 6Gb/s HDDs/SSDs	4 x 3.5"/2.5" SATA 6Gb/s HDDs/SSDs
LAN Port	2 x 2.5GbE LAN	2 x 2.5GbE LAN
PCIe Slot	1 x PCIe Gen3 x8	N/A
USB Ports	1 x USB 3.2 Gen1 Type-A port 2 x USB 3.2 Gen2 Type-C port 1 x USB 3.2 Gen2 Type-A port	2 x External USB 2.0 2 x External USB 3.2 Gen2
HDMI Output	Optional via a PCIe graphics card	1 x HDMI™ 1.4b
LED Indicator	Status/Power, LAN, USB, Drive 1 - 8	Power/Status, LAN, USB, HDD1-4, M.2 SSD 1 - 2
Button	Power/Status, Reset	Power, Reset
Form Factor	2U Short Depth Rackmount	1U Short Depth Rackmount
Dimension (W x L x H) (mm)	432 x 297.4 x 88.6	430 x 292.1 x 43.3
Net Weight	9.15 kg	5.9 kg
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
Relative Humidity	5% ~ 95% RH non-condensing, wet bulb: 27°C	5% to 95% non-condensing, wet bulb: 27°C
Power Supply	300W (x2), 100-240V AC, 50/60 Hz	100W PSU, 100-240V
Fan	3 x 60mm	3 x 40 mm

Industrial Panel PCs

Industrial Grade, Advanced Performance

IEI offers a comprehensive range of panel PC solutions, from light to heavy industrial-grade systems designed for demanding vertical applications. Featuring up to IP66 ratings, anti-glare and anti-UV PCAP touchscreens, and industrial-grade durability, these panel PCs are built to withstand shock, vibration, and harsh environments—ensuring reliable performance across diverse sectors.



AFL series

Size	Resolution	Intel® Alder Lake-S (Desktop)		Intel® Elkhart Lake (Celeron)	ARM-Based
7"	1024 x 600 (17:10)			AFL4-W07-EHL	AFL4-W07-RK3566
8"	800 x 600 (4:3)			AFL4-W08-EHL	
10.1"	1280 x 800 (16:10)	AFL4-W101-ADLP		AFL4-W10-EHL	AFL4-W10-RK3568
12.1"	1024 x 768 (4:3)	AFL4-121-ADLP		AFL4-12-EHL	
12.1"	1280 x 800 (16:10)	AFL4-W121-ADLP		AFL4-W12-EHL	
12.3"	1920 x 720 (8:3)				
13.3"	1920 x 1080 (16:9)	AFL4-W133-ADLP		AFL4-W13-EHL	
15"	1024 x 768 (4:3)				
15.6"	1920 x 1080 (16:9)		AFL3-W15C-ADLP	AFL4-W15-EHL	
18.5"	1920 x 1080 (16:9)		AFL3-W19C-ADLP		
21.5"	1920 x 1080 (16:9)		AFL3-W22C-ADLP		
Memory		On-board LPDDR4x	DDR4 SO-DIMM	On board LPDDR4x	On board LPDDR4x
Storage		M.2 2242 M.2 2280	2.5" SATA SSD M.2 2280	M.2 2242 M.2 2280	eMMC

PPC series

Size	Resolution	Intel® Alder Lake-S (Desktop)	Intel® Raptor Lake-P (Mobile)	Intel® Alder Lake-P (Mobile)	Intel® Elkhart Lake (Celeron)	Intel® Atom®
7"	1024 x 600 (17:10)					
8"	800 x 600 (4:3)					
10.1"	1280 x 800 (16:10)					
10.4"	800 x 600 (4:3)					
12.1"	1024 x 768 (4:3)		UPC-F12M-RPLP			
12.1"	1280 x 800 (16:10)					
12.3"	1920 x 720 (8:3)				PPC2-CW123-EHL	
13.3"	1920 x 1080 (16:9)					
15"	1024 x 768 (4:3)	PPC2-C15-ADL			PPC2-C15-EHL	
15.6"	1920 x 1080 (16:9)	PPC2-CW15-ADL		PPC2-CW156A-ADLP		SHIELD-156
17"	1280 x 1024 (4:3)	PPC2-C17-ADL			PPC2-C17-EHL	
18.5"	1920 x 1080 (16:9)	PPC2-CW19-ADL		PPC2-CW185A-ADLP	PPC2-CW19-EHL	SHIELD-185
19"	1280 x 1024 (4:3)	PPC2-C19-ADL			PPC2-C19-EHL	
21.5"	1920 x 1080 (16:9)	PPC2-CW22-ADL		PPC2-CW215A-ADLP	PPC2-CW22-EHL	SHIELD-215
Memory		SO-DIMM	On board LPDDR4x	DDR4 SO-DIMM	On board LPDDR4x	DDR5 SO-DIMM
Storage		2.5" SATA SSD M.2 2242/2280	M.2 2280	2.5" SATA SSD M.2 2280	M.2 2242 M.2 2280	M.2 2280 1 x 128GB Emmc (optional)

AFL series

Compact and Slim-Bezel Panel PCs

The AFL-4 series features a sleek narrow bezel and 10-point PCAP touchscreen with anti-glare and wet/gloved hand support. Its aluminum chassis offers durability and efficient heat dissipation. With Wi-Fi 6E, Bluetooth 5.2 and rich I/O, it's ideal for factory automation, IoT, and smart retail.



LCD Size		7"	10.1"
Model		AFL4-W07-RK3566	AFL4-W10-RK3568
LCD	Resolution (WxH)	1024 x 600	1280 x 800 (16:10)
	Brightness (cd/m²)	450	420
	Contrast Ratio	800:1	1000:1
	Viewing Angle(H-V)	170° / 170°	170° / 170°
Touch	Touchscreen	PCAP with USB interface (anti-UV/AG coating)	PCAP with USB interface (anti-UV/AG coating)
	Touch IC	EETI EXC81 Series	EETI EXC81 Series
Motherboard	SoC	Rockchip RK3566 (Quad-code Cortex-A55 up to 1.8Ghz)	Rockchip® RK3568 (Quad-cord Cortex-A55, up to 2.0 GHz)
	RAM	4GB LPDDR4/4x, up to 8GB	
	Storage	32GB eMMC NAND flash	
Wireless& Bluetooth (Option)		Wi-Fi 5 / Wi-Fi 6 & Bluetooth v5.0 (B to B connector, supporting IEL wireless module)	Wi-Fi 5 / Wi-Fi 6 & Bluetooth v5.0 (B to B connector, supporting IEL wireless module)
I/O	USB 3.0	1 x USB 3.0 Type A HOST	2 x USB 3.0 Type A (1× OTG,1× HOST)
	USB 2.0	1 x USB 2.0 Type A OTG	2 x USB2.0
	Ethernet	1 x 1GbE RJ45 By YT8521	2 x 1GbE RJ45 By YT8521SC
	UART	2 x (RS-232+422+485) by DB9 Port	2 x RS-232/485 by DB9
	HDMI	1 × HDMI 2.0 type A,Up to 4K (Android support display both screens at the same time, dabian support separate display)	1 x HDMI2.0 output
	SD Card	1 x Micro SD Slot	1 x Micro SD Slot
	Power Port	1 x 12V DC Jack	1 x 12V DC Jack
	Expansion Interface	1 x 3042/52 B-key (PCIe Gen2 x1) 1 x On-board SIM card socket (push-push type) for M.2 B key	1 x 3042/52 B-key (PCIe Gen2 x1) 1 x On-board SIM card socket (hinge type) for M.2 B key
Multimedia	Audio	1 x Speaker (1W)	1 x Speaker (1.3W)
		1 x 3.5mm Audio Jack (Line out/Mic in)	1 x 3.5mm Audio Jack (Line out/Mic in)
Indicator light and Switch	Indicator	1 x Power key with LED 1 x System Operating status indicator (built-in)	1 x Power LED 1 x Reserved LED (Programmable)
	Switch	1 x Reset key 1 x USB OTG Switch	1 x USB OTG switch
Physical	Construction Material	Aluminum die casting	Aluminum
	Mounting	Panel, Wall, Stand, Arm, Rack VESA 75	Wall, Stand, Arm, VESA 75
	Color	Silver + Black	Silver+Black
	Dimensions (WxH)	180 mm x 116 mm	243.56 mm x 166.2 mm
Environment	Operating Temperature	0°C ~ 50°C	-10°C ~ 50°C with air flow
	Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
	Humidity	10% ~ 90%@40°C (Non-condensing)	10% to 90%@40°C (non-condensing)
	IP Level	Front panel compliance IP 54	Front panel IP64
	Safety & EMC	CE, FCC, Class A	CE/EMC, FCC
	Thermal Solution	Fanless	Fanless
	Power	12V DC	12V DC
	OS	Debian10 (Kernel 4.19)	Android 12.0 / Linux Debian 10 (kernel 4.19)
OS	Watchdog	Yes	Yes

AFL series



LCD Display		10.1"	12.1"	12.1"	13.3"	
Model		AFL4-W101-ADLP	AFL4-121-ADLP	AFL4-W121-ADLP	AFL4-W133-ADLP	
LCD	Resolution (WxH)	1280 x 800 (16:10)	1024 x 768 (4:3)	1280 x 800 (16:10)	1920 x 1080 (16:9)	
	Brightness (cd/m²)	350 cd/cm²	500 cd/cm²	450 cd/cm²	350 cd/cm²	
	Contrast Ratio	900:1	700:1	1200:1	800:1	
	LCD Color	16.7M	16.2M	16.2M	16.2M	
	Viewing Angle (H-V)	170°/170°	160°/140°	170°/170°	170°/170°	
	Backlight MTBF	30,000 hours	50,000 hours	50,000 hours	50,000 hours	
Touch	Touchscreen	Multi-point projected capacitive type (anti-UV / anti-glare coating) Surface hardness: ≥7H				
	Touch Controller	Projected capacitive type: EETI 80				
Mainboard	CPU (SoC)	12th Generation Intel® Core™ i7/i5/i3 Processor (Alder Lake-P) 13th Generation Intel® Core™ i7/i5/i3 Processor (Raptor Lake-P)				
	Memory	Dual-channel 8GB LPDDR4x on-board				
	Ethernet	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226-LM 2.5GbE controller (support Intel® AMT)				
	Expansion	1 x M.2 M key 2242 (PCIe Gen4 x4) 1 x M.2 M key 2280 (PCIe Gen4 x4)				
	I/O Ports, Switch	2 x RS-232 by DB9 2 x RS-232/422/485 by DB9 2 x 2.5GbE LAN 2 x USB 3.2 Gen2 2 x USB 3.2 Gen1 1 x USB 2.0 1 x HDMI output 1 x 12V DC Jack 1 x Power button 1 x Reset button 1 x AT/ATX switch	2 x RS-232 by DB9 2 x RS-232/422/485 by DB9 2 x 2.5GbE LAN 2 x USB 3.2 Gen2 2 x USB 3.2 Gen1 1 x USB 2.0 1 x HDMI output 1 x 12V DC Jack 1 x Power button 1 x Reset button 1 x AT/ATX switch	2 x RS-232 by DB9 2 x RS-232/422/485 by DB9 2 x 2.5GbE LAN 2 x USB 3.2 Gen2 2 x USB 3.2 Gen1 1 x USB 2.0 1 x HDMI output 1 x 12V DC Jack 1 x Power button 1 x Reset button 1 x AT/ATX switch	2 x RS-232 by DB9 2 x RS-232/422/485 by DB9 2 x 2.5GbE LAN 2 x USB 3.2 Gen2 2 x USB 3.2 Gen1 1 x USB 2.0 1 x HDMI output 1 x 12V DC Jack 1 x Power button 1 x Reset button 1 x AT/ATX switch	
Wireless & Bluetooth		IEEE 802.11ax 2T2R module (Wi-Fi 6E) with BT v5.2 (M.2 2230 E-key)				
Physical	Mounting	VESA 100, Wall, Stand and Arm	VESA 100, Wall, Stand and Arm	VESA 100, Wall, Stand and Arm	VESA 100, Wall, Stand and Arm	
	Construction Material	Aluminum front cover and sheet metal rear cover				
	Enclosure Color	Silver+Black	Silver+Black	Silver+Black	Silver+Black	
	TPM	Intel® Platform Trust Technology	Intel® Platform Trust Technology	Intel® Platform Trust Technology	Intel® Platform Trust Technology	
	Watchdog Timer	Software Programmable support 1~255 sec. system reset				
Environment	Operating Temperature (with air flow)	-10°C ~ 50°C				
	Storage Temperature	-20°C ~ 60°C				
	Humidity	10% ~ 95%@40°C, non-condensing				
	IP Level	IP 64 compliant front panel				
	Operation Vibration	MIL-STD-810G 514.6C-1(with SSD)				
	Operation Shock	Half-sine wave shock 5G; 11ms; 100 shocks per axis				
	Dimensions (H x W x D) (mm)	243.56 x 166.20 x50.95	280.36 x 220.92 x 57.80	295.72 x 197.80 x 57.80	327.70 x 203.33 x 57.80	
	Net Weight	1.66kg	2.38kg	2.39kg	2.56kg	
	Safety and EMC	CE, FCC Class A, UKCA	CE, FCC Class A, UKCA	CE, FCC Class A, UKCA	CE, FCC Class A, UKCA	
	Thermal	Fanless	Fanless	Fanless	Fanless	
	Power	Power Requirement	12V DC	12V DC	12V DC	12V DC
		Power Consumption	12V @ 4.819A (Intel® Core i7-1270PE with 8GB memory)	12V @ 5.853A (Intel® Core i7-1270PE with 8GB memory)	12V @ 4.960A (Intel® Core i7-1270PE with 8GB memory)	12V @ 5.063A (Intel® Core i7-1270PE with 8GB memory)
ErP		ErP 2009/125/EC	ErP 2009/125/EC	ErP 2009/125/EC	ErP 2009/125/EC	
Supported OS		Windows 10/11 IoT, Linux	Windows 10/11 IoT, Linux	Windows 10/11 IoT, Linux	Windows 10/11 IoT, Linux	

AFL series

intel
13th/12th Gen
Intel® Core™



LCD Size		15.6"	18.5"	21.5"
Model		AFL3-W15C-ADLP	AFL3-W19C-ADLP	AFL3-W22C-ADLP
LCD	Resolution	1920 x 1080 (16:9)	1920 x 1080 (16:9)	1920 x 1080 (16:9)
	Brightness (cd/m²)	450	350	350
	Contrast Ratio	800:1	1200:1	1000:1
	Viewing Angle (H-V)	178°/178°	170°/170°	178°/178°
	Backlight MTBF	50,000 hours	50,000 hours	50,000 hours
Touch	Touch Screen	PCAP with USB interface (anti-UV/AG coating)		
	Touch Controller	EXC3160		
Mainboard	Ethernet	LAN1: Intel® I226 LM (support Intel AMT) LAN2: Intel® I226V		
	RAM	Two 260-pin 3200 MHz dual-channel DDR4 SO-DIMM (8GB pre-installed) (up to 64GB)		
	SoC	12/13th Gen Intel® Core™ Mobile i7/i5/i3 Processors (Alder Lake-P/Raptor Lake-P)		
	Audio Codec	ALC888S	ALC888S	ALC888S
	Storage	1 x 2.5" SATA 6Gb/s HDD bay	1 x 2.5" SATA 6Gb/s HDD bay	1 x 2.5" SATA 6G/s HDD bay
	Expansion	2 x M.2 2280 M-key (PCIe Gen4x4) 1 x M.2 3080 B-key (PCIe x1 or SATA) support IPMI function		
	I/O Ports & Switch	1 x RS-232 by DB9 1 x RS-232/422/485 w/ AFC by DB9 2 x 2.5GbE LAN 1 x RJ45 for IPMI 4 x USB 3.2 Gen1 1 x HDMI output	1 x 12V DC jack 1 x Power button 1 x Reset button 1 x Clear CMOS button 1 x AT/ATX switch	
Audio		AMP 3W + 3W (internal speaker)		
Camera / Microphone		2-megapixel with low light function, digital microphone		
Wireless & Bluetooth		IEEE 802.11ax 2T2R module (Wi-Fi 6E) with BT v5.2 (M.2 2230 E-key)		
Physical	Construction Front Panel	PC + ABS Plastic		
	Mounting	VESA 75 /100mm		
	Color	Black C		
Environment	Operating Temperature (Ambient with air flow)	0°C ~ 50°C		
	Storage Temperature (°C)	-20°C ~ 60°C		
	Humidity	10 ~ 90RH@40°C (non-condensing)		
	IP Level	IP 64 compliant front panel		
	Dimensions (H x W x D) (mm)	395.5 x 249.8 x 69.4	469.6 x 289.6 x 70.0	530.0 x 337.95 x 69.50
	Net Weight	4.22kg	6.79kg	7.83kg
	Safety&EMC	CE, FCC (Class A) , UKCA		
	Thermal	Fanless		
Power	Power Requirement	12V DC	12V DC	12V DC
	Power Consumption	12V@6.46A (Intel® Core i7-1270PE With 8GB DDR4 Memory)	12V@7.1A (Intel® Core i7-1270PE With 8GB DDR4 Memory)	12V@8.07A (Intel® Core i7-1270PE With 8GB DDR4 Memory)
ErP		ErP 2009/125/EC		
Supported OS		Microsoft Windows® 10/11 IoT, Linux		

AFL series

intel
Intel® Celeron®
processor



LCD Size		7"	8"	10.1"
Model		AFL4-W07-EHL	AFL4-W08-EHL	AFL4-W10-EHL
LCD	Resolution (WxH)	1024 x 600 (16:9)	1280 x 800 (16:10)	1280 x 800 (16:10)
	Brightness (cd/m²)	450	420	350
	LCD Color	16.2M	16.7M	16.7M
	Pixel Pitch (mm)	0.1506 x 0.1432	0.135 x 0.135	0.1695 x 0.1695
	Contrast Ratio	800:1	800:1	900:1
	Viewing Angle (H-V)	170°/170°	170°/170°	170°/170°
	Backlight MTBF	20,000 hours	30,000 hours	30,000 hours
Touch	Touch Screen	PCAP with USB interface (Anti-UV/AG coating)		
	Touch Controller	EETI EXC 81 Series	EETI EXC 81 Series	EETI EXC 81 Series
Mainboard	SoC	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz / TDP 10W	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz / TDP 10W	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz / TDP 10W
	RAM	Dual channel 8GB LPDDR4x on board (up to 16GB)		
	Ethernet	LAN1: Intel® I226V 2.5GbE controller	LAN1: Intel® I226-V 2.5GbE controller	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller
	Audio Codec	Realtek ALC888S	Realtek ALC888S	Realtek ALC888S
	Storage	128G eMMC (optional)	128G eMMC (optional)	
	Expansion	1 x M.2 M key 2242 (PCIe Gen3 x1 or SATA)	1 x M.2 2242 M key (PCIe Gen3 x1 + SATA)	1 x M.2 M key 2242 (PCIe Gen3 x1 or SATA) 1 x M.2 M key 2280 (PCIe Gen3 x2)
	I/O Ports & Switch	2 x RS-232/422/485 by DB9 1 x 2.5GbE LAN 2 x USB 3.2 Gen2 1 x USB2.0 1 x HDMI output 1 x 12V DC Jack 1 x Power button 1 x Reset button 1 x AT/ATX switch		2 x RS-232 by DB9 2 x RS-232/422/485 by DB9 2 x 2.5GbE LAN 2 x USB 3.2 Gen1 3 x USB 2.0 1 x HDMI output 1 x 12V DC jack 1 x Power button 1 x Reset button 1 x AT/ATX switch
Audio		AMP 1.2W (internal speaker)	AMP 1.2 W (internal speaker)	AMP 1.2W (internal speaker)
Wireless & Bluetooth		IEEE 802.11ax 2T2R module (Wi-Fi 6E) with BT v5.2 (M.2 2230 A Key)	IEEE 802.11 a/b/g/n/ax, Bluetooth V5.2 1 x M.2 2230 A Key Slot (PCIe + USB signal)	IEEE 802.11ax 2T2R module (Wi-Fi 6E) with BT v5.2 (M.2 2230 A Key)
Physical	Body Material	Aluminum die casting+SECC	Aluminum die casting+SECC	Aluminum die casting+SECC
	Mounting	Wall, Stand, ARM, VESA 75	Wall, Stand, ARM, VESA 75	Wall, Stand, Arm, VESA 75/100
	Color	Silver+Black	Silver+Black	Silver+Black
Environment	Operating Temperature (°C)	-10°C ~ 40°C	-10°C ~ 50°C	-10°C ~ 50°C
	Storage Temperature (°C)	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C
	Humidity	10% to 95%@40°C (non-condensing)	10% to 90%@40°C (non-condensing)	10% to 95%@40°C (non-condensing)
	Safety&EMC	CE/EMC, UKCA, FCC, RED (Class A)	CE/EMC, UKCA, FCC, RED (Class A)	CE/EMC, UKCA, FCC, RED (Class A)
	Thermal Solution	Fanless	Fanless	Fanless
	Power	12V DC	12V DC	12V DC
	IP Level	Front Panel Compliance IP64	Front panel IP64	Front Panel Compliance IP64
	Net Weight	0.740 kg	0.980kg	1.370 kg
ErP		ErP 2009/125/EC	ErP 2009/125/EC	ErP 2009/125/EC
Supported OS		Windows 10/11 IoT/Linux	Windows 10/11 IoT/Linux	Windows 10/11 IoT / Linux

AFL series

intel
Intel® Celeron®
processor



LCD Size		12.1"	12.1"	13.3"	15.6"
Model		AFL4-12-EHL	AFL4-W12-EHL	AFL4-W13-EHL	AFL4-W15-EHL
LCD	Resolution (WxH)	1024 x 768 (4:3)	1280 x 800 (16:10)	1920 x1080 (16:9)	1920 x1080 (16:9)
	Brightness (cd/m²)	500	500	350	450
	LCD Color	16.7M	16.7M	16.7M	16.2M
	Pixel Pitch (mm)	0.24 x 0.24	0.1695 x 0.1695	0.153 x 0.153	0.179 x 0.179
	Contrast Ratio	700:1	1200:1	1000:1	800:1
	Viewing Angle (H-V)	170°/170°	170°/170°	176°/176°	178°/178°
	Backlight MTBF	30,000 hours	50,000 hours	50,000 hours	50,000 hours
	Touch Screen	PCAP with USB interface (anti-UV/AG coating)			
Touch Panel		Touch IC	EETI EXC 81 Series	EETI EXC 81 Series	EETI EXC 81 Series
Motherboard	SoC	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz / TDP 10W			Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz / TDP 10W
	RAM	Dual channel 8GB LPDDR4x on board (up to 16GB)			
	Ethernet	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226V 2.5GbE controller			LAN1: Intel® I226-V LAN2: Intel® I226-V
	Audio Codec	Realtek ALC888S			
	Expansion & Storage	1 x M.2 M key 2242 (PCIe Gen3 x1 or SATA) 1 x M.2 M key 2280 (PCIe Gen3 x2)			1 x M.2 M key 2242 (PCIe Gen3 x1 + SATA) 1 x M.2 M key 2280 (PCIe Gen3 x2)
	I/O Ports & Switch	2 x RS-232 by DB9 2 x RS-232/422/485 by DB9 2 x 2.5GbE LAN 2 x USB 3.2 Gen1 3 x USB 2.0 1 x HDMI output 1 x 12V DC jack 1 x Power button 1 x Reset button 1 x AT/ATX switch			2 x RS-232 by DB9 2 x RS-422/485 by DB9 2 x 2.5GbE RJ45 2 x USB 3.2 Gen2 3 x USB 2.0 1 x HDMI output 1 x 12V DC jack 1 x Power button 1 x Reset button 1 x AT/ATX switch
	Speaker	AMP 1.2W (internal speaker)	AMP 1.2W (internal speaker)	AMP 1.2W (internal speaker)	AMP 1.2W (internal speaker)
	Wireless & Bluetooth	IEEE 802.11ax 2T2R module (Wi-Fi 6E) with BT v5.2 (M.2 2230 A Key)			IEEE 802.11 a/b/g/n/ax, Bluetooth V5.2 1 x M.2 2230 A Key Slot (PCIe + USB signal)
Physical	Body Material	Aluminum die casting+SECC	Aluminum die casting	Aluminum die casting	Aluminum die casting+SECC
	Mounting	Wall, Stand, Arm, VESA 75/100	Wall, Stand, Arm, VESA 75/100	Wall, Stand, Arm, VESA 75/100	Wall, Stand, ARM, VESA 75/100
	Color	Silver+Black	Silver+Black	Silver+Black	Silver+Black
Environment	Operating Temperature (°C)	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C
	Storage Temperature (°C)	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C
	Humidity	10% to 95%@40°C (non-condensing)			10% to 90%@40°C (non-condensing)
	Safety&EMC	CE/EMC, UKCA, FCC, RED (Class A)			
	Thermal Solution	Fanless			
	Power Input	12V DC			
	IP Level	Front Panel Compliance IP64	Front Panel Compliance IP64	Front Panel Compliance IP64	Front panel IP64
	Net Weight	2.041 kg	2.140 kg	2.270 kg	3.04kg
ErP		ErP 2009/125/EC			
OS		Windows 10/11 IoT / Linux	Windows 10/11 IoT / Linux	Windows 10/11 IoT / Linux	Windows 10/11 IoT / Linux

AFL series

intel
Intel® Celeron®
processor



LCD Size		7"	7"	8.4"
Model		AFL3-W07A-AL	AFL3-W07A-BT	AFL3-08A-BT
LCD	Resolution	1024 x 600 (16:9)	1024 x 600 (16:9)	800 x 600 (4:3)
	Brightness (cd/m²)	500	500	350
	Contrast Ratio	700:1	700:1	600:1
	LCD Color		16.2M	16.2M
	Pixel Pitch (mm)		0.0635 (H) x 0.1905 (V)	0.213 (H) x 0.213 (V)
	Viewing Angle (H-V)	150° / 145°	150° / 145°	160° / 140°
	Backlight MTBF	20,000 hrs	20,000 hrs	50,000 hrs
Touch	Touch Screen	PCAP with USB interface (anti-UV/AG coating)	Projected capacitive with USB interface (anti-UV / anti-glare coating)	5-wire resistive with RS-232 interface (anti-glare coating) Projected capacitive with USB interface (anti-UV / anti-glare coating)
	Touch Controller	EETI 80H60	EETI EXC3160	PenMount DMC 9000/EETI EXC3146
Mainboard	CPU	Intel® Celeron® N3350 (2M Cache, up to 2.4 GHz) TDP 6W	Intel® Celeron® N2807 (dual core, 1.58 GHz)	Intel® Celeron® J1900 (quad core, 2.0 GHz)
	RAM	One 204-pin 1866MHz DDR3L DIMMs support up to 8GB	2GB DDR3L onboard RAM	One 204-pin 2 GB 1333MHz single-channel, 2GB DDR3L SO-DIMM pre-installed (system max. 8GB)
	Ethernet	LAN1: Intel® I211 + LAN2: Intel® I211	2 x PCIe GbE by RTL8111HN-CG	2 x PCIe GbE by RTL8111HN-CG controller
	Audio Codec	Realtek ALC 888S		
Storage		1 x M.2 B+M key 2242 slot (USB/SATA signal)	mSATA	mSATA
I/O Ports & Switch		2 x GbE LAN 2 x USB 3.2 Gen 1 (5Gb/s) 2 x USB 2.0 1 x 12V DC Jack 1 x Power button 1 x Reset button 1 x Clear CMOS button 1 x AT/ATX switch	2 x RS-232 COM port (DB-9 connector) 2 x USB 3.2 Gen 1 (5Gb/s) 2 x GbE LAN 1 x Power button 1 x Reset button 1 x AT/ATX switch 1 x 9-30V Lockable power jack	1 x RS-232 COM port (RJ-45 connector) 1 x RS-232/422/485 COM port (DB-9 connector) (R1/5V/12V) 2 x USB 3.2 Gen 1 (5Gb/s) 2 x RJ-45 for GbE LAN 1 x Power button 1 x Audio port (line-out) 1 x Reset button 1 x AT/ATX switch 1 x 9-30V DC Lockable power jack
PoE Support		Onboard PoE at	N/A	N/A
Audio		AMP 2W (internal speaker)	AMP 2W (internal speaker, left channel output)	AMP 2W + 2W (internal speaker)
Camera / Microphone		N/A	N/A	N/A
Wireless & Bluetooth		IEEE 802.11 a/b/g/n/ac, Bluetooth V4.2 (1 x M.2 A key 2230)	IEEE 802.11 a/b/g/n/ac / Bluetooth 4.2 half-size mini-PCIe slot (PCIe / USB signal)	
Physical	Construction Front Panel	PC + ABS Plastic		
	Mounting	Panel, Wall, Stand and Arm VESA 75mm x 75mm		
	Color	Black C		
	Dimensions (W x H x D) (mm)	191 x 127 x 43	191 x 127 x 43	233 x 175 x 50
	Cut-out Dimensions (W x H) (mm)	182 x 111	182 x 111	207 x 143
	Net/Gross Weight (kgs)	0.73/1.81	0.73/1.81	0.8/2.44
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 50°C	-20°C ~ 50°C	-15°C ~ 55°C
	Storage Temperature (°C)	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 65°C
	Humidity	10% to 95% (non-condensing)		
	IP Level	IP 65 compliant front panel	IP 65 compliant front panel	IP 64 compliant front panel
	Safety & EMC	CE / FCC class A	CE / FCC	CE / FCC
	Thermal Solution	Fanless		
	Power Requirement	12V/3A	9 V ~ 30 V DC	9 V ~ 30 V DC
Power	Power Consumption		12V@2.08 (Intel® N2807 CPU with 2GB 1333 MHz DDR3L memory)	12V@2A (Intel® J1900 CPU with 2GB 1333 MHz DDR3L memory)
	ErP	ErP 2009/125/EC		

AFL series

intel
Intel® Celeron®
processor



LCD Size		10.1"	12.1"
Model		AFL3-W10A-BT	AFL3-12A-BT
LCD	Size	10.1"	12.1"
	Resolution	1280 x 800 (16:10)	1024 x 768 (4:3)
	Brightness (cd/m²)	350	500
	Contrast Ratio	800:1	700:1
	LCD Color	16.2M	16.2M
	Pixel Pitch (mm)	0.1695 (H)×0.1695 (V)	0.240 (H) x 0.240 (V)
	Viewing Angle (H-V)	170° / 170°	160° / 140°
	Backlight MTBF(hrs)	15000 hrs	50000 hrs
Touch	Touch Screen	Projected capacitive with USB interface (anti-UV / anti-glare coating)	5-wire resistive with RS-232 interface (anti-glare coating) Projected capacitive with USB interface (anti-UV / anti-glare coating)
	Touch Controller	EETI EXC3146	PenMount DMC9000/ EETI EXC3146
Motherboard	CPU	Intel® Celeron® J1900 (quad core, 2.0 GHz)	
	RAM	One 204-pin 2 GB 1333MHz single-channel, 2GB DDR3L SO-DIMM pre-installed (system max. 8GB)	
	Ethernet	2 x PCIe GbE by RTL8111HN-CG controller	
	Audio Codec	Realtek ALC 888S	
Storage		1 x mSATA	1 x mSATA 1 x 2.5" SATA 3Gb/s HDD bay
I/O Ports & Switch		1 x RS-232 COM port (RJ-45 connector) 1 x RS-232/422/485 COM port (DB-9 connector)(RI/5V/12V) 2 x USB 3.2 Gen 1 (5Gb/s) 2 x USB 2.0 2 x RJ-45 for GbE LAN 1 x Power button 1 x Audio port (line-out) 1 x Reset button 1 x AT/ATX switch 1 x 9-30V DC lockable power jack	1 x RS-232 COM port (RJ-45 connector) 1 x RS-232/422/485 COM port (DB-9 connector)(RI/5V/12V) 2 x USB 3.2 Gen 1 (5Gb/s) 2 x USB 2.0 2 x RJ-45 for GbE LAN 1 x Power button 1 x Audio port (line-out) 1 x Reset button 1 x AT/ATX switch 1 x 9-30V lockable power jack
Audio		AMP 2W + 2W (internal speaker)	AMP 3W + 3W (internal speaker)
Camera and Microphone		2-megapixel with low light function, digital microphone	
Wireless		IEEE 802.11 a/b/g/n/ac / Bluetooth 4.2 half-size mini-PCIe slot (PCIe / USB signal)	IEEE 802.11a/b/g/n/ac half-size mini-PCIe slot (PCIe signal)
OSD Function		Software OSD	
Physical	Front Panel Construction	PC + ABS Plastic	
	Mounting	Panel, Wall, Stand, Arm, Rack VESA 75mm x 75mm	Panel, Wall, Rack, Stand and Arm VESA 75mm x 75mm / 100mm x 100mm
	Color	Black C	
	Dimensions (WxHxD) (mm)	262 x 181 x 42	304 x 243 x 44
	Cut-out Dimensions (WxH) (mm)	236 x 149	243 x 205
	Net/Gross Weight (kgs)	1.06/2.58	1.92/3.95
Environment	Operating Temperature (Ambient with air flow)	-10°C ~ 50°C	-20°C ~ 50°C
	Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
	Humidity	10% to 95% (non-condensing)	
	IP Level	IP 64 compliant front panel	
	Safety & EMC	CE / FCC	
	Thermal Solution	Fanless	
Power	Power Requirement	9 V ~ 30 V DC	
	Power Consumption	12V@2.3A (Intel® J1900 CPU with 2GB 1333 MHz DDR3L memory)	12V@3.58A (Intel® J1900 CPU with 2GB 1333 MHz DDR3L memory)

PPC series

High-Performance Panel PCs

The PPC 2 series Panel PCs are designed for heavy-duty industrial tasks needing strong computing capabilities. They feature Intel® Core™ processors, Intel® UHD Graphics, and a PCIe slots, which boost their functionality. With energy optimization, these PCs excel in various applications such as edge AI, industrial automation, and machine vision.

intel
14th/13th/12th Gen
Intel® Core™



LCD Size		15"	15.6"	17"
Model		PPC2-C15-ADL	PPC2-CW15-ADL	PPC2-C17-ADL
Max. Resolution		1024 x 768 (4:3)	1920 x 1080 (16:9)	1280 x 1024 (5:4)
Brightness		400 cd/m²	450 cd/m²	350 cd/m²
Contrast Ratio		800:1	500:1	800:1
LCD Color		16.2M	16.2M	16.7M
Pixel Pitch (mm)		0.297 x 0.297	0.252 x 0.252	0.26 x 0.26
Viewing Angle (H-V)		160°/150°	170°/160°	170°/160°
Backlight MTBF		70,000 hours	50,000 hours	50,000 hours
CPU		Support 12th/13th/14th Gen Intel® Core™ i9/i7/i5/i3 and Pentium® Processor (LGA1700)		
Chipset		Intel® H610		
Graphics Engine		New Intel® Xe Graphics architecture with SRIOV, Genlock		
Display Output		1 x HDMI 2.0		
Memory		1 x 8GB 3200Mhz SO-DIMM DDR4 (Max. 64GB)		
Touchscreen		Multi-point projected capacitive type Surface hardness: ≥7H		
Touch Controller		Projected capacitive type: EETI 80		
Storage		1 x 2.5" SATA HDD bay (Height limit: 7.5mm)		
Ethernet		LAN1: Intel® I225 + LAN2: Intel® I225		
Expansion		1 x PCIe Gen4 x16 slot with x16 signal 1 x M.2 E-Key 2230 (PCIe Gen3 x1 + CNVlo + USB 2.0) 1 x M.2 M Key 2242/2280 NVMe (PCIe Gen3 x4)		
Mounting		VESA 100mm x 100mm Panel, Wall, Rack, Stand and Arm		
Construction Material		Aluminum front cover and sheet metal rear cover		
Enclosure Color		Black C		
I/O Ports, Switches and Buttons		1 x HDMI 2.0 2 x 2.5GbE RJ45 2 x USB 2.0 (Type-A) 2 x USB 3.2 Gen1 (Type-A) (5Gb/s) 2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 1 x RS-232/422/485 (RS-485 support AFC)	4 x RS-232 1 x AC input 1 x Power switch 1 x Clear CMOS button 1 x Reset button 1 x AT/ATX switch	
Power Supply		AC input ATX power supply 250W power supply - Input: 100V~240V AC, 47Hz-63Hz - Output (max.): 3.3V@6A, 5V@12A, 12V@17A, -12V@0.5A,+5Vsb@2A Support AT/ATX mode, ErP/EuP Compliant		
Thermal Solution		Smart fan (2 x CPU fan, 2 x System fan)		
TPM		Intel® Platform Trust Technology		
Watchdog Timer		Software Programmable Support 1~255 sec. system reset		
Operating Temperature (with air flow)		-10°C ~ 60°C		
Storage Temperature		-20°C ~ 60°C		
Humidity		10% ~ 95%@40, non-condensing		
IP Level		IP 65 compliant front panel		
Operating Vibration		MIL-STD-810G 514.6C-1 (with SSD)		
Operating Shock		Half-sine wave shock 5G; 11ms; 100 shocks per axis		
Safety and EMC		CE, FCC Class A, UKCA		
ErP		ErP 2009/125/EC		
Dimensions (H x W x D) (mm)		378.5 x 303 x 76.16	400.70 x 253.90 x 86.45	408.40 x 341.40 x 84.70
Net Weight		5.715 kg	5.64 kg	5.73 kg

PPC series

intel
14th/13th/12th Gen
Intel® Core™



LCD Size	18.5"	19"	21.5"
Model	PPC2-CW19-ADL	PPC2-C19-ADL	PPC2-CW22-ADL
Max. Resolution	1920 x 1080 (16:9)	1280 x 1024 (5:4)	1920 x 1080 (16:9)
Brightness	350 cd/m²	450 cd/m²	350 cd/m²
Contrast Ratio	1000:1	1000:1	1000:1
LCD Color	16.7M	16.7M	16.7M
Pixel Pitch (mm)	0.3 x 0.3	0.294 x 0.294	0.3 x 0.3
Viewing Angle (H-V)	170°/160°	170°/160°	170°/160°
Backlight MTBF	50,000 hours	50,000 hours	50,000 hours
CPU	Support 12th/13th/14th Gen Intel® Core™ i9/i7/i5/i3 and Pentium® Processor		
Chipset	Intel® H610		
Graphics Engine	New Intel® Xe Graphics architecture with SRIOV, Genlock		
Display Output	1 x HDMI 2.0		
Memory	1 x 8GB 3200Mhz SO-DIMM DDR4 (Max. 64GB)		
Touchscreen	Multi-point projected capacitive type Surface hardness: ≥7H		
Touch Controller	Projected capacitive type: EETI 80		
Storage	1 x 2.5" SATA HDD bay		
Ethernet	LAN1: Intel® I225 + LAN2: Intel® I225		
Expansion	1 x PCIe Gen4 x16 slot with x16 signal 1 x M.2 E-Key 2230 (PCIe Gen3 x1 + CNVio + USB 2.0) 1 x M.2 M Key 2242/2280 NVMe (PCIe Gen3 x4)		
Mounting	VESA 100mm x 100mm Panel, Wall, Rack, Stand and Arm		
Construction Material	Aluminum front cover and sheet metal rear cover		
Enclosure Color	Black C		
I/O Ports, Switches and Buttons	1 x HDMI 2.0 2 x 2.5GbE RJ45 2 x USB 2.0 (Type-A) 2 x USB 3.2 Gen1 (Type-A) (5Gb/s) 2 x USB 3.2 Gen2 (Type-A) (10Gb/s) 1 x RS-232/422/485 (RS-485 support AFC)	4 x RS-232 1 x AC input 1 x Power switch 1 x Clear CMOS button 1 x Reset button 1 x AT/ATX switch	
Power Supply	AC input ATX power supply 250W power supply - Input: 100V~240V AC, 47Hz-63Hz - Output (max.): 3.3V@6A, 5V@12A, 12V@17A, -12V@0.5A,+5Vsb@2A Support AT/ATX mode ErP/EuP Compliant		
Thermal Solution	Smart fan (2 x CPU fan, 2 x System fan)		
TPM	Intel® Platform Trust Technology		
Watchdog Timer	Software Programmable Support 1~255 sec. system reset		
Operating Temperature (with air flow)	-10°C ~ 60°C	-10°C ~ 60°C	-10°C ~ 50°C
Storage Temperature	-20°C ~ 60°C		
Humidity	10% ~ 95%@40, non-condensing		
IP Level	IP 65 compliant front panel		
Operating Vibration	MIL-STD-810G 514.6C-1 (with SSD)		
Operating Shock	Half-sine wave shock 5G; 11ms; 100 shocks per axis		
Safety and EMC	CE, FCC Class A, UKCA		
ErP	ErP 2009/125/EC		
Dimensions(H x W x D) (mm)	468.80 x 288.20 x 82	447.4 x 372.4 x 82.2	550.40 x 358.40 x 81.66
Net Weight	6.965 kg	7.66 kg	8.205 kg

PPC series

intel
4th Gen Intel® Core™



LCD Size	17"	
Model	PPC-F17A-H81	
LCD	LCD Display	17" (5:4)
	Max. Resolution	1280 (W) x 1024 (H)
	Brightness (cd/m²)	350
	Contrast Ratio	800 : 1
	LCD Color	16.7M
	Pixel Pitch (mm)	0.26 x 0.26
	Viewing Angle (H-V)	170° / 160°
	Backlight MTBF (hrs)	50000
Motherboard	SBC Model	FPPCMB-H81-R10
	CPU	LGA1150 Intel® 4th generation Core™ i7/i5, Pentium® or Celeron® processor with up to 65W TDP
	Chipset	Intel® H81
	RAM	Support 2 x 204-pin 1066/1333/1600 MHz dual-channel DDR3 SO-DIMM slots (max. 16GB)
Touch	Touchscreen & Controller	5-wire resistive single touch window, 3H/Penmount 9000 (Anti-glare Surface) 10-point Projected capacitive touch window, 6H/EETI EXC3188 (Anti-UV, Anti-glare Surface)
Input Interfaces	I/O Ports & Switch	2 x RJ-45 LAN Port 2 x USB 3.2 Gen 1 (5Gb/s) 4 x USB 2.0 1 x HDMI output 4 x RS-232 1 x RS-422/485 1 x MIC-in 1 x Line-out
	Expansion	1 x Full-size/half-size PCIe Mini card (PCIe and USB signal) 1 x Full-size/half-size PCIe Mini card (PCIe , USB and mSATA signal)
Wireless LAN		802.11 b/g/n (optional)
Storage		1 x 2.5" HDD/SSD drive bay 1 x mSATA
Physical	Construction Material	Aluminum front cover and sheet metal rear cover
	Mounting	Panel mount, rack mount, 100x100 VESA mount
	Enclosure Color	Black C
	Dimensions (mm)	341.4 x 408.4 x 73.8
	Cutout Dimensions (mm)	323 x 390
	Net/ Gross Weight (kg)	7.5/10.7
Environment	Operating Temperature (with air flow)	-10°C ~ 50°C
	Storage Temperature	-20°C ~ 60°C
	Humidity	10% to 95% (non-condensing)
	IP Level	Front IP 65
	Safety and EMC	CE & FCC certified
Power Supply	AC Input	AC input ATX power supply - P/N: 63030-010220-100-RS - 220W power supply - Input: 90VAC-264VAC, 50/60Hz - Output (max.): 3.3V@10A, 5V@14A, 12V@14A, -12V@0.3A
Power Consumption		100W

PPC series

intel
13th/12th Gen
Intel® Core™



LCD Size	10.4"		12.1"	13.3"
Model	PPC2-C104-ADLP		PPC2-C121-ADLP	PPC2-CW133-ADLP
Resolution (WxH)	800 x 600 (4:3)		1024 x 768 (4:3)	1920 x 1080 (16:10)
Brightness	400 cd/m²		500 cd/m²	350
Contrast Ratio	700:1		1000:1	1000:1
LCD Color	16.2M		16.2M	16.7M
Viewing Angle (H-V)	160°/140°		178°/178°	176°/176°
Backlight MTBF	30,000 hours		30,000 hours	30,000 hours
CPU (SoC)	Support 12th/13th Generation Intel® Alder Lake-P Core™ i7/i5/i3 Processor			
Memory	On-board dual-channel LPDDR4x 8GB (system max. 32GB)			
Touchscreen	PCAP with USB interface (anti-UV/AG coating)			
Touch Controller	Surface hardness: ≥7H Projected capacitive type: EETI 80			
Ethernet	LAN1: Intel® I225V/I226V 2.5GbE controller LAN2: Intel® I225-LM/I226-LM 2.5GbE controller (support Intel® AMT)			
Expansion	1 x M.2 M key 2242 (PCIe Gen4 x4) 1 x M.2 M key 2280 (PCIe Gen4 x4)			
Mounting	VESA 100, Panel, Wall, Rack, Stand and Arm			
Construction Material	Aluminum front cover and sheet metal rear cover			
Enclosure Color	Silver+Black			
I/O Ports & Switch	2 x RS-232 by DB9 1 x HDMI output 2 x USB 3.2 Gen2 2 x RS-232/422/485 by DB9 1 x 12V DC jack 2 x USB 3.2 Gen1 2 x 2.5GbE LAN 1 x Power button 1 x USB 2.0 1 x Reset button 1 x AT/ATX switch	2 x RS-232 by DB9 1 x HDMI output 2 x USB 3.2 Gen2 2 x RS-232/422/485 by DB9 1 x 12V DC jack 2 x USB 3.2 Gen1 2 x 2.5GbE LAN 1 x Power button 1 x USB 2.0 1 x Reset button 1 x AT/ATX switch	2 x RS-232 by DB9 1 x HDMI output 2 x USB 3.2 Gen2 2 x RS-232/422/485 by DB9 1 x 12V DC jack 2 x USB 3.2 Gen1 2 x 2.5GbE LAN 1 x Power button 1 x USB 2.0 1 x Reset button 1 x AT/ATX switch	2 x RS-232 by DB9 1 x HDMI output 2 x USB 3.2 Gen2 2 x RS-232/422/485 by DB9 1 x 12V DC jack 2 x USB 3.2 Gen1 2 x 2.5GbE LAN 1 x Power button 1 x USB 2.0 1 x Reset button 1 x AT/ATX switch
Thermal Solution	Fanless			
Power Input	12V DC			
Power Consumption	12V@4.72A (Intel® Core™ i7-1270PE with 8GB LPDDR4)	12V@5.09A (Intel® Core™ i7-1270PE with 8GB LPDDR4)	12V@5.12A (Intel® Core™ i7-1270PE with 8GB LPDDR4)	
TPM	Intel® Platform Trust Technology			
Watchdog Timer	Software Programmable support 1~255 sec. system reset			
Operating Temperature (with air flow)	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C	
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C	
Humidity	10% ~ 95%@40°C, non-condensing			
IP Level	IP65 compliant front panel			
Safety and EMC	CE, FCC Class A, UKCA			
Operation Vibration	MIL-STD-810G 514.6C-1(with SSD)			
Operation Shock	Half-sine wave shock 5G; 11ms; 100 shocks per axis			
Dimensions (H x W x D) (mm)	285.20 x 232.40 x 57.50	322.20 x 262.20 x 59.8	327.70 x 203.33 x 69.6	
Net Weight	2.56 kg	2.97 kg	1.935 kg	
ErP	ErP 2009/125/EC			
OS	Windows 10/11 IoT, Linux			

PPC series

intel
13th/12th Gen
Intel® Core™



LCD Size	15"		15.6"	17"
Model	PPC2-C150-ADLP		PPC2-CW156-ADLP	PPC2-C170-ADLP
Resolution (WxH)	1024 x 768 (4:3)		1920 x1080 (16:9)	1280 x 1024 (5:4)
Brightness	400 cd/m²		450 cd/m²	350 cd/m²
Contrast Ratio	800:1		800:1	800:1
LCD Color	16.2M		16.2M	16.7M
Viewing Angle (H-V)	176°/176°		178°/178°	170°/160°
Backlight MTBF	70,000 hours		50,000 hours	50,000 hours
CPU (SoC)	Support 12th/13th Generation Intel® Alder Lake-P Core™ i7/i5/i3 Processor			
Memory	On-board dual-channel LPDDR4x 8GB (system max. 32GB)			
Touchscreen	PCAP with USB interface (anti-UV/AG coating)			
Touch Controller	Surface hardness: ≥7H Projected capacitive type: EETI 80			
Ethernet	LAN1: Intel® I225V/I226V 2.5GbE controller LAN2: Intel® I225-LM/I226-LM 2.5GbE controller (support Intel® AMT)			
Expansion	1 x M.2 M key 2242 (PCIe Gen4 x4) 1 x M.2 M key 2280 (PCIe Gen4 x4)			
Mounting	VESA 100, Panel, Wall, Rack, Stand and Arm			
Construction Material	Aluminum front cover and sheet metal rear cover			
Enclosure Color	Silver+Black			
I/O Ports, Switch	2 x RS-232 by DB9 1 x HDMI output 2 x USB 3.2 Gen2 2 x RS-232/422/485 by DB9 1 x 12V DC Jack 2 x USB 3.2 Gen1 2 x 2.5GbE LAN 1 x Power button 1 x USB 2.0 1 x Reset button 1 x AT/ATX switch	2 x RS-232 by DB9 1 x HDMI output 2 x USB 3.2 Gen2 2 x RS-232/422/485 by DB9 1 x 12V DC Jack 2 x USB 3.2 Gen1 2 x 2.5GbE LAN 1 x Power button 1 x USB 2.0 1 x Reset button 1 x AT/ATX switch	2 x RS-232 by DB9 1 x HDMI output 2 x USB 3.2 Gen2 2 x RS-232/422/485 by DB9 1 x 12V DC Jack 2 x USB 3.2 Gen1 2 x 2.5GbE LAN 1 x Power button 1 x USB 2.0 1 x Reset button 1 x AT/ATX switch	2 x RS-232 by DB9 1 x HDMI output 2 x USB 3.2 Gen2 2 x RS-232/422/485 by DB9 1 x 12V DC Jack 2 x USB 3.2 Gen1 2 x 2.5GbE LAN 1 x Power button 1 x USB 2.0 1 x Reset button 1 x AT/ATX switch
Thermal Solution	Fanless			
Power Input	12V DC			
Power Consumption	12V@5.56A (Intel® Core™ i7-1270PE with 8GB LPDDR4)	12V@5.86A (Intel® Core™ i7-1270PE with 8GB LPDDR4)	12V@4.63A (Intel® Core™ i7-1270PE with 8GB LPDDR4)	
TPM	Intel® Platform Trust Technology			
Watchdog Timer	Software Programmable support 1~255 sec. system reset			
Operating Temperature (with air flow)	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C	
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C	
Humidity	10% ~ 95%@40°C, non-condensing			
IP Level	IP65 compliant front panel			
Safety and EMC	CE, FCC Class A, UKCA			
Operation Vibration	MIL-STD-810G 514.6C-1(with SSD)			
Operation Shock	Half-sine wave shock 5G; 11ms; 100 shocks per axis			
Dimensions (H x W x D) (mm)	375.80 x 303.00 x 61.00	400.10 x 253.30 x 66.25	408.40 x 341.40 x 66.00	
Net Weight	4.125 kg	3.89 kg	4.890 kg	
ErP	ErP 2009/125/EC			
OS	Windows 10/11 IoT, Linux			

PPC series

intel
13th/12th Gen
Intel® Core™



LCD Size	18.5"		19"	21.5"
Model	PPC2-CW185-ADLP		PPC2-C19-ADLP	PPC2-CW215-ADLP
Resolution (WxH)	1920 x 1080 (16:9)		1280 x1024 (5:4)	1920 x 1080 (16:9)
Brightness	350 cd/m²		450 cd/m²	350 cd/m²
Contrast Ratio	1000:1		1000:1	1000:1
LCD Color	16.2M		16.2M	16.7M
Viewing Angle (H-V)	170°/170°		178°/178°	178°/178°
Backlight MTBF	50,000 hours		50,000 hours	50,000 hours
CPU (SoC)	12th/13th Generation Intel® Core™ i Processors (Alder Lake-P & Raptor Lake-P) Intel® Core™ i7-1370PE (up to 4.8GHz,14-core,28W TDP) Intel® Core™ i5-1340PE (up to 4.5GHz,12-core,28W TDP) Intel® Core™ i3-1320PE (up to 4.5GHz,8-core,28W TDP)			
Memory	On-board dual-channel LPDDR4x 8GB (system max. 32GB)			
Touchscreen	PCAP with USB interface (anti-UV/AG coating)			
Touch Controller	Surface hardness: ≥7H Projected capacitive type: EETI 80			
Ethernet	LAN1: Intel® I226V 2.5GbE controller LAN2: Intel® I226-LM 2.5GbE controller (support Intel® AMT)			
Expansion	1 x M.2 M key 2242 (PCIe Gen4 x4) 1 x M.2 M key 2280 (PCIe Gen4 x4)			
Mounting	VESA 100, Panel, Wall, Rack, Stand and Arm			
Construction Material	Aluminum front cover and sheet metal rear cover			
Enclosure Color	Silver+Black			
I/O Ports & Switch	2 x RS-232 by DB9 1 x HDMI output 2 x USB 3.2 Gen2 2 x RS-232/422/485 by DB9 1 x 12V DC jack 2 x USB 3.2 Gen1 2 x 2.5GbE LAN 1 x Power button 1 x USB 2.0 1 x Reset button 1 x AT/ATX switch			
Thermal Solution	Fanless			
Power Input	12V DC			
Power Consumption	12V@3.73A (Intel® Core i7-1270PE With 8GB LPDDR4 Memory)		12V@6.03A (Intel® Core™ i7-1270PE with 8GB LPDDR4)	12V@5.87A (Intel® Core™ i7-1270PE with 8GB LPDDR4)
TPM	Intel® Platform Trust Technology			
Watchdog Timer	Software Programmable support 1~255 sec. system reset			
Operating Temperature (with air flow)	-10°C ~ 50°C		-10°C ~ 50°C	-10°C ~ 50°C
Storage Temperature	-20°C ~ 60°C		-20°C ~ 60°C	-20°C ~ 60°C
Humidity	10% ~ 95%@40°C, non-condensing			
IP Level	IP65 compliant front panel			
Safety and EMC	CE, FCC Class A, UKCA			
Operation Vibration	MIL-STD-810G 514.6C-1(with SSD)			
Operation Shock	Half-sine wave shock 5G; 11ms; 100 shocks per axis			
Power Consumption	+12V @ 5.903A (Intel® Core™ i7-1260P with 8GB memory)		TBD	TBD
Dimensions (H x W x D) (mm)	469.8 x 289.2 x 69.3		447.40 x 372.4 x 67.26	550.40 x 358.4
Cutout Dimensions (mm)	447.80 x 267.20		TBD	532.60 x 340.60
Net Weight	5.885 kg		5.635 kg	6.48 kg
ErP	ErP 2009/125/EC			
OS	Microsoft® Windows 10/11 IOT;Linux			

PPC series

intel
13th/12th Gen
Intel® Core™



LCD Size	15.6"	18.5"	21.5"
Model	PPC2-CW156A-ADLP	PPC2-CW185A-ADLP	PPC2-CW215A-ADLP
Resolution (WxH)	1920 x 1080 (16:9)	1920 x 1080 (16:9)	1920 x 1080 (16:9)
Brightness	450 cd/m²	350 cd/m²	350 cd/m²
Contrast Ratio	800:1	1200:1	1000:1
LCD Color	16.2M	16.7M	16.7M
Pixel Pitch (mm)	0.179 x 0.179	0.21 x 0.21	0.248 x 0.248
Viewing Angle (H-V)	178°/178°	170°/170°	178°/178°
Backlight MTBF	50,000 hours	50,000 hours	50,000 hours
CPU (SoC)	12th/13th Genertion Intel® Alder Lake-P/ Raptor Lake-P Core™ i7/i5/i3 Processor		
Memory	Dual channel SO-DIMM DDR4-3200 (Max. 64GB) (Pre-installed 1 x 8GB)		
Storage	1 x 2.5" SSD bay		
Touchscreen	PCAP with USB interface (anti-UV/AR coating)		
Touch Controller	EETI EXC 81 Series		
Ethernet	LAN1: Intel® I226 LM(support Intel AMT) LAN2: Intel® I226V		
Expansion	2 x M.2 2280 M-key (PCIex4) 1 x M.2 3080 B-key (PCIex 1 or SATA) support IPMI function 1 x M.2 2230 E-key (PCIex 1 + USB)		
I/O Ports & Switch	1 x RS-232 by DB9 1 x RS-232/422/485/ AFC by DB9 2 x 2.5GbE LAN 1 x RJ45 for IPMI 4 x USB 3.2 Gen1 1 x HDMI output 1 x 12V DC jack 1 x Power button 1 x Reset button 1 x Clear CMOS button 1 x AT/ATX switch		
Mounting	VESA 75/100 Panel, Wall, Rack, Stand and Arm		
Construction Material	Aluminum die casting+SECC		
Enclosure Color	Black		
Power Input	12V DC		
Power Input	96W Power adapter		
Thermal	Fanless		
TPM	Intel® Platform Trust Technology		
Watchdog Timer	Software Programmable support 1~255 sec. system reset		
Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 60°C (60@50RH)		
Storage Temperature (°C)	-20°C ~ 70°C (70°C@20%RH)		
Humidity	10 ~ 90RH (40°C@90RH) (non-condensing)		
Operating Vibration	Operation: Random Vibration Mode,MIL-STD-810G 514.6C-1(With SSD) Non-OP:Sine Vibration Mode,IEC-60068-2-06		
Operating Shock	Operation: IEC68-2-27 5 G, 11ms, 100 shocks Non-OP: IEC68-2-27 15 G, 11ms, 100 shocks		
IP Level	Front panel IP65 compliant		
Safety & EMC	CE/EMC, FCC, UKCA		
Dimensions (H x W x D) (mm)	400.1 x 253.3 x 68.35	469.8 x 289.2 x 69.3	550.40 x 358.40 x 68.90
Net Weight	4.720kg	5.885 kg	7.165 kg
ErP	ErP 2009/125/EC		
OS	Microsoft® Windows 10/11 IOT Linux		

PPC series

intel
Intel® Celeron®
processor



LCD Size	8”		10.4”	12”
Model	PPC2-C08-EHL		PPC2-C10-EHL	PPC2-C12-EHL
Resolution (WxH)	800 x 600 (4:3)		800 x 600 (4:3)	1024 x 768 (4:3)
Brightness	500 cd/m²		400 cd/m²	500 cd/m²
Contrast Ratio	500:1		700:1	1000:1
LCD Color	262K		16.2M	16.2M
Pixel Pitch (mm)	0.2025 x 0.0675		0.264 x 0.264	0.24 x 0.24
Viewing Angle (H-V)	140°/120°		160°/140°	178°/178°
Backlight MTBF	50,000 hours		30,000 hours	30,000 hours
CPU (SoC)	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz / TDP 10W			
Memory	Dual channel LPDDR4x 8GB on board (up to 16GB)			
Touchscreen	Multi-point projected capacitive type (anti-UV / anti-glare coating, support gloves) Surface hardness: ≥7H			
Touch Controller	Projected capacitive type: EETI 80			
Storage	N/A		N/A	1 x 2.5" HDD/SSD drive bay
Ethernet	2 x 2.5GbE LAN via Intel I226-V			
Expansion	1 x M.2 2242/2280 B key (PCIe Gen3 x1 + USB 3.0) 1 x M.2 2242 M key (PCIe Gen3 x2)			
Mounting	VESA 75/75 mm, Panel, Wall, Stand and Arm		VESA 75/100 mm,Panel, Wall, Rack, Stand and Arm	
Construction Material	Aluminum front cover and sheet metal rear cover			
Enclosure Color	Black			
I/O Ports, Switches and Buttons	1 x HDMI output 2 x RJ-45 2.5GbE 2 x USB 3.2 Gen 2x1 (10Gb/s) 2 x USB 2.0 1 x RS-232/422/485 1 x RS-232 1 x 12V-24V power jack 1 x Power terminal block (2-pin) 1 x AT/ATX switch 1 x Power button 1 x Reset button 1 x Clear CMOS button	1 x HDMI output 2 x 2.5GbE RJ-45 2 x USB 3.2 Gen 2x1 (10Gb/s) 2 x USB 2.0 1 x RS-232/422/485 1 x RS-232 1 x 12V-24V power jack 1 x Power terminal block (2-pin) 1 x AT/ATX switch 1 x Power button 1 x Reset button 1 x Clear CMOS button PPC2-XIO-03-R10: 1 x RS-232 DB9 1 x M.2 B key 2242/2280 (PCIe Gen3 x 2 + USB 2.0)	1 x HDMI output 2 x 2.5GbE RJ-45 2 x USB 3.2 Gen 2x1 (10Gb/s) 2 x USB 2.0 1 x RS-232/422/485 1 x RS-232 1 x 12V-24V power jack 1 x Power terminal block (2-pin) 1 x AT/ATX switch 1 x Power button 1 x Reset button 1 x Clear CMOS button PPC2-XIO-01-R10: 2 x USB 2.0 2 x RS-232 DB9 1 x M.2 B key 2242/2280 (PCIe Gen3 x 2 + USB 2.0)	
Power Input	12 V ~ 24 V DC			
Power Consumption	12V @ 3.147A (Intel® Celeron J6412 with 8GB memory)	12V @ 3.179A (Intel® Celeron J6412 with 8GB memory)		12V @ 3.424A (Intel® Celeron J6412 with 8GB memory)
Power Adapter	60W power adapter			
Thermal Solution	Fanless			
TPM	Intel® Platform Trust Technology			
Watchdog Timer	Software Programmable support 1~255 sec. system reset			
Operating Temperature (with air flow)	-10°C ~ 60°C			
Storage Temperature	-20°C ~ 60°C			
Humidity	10% ~ 90%@40°C, non-condensing			
Operating Vibration	MIL-STD-810G 514.6C-1 (with SSD)			
Operating Shock	Half-sine wave shock 5G; 11ms; 100 shocks per axis			
IP Level	IP 65 compliant front panel			
Safety and EMC	CE, FCC Class A			
ErP	ErP 2009/125/EC			
Dimensions (H x W x D) (mm)	222.2 x 182.2 x 49.7	285.2 x 232.4 x 49.9		322.2 x 262.2 x 53
Cutout Dimensions (mm)	205.30 x 154.00	266.30 x 214.40		304.80 x 244.80
Net Weight	1.635kg	2.335KG		3.095KG

PPC series

intel
Intel® Celeron®
processor



LCD Size	12.3"	13.3"	15"	15.6"
Model	PPC2-CW123-EHL	PPC2-CW133-EHL	PPC2-C15-EHL	PPC2-CW15-EHL
Resolution (WxH)	1920 x 720 (8:3)	1920 x 1080 (16:9)	1024 x 768 (4:3)	1920 x 1080 (16:9)
Brightness	850 cd/cm²	350 cd/cm²	400 cd/m²	450 cd/m²
Contrast Ratio	1000:1	1000:1	2500:1	800:1
LCD Color	16.7M	16.7M	16.2M	16.2M
Pixel Pitch (mm)	0.152 x 0.152	0.153 x 0.153	0.297 x 0.297	0.252 x 0.252
Viewing Angle (H-V)	170°/170°	176°/176°	176°/176°	178°/178°
Backlight MTBF	30,000 hours	30,000 hours	70,000 hours	50,000 hours
CPU (SoC)	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz / TDP 10W			
Memory	Dual channel LPDDR4x 8GB on board (up to 16GB)			
Touchscreen	Multi-point projected capacitive type (anti-UV / anti-glare coating,support gloves) Surface hardness: ≥7H			
Touch Controller	Projected capacitive type: EETI 80			
Storage	-	-	1 x 2.5" HDD/SSD drive bay	1 x 2.5" HDD/SSD drive bay
Ethernet	2 x 2.5GbE LAN via Intel I226-V			
Expansion	1 x M.2 2242/2280 B key (PCIe Gen3 x1 + USB 3.0) 1 x M.2 2242 M key (PCIe Gen3 x2)			
Mounting	VESA 75/75 Panel, Wall, Stand and Arm	VESA 75/75 Panel, Wall, Rack, Stand and Arm	VESA 75/100 Panel, Wall, Rack, Stand and Arm	VESA 75/100 Panel, Wall, Rack, Stand and Arm
Construction Material	Aluminum front cover and sheet metal rear cover			
Enclosure Color	Black			
I/O Ports, Switches and Buttons	1 x HDMI output 2 x RJ-45 2.5GbE 2 x USB 3.2 Gen 2x1 (10Gb/s) 2 x USB 2.0 1 x RS-232/422/485 1 x RS-232 1 x 12V-24V power jack 1 x Power terminal block (2-pin) 1 x AT/ATX switch 1 x Power button 1 x Reset button 1 x Clear CMOS button	1 x HDMI output 2 x RJ-45 2.5GbE 2 x USB 3.2 Gen 2x1 (10Gb/s) 2 x USB 2.0 1 x RS-232/422/485 1 x RS-232 1 x 12V-24V power jack 1 x Power terminal block (2-pin) 1 x AT/ATX switch 1 x Power button 1 x Reset button 1 x Clear CMOS button PPC2-XIO-01-R10: 2 x USB 2.0 2 x RS-232 DB9 1 x M.2 B key 2242/2280 (PCIe Gen3 x 2 + USB 2.0)	1 x HDMI output 2 x 2.5GbE RJ-45 2 x USB 3.2 Gen 2x1 (10Gb/s) 2 x USB 2.0 1 x RS-232/422/485 1 x RS-232 1 x 12V-24V power jack 1 x Power terminal block (2-pin) 1 x AT/ATX switch 1 x Power button 1 x Reset button 1 x Clear CMOS button PPC2-XIO-04-R10: 2 x USB 2.0 3 x RS-232 1 x M.2 A Key 2230 (PCIe gen3 x 2 + USB2.0)	
Power Input	12 V ~ 24 V DC			
Power Consumption	12V @ 4.033A (Intel® Celeron J6412 with 8GB memory)	12V @ 1.887A (Intel® Celeron J6412 with 8GB memory)	12V @ 3.949A (Intel® Celeron J6412 with 8GB memory)	12V @ 3.849A (Intel® Celeron J6412 with 8GB memory)
Power Adapter	60W power adapter	60W power adapter	90W power adapter	90W power adapter
Thermal Solution	Fanless			
TPM	Intel® Platform Trust Technology			
Watchdog Timer	Software Programmable support 1~255 sec. system reset			
Operating Temperature (with air flow)	-10°C ~ 50°C	-10°C ~ 60°C	-10°C ~ 60°C	-10°C ~ 60°C
Storage Temperature	-20°C ~ 60°C			
Humidity	10% ~ 90%@40°C, non-condensing			
Operating Vibration	MIL-STD-810G 514.6C-1 (with SSD)			
Operating Shock	Half-sine wave shock 5G; 11ms; 100 shocks per axis			
IP Level	IP 65 compliant front panel			
Safety and EMC	CE, FCC Class A, UKCA	CE, FCC Class A, UKCA	CE, FCC Class A	CE, FCC Class A
ErP	ErP 2009/125/EC			
Dimensions (HxWxD)(mm)	323.43 x 147.91 x 52.50	327.70 x 203.33 x 61.50	378.5 x 303 x 53.2	400.10 x 253.30 x 63.35
Cutout Dimensions (mm)	307 x 131	306.5 x 128.13	361 x 285.6	379.10 x 232.30
Net Weight	2.03kg	2.28kg	3.895kg	3.86kg

PPC series

intel
Intel® Celeron®
processor



LCD Size	17"		19"		18.5"		21.5"	
Model	PPC2-C17-EHL		PPC2-C19-EHL		PPC2-CW19-EHL		PPC2-CW22-EHL	
Resolution (WxH)	1280 x 1024 (5:4)		1280 x 1024 (5:4)		1920 x 1080 (16:9)		1920 x 1080 (16:9)	
Brightness	350 cd/m²		450 cd/m²		350cd/m²		350cd/m²	
Contrast Ratio	800:1		1000:1		1200:1		1000:1	
LCD Color	16.7M		16.7M		16.7M		16.7M	
Pixel Pitch (mm)	0.26 x 0.26		0.294 x 0.294		0.213 x 0.213		0.248 x 0.248	
Viewing Angle (H-V)	160°/140°		178°/178°		170°/170°		178°/178°	
Backlight MTBF	50,000 hours		50,000 hours		50,000 hours		50,000 hours	
SBC Model	PPC2MB2-EHL-RC-R10+PPC2-XIO-04-R10							
CPU (SoC)	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz / TDP 10W							
Memory	Dual channel LPDDR4x 8GB on board (up to 16GB)							
Touchscreen	Multi-point projected capacitive type (anti-UV / anti-glare coating, support gloves) Surface hardness: ≥7H							
Touch Controller	Projected capacitive type: EETI 80							
Storage	1 x 2.5" HDD/SSD drive bay							
Ethernet	2 x 2.5GbE LAN via Intel I226-V							
Expansion	1 x M.2 2242/2280 B key (PCIe Gen3 x1 + USB 3.0) 1 x M.2 2242 M key (PCIe Gen3 x2)							
Mounting	VESA 75/100 Panel, Wall, Rack, Stand and Arm							
Construction Material	Aluminum front cover and sheet metal rear cover							
Enclosure Color	Black							
I/O Ports, Switches and Buttons	1 x HDMI output 2 x 2.5GbE RJ-45 2 x USB 3.2 Gen 2x1 (10Gb/s) 2 x USB 2.0 1 x RS-232/422/485 1 x RS-232 1 x 12V-24V power jack 1 x Power terminal block (2-pin) 1 x AT/ATX switch 1 x Power button 1 x Reset button 1 x Clear CMOS button PPC2-XIO-04-R10: 2 x USB 2.0 3 x RS-232 1 x M.2 A Key 2230 (PCIe gen3 x 2 + USB2.0)							
Power Input	12 V ~ 24 V DC							
Power Consumption	12V @ 4.561A (Intel® Celeron J6412 with 8GB memory)	12V @ 5.051A (Intel® Celeron J6412 with 8GB memory)	12V @ 4.397A (Intel® Celeron J6412 with 8GB memory)	12V @ 3.994A (Intel® Celeron J6412 with 8GB memory)				
Power Adapter	90W power adapter							
Thermal Solution	Fanless							
TPM	Intel® Platform Trust Technology							
Watchdog Timer	Software Programmable support 1~255 sec. system reset							
Operating Temperature (with air flow)	-10°C ~ 60°C	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C				
Storage Temperature	-20°C ~ 60°C							
Humidity	10% ~ 80%@40°C							
Operating Vibration	MIL-STD-810G 514.6C-1 (with SSD)							
Operating Shock	Half-sine wave shock 5G; 11ms; 100 shocks per axis							
IP Level	IP 65 compliant front panel							
Safety and EMC	CE, FCC Class A							
ErP	ErP 2009/125/EC							
Dimensions (H x W x D) (mm)	408.40 x 341.40 x 61.80	447.40 x 372.40 x 59.20	468.80 x 288.20 x 59.40	550.40 x 358.40 x 58.50				
Cutout Dimensions (mm)	391 x 324.6	430 x 355	447.80 x 267.20	532.60 x 340.60				
Net Weight	4.830 kg	5.745 kg	5.096 kg	6.330 kg				

PPC series

intel
Intel® Celeron®
processor



LCD Size		8"		10.4"		12"		15"		17"	
Model		PPC-F08B-BT		PPC-F10B-BT		PPC-F12B-BT		PPC-F15B-BT		PPC-F17B-BT	
LCD	Resolution (WxH)	800 x 600 (4:3)		800 x 600 (4:3)		1024 x 768 (4:3)		1024 x 768 (4:3)		1280 x 1024 (5:4)	
	Brightness (cd/m²)	500		400		600		450		350	
	Contrast Ratio	500:1		700:1		700 : 1		800 : 1		800 : 1	
	LCD Color	16.2M		16.2M		16.2M		16.2M		16.7M	
	Pixel Pitch (mm)	0.2025 (H) x 0.0675 (V)		0.264 (H) x 0.264 (V)		0.24 x 0.24		0.297 x 0.297		0.26 x 0.26	
	Viewing Angle (H-V)	140° / 120°		160° / 140°		160° / 140°		160° / 150°		170° / 160°	
	Backlight MTBF	50,000 hours		30,000 hours		50,000 hours		70,000 hours		50,000 hours	
Motherboard	CPU	Intel® Celeron® J1900 quad-core on-board SoC, 2GHz				Intel® Celeron® processor J1900 (2M cache, up to 2.42 GHz)					
	RAM	1 x 204-pin DDR3L SO-DIMM slots (max. 8GB)				2 x 204-pin DDR3L SO-DIMM slot (max. 8GB), pre-installed with 2GB					
Touch	Touchscreen & Controller	5-wire resistive type flat touchscreen, PenMount DMC9000, 3H				5-wire resistive single touch window, 3H/Penmount DMC9000 (Anti-glare Surface) 10-point Projected capacitive touch window, 6H/EETI EXC3188 (Anti-UV, Anti-glare Surface)					
Input Interfaces	I/O Ports & Switches	1 x RS-232 COM port (RJ-45 connector) 1 x RS-232/422/485 COM port (DB-9 connector) (RI/5V/12V) 2 x USB 3.2 Gen 1 (5Gb/s) 2 x GbE LAN 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Audio port (line-out) 1 x 9 V~30 V lockable power jack		1 x RS-232 COM port (RJ-45 connector) 1 x RS-232/422/485 COM port (DB9 connector) (RI/5V/12V) 2 x USB 2.0 2 x USB 3.2 Gen 1 (5Gb/s) 2 x GbE LAN 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Audio port (line-out) 1 x 9 V~30 V lockable power jack		2 x RJ-45 LAN port 2 x USB 3.2 Gen 1 (5Gb/s) 2 x USB 2.0 1 x HDMI 2 x RS-232 1 x RS-232/422/485 1 x VGA 1 x 9 V~36 V DC jack (4-pin) 1 x 9 V~36 V DC terminal block 1 x Line-out 1 x Power switch		2 x RJ-45 LAN port 2 x USB 3.2 Gen 1 (5Gb/s) 2 x USB 2.0 1 x HDMI 2 x RS-232 1 x RS-232/422/485 1 x VGA 1 x 9 V~36 V DC jack (4-pin) 1 x 9 V~36 V DC terminal block 1 x Line-out 1 x Power switch		2 x RJ-45 LAN port 2 x USB 3.2 Gen 1 (5Gb/s) 2 x USB 2.0 1 x HDMI 2 x RS-232 1 x RS-232/422/485 1 x VGA 1 x 9 V~36 V DC jack (4-pin) 1 x 9 V~36 V DC terminal block 1 x Line-out 1 x Power switch	
		1 x Full-size/half-size PCIe Mini slot (mSATA/PCIe/USB signal) 1 x Half-size PCIe Mini slot (PCIe signal only)		1 x Full-size PCIe Mini slot (mSATA/PCIe/USB signal) 1 x Full-size/half-size PCIe Mini slot (PCIe/USB signal)							
Expansion		1 x Full-size/half-size PCIe Mini slot (mSATA/PCIe/USB signal) 1 x Half-size PCIe Mini slot (PCIe signal only)				1 x Full-size PCIe Mini slot (mSATA/PCIe/USB signal) 1 x Full-size/half-size PCIe Mini slot (PCIe/USB signal)					
Wireless LAN		802.11 b/g/n (optional)				802.11 b/g/n (optional)					
Storage	SSD	mSATA		mSATA		-		-		-	
	HDD	N/A		1 x 2.5" HDD bay		-		-		-	
Physical	Mounting	Stand, panel mount, VESA 75x75		Stand, panel mount, VESA 75x75/100x100		Panel mount, rack mount, VESA 100x100					
	Enclosure Color	Black C									
	Dimensions (mm)	182.2 x 222.2 x 44		232.4 x 285.2 x 44		262.2 x 322.2 x 47.2		303 x 378.5 x 46.2		341.4 x 408.4 x 51.8	
	Net Weight	1.17 kg		1.77 kg		3.2 kg		4.1 kg		5 kg	
	Cut-out Dimensions (mm)	207 x 154		267.2 x 214.4		244.8 x 304.8		285.6 x 361		323 x 390	
Environment	Operating Temperature (with air flow)	-10°C~50°C (14°F~122°F)									
	Storage Temperature	-20°C~60°C (-4°F~140°F)									
	Humidity	10% to 95% (non-condensing)									
	IP Level	IP 65 compliant front panel									
	Safety and EMC	CE & FCC Class A certified									
Power	Power Adapter	P/N: 63040-010036-210-RS, 36W Power Adapter Input: 90 ~ 264V AC, 50/60Hz Output: 12V DC				P/N: 63040-010060-220-RS, 60W Power Adapter Input: 90 ~ 264V AC, 50/60Hz Output: 12V DC					
	Power Requirement	9 ~ 30V DC				9 V~36 V DC					
	Power Consumption	28W		34W		40W		41W		42W	

UPC series

RUGGED IP66 Industrial Panel PCs

The UPC series industrial Panel PC features all-around IP66 water and dust resistance, embedded antennas, and a fanless, sturdy aluminum housing, ideal for logistics, food and beverage, and pharmaceutical industries.



Model		UPC-F12M1-RPLP-i3/PC/8G-R10	UPC-F12-RPLP
LCD	Size	12.1" (4:3)	12.1" (4:3)
	Resolution (WxH)	1024 x 768	1024 x 768
	Brightness (cd/m²)	600	600
	LCD Color	16.7M	16.7M
	Pixel Pitch (mm)	0.24 x 0.24	0.24 x 0.24
	Contrast Ratio	1000 : 1	1000 : 1
	Viewing Angle (H-V)	178°/178°	178°/178°
	Backlight MTBF	50,000 hours	50,000 hours
Touch	Touch Screen	PCAP with USB interface (anti-UV/AG coating)	PCAP with USB interface (anti-UV/AG coating)
	Touch Controller	ILITEK: ILI2520	ILITEK: ILI2520
Motherboard	SoC	Intel® Raptor Lake-P Core™ i3-1315URE SoC Processor (15W)	Intel® Raptor Lake-P Core™ i3-1315URE SoC Processor (15W)
	RAM	Dual channel 8GB LPDDR4x on board	Dual channel 8GB LPDDR4x on board (up to 32 GB)
	Ethernet	LAN1: Intel® I226IT 2.5GbE controller LAN2: Intel® I226IT 2.5GbE controller	LAN1: Intel® I226IT 2.5GbE controller LAN2: Intel® I226IT 2.5GbE controller
	Storage	1 x M.2 M key 2280 (PCIe Gen3 x4)	1 x M.2 M key 2280 (PCIe Gen3 x4)
	Expansion	1 x M.2 B key 3042/3052/2280 (SATA & PCIe Gen3 x1 & USB 3.0) 1 x M.2 M key 2280 (PCIe Gen3 x4) 1 x M.2 2230 E key Slot (PCIe + USB signal)	1 x M.2 B key 3042/3052/2280 (SATA & PCIe Gen3 x1 & USB 3.0) 1 x M.2 M key 2280 (PCIe Gen3 x4) 1 x M.2 2230 E key Slot (PCIe + USB signal)
	Internal I/O Ports	1 x HDMI 2 x LAN (RJ45) 2 x CAN Bus (RJ45) 1 x RS-232 (RJ45) 1 x RS-232/422/485 (RJ45) 2 x USB3.2 Gen2 1 x USB3.0 1 x DIN 4pin DC jack (9~36V DC) 1 x DC-in terminal block (9~36V DC) support ACC mode	1 x HDMI 2 x LAN (RJ45) 2 x CAN Bus (RJ45) 1 x RS-232 (RJ45) 1 x RS-232/422/485 (RJ45) 2 x USB3.2 Gen2 1 x USB3.0 1 x DIN 4pin DC jack (9~36V DC) 1 x DC-in terminal block (9~36V DC) support ACC mode
	External I/O Ports	1 x 5pin M12A MALE connector for DC Jack / Terminal (9V~36V DC) 1 x 8pin M12A MALE connector for CANBUS 1 x 8pin M12A MALE connector for COM (RS-232/422/485) 1 x 8pin M12X MALE connector for GbE LAN (2.5G) 2 x 8pin M12A MALE connector for USB 2.0	-
	Connectivity	Mifare RFID reader, 13.56M Hz (optional) IEEE 802.11 a/b/g/n/ax, Bluetooth V5.2 (optional)	
Physical	Construction	Aluminum die-casting	Aluminum die-casting
	Mounting	VESA 100mm x 100mm	VESA 100mm x 100mm
	Net Weight	5kg	5kg
	Dimensions (W x L x D) (mm)	316 x 279 x 76	316 x 279 x 76
Environment	Operating Temperature (Ambient with air flow)	-20°C ~ 60°C	-20°C ~ 60°C
	Storage Temperature	-20°C ~ 70°C	-20°C ~ 70°C
	Humidity	10% to 95%@40°C (non-condensing)	10% to 95%@40°C (non-condensing)
	Operating Shock	Half-sine wave shock 5G; 11ms; 100 shocks per axis	Half-sine wave shock 5G; 11ms; 100 shocks per axis
	Operating Vibration	MIL-STD-810H 514.8C-1 (with SSD)	
	IP Level	6 side IP66	Front IP66, Back IP64 with sealing rubber
	Safety&EMC	CE/FCC/UKCA	CE/FCC
	Termal Solution	Fanless	Fanless
	Power	9 ~ 36V DC-in terminal block support ACC mode	9 ~ 36V
ErP		ErP 2009/125/EC	ErP 2009/125/EC
OS		Windows 10/11 IoT Linux	Windows 10/11 IoT Linux

SHIELD series

Stainless Steel Industrial Panel PCs

The Shield Series features a corrosion-resistant 304 stainless steel housing with fully waterproof ports. And it has longer life cycle and lower maintenance costs



Model	SHIELD-156	SHIELD-185	SHIELD-215
LCD Display	15.6"	18.5"	21.5"
Resolution	1920 (W) x 1080 (H)	1920 (W) x 1080 (H)	1920 (W) x 1080 (H)
Brightness	450 cd/m²	500 cd/m²	500 cd/m²
Contrast Ratio	800:1	1000:1	1000:1
LCD Color	16.2M	16.7M	16.7M
Pixel Pitch (mm)	0.179 (H) x 0.179 (V)	0.213 (H) x 0.213 (V)	0.248 (H) x 0.248 (V)
Viewing Angle (H-V)	178°/178°	178°/178°	178°/178°
Backlight MTBF	50,000 hours	50,000 hours	50,000 hours
Touchscreen	Multi-point projected capacitive type (anti-UV / anti-glare coating,support gloves) Surface hardness: ≥7H		
Touch Controller	Projected capacitive type: ILI2520		
CPU (SoC)	Intel Atom® x7433RE Processor 6M Cache, up to 3.40 GHz / TDP 9w Intel Atom® x7835RE Processor 6M Cache, up to 3.40 GHz / TDP 12w		
Memory	1 x SO-DIMM DDR5-4800 up to 16GB (Pre-installed 8GB) (ECC supported)		
Ethernet	2 x 2.5GbE LAN via Intel I226-IT		
Storage	1 x M-Key 2280 (PCIe Gen3 x2) for M.2 SSD 1 x 128GB Emmc (optional)*		
Expansion slot	1 x M.2 M-Key 2242/2280 (PCIe Gen3 x1 + SATA) 1 x M.2 B-Key 3052/3080 (PCIe Gen3 x1 + USB 3.0 x1) 1 x NANO-SIM 1 x M.2 E-key 2230 (PCIe Gen3 x1 + USB 2.0 x1) for optional WIFI/BT module		
Camera	1 x Camera (Wide-viewing angle)		
External I/O Interface	M12 Waterproof Connector for 2 x RJ-45 2.5GbE LAN M12 Waterproof Connector for 1 x RS-232(with 2.0 kV isolation) M12 Waterproof Connector for 1 x RS-232/422/485(with 2.0 kV isolation) M12 Waterproof Connector for 1 x CANBUS(with 2.0 kV isolation) M12 Waterproof Connector for 1 x 8bit DIO (Isolator) (with 1.6 KV isolation) with SMBus M12 Waterproof Connector for 1 x USB2.0 M20 Waterproof Connector for 1 x USB3.0 M20 Waterproof Connector for 1 x HDMI 1.4b Waterproof Connector for Power switch M12 Waterproof Connector for DC Input Power		
Construction Material	304 Stainless Steel Chassis		
Mounting	VESA Mount 100 x 100 / Pole Mount / YOKE Mount		
IP Rating	Fully IP66		
Power Input	DC 10~28V		
Operating Temperature(with airflow)	-30°C~55°C@50%RH		
Storage Temperature	-40°C~70°C		
Humidity	10 to 90%RH @ 40°C, non-condensing		
Safety and EMC	CE/FCC		
OS	Windows 10/11 IoT Enterprise 64-bit Linux		

Industrial Monitors

Premium Industrial Monitors with Versatile Sizing and Robust Features

IEI's Industrial Monitor series delivers exceptional performance, durability, and versatility for demanding industrial environments. Available in sizes from compact to large-format, these monitors feature IP65-rated front panels, glove-operable projected capacitive (PCAP) touchscreens, and support for wide operating temperature ranges. Built with industrial-grade components, they ensure reliable operation across applications such as HMI displays, kiosks, self-service terminals, and digital signage.



Highlights



Rugged Industrial Design

- IP65-rated front panel with a die-cast aluminum bezel for water and dust resistance
- Operates in extreme temperatures from -20°C to 60°C
- Complies with MIL-810G military standard for vibration resistance



Comprehensive Connectivity and Multimedia

- Versatile input options: HDMI, VGA, DisplayPort, and USB 3.2 hub (4x Type-A, 1x Type-B)
- Integrated 720P webcam and dual 2.5W speakers for real-time interaction and AI facial recognition
- Wide 9V–36V DC input range for flexible power configurations



Versatile Display and Touchscreen

- Available in comprehensive display sizes
- Anti-glare, anti-UV, and 10-point projected capacitive (PCAP) touchscreen
- Touch operable with gloves and resistant to scratches (7H hardness)



User-Friendly Interface


- Front-access OSD buttons for quick brightness and input adjustments
- Narrow bezel design
- Easy panel mounting without specialized tools

Product Selection Guide

Model	Diagonal Size (inch)		Resolution	Brightness (cd/m ²)	Aspect Ratio
DM2-104E	Industrial Grade 4:3 Ratio	10.4	1024x768	350	4:3
DM2-121E(L)		12.1	1024x768	500	4:3
DM2-121E(L)-HL		12.1	1024x768	1000	4:3
DM2-150E(L)		15	1024x768	350	4:3
DM2-170H(L)	Industrial Grade 5:4 Ratio	17	1280x1024	350	5:4
DM2-190H(L)		19	1280x1024	450	5:4
DM2-UW123I(L)	Ultra-Wide Format	12.3	1920x720	850	16:9
DM2-W101G(L)	Wide Format	10.1	1280x800	400	16:10
DM2-W121G(L)		12.1	1280x800	400	16:10
DM2-W121G(L)-HL		12.1	1280x800	1000	16:10
DM2-W133K(L)		13.3	1920x1080	400	16:9
DM2-W156K(L)		15.6	1920x1080	400	16:9
DM2-W185K(L)		18.5	1920x1080	400	16:9
DM2-W215K(L)		21.5	1920x1080	250	16:9
DM2-W238K(L)	Large Size	23.8	1920x1080	250	16:9
DM2-W270P(L)		27	2560x1440	350	16:9
DM2-W315O(L)		31.5	3840x2160	350	16:9

* The DM2-xxxxL does not include camera, speaker, or USB hub features.

DM2 series

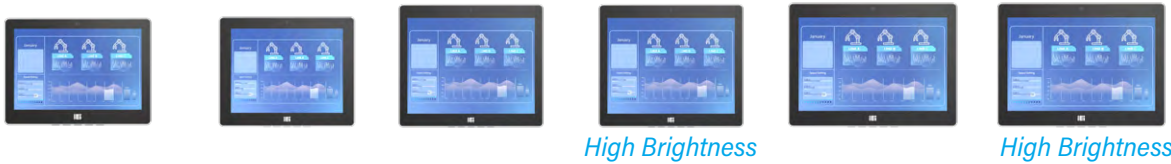

LCD Size	10.1"	10.4"	12.1"	12.1"	12.1"	12.1"
Model	DM2-W101G(L)	DM2-104E(L)	DM2-121E(L)	DM2-121E(L)-HL	DM2-W121G(L)	DM2-W121G(L)-HL
Brightness (cd/m²)	400	350	500	1000	500	1000
Max Resolution (WxH)	1280 x 800 (16:10)	1024 x 768 (4:3)	1024 x 768 (4:3)	1024 x 768 (4:3)	1280 x 800 (16:10)	1280 x 800 (16:10)
Contrast Ratio	800 : 1	1000 : 1	1000 : 1	1000 : 1	1200 : 1	1000 : 1
LCD Color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Viewing Angle (H-V)	178°/178°	176°/176°	178°/178°	178°/178°	170°/170°	170°/170°
Backlight MTBF (hrs)	30,000 hours	50,000 hours	30,000 hours	50,000 hours	50,000 hours	50,000 hours
Touch Screen	10-point projected capacitive touch window (anti-UV, anti-glare surface)					
Touch Controller	Capacitive: ilitek					
I/O Ports and Switches	1 x VGA (DB-15) 1 x Line out 1 x HDMI 1 x DisplayPort 1.2 1 x USB 3.2 Gen1 Type-B 4 x USB 3.2 Gen1 Type-A * 1 x 9V-36V DC jack 1 x 3-pin terminal block					
OSD Keypad	5-key membrane OSD keypad					
Camera	720P Wide Angle Fixed Focus*					
Speaker	2 x 2W AMP (internal speaker)*					
Construction Material	Aluminum front frame and sheet metal rear cover					
Mounting	Panel mount, VESA 100					
Enclosure Color	Silver+Black					
Dimensions (LxWxH) (mm)	251 x 180.95 x 49.30	256.60 x 208.20 x 49.30	279.86 x 237.50 x 49.3	279.86 x 237.50 x 49.3	298 x 218.59 x 49.30	298 x 218.59 x 49.30
Cutout Dimensions (mm)	241.80 x 157.80	247.4 x 185	270.50 x 214.10	270.50 x 214.10	288.60 x 195.10	288.60 x 195.10
Operating Temperature	-20°C ~ 60°C (with air flow)					
Storage Temperature	-20°C ~ 60°C	-20°C ~ 70°C	-20°C ~ 70°C	-20°C ~ 70°C	-20°C ~ 70°C	-20°C ~ 70°C
Humidity	10% to 95%@40°C (non-condensing) (50%@60°C)					
Vibration	MIL-STD-810F 514.5C-1					
Shock	Operating: Half-sine wave shock 5G; 11ms; 100 shocks per axis Non-operating: Half-sine wave shock 15G; 11ms; 100 shocks per axis					
IP Level	IP 65 compliant front panel					
Safety & EMC	CE/FCC/UKCA Class B					
Power Input	9~36V DC					
Power Cord	EU					

* L (Lite) without Camera, Speaker, USB-A x 4

DM2 series



LCD Size	12.3"	13.3"	15"	15.6"
Model	DM2-UW123J(L)	DM2-W133K(L)	DM2-150E(L)	DM2-W156K(L)
Brightness (cd/m²)	850	350	400	450
Max Resolution (WxH)	1920 x 720 (8:3)	1920 x 1080 (16:9)	1024 x 768 (4:3)	1920 x 1080 (16:9)
Contrast Ratio	1500 : 1	1000 : 1	2500 : 1	800 : 1
LCD Color	16.7M	16.7M	16.7M	16.2M
Viewing Angle (H-V)	170°/170°	176°/176°	176°/178°	178°/178°
Backlight MTBF (hrs)	30,000 hours	30,000 hours	70,000 hours	50,000 hours
Touch Screen	10-point projected capacitive touch window (anti-UV, anti-glare surface)			
Touch Controller	Capacitive: ilitek	Capacitive: ilitek(optical bonding)	Capacitive: ilitek	Capacitive: ilitek
I/O Ports and Switches	1 x VGA (DB-15) 1 x Line out 1 x HDMI 1 x DisplayPort 1.2 1 x USB 3.2 Gen1 Type-B 1 x 9V-36V DC jack 4 x USB 3.2 Gen1 Type-A * 1 x 3-pin terminal block			
OSD Keypad	5-key membrane OSD keypad			
Camera	720P Wide Angle Fixed Focus*			
Speaker	2 x 2W AMP (internal speaker)*			
Construction Material	Aluminum front frame and sheet metal rear cover			
Mounting	Panel mount, VESA 75	Panel mount, VESA 100		
Enclosure Color	Black+Silver			
Dimensions (LxWxH) (mm)	326.60 x 160.60 x 49.4	333.04 x 215.88 x 51.41	353.80 x 287.08 x 50.30	391.50 x 250 x 49.6
Cutout Dimensions (mm)	310.80 x 141.00	314.34 x193.55	335.60 x 264.88	373.30 x 269
Operating Temperature	-20°C ~ 60°C (with air flow)			
Storage Temperature	-20°C ~ 70°C			
Humidity	10% to 95%@40°C (non-condensing) (50%@60°C)			
Vibration	MIL-STD-810F 514.5C-1			
Shock	Operating:Half-sine wave shock 5G; 11ms; 100 shocks per axis Non-operating:Half-sine wave shock 15G; 11ms; 100 shocks per axis			
IP Level	IP 65 compliant front panel			
Safety & EMC	CE/FCC/UKCA Class B			
Power Input	9~36V DC			
Power Cord	EU			

* L (Lite) without Camera, Speaker, USB-A x 4

DM2 series



LCD Size	17"	19"	18.5"	21.5"
Model	DM2-170H(L)	DM2-190H(L)	DM2-W185K(L)	DM2-W215K(L)
Brightness (cd/m²)	350	450	350	350
Max Resolution (WxH)	1280 x 1024 (5:4)	1280 x 1024 (5:4)	1920 x 1080 (16:9)	1920 x 1080 (16:9)
Contrast Ratio	800 : 1	1000 : 1	1200 : 1	1000 : 1
LCD Color	16.7M	16.7M	16.7M	16.7M
Viewing Angle (H-V)	160°/140°	178°/178°	170°/170°	178°/178°
Backlight MTBF (hrs)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Touch Screen	10-point projected capacitive touch window (anti-UV, anti-glare surface)			
Touch Controller	Capacitive: ilitek			
I/O Ports and Switches	1 x VGA (DB-15) 1 x Line out 1 x HDMI 1 x DisplayPort 1.2 1 x USB 3.2 Gen1 Type-B 1 x 9V-36V DC jack 4 x USB 3.2 Gen1 Type-A * 1 x 3-pin terminal block	1 x VGA (DB-15) 1 x Line out 1 x HDMI 1 x DisplayPort 1.2 1 x USB 3.2 Gen1 Type-B 1 x 9V-36V DC jack 4 x USB 3.2 Gen1 Type-A * 1 x 3-pin terminal block	1 x VGA (DB-15) 1 x Line out 1 x HDMI 1 x DisplayPort 1.2 1 x USB 3.2 Gen1 Type-B 1 x 9V-36V DC jack 4 x USB 3.2 Gen1 Type-A * 1 x 3-pin terminal block	1 x VGA (DB-15) 1 x Line out 1 x HDMI 1 x DisplayPort 1.2 1 x USB 3.2 Gen1 Type-B 1 x 9V-36V DC jack 4 x USB 3.2 Gen1 Type-A * 1 x 3-pin terminal block
OSD Keypad	5-key membrane OSD keypad			
Camera	720P Wide Angle Fixed Focus*			
Speaker	2 x 2W AMP (internal speaker)*			
Construction Material	Aluminum front frame and sheet metal rear cover			
Mounting	Panel mount, VESA 100			
Enclosure Color	Black+Silver			
Dimensions (LxWxH) (mm)	385.60 x 331.60 x 50.50	424.50 x 361.57 x 51.2	458.40 x 288.80 x 50.50	519.40 x 327.00 x 50.50
Cutout Dimensions (mm)	367.40 x 309.60	406.30 x 337.57	438.20 x 262.80	501 x 302
Operating Temperature	-20°C ~ 60°C (with air flow)	-20°C ~ 60°C (with air flow)	-20°C ~ 60°C (with air flow)	0°C ~ 50°C (with air flow)
Storage Temperature	-20°C ~ 70°C	-20°C ~ 70°C	-20°C ~ 70°C	-20°C ~ 60°C
Humidity	10% to 95%@40°C (non-condensing) (50%@60°C)			
Vibration	MIL-STD-810F 514.5C-1			
Shock	Operating:Half-sine wave shock 5G; 11ms; 100 shocks per axis Non-operating:Half-sine wave shock 15G; 11ms; 100 shocks per axis			
IP Level	IP 65 compliant front panel			
Safety & EMC	CE/FCC/UKCA Class B			
Power Input	9~36V DC			
Power Cord	EU			

* L (Lite) without Camera, Speaker, USB-A x 4

DM2 series



LCD Size	23.8"	27.0"	31.5"
Model	DM2-W238K(L)	DM2-W270P(L)	DM2-W315Q(L)
Brightness (cd/m²)	350	350	350
Max Resolution (WxH)	1920 x 1080 (16:9)	2560 x 1440 (16:9)	3840 x 2160 (16:9)
Contrast Ratio	1000 : 1	1000 : 1	1000 : 1
LCD Color	16.7M	16.8M	16.8M
Viewing Angle (H-V)	178°/178°	178°/178°	178°/178°
Backlight MTBF (hrs)	30,000 hours	30,000 hours	30,000 hours
Touch Screen	10-point projected capacitive touch window (anti-UV, anti-glare surface)		
Touch Controller	Capacitive:ilitek		
I/O Ports and Switches	1 x VGA (DB-15) 1 x Line out 1 x HDMI 1 x DisplayPort 1.2 1 x USB 3.2 Gen1 Type-B 1 x 9V-36V DC jack 4 x USB 3.2 Gen1 Type-A * 1 x 3-pin terminal block	1 x VGA (DB-15) 1 x Line in 1 x HDMI 1 x Line out 1 x USB 3.2 Gen1 Type-B 1 x DisplayPort 1.2 4 x USB 3.2 Gen1 Type-A 1 x 9V-36V DC jack 1 x 3-pin terminal block	1 x VGA (DB-15) 1 x Line in 1 x HDMI 1 x Line out 1 x USB 3.2 Gen1 Type-B 1 x DisplayPort 1.2 4 x USB 3.2 Gen1 Type-A 1 x 9V-36V DC jack 1 x 3-pin terminal block
OSD Keypad	5-key membrane OSD keypad		
Camera	720P Wide Angle Fixed Focus*	720P Wide Angle Fixed Focus*	720P Wide Angle Fixed Focus*
Speaker	2 x 2W AMP (internal speaker)*		
Construction Material	Aluminum front frame and sheet metal rear cover		
Mounting	Panel mount, VESA 100		
Enclosure Color	Black+Silver	Black+Silver	Black+Silver
Dimensions (LxWxH) (mm)	571.40 x 354.50 x 51.20	636.24 x 393.16 x 52	738.8 x 448.4 x 52
Cutout Dimensions (mm)	553.20 x 332.50	614 x 365.1	716.6 x 420.4
Operating Temperature	0°C ~ 50°C (with air flow)	0°C ~ 50°C (with air flow)	0°C ~ 50°C (with air flow)
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C
Humidity	10% to 95%@40°C (non-condensing) (50%@60°C)	10% to 95%@40°C (non-condensing) (50%@50°C)	10% to 95%@40°C (non-condensing) (50%@50°C)
Vibration	MIL-STD-810F 514.5C-1		
Shock	Operating:Half-sine wave shock 5G; 11ms; 100 shocks per axis Non-operating:Half-sine wave shock 10G; 11ms; 100 shocks per axis		
IP Level	IP 65 compliant front panel		
Safety & EMC	CE/FCC/UKCA Class B	CE/FCC	CE/FCC
Power Input	9~36V DC		
Power Cord	EU		

*L (Lite) sku without camera, speaker and four USB Type-A

DM2 series



LCD Size		8"	12.1"	15"	15.6"
Model		DM-F08A	DM-F12A	DM-F15A	DM-FW15A
Display	Max. Resolution	800 x 600 (4:3)	1024 x 768 (4:3)	1024 x 768 (4:3)	1366 x768 (16:9)
	Brightness (cd/m²)	500	600	500	400
	Contrast Ratio	500:1	700 : 1	800 : 1	500:1
	LCD Color	262K	16.2M	16.2M	16.2M
	Pixel Pitch (mm)	0.0675 x 0.2025	0.24 x 0.24	0.29 x 0.29	0.252 x 0.252
	Viewing Angle (H-V)	140°/120°	160° /140°	160° / 150°	170° / 160°
	Backlight MTBF (Hrs)	50,000 hours	50,000 hours	70,000 hours	50,000 hours
Touchscreen & Controller		5-wire resistive single touch window/ Penmount 6000	5-wire resistive single touch window/ Penmount 6000 (Anti-glare Surface) 10-point Projected capacitive touch window, 6H/EETI EXC3188 (Anti-UV, Anti-glare Surface)		
I/O Ports		1 x VGA (DB-15) 1 x DVI 1 x USB 2.0 (touch) 1 x RS-232 (reserved for resistive touch ATO) 1 x Lockable 12V DC jack	1 x VGA (DB-15) 1 x HDMI 1 x DisplayPort 1.1 1 x USB 2.0 (touch) 1 x RS-232 (reserved for resistive touch ATO) 1 x Lockable 9V-36V DC jack 1 x 9V-36V terminal block		
OSD	OSD Button	5-key membrane OSD keypad	7-key membrane OSD keypad		
	Smart OSD Software	Smart OSD Software			
Physical	Construction Material	Aluminum front frame and sheet metal rear cover			
	Mounting	Panel Mount/ Rack Mount 75 x 75 VESA Mount	Panel Mount/ Rack Mount 100 x 100 VESA Mount		
	Enclosure Color	Black C			
	Dimensions (mm)	222.2 x 182.2 x 42.7	262.2 x 322.2 x 40.5	303 x 378.5 x 43.2	400.1 x 253.3 x 52.9
	Cutout Dimensions (mm)	206 x 154	244.8 x 304.8	285.6 x 361.1	379.1 x 232.3
	Weight (kg) Net/ Gross	1.33 / 4.5	2.7 / 4.9	3.5 / 5.5	4 / 6.5
Environment	Operating Temperature (with air flow)	-20°C ~ 60°C (with air flow)			
	Storage Temperature	-20°C ~ 70°C			
	Humidity	10% to 95% (non-condensing)			
	IP Level	IP 65 compliant front panel			
	Safety and EMC	CE & FCC certified			
Power Input		12V DC	9V~36V DC		
Power consumption		12V @ 0.5A	9V @ 2.2A 36V @ 0.5A	9V @ 1.6A 36V @ 0.4A	9V @ 1.3 36V @ 0.33

DM2 series



LCD Size		17"	19"	23.8"
Model		DM-F17A	DM-F19A	DM-F24A
Display	Max. Resolution	1280 x 1024 (5:4)	1280x 1024 (5:4)	1920x 1080 (16:9)
	Brightness (cd/m²)	350	350	250
	Contrast Ratio	1000 : 1	1000 : 1	3000 : 1
	LCD Color	16.7M		
	Pixel Pitch (mm)	0.26 x 0.26	0.294 x 0.294	0.28 x 0.28
	Viewing Angle (H-V)	170° / 160°		178° / 178°
	Backlight MTBF (Hrs)	50000		30000
Touchscreen & Controller		5-wire resistive single touch window, 3H/Penmount 6000 (Anti-glare Surface) 10-point Projected capacitive touch window, 6H/EETI EXC3188 (Anti-UV, Anti-glare Surface)		10-point Projected capacitive touch window, 6H/ EETI EXC3188 (Anti-UV, Anti-glare Surface)
I/O Ports		1 x VGA (DB-15) 1 x DVI (F19A only) 1 x HDMI (F17A & FW19A only) 1 x DisplayPort 1.1 1 x USB 2.0 (touch) 1 x RS-232 (reserved for resistive touch ATO) 1 x Lockable 9V-36V DC jack 1 x 9V-36V terminal block		1 x VGA (DB-15) 1 x HDMI 1 x DisplayPort 1.1 1 x USB 2.0 (touch) 1 x RS-232 (reserved for resistive touch ATO) 1 x Lockable 9V-36V DC jack 1 x 9V-36V terminal block
OSD	OSD Button	7-key membrane OSD keypad		
	Smart OSD Software	Smart OSD Software		
Physical	Construction Material	Aluminum front frame and sheet metal rear cover		
	Mounting	Panel Mount/ Rack Mount 100 x 100 VESA Mount		Panel Mount 100 x 100 VESA Mount
	Enclosure Color	Black C		
	Dimensions (mm)	341.4 x 408.4 x 49.3	372.4 x 447.4 x 49.57	382 x 600 x 49.4
	Cutout Dimensions (mm)	324 x 391	430 x 355	358.6 x 576.6
	Weight (kg) Net/Gross	4.4 / 7.1	5.4 /8.4	7.6 / 10.9
	Operating Temperature (with air flow)	-20°C ~ 60°C (with air flow)		
Environment	Storage Temperature	-20°C ~ 70°C	-20°C ~ 70°C	-20°C ~ 60°C
	Humidity	10% to 95% (non-condensing)		
	IP Level	IP 65 compliant front panel		
	Safety and EMC	CE & FCC certified		
Power input		9V~36V DC		
Power consumption		9V @ 2.6A 36V @ 0.6A	9V @ 3.3A 36V @ 0.8A	9V @ 3.4A 36V @ 0.8A

ePaper Solutions

Empowering Sustainable Communication
in Co-Working Spaces



✓ Reusable ✓ Convenient ✓ Eco-friendly

IEI's wireless ePaper solution is built for smart manufacturing, healthcare, and sustainable city applications. With ultra-low power use, no backlight, and high readability, it supports Wi-Fi 2.4GHz and Bluetooth 5 (LE), replacing traditional paper signage. Managed via the ideaRoomX cloud platform, it enables remote updates and centralized control for efficient, low-carbon operations. From warehouse labels to bedside cards and co-working spaces, it drives digital transformation and ESG goals. Its use of replaceable AAA batteries further reduces e-waste and supports long-term sustainability.

NET
ZERO

2.9" ePaper
Pitaya-E29 Series

7.3" ePaper
Peach-E73 Series

4.2" ePaper
Pitaya-E42 Series



Highlights

Eco-Friendly and Low Power Consumption

- Utilizes energy only when content changes, minimizing electricity use.
- Contributes to carbon reduction—500 displays emit just 0.009 tCO₂e/year, compared to 2.965 tCO₂e/year for LCDs.

Advanced Remote Content Management

- Integrated with IEI's ideaRoomX platform for easy remote updates.
- Enables centralized management of multiple displays via Wi-Fi.
- Reduces manual maintenance and ensures real-time content customization

Flexible Power and Connectivity Options

- Dual power sources: AAA batteries for portability or USB-C for continuous use.
- Supports both Wi-Fi (IEEE 802.11b/g/n) and Bluetooth 5 (LE) for seamless wireless communication.
- USB Type-C port allows both power delivery and data transfer.

User-Centric and Versatile Design

- Color E Ink display with anti-glare surface.
- Lightweight, curved-edge body for easier cleaning and better hygiene.

Products	Peach-E73	Pitaya-E42	Pitaya-E29	Mongosteen-E29
Active Area	7.3"	4.2"	2.9"	2.9"
Resolution	800 x 480	400 x 300	128 x 296	128 x 296
Wireless	Wi-Fi / BLE	Wi-Fi / BLE	Wi-Fi / BLE	Wi-Fi / BLE
Connector	USB Type-C	USB Type-C	NA	NA
LED	2 colors	2 colors	3 colors	3 colors
Keys	Power / BLE / Reset	Power / BLE / Reset	Power / BLE / Reset / Programmable x1	Power / BLE / Reset / Programmable x1
Battery	AAAx6	AAAx6	AAAx2	AAAx2
EPD Colors	BWRY	BWR	BWR	BW
Image Update Time (25°C typ)	14 sec	14 sec	14 sec	2 sec
Best Optic Temperature Range	15°C ~ 35°C	15°C ~ 35°C	15°C ~ 35°C	0°C ~ 50°C
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C

Network Appliances

Empower Networks, Drive Transformation

Our network appliance solutions, the IEI PUZZLE series, support digital transformation across various industries and environments, playing a key role in SD-WAN deployment, network security, edge computing, and data center operations. Our range includes versatile platforms, from budget-friendly, compact tabletop solutions to high-performance 1U rackmount servers, scalable 2U systems, and AI-based 5U edge server, meeting the needs of businesses and service providers of all sizes, and supporting critical applications from data center operations to edge computing.



PUZZLE-9070 Series 5U Premium Network Appliance

High-Performance Computing (HPC) & AI-Oriented Applications




PUZZLE-5070 Series 1U Premium Network Appliance

Virtualization Workload Consolidation



PUZZLE-8010 Series 2U Premium Network Appliance

Hyperconverged infrastructure & MEC

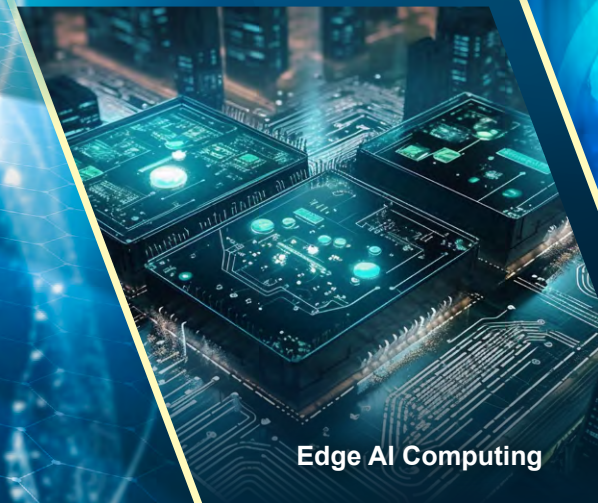

Edge AI Computing



Cyber Security



Cloud Computing & Data Center

Highlights



Optimized for HPC and AI Workloads

- Supports multi-core, high-frequency Intel® and AMD processors with scalable PCIe Gen4/5 lanes for massive data throughput.
- Integrated GPU and FPGA compatibility for compute-intensive AI inference and training tasks.



Accelerated Virtualization and Workload Consolidation

- Virtualization-ready architecture with SR-IOV, DPDK, and VT-d/IOMMU support for efficient resource sharing.
- Integrated with IEI Virtualization Edge Computer (IVEC) solution to enhance VM functionality, enable seamless workload consolidation and simplify edge infrastructure management.



Reliable System Availability


- Features such as hot-swappable fans and storage, redundant CRPS power supplies, and LAN bypass.
- Integrated BMC/IRIS2 modules enable out-of-band remote management, minimizing system downtime.
- Designed for 24/7 operation with validated thermal efficiency.



Flexible Software and Ecosystem Integration

- Support major open-source platforms like OpenWrt, pfSense®, and OPNsense®.
- Pre-validation with SD-WAN, uCPE, and security software from ecosystem partners.
- BIOS-configurable bypass function, flexible NFV-ready architecture with VNF deployment capability.

IEI Puzzle Series – Tiered Network Appliance Solutions for Every Deployment Need

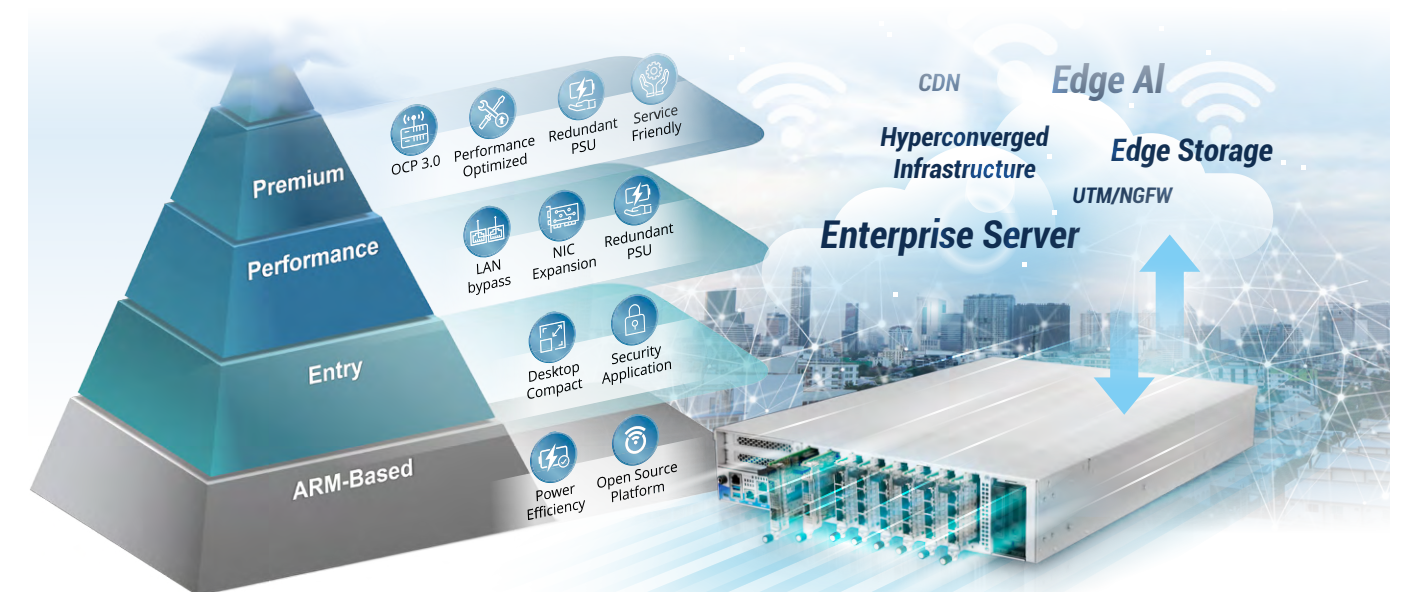

Alliance Partners



Premium Network Appliances



Model		PUZZLE-9070	PUZZLE-8010
Platform	Form Factor	5U rackmount	2U rackmount
	CPU	2 x Intel® Granite Rapids -SP	Intel® Granite Rapids -XEON-W
	Chipset	Integrated in CPU	Intel® W890
Memory	Memory Technology	16 x DDR5 6400MHz RDIMM Slot	8 x DDR5 5600MHz RDIMM Slot
	Memory Capacity	Based on DIMM capacity	Based on DIMM capacity
	Memory Socket	16 x 288-pin DDR5 DIMM	8 x 288-pin DDR5 DIMM
Network and Security	Network Acceleration and Security Function	Intel® QuickAssist Technology (QAT) Intel® Dynamic Load Balancer (DLB) Intel® Data Streaming Accelerator (DSA) Intel® In-memory Analytics Accelerator (IAA) Intel® Advanced Matrix Extensions (AMX) Intel® Deep Learning Boost (Intel® DL Boost) Intel® AES New Instructions (AES-NI) Intel® Software Guard Extensions (Intel® SGX) Intel® Trusted Execution Technology (TXT) Intel® Total Memory Encryption (TME)	N/A
	TPM	1 x TPM 2.0 pin header	1 x TPM 2.0 pin header
BMC	BMC Solution	1 x M.2 Socket B Key support IEI iRIS2 BMC module 1 x 1 GbE RJ45 for IPMI port	1 x M.2 Socket B Key support IEI iRIS2 BMC module 1 x 1 GbE RJ45 for IPMI port
Networking	Ethernet IC	Intel® X710 10G Dual Port Intel® I350 1G Dual Port	Intel® X710 10G Dual Port Intel® I350 1G Dual Port
	Ethernet Port	2 x 1 GbE RJ45 for Ethernet port 2 x 10GbE SFP+ for Ethernet port	2 x 1 GbE RJ45 for Ethernet port 2 x 10GbE SFP+ for Ethernet port
	Bypass	N/A	N/A
	Network Module Slot	Support up to 4* Standard OCP 3.0 (PCIe Gen5x16)	Support up to 6* Standard OCP 3.0 (PCIe Gen5x16)
Expansion Slot	PCIe Slot	4 x PCIe Gen5x16 FHFL	2 x PCIe Gen5x 16 FHFL
Storage	Storage	2 x External 2.5" U.2 SSD removable tray (PCIe Gen5x4) 2 x M.2 2280 M-Key (PCIe Gen5x4)	2 x External 2.5" U.2 SSD removable tray (PCIe Gen4x4) 2 x M.2 2280 M-Key (PCIe Gen4x4)
	USB	2 x USB 3.0 Type A	2 x USB 3.0 Type A
	Console	1 x USB Type-C 1 x RJ45 auto-switching console port	1 x USB Type-C 1 x RJ45 auto-switching console port
Power and Mechanical	Power Switch	Front: 1 x Power Button	Rear: 1 x Power Button
	Reset Button	Front: 1 x Location Button 1 x Reset Button	Front: 1 x Location Button 1 x Reset Button
	Power Input	90 V ~ 264 V	90 V ~ 264 V
	Type/Watt	Redundant Power; 4 x 2000W, 90V – 264V AC	Redundant PSU 1300W, 90V – 264V AC
	Processor Cooling		
	System Cooling	9 x System fans	3 x System Fans
Physical and Environmental	Storage Temperature	-10°C ~ 50°C	-10°C ~ 50°C
	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
	Operating Humidity	5%~90% non-condensing	5% ~ 90% non-condensing
	Dimensions (W x L x H) (mm)	438 x 791 x 221.5	438 x 587 x 88
	Weight	TBD	TBD
Certifications	Certification	By customer request	By customer request
	Supported Operating System	Ubuntu, Linux based OS	Ubuntu, Linux based OS
Indicators	LCM	N/A	N/A
		Front: 1 x Power LED, 1 x HDD Activity LED 1 x Alert LED, 1 x PSU LED, 1 x Location LED Rear: 4 x PSU LED	Front: 1 x Power LED, 1 x HDD Activity LED 1 x Alert LED, 1 x PSU LED, 1 x Location LED Rear: 2 x PSU LED

Premium Network Appliances



Model		PUZZLE-9040	PUZZLE-9030	PUZZLE-7050
Platform	Form Factor	2U	1U	1U rackmount
	CPU	2 x 4th Gen Intel® Xeon® Scalable processors (Code Name: Sapphire Rapids) Supporting TDP 350W	2 x AMD EPYC™ Milan Series	1 x 4th Gen AMD EPYC™ 8004 Series Processor
	Chipset	Intel® C741	Integrated in CPU	Integrated in CPU
Memory	Memory Technology	16 x DDR5 4800MHz ECC RDIMM Slot	16 x DDR4 4800 MHz ECC RDIMM Slot	12 x DDR5 up to 4800MHz ECC RDIMM Slots (6 channels)
	Memory Capacity	Based on DIMM capacity	Based on DIMM capacity	Based on DIMM capacity
	Memory Socket	16 x 288-pin DDR5 DIMM	16 x 288-pin DDR4 DIMM	12 x 288-pin DDR5 DIMM
Network and Security	Network Acceleration and Security Function	Next-gen Intel® Quick Assist Technology, DLB, AMX/TMUL, DSA, 5G ISA, BFloat16 SGX with Integrity, MKTME - 128 Keys, Platform Firmware Resilience (PFR) with Peripheral Device Attestation Hardware Enforced Execution Controls: Hypervisor-Managed Linear Address Translation (HLAT), Control Flow Enforcement Technology (CET), VM Denial of Service Prevention	N/A	N/A
	TPM	1 x TPM 2.0 pin header	1 x TPM 2.0 pin header	1 x TPM 2.0 pin header
BMC	BMC Solution	1 x M.2 Socket B Key support IEI iRIS2 BMC module, 1 x 1 GbE RJ45 for IPMI port	1 x AST2620	1 x M.2 Socket B Key support IEI iRIS2 BMC module, 1 x 1 GbE RJ45 for IPMI port
Networking	Ethernet IC	Intel 10G Dual Port X710 Intel 1G Dual Port I350	Intel I210	2 x Intel 1G I210-AT
	Ethernet Port	2 x GbE RJ45 ports 1 x GbE RJ45 LOM/BMC port	1 x GbE RJ45	2 x GbE RJ45 ports
	Network Module Slot	Support up to 8 x Standard OCP 3.0 Network Module	Support up to 4 x OCP 3.0 PuIM Network Module (PuIM-100G2SF-CX6)	Support up to 2 x Standard OCP 3.0 Network Module
	PCIe Slot	1 x PCIe x16 FHFL	1x PCIe x16 FHHL	1 x PCIe x16 FHFL
Expansion Slot	M.2	1 x 2280 M-Key (PCIe Gen4 x4)	2 x M.2 M key 2280 (PCIe Gen4 x4)	1 x B key for BMC module 2 x M.2 2280 M-Key
Storage	Storage	2 x External 2.5" removable trays (Supports 2.5" U.2 PCIe x4 NVMe)	2 x U.2 (PCIe Gen4 x4) 2.5" NVMe SSD or 2 x SATA 3.0 3.5" HDD	2 x External 2.5" removable trays (Supports 2.5" U.2 PCIe x4 NVMe)
	USB	2 x USB 3.0 Type-A	2 x USB 3.1 Type A	2 x USB 3.0 Type-A
	Console	1x USB Type C and 1x RJ45 auto-switching console port	1 x RJ45	1 x USB Type C 1 x RJ45 auto-switching console port
Power and Mechanical	Power Switch	Rear: 1 x Power button	N/A	Rear: 1 x Power button
	Reset Button	Front: 1 x Reset button	1 x Reset button	Front: 1 x Reset button
	Power Input	90 V ~ 264 V	90~264V AC	90 V ~ 264 V
	Type/Watt	2000W CRPS redundant power	1300W redundant power	Dual CRPS redundant power
	Processor Cooling	2 x Passive CPU Heatsinks	2 x CPU Heatsinks	1 x Passive CPU Heatsink
	System Cooling	4 x System fans	6 x Individual hot-swappable cooling fans	3 x System fans, 1 x fan reserved
Physical and Environmental	Antenna Hole	N/A	N/A	N/A
	Storage Temperature	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C
	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
	Operating Humidity	5% ~ 90% non-condensing	5% ~ 90% non-condensing	5% ~ 90% non-condensing
	Dimensions (W x L x H) (mm)	438 x 623 x 88.5	438 x 670 x 44.2	430 x 521 x 44.2
Certifications	Weight	< 25 kg	12.1 kg	< 10 kg
	Certification	By customer request	By customer request	By customer request
	Supported Operating System	Ubuntu, Linux based OS	Ubuntu, Linux based OS	Ubuntu, Linux based OS
	LCM	N/A	N/A	Optional
	LED	1 x Power LED, 1 x HDD Activity LED, 1 x Alert LED, 1 x PSU LED, 1 x Location LED 2 x PSU LED, 1 x Location LED	1 x Power LED 1 x Status LED 1 x Alert LED	1 x Power LED, 1 x Alert LED, 1 x Storage LED, 1 x Location LED, 2 x PSU LED

Premium Network Appliances



Model		PUZZLE-7030A	PUZZLE-IN005
Platform	Form Factor	1U	2U
	CPU	Intel® Xeon® D-1700 Processor series	Intel® Ice-Lake LGA-4189 Xeon® Scalable Processor
	Chipset	Integrated in CPU	Intel® C627A
Memory	Memory Technology	4 x DDR4 2400/2933 MHz ECC UDIMM/RDIMM	DDR4 3200 MHz ECC RDIMM / LRDIMM
	Memory Capacity	Based on DIMM capacity	Up to 1280GB (20 x 64GB)
	Memory Socket	4 x 288-pin DDR4 DIMM slots	20 x 288-pin DIMM
Network and Security	Network Acceleration and Security Function	• Intel® AES New Instructions • Intel® Software Guard Extensions (Intel® SGX) • Intel® Memory Protection Extensions (Intel® MPX) • Intel® Trusted Execution Technology	• Intel® AES New Instructions • Intel® QuickAssist Technology (Intel® QAT) • Intel® Virtualization Technology (Intel® VT) • Intel® Trusted Execution Technology (Intel® TXT)
	TPM	1 x TPM 2.0 pin header	1 x TPM 2.0 pin header
BMC	BMC Solution	1 x M.2 Socket B Key support IEI iRIS2 BMC module, 1 x 1 GbE RJ45 for IPMI port	1 x iRIS-2600 module
Networking	Ethernet IC	Intel® I226V 2.5GbE	1GbE NIC: Intel® I210-AT with NCSI support 1GbE NIC: Intel® I219
	Ethernet Port	8 x 2.5 GbE RJ45 LAN ports 5 x 10 GbE SFP+	2 x 1GbE RJ45 ports (1 x BMC LAN)
	Network Module Slot	Support up to 1 x Standard OCP 3.0	8 x IEI PuIM network module slots
Expansion Slot	PCIe Slot	1 x PCIe Gen4 x 8 or 2 x PCIe Gen4 x 4	1 x PCIe Gen4 x8 (FHHL) slot (single width)
	M.2	2 x M.2 2280 M-key (PCIe Gen3 x2)	2 x M.2 M key 2280 support PCIe Gen3 x4 NVMe
Storage	Storage	2 x 2.5" SSD/HDD Bay: support SATA 3.0 (6 Gbps)	4 x U.2 SSD drive bay support SATA 3.0 (6 Gbps)
	USB	2 x USB 3.0 Type A	2 x USB 3.0 Type A
	Console	1 x RJ45 1 x USB Type-C	1 x RJ45 1 x USB Type-C
Power and Mechanical	Power Switch	Rear: 1 x Power Button	1 x Power Switch
	Reset Button	Front: 1 x Reset Button	1 x Reset Button
	Power Input	90 V ~ 264 V	100 V ~ 240 V
	Type/Watt	320W redundant power	1200W redundant power 90V~264V AC
	Processor Cooling	1 x Passive CPU heatsink	2 x Active CPU cooler
	System Cooling	4 x System fans	5 x Smart cooling fans
	Antenna Hole	1 x Antenna hole	N/A
Physical and Environmental	Storage Temperature	-10°C ~ 50°C	-10°C ~ 50°C
	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
	Operating Humidity	5% ~ 90% non-condensing	5% ~ 90% non-condensing
	Dimensions (W x L x H) (mm)	436.2 x 454.3 x 44.2	438 x 650 x 88
	Weight	8 kg	23 kg
Certifications	Certification	By customer request	CE / FCC / RoHS
	Supported Operating System	Ubuntu, Linux based OS	Linux 18.04 (CentOS, Red Hat, Ubuntu, etc.) Windows Server 2019
Indicators	LCM	LCM, 2 buttons	N/A
	LED	1 x Power LED, 1 x Storage LED, 1 x Alert LED	1 x Power LED, 1 x Storage LED, 1 x Alert LED

Performance Network Appliances



		PUZZLE-5060	PUZZLE-5070
Platform	Form Factor	1U rackmount	1U rackmount
	CPU	AMD Ryzen 7000 & 8000	Intel® Arrow Lake S
	Chipset	AMD 600 series	Intel® 800 Seies
Memory	Memory Technology	4 x DDR5 4800MHz DIMM slots	4 x DDR5 6400MHz UDIMM Slot
	Memory Capacity	Based on DIMM capacity	Based on DIMM capacity
	Memory Socket	4 x 288-pin DDR5 UDIMM	4 x 288-pin DIMM
Network and Security	Network Acceleration and Security Function	N/A	Intel® Threat Detection Technology (TDT) Intel® AES New Instructions (AES-NI) Intel® Trusted Execution Technology (TXT) Intel® OS Guard
	TPM	1 x TPM 2.0 pin header	1 x TPM 2.0 pin header
BMC	BMC Solution	1 x M.2 Socket B Key support IEI iRIS2 BMC module, 1 x 1 GbE RJ45 for IPMI port	1 x M.2 Socket B Key support IEI iRIS2 BMC module
Networking	Ethernet IC	Intel® I210	Intel® i210
	Ethernet Port	8 x 1 GbE RJ45 ports	8 x 1 GbE RJ45 LAN ports 2 x 1 GbE RJ45 MGMT ports
	Network Module Slot	2 x IEI PuIM network module slots	Support 2x IEI proprietary networking module (PuIM module) slots
Expansion Slot	PCIe Slot	N/A	N/A
	M.2	1 x B key for BMC module 1 x M.2 2280 M-Key	
Storage	Storage	2 x U.2 2.5" NVMe SSD	2 x External 2.5" U.2 SSD removable tray (PCIe Gen4x4) 1 x M.2 2280 M-Key (PCIe Gen5x4)
	USB	2 x USB 3.0 Type-A	2 x USB 3.0 Type A
	Console	1 x RJ45 console port	1 x RJ45
Power and Mechanical	Power Switch	Rear: 1 x Power button	Rear: 1 x Power Button
	Reset Button	Front: 1 x Reset button	Front: 1 x Reset Button
	Power Input	100 V ~ 240 V	90 V ~ 264 V
	Type/Watt	Dual CRPS redundant power	Redundant PSU 300W, 90V ~ 264V AC
	Processor Cooling	1 x Passive CPU Heatsink	
Physical and Environmental	System Cooling	4 x System fans	4 x System fans
	Storage Temperature	-10°C ~ 50°C	-10°C ~ 50°C
	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
	Operating Humidity	5% ~ 90% non-condensing	5% ~ 90% non-condensing
	Dimensions (W x L x H) (mm)	430 x 414.2 x 44.2	436.2 x 454.3 x 44.2
Certifications	Weight	<10 kg	TBD
	Certification	By customer request	By customer request
	Supported Operating System	Ubuntu Linux	Ubuntu, Linux based OS
Indicators	LCM	N/A	N/A
	LED	1 x System LED, 1 x Storage LED	Front: 1 x Storage LED, 1 x System LED Rear: 2 x PSU LED

Entry Network Appliances



		PUZZLE-1100	PUZZLE-3034	PUZZLE-3032
Platform	Form Factor	Desktop	Desktop	Desktop
	CPU	1 x Intel® Amston® Lake processors supporting TDP 25W	Intel® Atom® C3758R 8C/8T (16M Cache, 2.4 GHz)	Intel® Atom® C3558R 4C/4T (8M cache, 2.4 GHz)
	Chipset	Integrated in CPU	Intel® Denverton-R	Intel® Denverton-R
Memory	Memory Technology	1 x DDR5 SO-DIMM slot	2 x DDR4 2400 MHz Non-ECC UDIMM Default: 1 x UDIMM 8GB	2 x DDR4 2400 MHz non-ECC UDIMM Default: 1 x UDIMM 8GB
	Memory Capacity	Based on SO-DIMM capacity	Up to 64GB (based on DIMM capacity)	Up to 64GB (based on DIMM capacity)
	Memory Socket	1 x 260-pin DDR5 SO-DIMM	2 x 288-pin DIMM	2 x 288-pin DIMM
Network and Security	Network Acceleration and Security Function	N/A	- Intel® AES New Instructions - Intel® Memory Protection Extensions (Intel® MPX) - Intel® Trusted Execution Technology - Intel® QuickAssist Technology (Intel® QAT)	- Intel® AES New Instructions - Intel® Memory Protection Extensions (Intel® MPX) - Intel® Trusted Execution Technology - Intel® QuickAssist Technology (Intel® QAT)
	TPM	1 x TPM 2.0 pin header	N/A	N/A
BMC	BMC Solution	1 x M.2 Socket B Key support IEI iRIS2 BMC module. 1 x 1 GbE RJ45 for IPMI port	N/A	N/A
Networking	Ethernet IC	4 x 2.5GbE Intel i226V	Intel 2.5GbE KT1225V SLNMH	Intel 2.5GbE KT1225V SLNMH
	Ethernet Port	4 x GbE RJ45 ports	8 x 2.5GbE RJ45 LAN ports 4 x 10GbE, SFP+	8 x 2.5GbE RJ45 LAN ports 2 x 10GbE, SFP+
	Network Module Slot	N/A	N/A	N/A
Expansion Slot	PCIe Slot	1 x PCIe Mini for WiFi module	N/A	N/A
	M.2	1x M.2 B key slot for 5G module	1 x 2242 B key slot for M.2 SATA 1 x 3052 B key slot + SIM card socket for 5G/ LTE card	1 x 2242 B key slot for M.2 SATA 1 x 3052 B key slot + SIM card socket for 5G/ LTE card
Storage	Storage	1 x 2240/2280 B-Key SATA SSD (PCIe Gen3 x1)	64GB eMMC 2 x 2280 M key slots for NVMe	64GB eMMC 2 x 2280 M key slots for NVMe
	USB	2 x USB 3.0 Type A	2 x USB 3.0 Type A	2 x USB 3.0 Type A
	Console	1 x USB Type-C	1 x RJ45	1 x RJ45
Power and Mechanical	Power Switch	Rear: 1 x Power Button	1 x Power button	1 x Power button
	Reset Button	Rear: 1 x Reset Button	1 x Reset button	1 x Reset button
	Power Input	1 x 12V DC jack	100 V ~ 240 V	100 V ~ 240 V
	Type/Watt	12V/5AAC-DC power adaptor	Open-frame DPS-60AP-5 D; Vin: 90 ~ 264VAC; 70W	Open-frame DPS-60AP-5 D; Vin: 90 ~ 264VAC; 70W
	Processor Cooling	12W: fanless 25W: fan and heatsink	1 x Passive CPU heatsink	1 x Passive CPU heatsink
	System Cooling	N/A	2 x Cooling fans	2 x Cooling fans
	Antenna Hole	8 x Antenna hole (reserved)	3 x Antenna hole (reserved)	3 x Antenna hole (reserved)
Physical and Environmental	Storage Temperature	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C
	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
	Operating Humidity	5% ~ 90% non-condensing	5% ~ 90% non-condensing	5% ~ 90% non-condensing
	Dimensions (W x L x H) (mm)	224.5 x 170 x 42.5	285 x 236.6 x 46.65	285 x 236.6 x 46.65
	Weight	3 kg	3.5 kg	3.5 kg
Certifications	Certification	By customer request	CE / FCC / RoHS	CE / FCC / RoHS
	Supported Operating System	Linux Ubuntu	Linux Ubuntu 18.04	Linux Ubuntu 18.04
Indicators	LCM	N/A	16 x 2 character with control keys	16 x 2 character with control keys
	LED	1 x Power LED, 1 x 5G LED, 1 x WiFi LED, 1 x Alert LED	1 x Power LED, 1 x Storage LED, 1 x Alert LED	1 x Power LED, 1 x Storage LED, 1 x Alert LED

Entry Network Appliances



		PUZZLE-IN003A	PUZZLE-IN003B
Platform	Form Factor	Desktop	Desktop
	CPU	Intel® Atom® processor C3558 8M cache, up to 2.20 GHz	Intel® Atom® processor C3758 16M cache, up to 2.20 GHz
	Chipset	Integrated in CPU	Integrated in CPU
Memory	Memory Technology	DDR4 2133 MHz ECC (by CPU) or non-ECC UDIMM, support DDR4 RDIMM	DDR4 2133 MHz ECC (by CPU) or non-ECC UDIMM, support DDR4 RDIMM
	Memory Capacity	UDIMM up to 64GB / RDIMM up to 128GB	UDIMM up to 64GB / RDIMM up to 128GB
	Memory Socket	2 x 288-pin DIMM	4 x 288-pin DIMM
Network and Security	Network Acceleration and Security Function	- Intel® AES New Instructions - Intel® Software Guard Extensions (Intel® SGX) - Intel® Virtualization Technology for Directed I/O (VT-d) - Intel® QuickAssist Technology (Intel® QAT)	- Intel® AES New Instructions - Intel® Software Guard Extensions (Intel® SGX) - Intel® Memory Protection Extensions (Intel® MPX) - Intel® Virtualization Technology for Directed I/O (VT-d) - Intel® QuickAssist Technology (Intel® QAT)
	TPM	1 x TPM 2.0 pin header	1 x TPM 2.0 pin header
Networking	Ethernet IC	1GbE NIC: Intel® I211-AT 1GbE PHY: Marvell® 88E1543	1GbE NIC: Intel® I211-AT 1GbE PHY: Marvell® 88E1512 10 GbE: Intel® X553 integrated in CPU
	Ethernet Port	4 x GbE from Intel® I211-AT 4 x GbE from Marvell® 88E1543	4 x 1GbE from Intel® I211-AT 2 x 1GbE from Marvell® 88E1512 2 x 10 GbE SFP+
	Bypass	2 bypass segments	N/A
	Network Module Slot	N/A	N/A
Expansion Slot	PCIe Slot	N/A	N/A
	M.2	1 x M.2 A key (PCIe Gen3 & USB 2.0)	1 x M.2 A key (PCIe Gen3 & USB 2.0)
Storage	Storage	1 x SATA 6Gb/s + 1 x 5V power connector (for SATA DOM) 1 x M.2 M key 2260/2280 supporting PCIe Gen3 x4 NVMe	1 x SATA 6Gb/s + 1 x 5V power connector (for SATA DOM) 1 x M.2 M key 2260/2280 supporting PCIe Gen3 x4 NVMe
	USB	1 x USB 2.0 1 x USB 3.2 Gen 1	1 x USB 2.0 1 x USB 3.2 Gen 1
	Console	1 x RJ45	1 x RJ45
Power and Mechanical	Power Switch	1 x Power switch	1 x Power switch
	Reset Button	1 x Reset button	1 x Reset button
	Power Input	1 x DC jack	1 x DC jack
	Type/Watt	12 V DC-in, 60W	12 V DC-in, 60W
	Processor Cooling	Passive CPU heatsink	Passive CPU heatsink
	System Cooling	Fanless	Two system fans
	Antenna Hole	2 x Antenna hole	2 x Antenna hole
Physical and Environmental	Storage Temperature	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)
	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
	Operating Humidity	5% ~ 90% non-condensing	5% ~ 90% non-condensing
	Dimensions (W x L x H) (mm)	225 x 206 x 44.2	225 x 206 x 44.2
	Weight	2 kg	2 kg
Certifications	Certification	CE / FCC / RoHS	CE / FCC / RoHS
	Supported Operating System	Linux Ubuntu 18.04.04 CentOS 7 / Red Hat / Fedora EPEL Microsoft Windows 10	Linux Ubuntu 18.04.04 CentOS 7 / Red Hat / Fedora EPEL Microsoft Windows 10
Indicators	LCM	N/A	N/A
	LED	1 x Power LED, 1 x Storage LED, 1 x Alert LED	1 x Power LED, 1 x Storage LED, 1 x Alert LED

ARM-Based Network Appliances



		PUZZLE-200	PUZZLE-100
Platform	Form Factor	Desktop	Desktop
	CPU	Marvell® CN10208 8-core 2.1GHz	Marvell® A7K 88F7040 ARM v8 quad-core 1.4GHz
	Chipset	Integrated in CPU	Integrated in CPU
Memory	Memory Technology	1 x DDR5 SO-DIMM slot	DDR4 1333MHz non-ECC
	Memory Capacity	Based on DIMM capacity	2GB
	Memory Socket	1 x 260-pin DDR5 SO-DIMM	On-board
Network and Security	Network Acceleration and Security Function	N/A	N/A
	TPM	N/A	N/A
BMC	BMC Solution	1 x IEI iRIS3 IPMI connector for IPMI module (optional) 1x RJ45 for BMC module (IEI iRIS module)	N/A
Networking	Ethernet IC	Marvell® 88E6393X, 88E2111	Marvell® 88E6352, 88E1512
	Ethernet Port	6 x GbE RJ45 ports 2 x 2.5GbE RJ45 port 2 x 10GbE SFP+ port	LAN: 5 x GbE RJ45 ports WAN: 1 x GbE RJ45 port
	Network Module Slot	N/A	N/A
Expansion Slot	PCIe Slot	N/A	N/A
	M.2	N/A	N/A
Storage	Storage	1 x eMMC 32GB	1 x eMMC 4GB
	USB	1 x USB 3.0 Type A	1 x USB 3.0 Type-A
	Console	1 x USB Type C	1 x USB 3.0 Type A
Power and Mechanical	Power Switch	N/A	Rear: 1 x Power button
	Reset Button	Side: 1 x Reset button	Front: 1 x Reset button
	Power Input	1 x 12V DC jack	1 x 12V DC jack
	Type/Watt	12V/6A AC-DC power adaptor	12V/3.3A AC-DC power adaptor
	Processor Cooling	Fanless	Fanless
	System Cooling	Fanless	Fanless
	Antenna Hole	N/A	N/A
Physical and Environmental	Storage Temperature	-10°C ~ 50°C	-10°C ~ 50°C
	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
	Operating Humidity	5% ~ 90% non-condensing	5% ~ 90% non-condensing
	Dimensions (W x L x H) (mm)	190 x 150 x 70	209.9 x 151.2 x 38.1
Certifications	Weight	TBD	0.6 kg
	Certification	By customer request	CE, FCC, VCCI, BSMI
Indicators	Supported Operating System	Linux Ubuntu	Linux Ubuntu
	LCM	N/A	N/A
	LED	Front: 1 x Power LED, 1 x Information LED	Front: 1 x Power LED, 1 x Network LED, 1 x Information LED

Network Modules

For 2U Rack Mount System



	PuIM-100G2SF-E810	PuIM-10G2SF/T-X710	PuIM-10G4SF/T-XL710
Chipset	Intel® E810	Intel® X710	Intel® XL710
Bypass	N/A	N/A	N/A
Host Interface	PCIe Gen4 x8	PCIe Gen3 x8	PCIe Gen3 x8
LAN Interface	QSFP28	SFP+	SFP+
Speed	1GbE / 10GbE / 25GbE / 50GbE / 100GbE	1GbE/10GbE	1GbE/10GbE
LAN Port Number	2	2	4
Storage Temp.	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
Humidity	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing
Dimensions (mm)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)



	PuIM-10G4SF/T-XL710-BP	PuIM-1G4SF/T-I350	PuIM-1G8SF/T-I350
Chipset	Intel® XL710	Intel® I350-AM4	Intel® I350-AM4
Bypass	Two pairs	N/A	N/A
Host Interface	PCIe Gen3 x8	PCIe Gen2 x4	2 PCIe Gen2 x4
LAN Interface	SFP+	SFP	SFP
Speed	1GbE/10GbE	1GbE	1GbE
LAN Port Number	4	4	8
Storage Temp.	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
Humidity	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing
Dimensions (mm)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)



	PuIM-1G4T/T-I350	PuIM-1G4T/T-I350-BP	PuIM-1G8T/T-I350	PuIM-1G8T/T-I350-BP
Chipset	Intel® I350-AM4	Intel® I350-AM4	Intel® I350-AM4	Intel® I350-AM4
Bypass	N/A	Two pairs	N/A	Four pairs
Host Interface	PCIe Gen2 x4	PCIe Gen2 x4	2 PCIe Gen2 x4	2 PCIe Gen2 x4
LAN Interface	RJ45	RJ45	RJ45	RJ45
Speed	1GbE	1GbE	1GbE	1GbE
LAN Port Number	4	4	8	8
Storage Temp.	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
Humidity	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing
Dimensions (mm)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)

Network Modules

For 1U Rack Mount System



	PuIM-100G2SF-CX6	PuIM-40G2SF-XL710
Chipset	Mellanox ConnectX-6	Intel® XL710
Bypass	N/A	N/A
Host Interface	PCIe Gen4 x16	PCIe Gen3 x8
LAN Interface	QSFP28	QSFP+
Speed	1GbE / 10GbE / 25GbE / 50GbE / 100GbE	1GbE/ 10GbE/ 40GbE
LAN Port Number	2	2
Storage Temp.	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
Humidity	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing
Dimensions (mm)	162.2 (L) x 74 (W) x 41.85 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)



	PuIM-10G2SF-X710	PuIM-10G4SF-XL710	PuIM-10G4SF-XL710-BP
Chipset	Intel® X710	Intel® XL710	Intel® XL710
Bypass	N/A	N/A	Two pairs
Host Interface	PCIe Gen3 x8	PCIe Gen3 x8	PCIe Gen3 x8
LAN Interface	SFP+	SFP+	SFP+
Speed	1GbE/ 10GbE	1GbE/10GbE	1GbE/10GbE
LAN Port Number	2	4	4
Storage Temp.	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
Humidity	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing
Dimensions (mm)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)



	PuIM-1G4SF-I350	PuIM-1G8SF-I350
Chipset	Intel® I350-AM4	Intel® I350-AM4
Bypass	N/A	N/A
Host Interface	PCIe Gen2 x4	2 PCIe Gen2 x4
LAN Interface	SFP	SFP
Speed	GbE	GbE
LAN Port Number	4	8
Storage Temp.	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
Humidity	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing
Dimensions (mm)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)

Network Modules

For 1U Rack Mount System



	PuIM-1G4T-I350	PuIM-1G4T-I350-BP	PuIM-1G8T-I350
Chipset	Intel® I350-AM4	Intel® I350-AM4	Intel® I350-AM4
Bypass	N/A	two pairs	N/A
Host Interface	PCIe Gen2 x4	PCIe Gen2 x4	2 PCIe Gen2 x4
LAN Interface	RJ45	RJ45	RJ45
Speed	GbE	GbE	GbE
LAN Port Number	4	4	8
Storage Temp.	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
Humidity	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing
Dimensions (mm)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)



	PuIM-1G8T-I350-BP	PuIM-2P1M	PuIM-M2-2S
Chipset	Intel® I350-AM4	Integrated in CPU	Integrated in CPU
Bypass	Four pairs	N/A	N/A
Host Interface	2 PCIe Gen2 x4	1 PCIe Gen3 x4	2 PCIe Gen3 x4
LAN Interface	RJ45	ASM1812 (PCIe Gen2 x4) FL1100EX (PCIe to USB 3.0, 4-port)	N/A
Speed	GbE	1 x 2230/2242 M.2 B key (PCIe Gen2, USB 3.2 Gen1) with SIM card slot	2 x M key 2260/2280/22110 (PCIe Gen3 x4/NVMe)
LAN Port Number	8	2 x PCIe Mini (PCIe Gen2, USB 2.0) with SIM card slot	N/A
Storage Temp.	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)	-20°C ~ 75°C (-4°F ~ 167°F)
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
Humidity	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing
Dimensions (mm)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)	165.50 (L) x 77.8 (W) x 44.2 (H)

Digital Healthcare

Advancing Safety and Quality in Medical Care Environments

IEI delivers advanced medical computing solutions that drive digital transformation in healthcare. With a strong commitment to innovation, IEI designs and manufactures high-quality, reliable products—including nursing cart computers, all-in-one medical panel PCs, AI-enabled box PCs, medical-grade UPS systems, and digital endoscopy devices. These solutions enhance clinical efficiency, improve working conditions for healthcare professionals, and support better patient outcomes.



Highlights



Reliability Meets Medical Standards

- Compliant with IEC 60601-1 standards
- Glove-friendly touchscreens and ergonomic designs enhance usability in demanding medical settings.
- IP65-rated front panel provides resistance to dust and water ingress.



Integrating AI, Computing, and Mobile Innovation

- Equipped with the latest Intel® processors for high-performance computing.
- Incorporates AI capabilities and edge computing to support real-time data processing and intelligent diagnostics.
- Includes hot-swappable battery systems and fast charging for uninterrupted mobile operations.



AI Powerhouse with Medical-Grade Resilience

- Powered by Intel® Core™ and Xeon® processors throughout the series, with high-end features such as NPU support or Core™ i9-level performance.
- Offers GPU expansion via PCIe or MXM, supporting real-time diagnostic inference.
- Enables AI imaging, analysis, and deployment across clinical and mobile systems.

Product Selection Guide

	Medical Panel PC					Medical Box PC
	24"	22"	10"	8"	7"	Non-Display
Intel® Core™ i9			HTB-230D-R680E			HTB-230-R680E
Intel® Core™ i7	POCi-W24C-RPL POCm-W24C-RPL	POCi-W22C-RPL POCm-W22C-RPL	HTB-230D-R680E			HTB-230-R680E HTB-210-Q470
Intel® Core™ i5	POCi-W24C-RPL POCm-W24C-RPL	POCi-W22C-RPL POCm-W22C-RPL	HTB-230D-R680E			HTB-230-R680E HTB-210-Q470
Intel® Celeron			IASO-W10B-N6210	IASO-W08PLED-N6210	IASO-W07A-N6210	HTB-150-N6210
Rockchip RK3588				EndoCap-3588		
NXP i.MX 8M Mini			IASO-W10B-IMX8M			

HTB series

This product series includes both high-performance AI box PCs with GPU support for medical imaging and diagnostics, and compact embedded systems designed for general medical computing needs.



Model		HTB-300-MTL-H
Processor	Processor	Intel® Core™ Ultra5-125H/ Ultra7-155H processor (Meteor Lake-H)
LAN	LAN Controller	Intel® I226-V
System	Storage	2 x M.2 2280 M key (PCIe) with RAID
	RAM	2 x 262-pin 5600MT/s dual-channel DDR5 SO-DIMM slots (system max. 64GB)
Expansion	Expansion	2 x M.2 2280 PCIe Gen4 x4 M key slot for SSD 1 x M.2 2230 A-E Key Slot (PCIe + USB) 1 x MXM 3.1 Type A/ B PCIe Gen5 x8 1 x PCIe Gen4 x4
Audio	Audio	1 x Combo audio-out/mic-in
Speaker	Speaker	1 x 3W speaker
Wireless	Wi-Fi	IEEE 802.11 be, Intel® Wi-Fi 7 BE200 (optional)
	Bluetooth	Bluetooth V5.4 (optional)
I/O	Front I/O	2 x USB 2.0 1 x HDMI 2.1 output 1 x USB Type-C (DP1.2 + USB 5V/3A)
	Rear I/O	1 x DC IN Jack 1 x Terminal Block (DC IN) 2 x 2.5 GbE LAN 4 x USB 3.2 Gen 2 (10Gb/s) 4 x RS232
Button	Button	1 x System power on/ off button (with power LED)
Physical	Color	White
	Thermal	Fanless
	Chassis Construction	NCT(N); SECC
	Construction Material	Aluminum
	Mounting	Wall, Stand and Arm; VESA 75/100 compliant; Din Rail mount
	Weight (Net) (kg)	2.05
	Weight (Gross) (kg)	4.26
	Dimensions (LxWxH) (mm)	232 X 202 X 43.5 mm
Power	Input	9~28 VDC
	Power Adapter	19VDC, 120W medical power adapter
Environment	Operating Temperature	0°C – 40°C
	Storage Temperature	-20°C – 60°C
	Humidity	10% – 95% (non-condensing)
	Vibration	1G
	Operating shock	5G peak acceleration (11ms duration)
Operating System	Supported OS	Windows 11; Linux Ubuntu
Certification	EMC & Safety	CE, FCC Class B Part18 UL 60601-1 IEC/EN 60601-1: 2005+AMD1:2012 (Edition 3.2) IEC/EN 60601-1-2 (Edition 4.1)

Model		HTB-230D-R680E	HTB-230-R680E
Display	Display Size	10.1"	-
	Resolution	1920 x 1200	
	Brightness (cd/m²)	400	
	Contrast Ratio	900:1	
	LCD Color	16.7M (8bit)	
Touch	Pixel Pitch (mm)	0.03764 x 0.11292	
	Viewing Angle (H/V)	160°/160°	
	Touchscreen	Projected capacitive type with 10-point multi-touch	
	Touch Controller	ILI	
	Surface Hardness	6H	
Processor	Processor	13th Gen Intel® Core™ i9-13900 / 13th Gen Intel® Core™ i7-13700 / 13th Gen Intel® Core™ i5-13500	-
	Chipset	Intel® R680E	
	GPU	Compatible with NVIDIA Quadro RTX Ampere series GPUs	
LAN	LAN Controller	Intel® I226-V	-
System	Storage	M.2 2280 PCIe Gen4 x4 NVMe SSD	
	RAM	4 x 288-pin dual-channel DDR5 U-DIMM (up to 4400MHz), ECC and non-ECC unbuffered memory (up to 128GB total)	-
Expansion	Expansion	1 x PCIe Gen4 x16 slot for GPU (supports full-height cards up to 111.15 mm (4.4 inches), full-length cards up to 312 mm (12.28 inches), and up to triple-slot widths, with a maximum TDP of 300W) 2 x PCIe Gen4 x4 slots for add-on cards 1 x M.2 2280 PCIe Gen4 x4 M-key slot for SSD	
Speaker	Speaker	2 x 3W speaker	-
Security	Security	Trusted Platform Module 2.0	
I/O	Front I/O	2 x USB 3.2 Gen 2 (10Gb/s)	-
	Rear I/O	1 x HDMI output 1 x AC IN 1 x Speaker 1 x Microphone 2 x 2.5 GbE LAN 4 x USB 3.2 Gen 2 (10Gb/s)	
Button	Button	1 x Power supply swich 1 x System power button (with power LED)	-
LED Indicator	LED Indicator	Power LED	
Physical	Color	White	-
	Thermal	Smart fan	
	Chassis Construction	NCT(N); SECC	
	Weight (Net) (kg)	7.68	
	Weight (Gross) (kg)	10.69	
Power	Dimensions (LxWxH) (mm)	310 x 206 x 390	-
	Input	100V AC – 240V AC medical grade ATX power	
Environment	Output	700W medical build in power supply	-
	Operating Temperature	0°C – 40°C	
Operating System	Storage Temperature	-20°C – 65°C	-
	Humidity	10% – 95% (non-condensing)	
	Vibration	1G	
	Operating Shock	5G peak acceleration (11ms duration)	
	Non-operating Shock	15G peak acceleration (11ms duration)	
Certification	Supported OS	Windows 11; Linux ubuntu	-
Certification	EMC & Safety	CE, FCC Class B Part18, UL 60601-1, IEC/EN 60601-1(edition 3.2), IEC/EN 60601-1-2 (edition 4.1)	

Model		HTB-210-Q470
Motherboard	CPU	Intel® Core™ i5-10500TE (6-core, 35W TDP) Intel® Core™ i7-10700TE (8-core, 35W TDP)
	Chipset	Intel® Q470
	System Memory	2 x 260-pin 2666/2133MHz dual-channel DDR4 SO-DIMM ECC & non-ECC unbuffered (system max. 128GB)
Storage	Hard Drive	1 x 2.5" SATA HDD/SSD bay
I/O	USB	1 x USB Type-C (5Gbps, w/o ALT mode) 2 x USB 3.2 Gen 1 (5Gb/s) 2 x USB 2.0 (front side)
	Ethernet	2 x Intel® I225-V PCIe controller (2.5GbE)
	COM Port	1 x RS-232/422/485
	Display	1 x HDMI
	Resolution	HDMI: up to 4096 x 2304 @30Hz
Expansions	Others	1 x Power button 1 x AT/ATX switch
	PCIe	1 x PCIe Gen3 x4 slot 1 x PCIe Gen3 x16 slot
	M.2	1 x M.2 2230 A key (PCIe x2 and USB 2.0) 1 x M.2 2280 M key (PCIe x4 and SATA)
Power	Power Input	19V DC
	Power Consumption	19V @4.8A
	Power Adapter	100V – 240V AC input, 19V DC output, 180W
Chassis	Color	White
	Dimension (LxWxH)	140 x 306.7 x 171 mm
	Thermal	Smart fan
	Chassis Construction	Metal housing (SECC)
Reliability	Operating Temperature	0°C – 40°C
	Operating Humidity	10% – 95% (non-condensing)
	Storage Temperature	-20°C – 60°C
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis
	Operation Vibration	MIL-STD-810G 514.6C-1 (with SSD)
Certification	Weight (Net)	2.8 kg
	Safety / EMC	UL/ cUL FCC Part 15B EN 62368-1 Ed.2 + RMF EN 55032 + EN 55035
OS	Supported OS	Windows 11, Windows 10, Linux

Model		HTB-150-N6210
Processor	Processor	Intel® Celeron® Processor N6210
LAN	LAN Controller	Intel® I225-V
System	Storage	On-board eMMC 32GB
	RAM	On-board LPDDR4x 8GB
Expansion	Expansion	1 x M.2 2230 A key slot (PCIe + USB) 1 x M.2 2280 M key slot (PCIe)
Wireless	Wi-Fi	Intel® Wi-Fi 6E AX210, IEEE 802.11a/b/g/n/ac/ax, MIMO 2x2 (optional)
	Bluetooth	Bluetooth® 5.3 (optional)
I/O	Front I/O	1 x Power on/off switch (with power LED) 1 x Reset button 1 x Clear CMOS 1 x AT/ATX switch 4 x USB 3.2 Gen 2 (Type A)
	Rear I/O	1 x 12V DC jack 1 x RS-232 1 x HDMI out 2 x GbE LAN
LED Indicator	LED Indicator	Power LED
Physical	Thermal	Fanless
	Construction Material	Extruded aluminum alloys
	Mounting	VESA 75 x 75 mm
	Weight (Net) (kg)	0.688
	Weight (Gross) (kg)	1.84
Power	Dimensions (LxWxH) (mm)	137 x 102.8 x 36
	Power Adapter	65W medical grade power adapter
Environment	Operating Temperature	0°C – 40°C
	Storage Temperature	-20°C – 60°C
	Humidity	10% – 95% (non-condensing)
	Vibration	1G
	Operating Shock	5G peak acceleration (11ms duration)
Operating System	Non-operating Shock	15G peak acceleration (11ms duration)
	Supported OS	Windows 10; Windows 11; Linux Ubuntu
Certification	EMC & Safety	CE, FCC Class B Part18, UL 60601-1, IEC/EN 60601-1, IEC/EN 60601-1-2

EndoCap series

Designed for upgrading legacy endoscopy systems, this compact box PC enables 4K@60FPS video capture and real-time dual HDMI output, supporting precise diagnostics and remote teaching without the need to replace existing equipment.



Model		EndoCap-3588	
Display	Display Size	8"	
	Resolution	1200 x 1920	
	Brightness (cd/m²)	460	
	Contrast Ratio	900:1	
	LCD Color	16.7M (RGB 8-bits)	
	Pixel Pitch (mm)	0.0897 x 0.0897	
	Viewing Angle (H/V)	170°/170°	
	Backlight MTBF (hrs)	30,000	
Touch	Touchscreen	Projected capacitive type with 10-point multi-touch	
	Touch Controller	ILI 2520	
Processor	Processor	Rockchip RK3588 (Quad core Cortex-A76 + Quad-core Cortex-A55)	
	GPU	ARM Mali-G610 MP4	
	NPU	6TOPS NPU, triple core, support int4/int8/int16/FP16/BF16/TF32 acceleration	
RAM	RAM	On-board 8GB LPDDR4x	
Flash	Flash	On-board 32GB of eMMC NAND Flash	
Recording and Capture	Encoding formats	H.264, H.265	
	Recording file format	MP4	
	Capture image format	BMP / BMP+DCM / JPEG	
	Audio encoding format	AAC-LC	
Expansion	Expansion	1 x M.2 2280 M key slot	
Audio	Audio	1 x Line-out jack	
Speaker	Speaker	2 x 3W speaker	
Microphone	Microphone	1 x Mic-in	
HDMI	HDMI	1 x HDMI-input up to 4K@60FPS / 1 x HDMI-output up to 4K@60FPS / 1 x HDMI-output up to 8K@60FPS	
Wireless	Wi-Fi	Wi-Fi 6	
	Bluetooth	Bluetooth v5.0	
I/O	Front I/O	2 x USB 3.0 1 x Line out	1 x Mic in Power button
	Rear I/O	1 x HDMI-output up to 8K@60Hz 1 x HDMI-output up to 4K@60Hz 1 x HDMI-input up to 4K@60FPS 2x GPIO for Pedal	1 x GbE LAN 1 x 2.5GbE LAN 4 x USB 2.0 1x DC IN
Button	Button	1 x Power on/off (with power LED)	
LED Indicator	LED Indicator	1 x Power LED / 1 x Capture status	
Physical	Color	White; Black	
	Thermal	Fanless	
	Weight (Net) (kg)	1.88	
	Weight (Gross) (kg)	4.89	
	Dimensions (LxWxH) (mm)	205.4 x 168.34 x 162.65	
Power	Input	12V DC	
	Power Adapter	65W power adapter	
Environment	Operating Temperature	0°C – 40°C	
	Storage Temperature	-20°C – 65°C	
	Humidity	10% – 95% (non-condensing)	
	Vibration	1G	
	Operating shock	5G peak acceleration (11ms duration)	
	Non-operating shock	15G peak acceleration (11ms duration)	
Operating System	Supported OS	Debian 11 (Linux kernel 5.10)	
Certification	EMC & Safety	CE, FCC Class A Part18	

IASO series

Medical information computers enhance clinical workflow by syncing patient data with PACS servers, making data management easier—ideal for scenarios like data handling, patient room displays, and bedside cards.



Model		IASO-W07A-N6210		IASO-W08PLED-N6210	
LCD Specifications	LCD Size	7"		8"	
	Resolution (W/H)	1024 x 600		1280 x 800	
	Brightness (cd/m²)	450		350	
	Contrast Ratio	800:1		800:1	
	LCD Color	-		16.7M	
	Pixel Pitch	-		0.13455 x 0.13455	
	Viewing Angle (H/V)	170°/170°		170°/170°	
	Backlight MTBF (hrs)	20,000		15,000	
Touch	Touchscreen	PCAP		P-CAP with multi-touch	
	Touch Controller	EETI		ILI	
	Surface Hardness	-		6H	
System	CPU Support	Intel® Celeron® Processor N6210		Intel® Celeron® N6210 (code name: Elkhart Lake, 1.2GHz, dual core, TDP 6.5W)	
	LAN Controller	Intel® I225-V		Intel® I226-V	
	RAM	On-board LPDDR4x 8G		On-board LPDDR4x 8GB	
	Storage	32GB on-board eMMC		On-board eMMC 128GB	
	Audio & Speaker	1 x AMP 1.5W speaker		1 x Audio line-out jack 1 x 1.5W speaker	
	Camera & Microphone	1 x Digital microphone		-	
	I/O Port	1 x 12V DC jack 1 x HDMI out 1 x Reset switch 1 x Clear CMOS switch	1 x AT/ATX switch 2 x GbE LAN 6 x USB 3.2 Gen 1 (Type A)	1 x 12V DC jack 1 x GbE LAN 1 x Power button 1 x Reset	1 x Clear COMS 1 x AT/ATX switch 2 x USB 3.2 Gen1 (Type A)
	LED	Power LED		Programmable RGB LED light bars on both sides	
	Wi-Fi	IEEE 802.11 a/b/g/n/ac/ax, Intel® Wi-Fi 6 AX200, Bluetooth V5.0		Intel® Wi-Fi 6E AX210, IEEE 802.11a/b/g/n/ac/ax, MIMO 2x2 (optional)	
	Bluetooth			Bluetooth® 5.3 (optional)	
Physical	Color	-		White	
	Construction Material	Front: PC Rear cover: PC/ABS plastic		Front: PC; Rear cover: ABS+PC	
	Mounting	VESA 75 x 75 mm		VESA 75 x 75 mm	
	Weight (Net / Gross)	0.72 kg / 1.65 kg		1	
	Dimensions (LxWxH)	190.9 x 127.3 x 43.4 mm		250.1 x 152.1 x 39.7	
Environment	Operating Temperature	0°C – 40°C			
	Storage Temperature	-20°C – 60°C			
	Humidity	10% – 95% (non-condensing)			
	Vibration	1G			
	Operating shock	5G peak acceleration (11ms duration)			
	Non-operating shock	15G peak acceleration (11ms duration)			
	Thermal	Fanless			
Operating System	Supported OS	Windows 10; Windows 11; Linux Ubuntu		Windows 11; Linux ubuntu	
Power	Power Input	-		12V	
	Power Adapter	65W medical grade power adapter		36W	
	PoE	-		IEEE 802.3at (Class 4) 25.5W	
Expansion	Expansion	1 x M.2 2230 A key slot (PCIe + USB) 1 x M.2 2280 M key slot (SATA)		1 x M.2 2230 A Key Slot (PCIe + USB) 1 x M.2 2242 M Key Slot (default SATA; PCIe)	
Certification	EMC & Safety	CE, FCC Class B Part18 IEC 60601-1: 2005+AMD2:2021 (Edition 3.2) IEC 60601-1-2: 2014 (Edition 4.0)		CE, IEC 62368-1, FCC Part 15 Class B	

IASO series

This 10.1" medical information terminal features an optically bonded touchscreen, eliminating air gaps to prevent dust and moisture ingress, thereby enhancing durability and reliability in clinical environments. Dual programmable LED light bars, provide customizable visual alerts to support medical workflows and safety protocols.



Model		IASO-W10B-N6210		IASO-W10B-IMX8M	
LCD Specifications	LCD Size	10.1"			
	Resolution (W/H)	1280 x 800			
	Brightness (cd/m²)	400			
	Contrast Ratio	800:1			
	LCD Color	16.7M (RGB 6-bit + Hi-FRC)			
	Pixel Pitch	0.1695 x 0.1695 mm			
	Viewing Angle (H/V)	178°/178°			
	Backlight MTBF (hrs)	30,000 (LED backlight)			
Touch	Touchscreen	Projected capacitive type with 10-point multi-touch and optical bonding			
	Touch Controller	EETI			
	Surface Hardness	6H			
System	CPU Support	Intel® Celeron® N6210 (Elkhart Lake, 6.5W TDP)		NXP i.MX 8M Mini (Quad-core Cortex-A53 up to 1.8 GHz)	
	LAN Controller	Intel® I225-V		Motorcomm YT8521	
	RAM	1 x DDR4 SO-DIMM		On-board 4GB LPDDR4x, up to 8GB	
	Storage	1 x M.2 2242 M key slot (PCIe/SATA signal)		1 x microSD slot	
	Audio	AMP 1W		AMP 0.5W	
	Camera & Microphone	1 x Digital microphone			
	I/O Port	1 x HDMI output 1 x Reset button 1 x Power button 1 x 12V DC jack 1 x AT/ATX switch 1 x Clear CMOS 1 x RS-232	1 x Audio jack (TRRS) 1 x GbE supporting PoE (ErP is not supported in PoE mode) 2 x USB 3.2 Gen 1 (5Gb/s)	1 x Reset button 1 x Power button 1 x 12V DC jack 1 x RS-232	1 x Audio jack (TRRS) 1 x GbE LAN optional supporting PoE 2 x USB 2.0 Type A
	LED	2 x LED light bar (each light bar has 10 programmable RGB LED with IEC62471 certification)		2 x LED light bar	
	Wi-Fi	Intel® Wi-Fi 6E AX210, IEEE 802.11a/b/g/n/ac/ax, MIMO 2x2		WiFi 802.11 a/b/g/n/ac/ax with Bluetooth V5.0	
	Bluetooth	Bluetooth® 5.3			
Physical	Construction Material	Front: PC; Rear cover: PC/ABS plastic			
	Mounting	Wall, Stand and Arm; VESA 75 x 75 mm			
	Weight (Net / Gross)	1.49 kg / 2.86 kg			
	Dimensions (LxWxH)	261 x 196.4 x 40 mm			
Environment	Operating Temperature	0°C – 40°C			
	Storage Temperature	-20°C – 60°C			
	Humidity	10% – 95% (non-condensing)			
	Vibration	1G			
	Operating shock	5G peak acceleration (11ms duration)			
	Non-operating shock	15G peak acceleration (11ms duration)			
	IP Level	Front: IP65			
	Thermal	Fanless			
Operating System	Supported OS	Windows 10; Windows 11; Linux Ubuntu		Android 12	
Power	Power Input	12V DC input			
	Power Adapter	65W medical grade power adapter			
	PoE	Class 4 (IEEE802.3 at) PD device w/o loading taken on I/O Class 5 (IEEE802.3 bt) PD device w/ full loading taken on I/O			
Certification	EMC & Safety	CE, TUV CB, ICES-001, FCC Part 18 Class B UL 60601-1, IEC/EN 60601-1, IEC/EN 60601-1-2		CE,FCC Class B Part 15B, EN 55032 2015+A11:2020, EN 55035 2017+A11:2020 EN / IEC 62368-1	

POCi series

Featuring optional DICOM mode, an IP66-rated front aluminum narrow bezel, a built-in medical-grade power supply, and a modular PCIe expansion slot, the POCi series is purpose-built for medical imaging and high-demand applications, enhancing diagnostic efficiency.



Model		POCi-W22C-RPL		POCi-W24C-RPL	
Display	Display Size	21.5" (16:9)		23.8" (16:9)	
	Resolution	1920 x 1080			
	Brightness (cd/m²)	350			
	Contrast Ratio	1000:1			
	LCD Color	16.7M (RGB 8-bit)			
	Pixel Pitch	0.24795 (H) x 0.24795 (V) mm		0.2745 (H) x 0.2745 (V) mm	
	Viewing Angle (H/V)	178° / 178°			
	Backlight MTBF (hrs)	50,000 (LED backlight)		30,000 (LED backlight)	
Touch	Touchscreen	Projected capacitive type with 10-point multi-touch			
	Touch Controller	EETI			
	Surface Hardness	6H			
	Coating	Chemical etching AG			
Processor	Processor	13th Gen Intel® Core™ i5-1340PE/ i7-1370PE (Raptor Lake-P)			
LAN	LAN Controller	2 x Intel® I226 Ethernet Controller			
	Storage	2 x M.2 2280 M key (PCIe/ SATA) with RAID			
	RAM	2 x 262-pin 4800MT/s dual-channel DDR5 SO-DIMM slots (system max. 64GB)			
Expansion	Expansion	1 x PCIe x4 slot, 1 x M.2 2230 A-E key (PCIe+USB), 2 x M.2 2280 M key (PCIe/ SATA) with RAID			
Audio	Speaker	2 x 2W speaker			
	Microphone	1 x Digital microphone			
Wireless	Wi-Fi	IEEE 802.11ax 2T2R module (Wi-Fi 6E) (M.2 2230 A-E key)			
	Bluetooth	Bluetooth V5.3			
I/O	I/O	Bottom 1 x AC jack 1 x HDMI output 1 x USB Type-C (DP + USB 5V/3A) 1 x Combo audio-out/mic-in 2 x RS-232 2 x 2.5GbE LAN port 4 x USB 3.2 Gen 2 (10Gb/s) port		Side 2 x USB 2.0 port	
Button	Button	1 x Power on/off			
On-Screen Display (OSD)	On-Screen Display (OSD)	1 x Power on/off 1 x Reading light on/off 1 x Brightness up		1 x Brightness down 1 x LCD & touch lock on/off 1 x DICOM mode app on/off (optional)	
Physical	Thermal	Fanless			
	Construction Material	Front bezel: Aluminum, Rear cover: ABS+PC plastic			
	Mounting	Wall, Stand and Arm; VESA 75/100 compliant			
	Weight (Net) (kg)	6.9 kg		8.1 kg	
	Dimensions (LxWxH)	507.5 x 335.5 x 64.5 mm		567 x 370.6 x 63.9 mm	
Power	Input	85V – 264V AC input			
	Power Adapter	150W medical power adapter (optional)			
	Built-in Power Supply	150W, 85V – 264V AC, medical power supply			
Environment	Operating Temperature	0°C – 40°C			
	Storage Temperature	-20°C – 60°C			
	Humidity	10% – 95% (non-condensing)			
	Vibration	1G			
	Operating shock	5G peak acceleration (11ms duration)			
	Non-operating shock	10G peak acceleration (11ms duration)			
	IP Level	Front: IP66			
Operating System	Supported OS	Windows 11; Linux Ubuntu			
Certification	EMC & Safety	CE, FCC Class B Part18 IEC 60601-1: 2005+AMD1:2012 (Edition 3.1) IEC 60601-1-2: 2014 (Edition 4.0)			

POCm series


High-performance medical panel PCs featuring Intel® Core™ processors, PCAP multi-touch, and three hot-swappable batteries. Ideal for non-powered medical carts, it offers IP65 protection, antimicrobial housing, and advanced connectivity to support mobile, hygienic, and efficient healthcare workflows.



Model		POCm-W22C-RPL		POCm-W24C-RPL	
LCD Specifications	LCD Size	21.5" (16:9)		23.8" (16:9)	
	Max. Resolution (W/H)	1920 x 1080			
	Brightness (cd/m²)	350			
	Contrast Ratio	1000:1			
	LCD Color	16.7M (RGB 8-bit)			
	Pixel Pitch (H/V)	0.24795 (H) x 0.24795 (V) mm		0.2745 (H) x 0.2745 (V) mm	
	Viewing Angle (H/V)	178°/178°			
	Backlight MTBF (hrs)	50,000 (LED backlight)		30,000 (LED backlight)	
Touch	Touchscreen	Projected capacitive type with 10-point multi-touch			
	Touch Controller	EETI			
	Surface Hardness	6H			
System	CPU Support	13th Gen Intel® Core™ i5-1340PE / i7-1370PE (Raptor Lake-P)			
	LAN Controller	2 x Intel® I225 Ethernet Controller			
	RAM	2 x 262-pin 4800MT/s dual-channel DDR5 SO-DIMM slots (system max. 64GB)			
	Storage	1 x 2.5" accessible SATA HDD bay / 2 x M.2 2280 M key (PCIe) with RAID			
	Audio	2 x 2W speaker			
	Microphone	1 x Digital microphone			
	Camera	8-megapixel CMOS front-facing camera			
	I/O Port	Bottom	Side		
		1 x DC jack 1 x Digital mic 1 x HDMI output 1 x USB Type-C (DP + USB 5V/3A) 1 x DC output(12V/19V/24V, 20-watt) 2 x 2.5GbE LAN port 1 x RS-232/422/485 port 4 x USB 3.2 Gen 2 (10Gb/s) port	1 x Mic in 1 x Audio out 2 x USB 2.0 port		
	OSD Function	1 x Power on/off 1 x Volume up 1 x Volume down	1 x Brightness up 1 x Brightness down 1 x LCD on/off and touch lock for cleaning		
		1 x PCIe Mini (PCIe) 1 x M.2 2230 A-E key (PCIe+USB)	2 x M.2 2260/80 B-M key (PCIe)		
		1 x RFID indicator 1 x Power indicator	3 x Battery indicator (color: blue/red)		
	Wi-Fi & Bluetooth	IEEE 802.11ax 2T2R module (Wi-Fi 6E) with BT v5.3 (M.2 2230 A-E key)			
Physical	Construction Material	ABS+PC plastic			
	Mounting	Wall, Stand and Arm; VESA 75/100 compliant			
	Weight (Net)	7.07 kg (without battery)	8.18 kg (without battery)		
		8.43 kg (with 3 batteries)	9.53 kg (with 3 batteries)		
Environment	Dimensions (LxWxH)	543 x 350 x 71 mm		594.6 x 379.6 x 71 mm	
	Operating Temperature	0°C – 40°C			
	Storage Temperature	-20°C – 60°C			
	Humidity	10% – 90% (non-condensing)			
	Vibration	1G			
	Shock	Operating shock: 5G peak acceleration (11ms duration) Non-operating shock: 10G peak acceleration (11ms duration)			
	IP Level	Front: IP65			
	Thermal	Fanless			
Power	Power Input	19V DC input			
	Power Adapter	150W medical power adapter			
	Battery	3 slots for Li-ion battery packs			
Certification	EMC & Safety	CE, FCC Class B Part18 EN 60601-1: 2006/A1:2013 (Edition 3.1) EN 60601-1-2: 2015 (Edition 4.0)			

MPOCm series

Mobile medical monitor tailored for non-powered carts. It features three hot-swappable batteries, dual DC outputs, and IP65 protection, enabling 24/7 operation and seamless mobility—ideal for nursing and medication carts in dynamic healthcare environments.



Model		MPOCm-W24	
LCD	LCD Size	23.8"	
	Max. Resolution (W/H)	1920x1080	
	Brightness (cd/m²)	250	
	Contrast Ratio	1000:1	
	LCD Color	16.7M RGB 6-bit (Hi-FRC)	
	Pixel Pitch (H/V)	0.2745 x 0.2745 mm	
	Viewing Angle (H/V)	178°/178°	
	Backlight MTBF (hrs)	30,000	
Touch	Touchscreen	Projected capacitive type with 10-point multi-touch	
	Touch Controller	EETI	
System	Surface Hardness	6H	
	Audio	2 x 2W speaker	
	I/O Port	1 x HDMI-in 1 x DC-in jack 1 x USB 2.0 (black, Type-B) for Touch 1 x USB 3.2 Gen 1 (blue, Type-B) 2 x USB 3.2 Gen 1 (blue, Type-A) 2 x Wi-Fi SMA connector (main/aux) 2 x Variable voltage DC power output for external devices (55W in total) DC OUT1: 19V, 24V (maximum of 55 watts) DC OUT2: 5V, 12V, 15V, 19V, 24V (maximum of 50 watts) *To use battery power, at least 2 batteries must be installed and the DC outputs must work properly.	
	OSD Function	1 x LCD on/off 1 x Volume up 1 x Volume down	1 x Brightness up 1 x Brightness down 1 x OSD menu key
	LED	1 x Power Indicator; 3 x Battery Indicator (color : blue/orange)	
Other Features	Battery Management APP	EC UART to USB, output to the box PC	
Physical	Construction Material	ABS+PC plastic with anti-bacterial material	
	Mounting	Wall, Stand and Arm VESA 75/100	
	Weight (Net)	8.18 kg without batteries; 9.53 kg with 3 batteries	
	Dimensions (LxWxH)	594.6 x 379.6 x 63.2 mm	
	Operating Temperature	0°C – 40°C	
Environment	Storage Temperature	-20°C – 60°C	
	Humidity	10% to 90% (non-condensing)	
	Vibration	1G	
	Shock	Operating shock: 5G peak acceleration (11ms duration) Non-operating shock: 10G peak acceleration (11ms duration)	
	IP Level	Front: IP65	
	Thermal	Fanless	
	Power Input	19V DC input (4 pin)	
Power	Power Adapter	150W medical power adapter Input: 100V~240V AC Output: 19V DC	
	Battery	3 x 3S3P cells Lithium-ion Battery (TC-202GA)	
Battery	Battery Pack Capacity	3 x 9000 mAh (3 x 97Wh)	
	Nominal Voltage	10.8 V	
	Battery Life Time	500 cycles (FCC >= 70% of the minimum capacity)	
	Charge Voltage	12.6 V	
	Maximum Continuous Charge Current	4 A for each battery pack	
	Maximum Continuous Discharge Current	5 A for each battery pack	
	Discharge Cut-off Voltage	9 V	
Certification	EMC & Safety	FCC Part15B EN 62368-1 Ed.2 (60601-1 Compatible) EN 55032 + EN 55035 (60601-1-2 Compatible) Battery Pack: UN38.3, IEC62133, IEC62368-1, UL2054	

AXON series

AXON series is a compact, scalable medical-grade power solution with three hot-swappable 9000mAh batteries, supporting UPS and Power Bank modes for continuous, secure operation, ideal for carts or VESA 100-mounted systems.



Model			AXON-mPOWER
I/O	I/O		1 x LAN: Web-based, specification 10/100Mbps with RJ-45 connection, Cat. 5 cable 2 x DC outputs 1 x USB Type C: 5V/ 3A(Max: 15W, Discharge Only) 1 x USB Type A (HID) 1 x AC-in: C13 connector 1 x Power on/off button
			DC out 1: Selectable 12V/15V/19V/24V (Max: 100W*) CONN MALE; DC JACK 5.5*2.1; DIP; 3PIN; 90°; SHEN MING; 655-196; SPRING WASHER+NUT; PBT; RoHS DC out 2: Selectable 12V/15V/19V/24V (Max: 100W*) JACK; DIP; 3PIN; 90°; BLACK; JKCR; MD-09038-3; Rating: 24VDC/9A; PBT; FEMALE; CCL; RoHS * DC out 1 + DC out 2 ≤ 125W
LED	LED Indicator		1 x System Status LED 2 x DC Output LED 3 x Battery LED
Physical	Thermal		Smart Fan
	Mounting		VESA 100 x 100 mm
Battery	Battery Pack Type		3 x 3S3P cells Lithium-ion Battery
	Battery Pack Capacity		3 x 9000 mAh (3 x 97Wh)
	Normal Voltage		10.8 V
	Battery Life Time		1000 cycles (FCC ≥70% of the minimum capacity)
	Charge Voltage		12.6 V
	Continuous Charge Current		2 A for each battery
	Continuous Discharge Current		4 A for each battery pack
	Maximum Discharge Current		5 A for each battery pack
Power	Input		100 – 240 VAC
	Built-in Power Supply		260W medical
Environment	Operating Temperature		0°C – 40°C
	Storage Temperature		-20°C – 60°C
	Humidity		10% – 95% (non-condensing)
	Vibration		1G
	Operating shock		5G peak acceleration (11ms duration)
Certification	EMC & Safety		FCC Part15B EN 62368-1 Ed.2 (60601-1 Compatible) EN 55032 + EN 55035 (60601-1-2 Compatible) Battery Pack: UN38.3, IEC62133, IEC62368-1, UL2054

Medical Power series



Model		TC-202GA
Battery Pack Type		3S3P cells Lithium-ion Battery
Battery Pack Capacity		9000 mAh (97Wh)
Nominal Voltage		10.8 V
Charge Voltage		12.6 V
Maximum Continuous Charge Current		4 A for each battery pack
Maximum Continuous Discharge Current		5 A for each battery pack
Discharge Cut-off Voltage		9 V
Battery Life Time		500 cycles (FCC ≥= 70% of the minimum capacity)
Protection		Over Charge Voltage Protection Over Discharge Voltage Protection Over Charge Current Protection Over Discharge Current Protection Short Circuit Protection Over Charge Temperature Protection Over Discharge Temperature Protection Under Charge Temperature Protection Under Discharge Temperature Protection Gas Gauge & Protection IC
LED Indicator		4 x Power Indicator (1 LED = 25%, 2 LED = 50%, 3 LED = 75%, 4 LED = 100%)
Weight (Net)		Less than 480g
Dimensions (LxWxH)		148.5 x 88.8 x 19.4 mm
Operating Temperature		0 - 40 °C
Storage Temperature		-20°C~50°C (-4 - 122 °F)
Certifications		Battery Pack: UN38.3, IEC62133, IEC62368-1, UL2054



Model			POCm-DOCKING-6BAY
Physical	Construction Material		Metal Housing
	Weight (Net)		0.8 kg
	Dimensions (LxWxH)		273.8 x 122 x 301.8 mm
Environment	Operating Temperature		(1) 0 - 40 °C, 10 - 95 % RH, non-condensing (2) Conformal coating AD board
	Storage Temperature		-20°C~60°C (-4 - 140 °F) 5 - 95% RH non-condensing
	Humidity		10% to 90% (non-condensing)
	Vibration		1G
	Shock		Operating shock: 5G peak acceleration (11ms duration) Non-operating shock: 10G peak acceleration (11ms duration)
	Thermal		2 x Active Fan
Power	Power Input		85V – 264V AC input
	Power Adapter		300W built-in power supply
LED	LED		1 x Power LED (Orange) 6 x Battery LED (Blue/ Orange) Charging Battery: Orange Fully Charged Battery: Blue
Charging	Battery Pack Type		6 x 3S3P cells Lithium-ion Battery
	Charge Voltage		12.6 V
	Continuous Charge Current		2 A for each battery pack
Certification	EMC & Safety		FCC Part15B EN 62368-1 Ed.2 (60601-1 Compatible) EN 55032 + EN 55035 (60601-1-2 Compatible)

Power Supplies

Gen2 Intelligent DC UPS Module



Model		AUPS2-A20-R10	AUPS2-B20-R10
Battery	Battery Pack Type	1 x 2S2P Lithium-ion batteries	1 x 4S2P Lithium-ion batteries
	Battery Pack Capacity	1 x 5200 mAh	1 x 5200 mAh
	Normal Voltage	7.26 V	14.52 V
	Battery Life Time	299 cycles > 70%	299 cycles > 70%
	Charge Time	TBD	TBD
	Charge Voltage	8.4V	16.8V
	Continuous Charge Current	2.55 A	2.55 A
	Continuous Discharge Current	7.5A	7.5A
	Maximum Discharge Current	9.36A (Duration < 5 sec)	9.36A (Duration < 5 sec)
	Discharge Cut-off Voltage	2.75 V/cell	2.75 V/cell
Power	DC-out Power	60W maximal	100W maximal
	Input voltage	DC 12-24V	DC 12-24V
	Output voltage	DC 12V	DC 12V
UPS Monitoring	Ethernet interface	Support SNMP by 10/100Mbps RJ-45 port	Support SNMP by 10/100Mbps RJ-45 port
	USB interface	UPS HID compatible shipping mode switch *1	UPS HID compatible shipping mode switch *1
LED Indicator	Green (Power input)	On: DC power in Off: DC power out	On: DC power in Off: DC power out
	Yellow (Charging Status)	On: Discharging Blinking: Charging	On: Discharging Blinking: Charging
	Orange (Battery Status)	On: Battery full Blinking: Battery low	On: Battery full Blinking: Battery low
Physical	Mounting	Din-Rail mount	Din-Rail mount
	Weight (Net)	TBD	TBD
	Dimensions (LxWxH)	TBD	TBD
Environment	Operating Temperature	0°C – 40°C	0°C – 40°C
	Operating Humidity	Relative humidity: 10% – 95%, non-condensing	Relative humidity: 10% – 95%, non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis	Half-sine wave shock 5G, 11ms, 100 shocks per axis
	Operation Vibration	MIL-STD-810G 514.6C-1	MIL-STD-810G 514.6C-1
Certification	Battery Pack	UN38.3, UL2054, IEC6213	UN38.3, UL2054, IEC62133
	EMC & Safety	CE, FCC	CE, FCC

Supercapacitor UPS Module series

Uninterruptible power backup solution based on IEL intelligent supercapacitors

Maintenance-free long-life supercapacitors serve as efficient and long-lasting energy storage devices, providing uninterrupted power in short transition times and up to 500,000 charge and discharge cycles. Different from bypassing batteries that store energy through chemical reactions, supercapacitors are based on electrophysical principles and can be fully charged for use in a very short time. The service life of supercapacitors is ten times longerdisplay interface than that of traditional lead-acid batteries, and energy storage systems equipped with supercapacitors usually have high current carrying capacity, power density and reliability.



Model	RHEA-I660A	RHEA-I420A	RHEA-I512A	RHEA-E1260A
Battery Type	Super Capacitor			
Capacitance	6 x 600F@3V	4 x 200F@3V	5 x 120F@3V	12 x 600F@3V
Service life	>10 years (when the capacitor works at 2.7V and 30 temperature)	>10 years (when the capacitor works at 2.7V and 20 temperature)		>10 years (when the capacitor works at 2.7V and 25 temperature)
Life cycle	500000 charge and discharge cycles			
Input voltage	12V or 19V or 24V ±10%	12-28V DC	12-28V DC	12V or 19V or 24V ±10%
Output voltage	The output voltage is equal to the input voltage: Input 12V ±10%, output 12V Input 19V ±10%, output 19V Input 24V ±10%, output 24V Output power 150W	12V DC Output power 60W	12V DC Output power 45W	The output voltage is equal to the input voltage: Input 12V ±10%, output 12V Input 19V ±10%, output 19V Input 24V ±10%, output 24V Output power 150W
LED Indicator	Red/Yellow	Red/Yellow	Red/Yellow	Red/Green
Backup time	60 sec. (under 150W load at 2.7V@30°C) 160 sec. (under 60W load at 2.7V@30°C)	20 sec. (under 60W load at 2.5V@30°C)	25 sec. (under 45W load at 2.5V@30°C)	100 sec. (under 150W load at 2.6V@30°C)
I/O interface	1 x LED display interface (2x10 Pin) 1 x DC in (2x2 Pin) 1 x DC out (2x2 Pin) 1 x Relay button (1x6 Pin) 1 x USB2.0 Type-A 1 x Debug (1x3 Pin) 1 x FW flash (2x7 Pin) 2 x Power button (1x2 Pin)	1 x DC in (2x2 Pin) 1 x DC out (2x2 Pin) 1 x USB2.0 (1x4 Pin) 1 x Debug (1x3 Pin) 1 x FW flash (2x7 Pin) 1 x Power button (1x2 Pin)	1 x DC in (2x2 Pin) 1 x DC out (2x2 Pin) 1 x USB2.0 (1x4 Pin) 1 x Debug (1x3 Pin) 1 x FW flash (2x7 Pin) 1 x Power button (1x2 Pin)	1 x 4 Pin DC JACK 1 x 4 Pin Terminal block power input 1 x 4 Pin Terminal block power output 1 x 4 Pin Terminal block (relay & power button) 1 x USB2.0 Type-A
Protect	Reverse protection Overload protection Overvoltage protection	Reverse protection Overload protection Overvoltage protection	Reverse protection Overload protection Overvoltage protection	Reverse protection Overload protection Overvoltage protection
Dimensions (mm)	166 x 90.5 x 82.6	81 x 135 mm	81 x 135 mm	160.2 x 125 x 110
Weight	0.9/1.2kg	0.25kg	0.22kg	2.37 / 2.6 kg
Working temperature	-40°C ~ 60°C			
Storage temperature	-40°C ~ 70°C			

1U/2U Power Supply

- **Safety (ITE Standard)** - CB IEC 62368, UL 62368, CSA C 22.2 No. 62368, TUV EN 62368
- **Safety (Medical Standard)** - CB IEC 60601, UL 60601, CSA C 22.2 No. 60601, TUV EN 60601
- **EMI** - Meets EN 55032, FCC Part 15, CISPR 32 Meets EN 61000-3-2, EN 61000-3-3 (PFC function)
- **EMS** - Meets EN 55024, EN 61000-4-2/3/4/5/6/8/11

*For detailed information, please refer to official specifications

1U AC Input													
Model No.	Watt AT/ATX PFC	Input Range	Output Current Range					Efficiency	ErP	On/off switch	Operating Temperature	Safety	Dimensions (mm)
		Voltage	+3.3 V	+5 V	+12 V	-12 V	+5 Vsb						
 63030-010300-000-RS	300W ATX PFC	90 ~ 265 VAC	12 A (0 A)	14 A (0 A)	25 A (0.1 A)	0.5 A	3 A	 87%	V		0°C ~ 50°C	CB/UL/ TUV/CCC/ CE/FCC	150 x 81.5 x 40.5
 63030-010220-010-RS	220W ATX PFC	90 ~ 264 VAC	10 A (0.1 A min.)	14 A (0.2 A min.)	14 A (0.6 A min.)	0.3 A	2.5 A	 85%	V		0°C ~ 50°C	CB/UL/ TUV/ CCC/ CE/FCC	150 x 81.5 x 40.5
 63030-010180-000-RS	180W ATX PFC	90 ~ 264 VAC	10 A (0.1 A min.)	14 A (0.2 A min.)	10 A (0.6 A min.)	0.3 A	2.5 A	 85%	V		0°C ~ 50°C	CB/UL/ TUV/CCC/ CE/FCC	150 x 81.5 x 40.5
 63030-010150-000-RS	150W ATX PFC	90 ~ 264 VAC	10 A (0.1 A min.)	14 A (0.2 A min.)	10 A (0.6 A min.)	0.3 A	2.5 A	 85%	V		0°C ~ 50°C	CB/UL/TUV/ CCC/ CE/FCC	150 x 81.5 x 40.5
 63030-010400-020-RS	400W ATX FPC	90-264V	14A	16A	33A	0.3A	3A	87%	V	x	0°C ~ 50°C	CB/UL/ TUV/CCC/ CE/FCC	150 x 81.5 x 40.5
 63030-010500-030-RS	500W ATX FPC	90-264V	14A	16A	41A	0.3A	3A	 87%	V	x	0°C ~ 50°C	CB/UL/ TUV/CCC/ CE/FCC	150 x 81.5 x 40.5
1U DC Input													
Model No.	Watt AT/ATX PFC	Input Range	Output Current Range					Efficiency			Operating Temperature	Safety	Dimensions (mm)
		Voltage	+3.3 V	+5 V	+12 V	-12 V	+5 Vsb						
 63030-010250-060-RS	250W ATX PFC	24 VDC (18~36 VDC)	10 A	14 A	18 A (0.05A min.)	0.3 A	2.5 A	80%			0°C ~ 50°C	CB UL TUV CCC NEMKO CE FCC	150 x 81.5 x 40.5

PS/2 Power Supply

- **Safety (ITE Standard)** - CB IEC 62368, UL 62368, CSA C 22.2 No. 62368, TUV EN 62368
- **Safety (Medical Standard)** - CB IEC 60601, UL 60601, CSA C 22.2 No. 60601, TUV EN 60601
- **EMI** - Meets EN 55032, FCC Part 15, CISPR 32 Meets EN 61000-3-2, EN 61000-3-3 (PFC function)
- **EMS** - Meets EN 55024, EN 61000-4-2/3/4/5/6/8/11

*For detailed information, please refer to official specifications

AC Input														
Model No.	Watt AT/ATX PFC	Input Range	Output Current Range						Efficiency	ErP	On/off switch	Operating Temperature	Safety	Dimensions (mm)
		Voltage	+3.3 V	+5 V	+12 V	-5 V	-12 V	+5 Vsb						
 63010-010600-010-RS	600W ATX PFC	90~264 VAC	25 A (0 A)	25 A (0.2 A)	V1: 16 A (0.05 A) V2: 16 A (0 A) V3: 16 A (0 A) V4: 16 A (0 A)	0.5 A (0 A)	0.5 A	4 A	 82%	v	X	0°C ~ 50°C	CB / UL / TUV CCC / CE / FCC	140 x 150 x 86
 63010-010400-020-RS	400W ATX PFC	90~264 VAC	21 A (0 A)	16 A (0.2 A)	V1: 17 A (0.05 A) V2: 17 A (0 A)	0.1 A (0 A)	0.5 A	3 A	 87%	v	X	-5°C ~ 50°C	CB / UL / TUV CCC / CE / FCC	140 x 150 x 86
 63010-010300-020-RS	300W ATX PFC	90~264 VAC	19 A (0 A)	16 A (0.2 A)	V1: 17 A (0.05 A) V2: 17 A (0 A)	0.1 A (0 A)	0.5 A (0 A)	3 A (0 A)	 87%	v	X	0°C ~ 50°C	CB / UL / TUV CCC / CE / FCC	140 x 150 x 86
 63010-410850-110-RS	850W ATX FPC	90-264V	20A	20A	70.5A		0.3A	2.5A	 87%	v	X	5°C ~ 50°C	CB / UL / TUV / CCC/ CE / FCC	140 x 150 x 86
 63010-411200-000-RS	1200W ATX FPC	90-264V	20A	20A	100A		0.3A	3A	 87%	v	v	0°C ~ 50°C	CB / UL / TUV / CCC/ CE / FCC	150 x 160 x 86

Power Adapter

- **Safety (ITE Standard)** - CB IEC 62368, UL 62368, CSA C 22.2 No. 62368, TUV EN 62368
- **Safety (Medical Standard)** - CB IEC 60601, UL 60601, CSA C 22.2 No. 60601, TUV EN 60601
- **EMI** - Meets EN 55032, FCC Part 15, CISPR 32 Meets EN 61000-3-2, EN 61000-3-3 (PFC function)
- **EMS** - Meets EN 55024, EN 61000-4-2/3/4/5/6/8/11

*For detailed information, please refer to official specifications

AC Input								
Model No.	Watt	Input Range	Output Current Range		Plug Type	Efficiency	Operating Temperature	Safety
		Voltage	+12 V	+19 V				
 FSP120-AHAN3	120W	90~264 VAC	10 A			87%	0°C ~ 40°C	UL / TUV / CCC / CE / GS / PSE / KC / BSMI
 FSP096-AHAN3	96W	90~264 VAC	8 A			88%	0°C ~ 40°C	UL / TUV / CCC / CE / GS / PSE / KC / BSMI / RCM
 FSP090-DBBN3	90W	90~264 VAC		4.74 A		88%	0°C ~ 40°C	UL / TUV / CCC / CE / GS / PSE / KC / BSMI / RCM / PSE
 FSP065-RBBN3	65W	90~264 VAC		3.42 A		89.54%	0°C ~ 40°C	UL / TUV / CCC / CE / BSMI / PSE / PSB / GS / EAC / NOM / RCM / IRAM / Nrcan / Nemko
 FSP060-DHAN3	60W	90 ~ 264 VAC	5V			85%	0°C ~ 40°C	UL / TUV / CCC/ GS / PSE / RCM/ CE / KC / BSMI
 FSP036-RHBN3	36W	90 ~ 264 VAC	3 A			88.3%	0°C ~ 40°C	UL / TUV / CCC / GS / CE / BSMI / PSE / RCM / KC
 FSP180-ABAN3	180W	90-264V		9.47A		89%	0°C ~ 40°C	UL / TUV /CCC / CE/ GS / PSE / KC

Redundant Power Supply

AC Input											
Model No.	Watt AT/ATX PFC	Input Range Voltage	Output Current Range						Efficiency	Operating Temperature	Safety
			+3.3 V	+5 V	+12 V	-5 V	-12 V	+5 Vsb			
 63050-010500-010-RS	500W ATX PFC	90 ~ 264 VAC	20A (0A min.)	20A (0A min.)	40A (1A min.)	0.3 A (0A min.)	0.5 A (0A min.)	3 A	84%	0°C ~ 50°C	CB UL TUV CCC CE FCC
 63050-040300-020-RS	300W ATX PFC	90 ~ 264 VAC	18 A (1 A min.)	25 A (3 A min.)	16 A (2 A min.)	0.5A	0.5 A	2 A (0.1 A min.)	65%	0°C ~ 50°C	CB UL TUV CCC CE FCC

DC/DC Converter Module

Product Model No.	Dimensions	Maximum Output Power	Input Voltage	Maximum Output Current		
				12V	19V	24V
 IDD-936160	25 mm x 82 mm	60 W	9 ~ 36 V	5 A	-	-
 IDD-636160S	45 mm x 95 mm	160W	9 ~ 36 V	13.3A*	8.4A*	6.7A*

*The IDD-636160S offers three selectable output voltages of 12V/19V/24V DC. Its max. output current depends on the selected output voltages.

Dedicated Engineering Team - Professional

Our committed team specializes in crafting application-specific integrated solutions tailored to your needs, ensuring you stay ahead of the competition. Our offerings encompass a range of features including standard and non-standard voltages, isolated and non-isolated configurations, diverse form factors, precise power sequencing, battery chargers, electromechanical interference protection, thermal management solutions, remote on/off functionality, and versatile I/O interfaces.



Advanced Test Equipment – Precision & Reliability



Timing/Noise Analyzer Chroma 6011



Electronic Load Chroma 6312 Series



Power Analyzer Chroma 6632



*Specifications are subject to change without prior notice.

Headquarters

威強電工業電腦股份有限公司 IEI Integration Corp.

No. 29, Zhongxing Rd., Xizhi Dist., New Taipei City 221
TEL : +886-2-86916798 / +886-2-26902098 FAX : +886-2-66160028
sales@ieiworld.com www.ieiworld.com

America

IEI Technology USA Corp.

138 University Parkway, Pomona, CA 91768
TEL : +1-909-595-2819 FAX : +1-909-595-2816
sales@usa.ieiworld.com usa.ieiworld.com

China

上海威強電工業電腦有限公司 IEI Technology (SH) Co.,Ltd

上海市閔行莘庄工業區申富路515號
515, Shen Fu Rd., Xin Zhuang Industrial Develop Zone, Shanghai, 201108, China
TEL:+86-400-067-5568 FAX:+86-21-3462-7797
sales@ieiworld.com.cn www.ieiworld.com.cn