



MODEL: **HPCIE-C236**

Half-Size PICMG 1.3 CPU Card Supports LGA1151 Intel® Xeon® E3 v5/v6, 6th/7th Gen Intel®Core™ i7/i5/i3, Pentium® or Celeron® CPU, Intel® C236 Chipset, ECC/non-ECC DDR4 SO-DIMM, Dual Intel® PCIe GbE, VGA, iDP, USB 3.2 Gen 1, SATA 6Gb/s, mSATA, Intel® AMT and RoHS

User Manual

Revision

Date	Version	Changes
June 1, 2021	1.04	Updated Section 2.3: Packing List Updated Chapter 6: Software Drivers
November 13, 2017	1.03	Updated supported CPUs
September 11, 2017	1.02	Modified J_FLASH1 jumper location and supported CPUs
February 6, 2017	1.01	Updated 2.4 Optional Items
October 24, 2016	1.00	Initial release

Copyright

COPYRIGHT NOTICE

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

TRADEMARKS

All registered trademarks and product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

Manual Conventions



WARNING

Warnings appear where overlooked details may cause damage to the equipment or result in personal injury. Warnings should be taken seriously.



CAUTION

Cautionary messages should be heeded to help reduce the chance of losing data or damaging the product.



NOTE

These messages inform the reader of essential but non-critical information. These messages should be read carefully as any directions or instructions contained therein can help avoid making mistakes.



HOT SURFACE

This symbol indicates a hot surface that should not be touched without taking care.

Table of Contents

1 INTRODUCTION.....	1
1.1 INTRODUCTION.....	2
1.2 FEATURES.....	3
1.3 CONNECTORS	4
1.4 DIMENSIONS.....	5
1.5 DATA FLOW	6
1.6 TECHNICAL SPECIFICATIONS	7
2 PACKING LIST	10
2.1 ANTI-STATIC PRECAUTIONS.....	11
2.2 UNPACKING PRECAUTIONS.....	11
2.3 PACKING LIST.....	12
2.4 OPTIONAL ITEMS	13
3 CONNECTORS	15
3.1 PERIPHERAL INTERFACE CONNECTORS.....	16
3.1.1 HPCIE-C236 Layout.....	16
3.1.2 Peripheral Interface Connectors	17
3.1.3 External Interface Panel Connectors.....	18
3.2 INTERNAL PERIPHERAL CONNECTORS	18
3.2.1 +12VATX Power Connector	18
3.2.2 Audio Kit Connector	19
3.2.3 Battery Connector.....	20
3.2.4 Buzzer Connector.....	21
3.2.5 Chassis Intrusion Connector.....	21
3.2.6 CRT FW Update Connector.....	22
3.2.7 DDR4 SO-DIMM Slots	23
3.2.8 Digital I/O Connector.....	24
3.2.9 EC Debug Connector.....	25
3.2.10 Fan Connector (CPU).....	26

3.2.11 Front Panel Connector.....	27
3.2.12 I ² C Connector.....	28
3.2.13 Internal DisplayPort Connector	29
3.2.14 Keyboard and Mouse Connector	30
3.2.15 LAN LED Connectors	31
3.2.16 PCIe Mini Slot.....	32
3.2.17 Power Button	33
3.2.18 RS-232/422/485 Serial Port Connectors	34
3.2.19 SATA 6Gb/s Drive Connector	35
3.2.20 SMBus Connector	36
3.2.21 SPI Flash Connector.....	37
3.2.22 USB 2.0 Connectors.....	38
3.3 EXTERNAL PERIPHERAL INTERFACE CONNECTOR PANEL	39
3.3.1 Ethernet Connectors	39
3.3.2 USB 3.2 Gen 1 Connectors	40
3.3.3 VGA Connector.....	40
4 INSTALLATION	42
4.1 ANTI-STATIC PRECAUTIONS	43
4.2 INSTALLATION CONSIDERATIONS.....	43
4.3 SOCKET LGA1151 CPU INSTALLATION	45
4.4 SOCKET LGA1151 COOLING KIT INSTALLATION	48
4.5 SO-DIMM INSTALLATION	50
4.6 FULL-SIZE PCIE MINI CARD INSTALLATION	51
4.7 HALF-SIZE PCIE MINI CARD INSTALLATION.....	52
4.8 SYSTEM CONFIGURATION	55
4.8.1 AT/ATX Power Mode Setting	55
4.8.2 Clear CMOS Button.....	56
4.8.3 PCIe x4 Channel Mode Setup	56
4.8.4 PCIe x16 Channel Mode Setup	58
4.8.5 Flash Descriptor Security Override Jumper.....	58
4.8.6 USB Power Selection	59
4.9 INTERNAL PERIPHERAL DEVICE CONNECTIONS	60
4.9.1 SATA Drive Connection	60
4.10 ADDING USB 3.0 DRIVERS TO A WINDOWS 7 INSTALLATION IMAGE	61

HPCIE-C236 Half-size PICMG 1.3 CPU Card

4.11 INTEL® AMT SETUP PROCEDURE	63
5 BIOS	65
5.1 INTRODUCTION.....	66
<i>5.1.1 Starting Setup.....</i>	66
<i>5.1.2 Using Setup</i>	66
<i>5.1.3 Getting Help.....</i>	67
<i>5.1.4 Unable to Reboot after Configuration Changes</i>	67
<i>5.1.5 BIOS Menu Bar.....</i>	67
5.2 MAIN.....	67
5.3 ADVANCED	69
<i>5.3.1 ACPI Settings.....</i>	70
<i>5.3.2 AMT Configuration</i>	71
<i>5.3.3 Super IO Configuration</i>	72
<i>5.3.3.1 Serial Port n Configuration</i>	73
<i>5.3.4 iWDD H/W Monitor.....</i>	76
<i>5.3.4.1 Smart Fan Mode Configuration</i>	77
<i>5.3.5 RTC Wake Settings</i>	78
<i>5.3.6 Serial Port Console Redirection</i>	79
<i>5.3.6.1 Legacy Console Redirection Settings</i>	81
<i>5.3.7 CPU Configuration</i>	82
<i>5.3.8 SATA Configuration.....</i>	84
<i>5.3.9 NVMe Configuration.....</i>	85
<i>5.3.10 USB Configuration.....</i>	86
<i>5.3.11 iEi Feature.....</i>	87
5.4 CHIPSET	88
<i>5.4.1 System Agent (SA) Configuration</i>	89
<i>5.4.1.1 Graphics Configuration.....</i>	90
<i>5.4.1.2 PEG Port Configuration</i>	92
<i>5.4.1.3 Memory Configuration</i>	93
<i>5.4.2 PCH-IO Configuration</i>	94
<i>5.4.2.1 PCI Express Configuration</i>	96
<i>5.4.2.2 HD Audio Configuration.....</i>	98
5.5 SECURITY	99
5.6 BOOT.....	100

5.7 SAVE & EXIT	102
6 SOFTWARE DRIVERS	103
6.1 AVAILABLE DRIVERS	104
6.2 DRIVER DOWNLOAD	104
A REGULATORY COMPLIANCE	106
B PRODUCT DISPOSAL	108
C BIOS OPTIONS	110
D DIGITAL I/O INTERFACE.....	113
D.1 INTRODUCTION.....	114
D.2 ASSEMBLY LANGUAGE SAMPLE 1.....	115
D.3 ASSEMBLY LANGUAGE SAMPLE 2.....	115
E WATCHDOG TIMER.....	116
F ERROR BEEP CODE	119
F.1 PEI BEEP CODES	120
F.2 DXE BEEP CODES	120
G HAZARDOUS MATERIALS DISCLOSURE	121
G.1 RoHS II DIRECTIVE (2015/863/EU).....	122
G.2 CHINA ROHS	123

List of Figures

Figure 1-1: HPCIE-C236	2
Figure 1-2: Connectors	4
Figure 1-3: HPCIE-C236 Dimensions (mm)	5
Figure 1-4: Data Flow Diagram.....	6
Figure 3-1: Peripheral Interface Connectors	16
Figure 3-2: +12V ATX Power Connector Pinout Location	18
Figure 3-3: Audio Connector Location	19
Figure 3-4: Battery Connector Location.....	20
Figure 3-5: Buzzer Connector Location	21
Figure 3-6: Chassis Intrusion Connector Location.....	22
Figure 3-7: CRT FW Update Connector Location.....	22
Figure 3-8: DDR4 SO-DIMM Slot Locations	23
Figure 3-9: Digital I/O Connector Location	24
Figure 3-10: EC Debug Connector Location	25
Figure 3-11: CPU Fan Connector Location	26
Figure 3-12: Front Panel Connector Location	27
Figure 3-13: I ² C Connector Location	28
Figure 3-14: Internal DisplayPort Connector Location	29
Figure 3-15: Keyboard and Mouse Connector Location.....	30
Figure 3-16: LAN LED Connector Locations	31
Figure 3-17: PCIe Mini Slot Location	32
Figure 3-18: Power Button Location.....	33
Figure 3-19: RS-232/422/485 Serial Port Connector Locations.....	34
Figure 3-20: SATA 6Gb/s Drive Connector Locations	35
Figure 3-21: SMBus Connector Location	36
Figure 3-22: SPI Flash Connector Location.....	37
Figure 3-23: USB 2.0 Connector Locations	38
Figure 3-24: External Peripheral Interface Connector	39
Figure 3-25: Ethernet Connector.....	39
Figure 3-26: VGA Connector	41

Figure 4-1: Disengage the CPU Socket Load Lever.....	45
Figure 4-2: Remove Protective Cover.....	46
Figure 4-3: Insert the Socket LGA1151 CPU	47
Figure 4-4: Close the Socket LGA1151	47
Figure 4-5: Cooling Kit Support Bracket.....	49
Figure 4-6: SO-DIMM Installation	50
Figure 4-7: Removing the Retention Screw	51
Figure 4-8: Inserting the Full-size PCIe Mini Card into the Slot at an Angle	52
Figure 4-9: Securing the Full-size PCIe Mini Card	52
Figure 4-10: Removing the Standoff.....	53
Figure 4-11: Installing the Standoff	54
Figure 4-12: Inserting the Half-size PCIe Mini Card into the Slot at an Angle.....	54
Figure 4-13: Securing the Half-size PCIe Mini Card	55
Figure 4-14: AT/ATX Power Mode Switch Location	55
Figure 4-15: Clear CMOS Button Location.....	56
Figure 4-16: BIOS Switch Location.....	57
Figure 4-17: Flash Descriptor Security Override Jumper Location	58
Figure 4-18: SATA Drive Cable Connection.....	60
Figure 4-19: SATA Power Drive Connection.....	61
Figure 4-20: Windows 7 USB 3.0 Creator Utility	62
Figure 4-21: Update Process is Complete	63
Figure 6-1: IEI Resource Download Center.....	104

List of Tables

Table 1-1: HPCIE-C236 Specifications.....	9
Table 2-1: Packing List.....	12
Table 2-2: Optional Items	14
Table 3-1: Peripheral Interface Connectors	17
Table 3-2: External Peripheral Connectors.....	18
Table 3-3: +12V ATX Power Connector Pinouts	19
Table 3-4: Audio Connector Pinouts	19
Table 3-5: Battery Connector Pinouts	20
Table 3-6: Buzzer Connector Pinouts.....	21
Table 3-7: Chassis Intrusion Connector Pinouts	22
Table 3-8: CRT FW Update Connector Pinouts	23
Table 3-9: Digital I/O Connector Pinouts.....	24
Table 3-10: EC Debug Connector Pinouts	25
Table 3-11: CPU Fan Connector Pinouts	26
Table 3-12: Front Panel Connector Pinouts.....	27
Table 3-13: I ² C Connector Pinouts.....	28
Table 3-14: Internal DisplayPort Connector Pinouts	29
Table 3-15: Keyboard and Mouse Connector Pinouts	30
Table 3-16: LAN1 LED Connector (LED_LAN1) Pinouts.....	31
Table 3-17: LAN2 LED Connector (LED_LAN2) Pinouts.....	31
Table 3-18: PCIe Mini Slot Pinouts.....	33
Table 3-19: RS-232/422/485 Serial Port Connector Pinouts	34
Table 3-20: DB-9 RS-232/422/485 Pinouts	35
Table 3-21: SATA 6Gb/s Drive Connector Pinouts.....	35
Table 3-22: SMBus Connector Pinouts	36
Table 3-23: SPI Flash Connector Pinouts	37
Table 3-24: USB 2.0 Connector Pinouts	38
Table 3-25: LAN Pinouts	39
Table 3-26: USB 3.2 Gen 1 Port Pinouts.....	40
Table 3-27: VGA Connector Pinouts.....	41

Table 4-1: AT/ATX Power Mode Switch Settings.....	56
Table 4-2: BIOS Switch Settings	56
Table 4-3: PCIe x16 Channel Mode Setup	58
Table 4-4: Flash Descriptor Security Override Jumper Settings.....	58
Table 4-5: BIOS Options and Configured USB Ports.....	59
Table 4-6: USB Power Source Setup	59
Table 5-1: BIOS Navigation Keys	67
Table 5-2: BIOS Options and Configured USB Ports.....	95

BIOS Menus

BIOS Menu 1: Main	68
BIOS Menu 2: Advanced	69
BIOS Menu 3: ACPI Configuration	70
BIOS Menu 4: AMT Configuration	71
BIOS Menu 5: Super IO Configuration	72
BIOS Menu 6: Serial Port n Configuration Menu	73
BIOS Menu 7: iWDD H/W Monitor	76
BIOS Menu 8: Smart Fan Mode Configuration	77
BIOS Menu 9: RTC Wake Settings	78
BIOS Menu 10: Serial Port Console Redirection	79
BIOS Menu 11: Legacy Console Redirection Settings	81
BIOS Menu 12: CPU Configuration	82
BIOS Menu 13: SATA Configuration	84
BIOS Menu 14: NVMe Configuration	85
BIOS Menu 15: USB Configuration	86
BIOS Menu 16: iEi Feature	87
BIOS Menu 17: Chipset	88
BIOS Menu 18: System Agent (SA) Configuration	89
BIOS Menu 19: Graphics Configuration	90
BIOS Menu 20: PEG Port Configuration	92
BIOS Menu 21: Memory Configuration	93
BIOS Menu 22: PCH-IO Configuration	94
BIOS Menu 23: PCI Express Configuration (For BIOS1)	96
BIOS Menu 24: PCI Express Configuration (For BIOS2)	96
BIOS Menu 25: PCI Express Port 1/2/3/4	97
BIOS Menu 26: HD Audio Configuration	98
BIOS Menu 27: Security	99
BIOS Menu 28: Boot	100
BIOS Menu 29: Save & Exit	102

Chapter

1

Introduction

1.1 Introduction



Figure 1-1: HPCIE-C236

The HPCIE-C236 is a half-size PICMG 1.3 CPU card. It accepts a Socket LGA1151 Intel® Xeon® E3 v5/v6, 6th/7th generation Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor and supports two 260-pin 2133/1867 MHz dual-channel DDR4 SO-DIMM modules up to 32 GB.

The HPCIE-C236 provides two GbE interfaces through the Intel® I219LM (with Intel® AMT 11.0 support) and the Intel® I210 PCIe controllers. The integrated Intel® C236 chipset supports two SATA 6Gb/s drives with RAID 0/1 function. In addition, the HPCIE-C236 includes VGA and iDP interfaces for dual independent display.

Two USB 3.2 Gen 1 (5Gb/s) on the rear panel, four USB 2.0 by pin headers, two RS-232/422/485 and one PCIe Mini interface (supports mSATA and USB 2.0) provide flexible expansion options. High Definition Audio (HDA) support ensures HDA devices can be easily implemented on the HPCIE-C236.

1.2 Features

Some of the HPCIE-C236 motherboard features are listed below:

- Half-size PICMG 1.3 CPU card
- LGA1151 Intel® Xeon® E3 v5/v6, 6th/7th generation Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- Intel® C236 chipset
- Two 260-pin 2133/1867 MHz dual-channel ECC/non-ECC unbuffered DDR4 SO-DIMMs support (system max. 32 GB)
- Two Intel® PCIe GbE connectors (LAN1 with Intel® AMT 11.0 support)
- Dual independent display by VGA and iDP interfaces
- One full-size/half-size PCIe Mini slot supports mSATA and USB 2.0
- Two SATA 6Gb/s connectors support RAID 0/1 function
- Two USB 3.2 Gen 1 (5Gb/s) ports on the rear I/O
- Four USB 2.0 ports via internal pin headers
- Two RS-232/422/485 serial ports
- High Definition Audio
- RoHS compliant

1.3 Connectors

The connectors on the HPCIE-C236 are shown in the figure below.

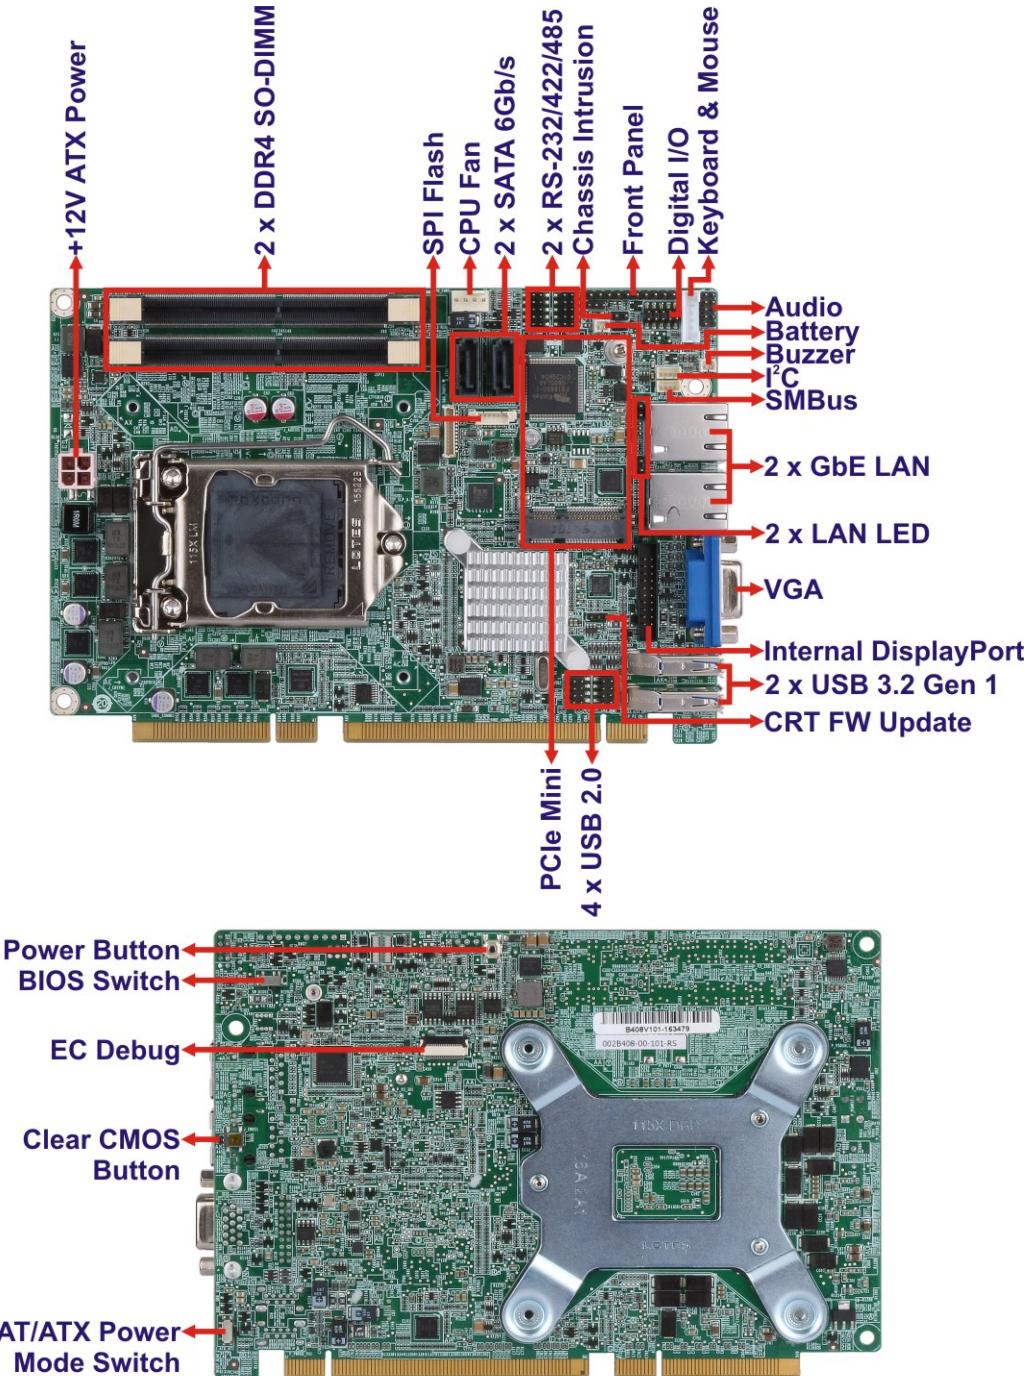


Figure 1-2: Connectors

HPCIE-C236 Half-size PICMG 1.3 CPU Card

1.4 Dimensions

The main dimensions of the HPCIE-C236 are shown in the diagram below.

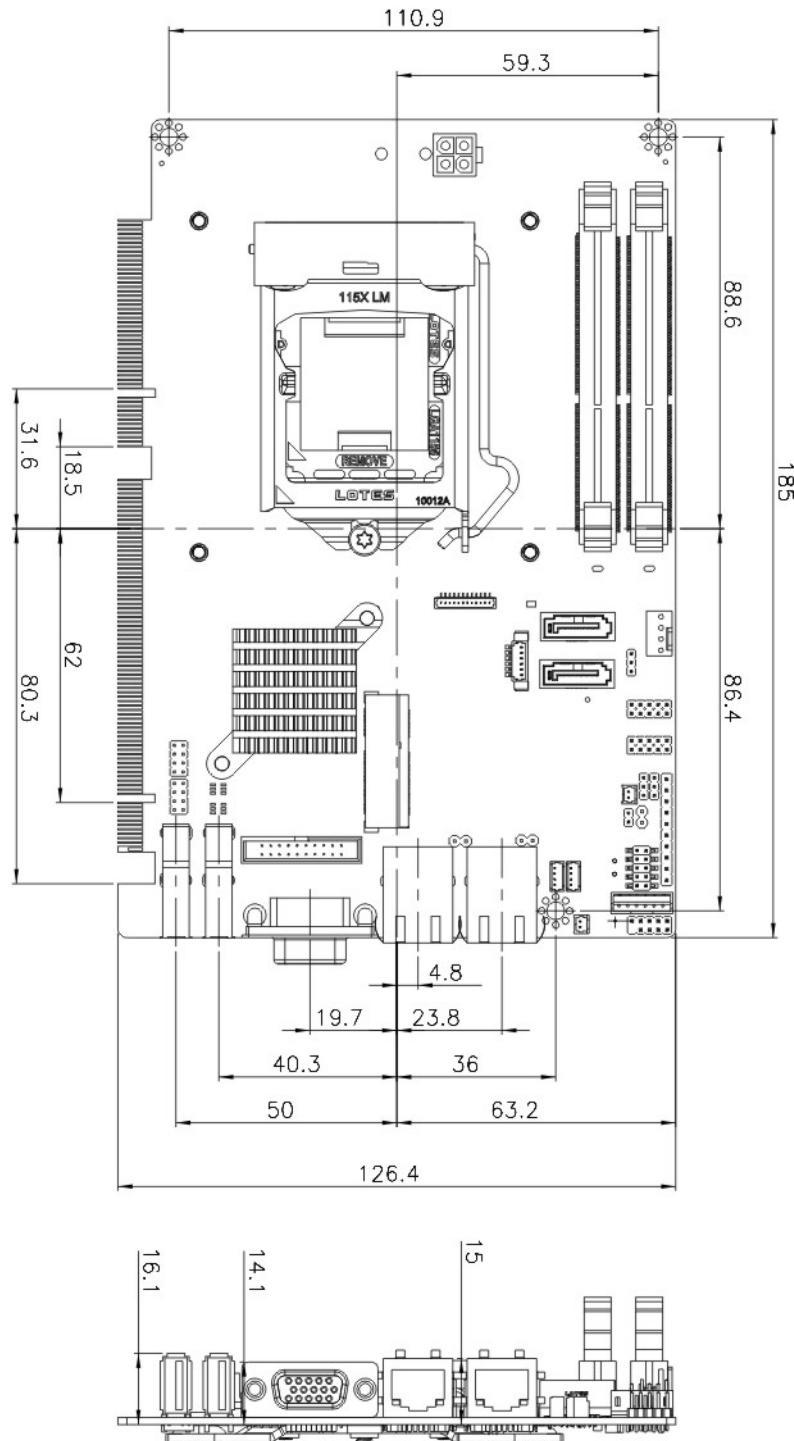


Figure 1-3: HPCIE-C236 Dimensions (mm)

1.5 Data Flow

Figure 1-4 shows the data flow between the system chipset, the CPU and other components installed on the motherboard.

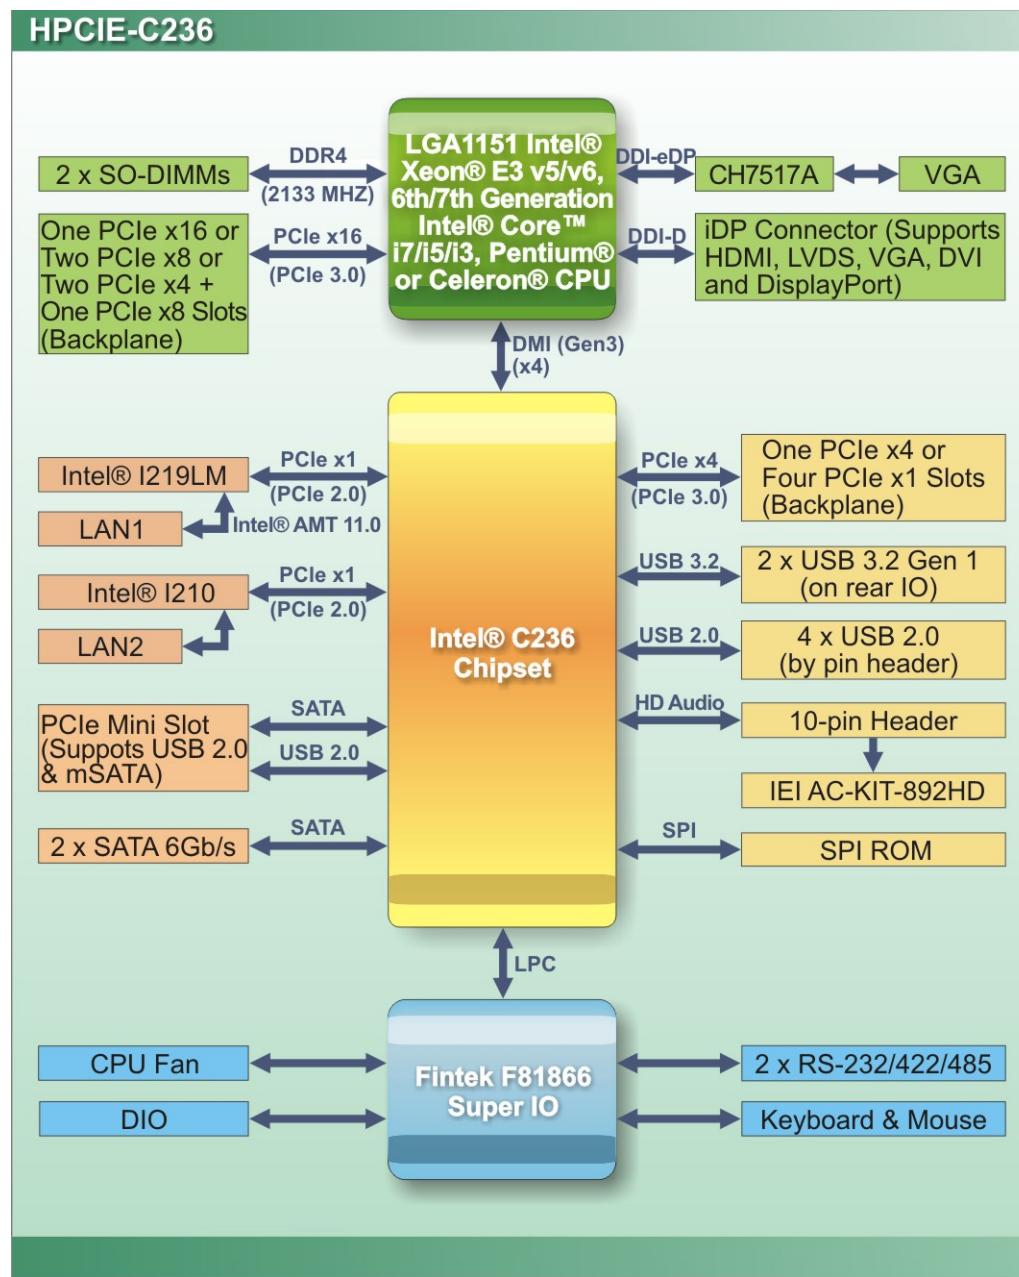


Figure 1-4: Data Flow Diagram

1.6 Technical Specifications

The HPCIE-C236 technical specifications are listed below.

Specification/Model	HPCIE-C236
Form Factor	Half-size PICMG 1.3 CPU card
CPU Supported	LGA1151 Intel® Xeon® E3 v5/v6, 6th/7th generation Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU
PCH	Intel® C236
Memory	Two 260-pin 2133/1867 MHz dual-channel ECC/non-ECC unbuffered DDR4 SO-DIMMs support (system max. 32 GB)
Graphics Engine	Intel® HD Graphics Gen9 engine supports DirectX 11/12, OpenCL 2.x and OpenGL 4.3/4.4 Decode/encode for HEVC, VP8, VP9, VDENC
Display Output	Supports dual independent display One VGA (via Chrontel CH7517A, up to 1920x1200@60 Hz) One iDP interface for HDMI, LVDS, VGA, DVI and DisplayPort (up to 3840x2160@60 Hz)
Ethernet Controllers	LAN1: Intel® I219LM PCIe GbE controller with Intel® AMT 11.0 support LAN2: Intel® I210 PCIe GbE controller
Audio	Supports 7.1-channel HD audio by IEI AC-KIT-888S kit
Expansion	One PCIe Mini slot supports mSATA and USB 2.0 16-lane PCIe link from CPU via golden finger: Supports one PCIe x16, or two PCIe x8, or two PCIe x4 + one PCIe x8 slots on the backplane (configured via BIOS) 4-lane PCIe link from PCH via golden finger: Supports four PCIe x1 slots or one PCIe x4 slot on the backplane (configured via BIOS switch)
Super I/O Controller	Fintek F81866
Watchdog Timer	Software programmable supports 1~255 sec. system reset
BIOS	UEFI BIOS

External I/O Interface Connectors	
Display Output	One VGA connector
Ethernet	Two RJ-45 ports
USB 3.2 Gen 1	<p>Two USB 3.2 Gen 1 (5Gb/s) ports</p> <p>* The Windows® 7 installation media does not include native driver support for USB 3.0. In order to use the USB keyboard or mouse connected to a USB 3.0 port during OS installation, the user has to update the Windows® 7 installation image so that it contains USB 3.0 drivers. Please refer to Section 4.10 for detailed installation procedures.</p>
Internal I/O Interface Connectors	
Audio Connector	One audio connector (10-pin header)
Chassis Intrusion	One 2-pin header
Digital I/O	8-bit digital I/O
Fan	One 4-pin CPU smart fan connector
Front Panel	One 10-pin header (power LED, HDD LED, power button, reset button)
I²C	One 4-pin wafer connector
Internal DisplayPort	One 20-pin box header
Keyboard and Mouse	One internal keyboard and mouse connector (6-pin wafer)
LAN LED	Two 2-pin headers for LAN1 LED and LAN2 LED
Serial ATA	Two SATA 6Gb/s connectors (support RAID 0, 1)
Serial Ports	Two RS-232/422/485 via internal 10-pin headers
SMBus	One 4-pin wafer connector
USB 2.0	Four USB 2.0 ports by two internal pin headers
Environmental and Power Specifications	
Power Supply	5V/12V, AT/ATX power support
Power Consumption	<p>5V@0.13A, 12V@7.89A, 3.3V@0.1A, 5VSB@0.2A (3.6 GHz Intel® Xeon® E3-1275 v5 CPU with two 16 GB 2133 MHz DDR4 memory)</p>

HPCIE-C236 Half-size PICMG 1.3 CPU Card

Operating Temperature	-20°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Operating Humidity	5% ~ 95% (non-condensing)
Physical Specifications	
Dimensions	185 mm x 126 mm
Weight (GW/NW)	1000 g/420 g

Table 1-1: HPCIE-C236 Specifications

Chapter

2

Packing List

2.1 Anti-static Precautions



WARNING!

Static electricity can destroy certain electronics. Make sure to follow the ESD precautions to prevent damage to the product, and injury to the user.

Make sure to adhere to the following guidelines:

- ***Wear an anti-static wristband:*** Wearing an anti-static wristband can prevent electrostatic discharge.
- ***Self-grounding:*** Touch a grounded conductor every few minutes to discharge any excess static buildup.
- ***Use an anti-static pad:*** When configuring any circuit board, place it on an anti-static mat.
- ***Only handle the edges of the PCB:*** Don't touch the surface of the motherboard. Hold the motherboard by the edges when handling.

2.2 Unpacking Precautions

When the HPCIE-C236 is unpacked, please do the following:

- Follow the anti-static guidelines above.
- Make sure the packing box is facing upwards when opening.
- Make sure all the packing list items are present.

2.3 Packing List



NOTE:

If any of the components listed in the checklist below are missing, do not proceed with the installation. Contact the IEI reseller or vendor the HPCIE-C236 was purchased from or contact an IEI sales representative directly by sending an email to sales@ieiworld.com.

The HPCIE-C236 is shipped with the following components:

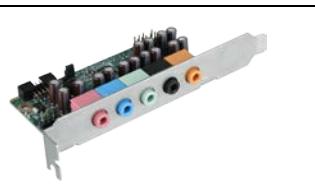
Quantity	Item and Part Number	Image
1	HPCIE-C236 CPU card	
1	SATA cable	
1	Quick installation guide	

Table 2-1: Packing List

HPCIE-C236 Half-size PICMG 1.3 CPU Card

2.4 Optional Items

The following are optional components which may be separately purchased:

Item and Part Number	Image
RS-232 cable with bracket (P/N: 19800-000300-100-RS)	
PS/2 KB/MS Y-cable with bracket (P/N: 19800-000075-RS)	
SATA power cable (P/N: 32102-000100-200-RS)	
7.1-channel HD audio kit with Realtek ALC888S audio codec supporting dual audio stream (P/N: AC-KIT-888S-R10)	
High-performance LGA1155/LGA1156 cooler kit (1U chassis compatible, 73W) (P/N: CF-115XA-R10)	
LGA1155/LGA1156 cooler kit (1U chassis compatible, 45W) (P/N: CF-115XC-R10)	
LGA1155/LGA1156 cooler kit (1U chassis compatible, 65W) (P/N: CF-115XD-R10)	
DisplayPort to HDMI converter board (for IEI iDP connector) (P/N: DP-HDMI-R10)	

Item and Part Number	Image
DisplayPort to LVDS converter board (for IEI iDP connector) (P/N: DP-LVDS-R10)	
DisplayPort to VGA converter board (for IEI iDP connector) (P/N: DP-VGA-R10)	
DisplayPort to DVI-D converter board (for IEI iDP connector) (P/N: DP-DVI-R10)	
DisplayPort to DisplayPort converter board (for IEI iDP connector) (P/N: DP-DP-R10)	
SATA to IDE/CompactFlash® converter board (P/N: SAIDE-KIT01-R10)	

Table 2-2: Optional Items

Chapter

3

Connectors

3.1 Peripheral Interface Connectors

This chapter details all the peripheral interface connectors.

3.1.1 HPCIE-C236 Layout

The figure below shows all the peripheral interface connectors.

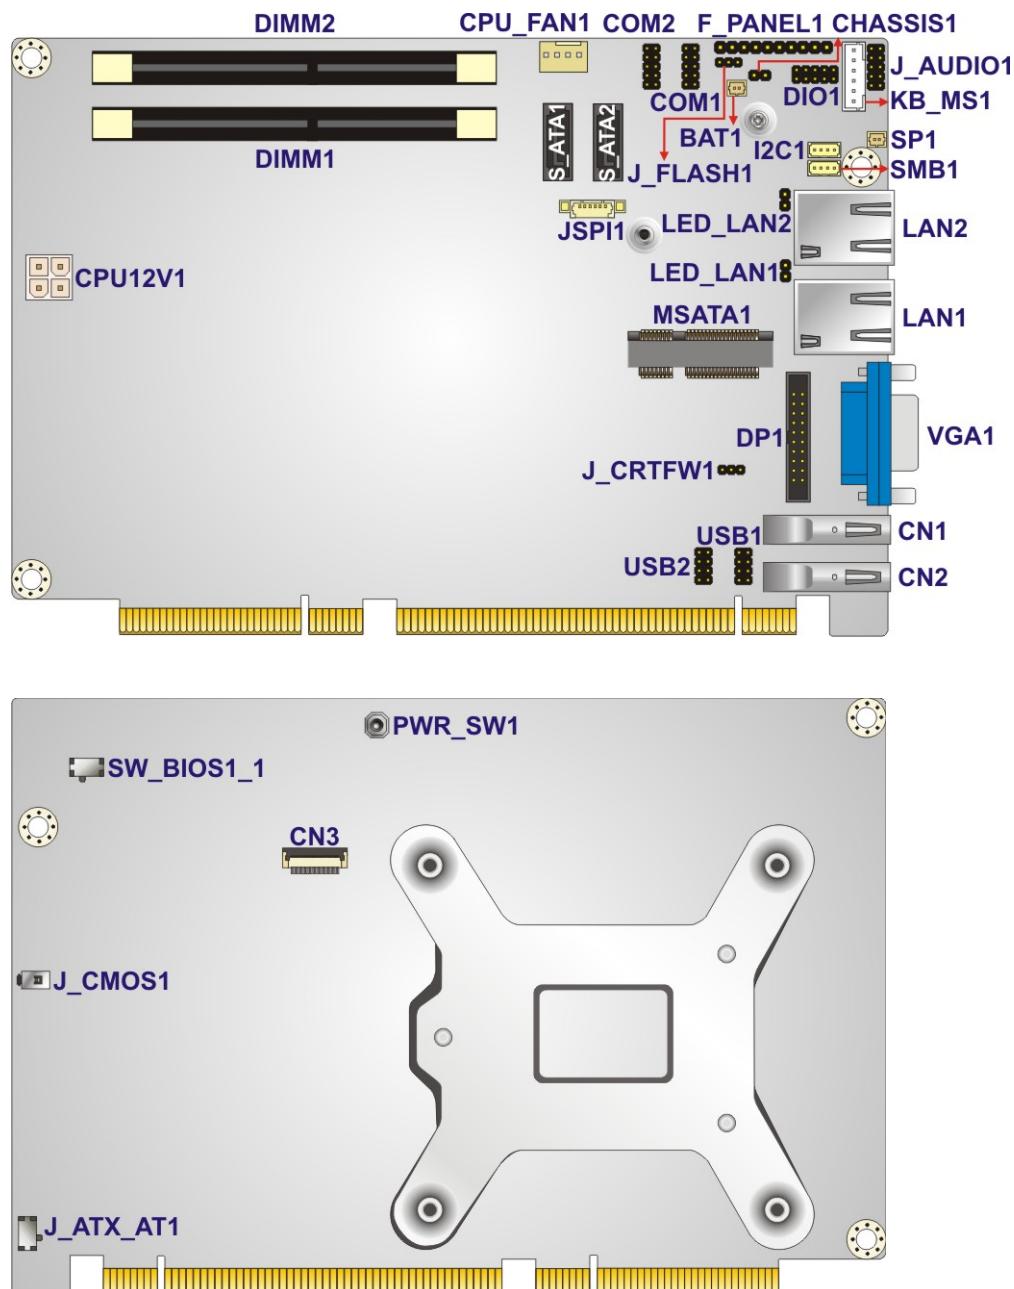


Figure 3-1: Peripheral Interface Connectors

3.1.2 Peripheral Interface Connectors

The table below lists all the connectors on the board.

Connector	Type	Label
+12V ATX power supply connector	4-pin Molex power connector	CPU12V1
Audio kit connector	10-pin header	J_AUDIO1
Battery connector	2-pin wafer	BAT1
Buzzer connector	2-pin wafer	SP1
Chassis intrusion connector	2-pin header	CHASSIS1
CRT FW update	3-pin header	J_CRTFW1
DDR4 SO-DIMM slots	260-pin DDR4 SO-DIMM slot	DIMM1, DIMM2
Digital I/O connector	10-pin header	DIO1
EC debug connector	20-pin wafer	CN3
Fan connector (CPU)	4-pin wafer	CPU_FAN1
Front panel connector	10-pin header	F_PANEL1
I ² C connector	4-pin wafer	I2C1
Internal DisplayPort connector	20-pin box header	DP1
Keyboard and mouse connector	6-pin wafer	KB_MS1
LAN LED connectors	2-pin header	LED_LAN1, LED_LAN2
PCIe Mini slot	PCIe Mini slot	MSATA1
Power button	Push button	PWR_SW1
RS-232/422/485 serial ports	10-pin header	COM1, COM2
SATA 6Gb/s drive connector	7-pin SATA connector	S_ATA1, S_ATA2
SMBus connector	4-pin wafer	SMB1
SPI flash connector	6-pin wafer	JSPI1
USB 2.0 connectors	8-pin header	USB1, USB2

Table 3-1: Peripheral Interface Connectors

3.1.3 External Interface Panel Connectors

The table below lists the connectors on the external I/O panel.

Connector	Type	Label
Ethernet ports	RJ-45	LAN1, LAN2
USB 3.2 Gen 1 (5Gb/s) ports	USB Type-A	CN1, CN2
VGA connector	15-pin female	VGA1

Table 3-2: External Peripheral Connectors

3.2 Internal Peripheral Connectors

The section describes all of the connectors on the HPCIE-C236.

3.2.1 +12V ATX Power Connector

CN Label: CPU12V1

CN Type: 4-pin Molex power connector, p=4.2 mm

CN Location: See Figure 3-2

CN Pinouts: See Table 3-3

This connector provides power to the CPU.

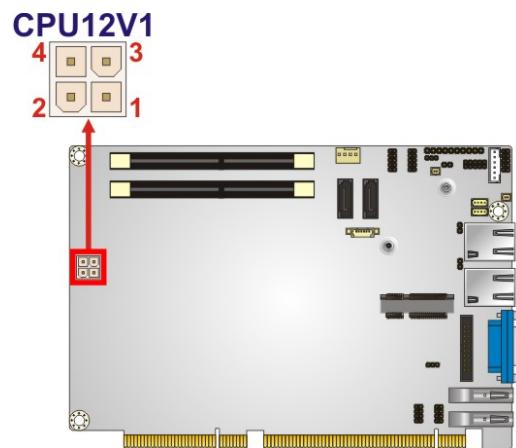



Figure 3-2: +12V ATX Power Connector Pinout Location

HPCIE-C236 Half-size PICMG 1.3 CPU Card

Pin	Description	Pin	Description
1	GND	2	GND
3	+12V	4	+12V

Table 3-3: +12V ATX Power Connector Pinouts**3.2.2 Audio Kit Connector****CN Label:** J_AUDIO1**CN Type:** 10-pin header, p=2.00 mm**CN Location:** See **Figure 3-3****CN Pinouts:** See **Table 3-4**

This connector allows connection to an external audio kit.

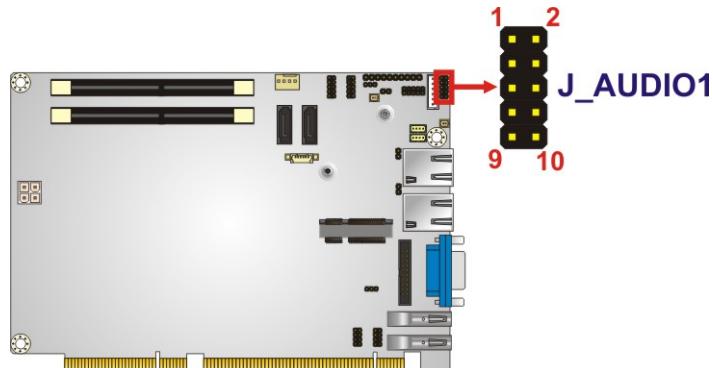**Figure 3-3: Audio Connector Location**

Pin	Description	Pin	Description
1	HDA_SYNC	2	HDA_BIT_CLK
3	HDA_SDOUT	4	HDA_SPKR
5	HDA_SDIN	6	HDA_RST#
7	HDA_VCC	8	HDA_GND
9	HDA_+12V	10	HDA_GND

Table 3-4: Audio Connector Pinouts

3.2.3 Battery Connector



CAUTION:

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

CN Label: BAT1

CN Type: 2-pin wafer, p=1.25 mm

CN Location: See **Figure 3-4**

CN Pinouts: See **Table 3-5**

This is connected to the system battery. The battery provides power to the system clock to retain the time when power is turned off. **NOTE:** It is recommended to attach the RTC battery onto the system chassis in which the HPCIE-C236 is installed.

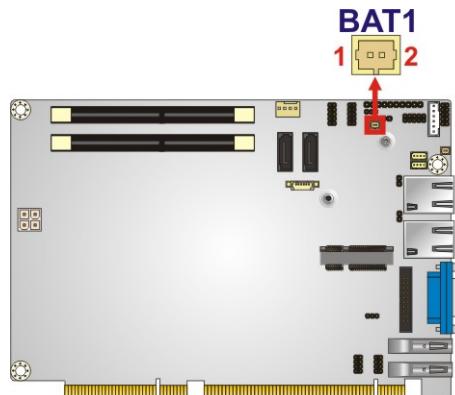


Figure 3-4: Battery Connector Location

Pin	Description
1	VBATT
2	GND

Table 3-5: Battery Connector Pinouts

3.2.4 Buzzer Connector

CN Label: SP1

CN Type: 2-pin wafer, p=1.25 mm

CN Location: See **Figure 3-5**

CN Pinouts: See **Table 3-6**

The buzzer connector is connected to the buzzer. **NOTE:** If you cannot find a good place to put a buzzer on the HPCIE-C236, it is recommended to attach the buzzer onto the system chassis in which the HPCIE-C236 is installed.

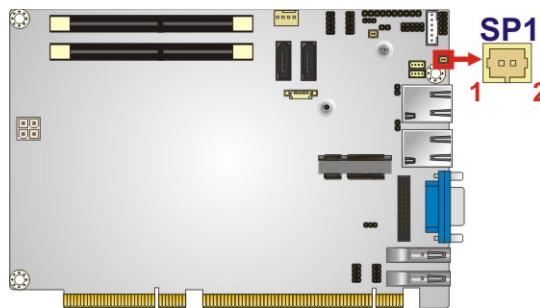


Figure 3-5: Buzzer Connector Location

Pin	Description
1	+V5S
2	GND

Table 3-6: Buzzer Connector Pinouts

3.2.5 Chassis Intrusion Connector

CN Label: CHASSIS1

CN Type: 2-pin header, p=2.54 mm

CN Location: See **Figure 3-6**

CN Pinouts: See **Table 3-7**

The chassis intrusion connector is for a chassis intrusion detection sensor or switch that detects if a chassis component is removed or replaced.

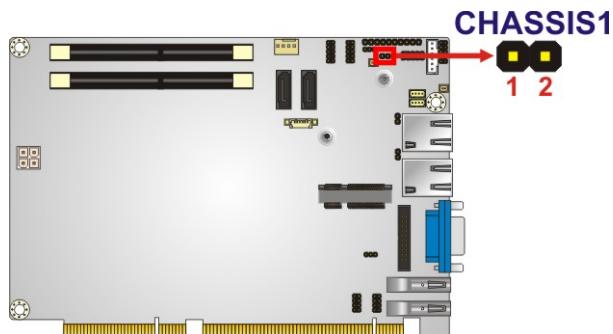


Figure 3-6: Chassis Intrusion Connector Location

Pin	Description
1	+3.3VSB
2	CHASSIS OPEN

Table 3-7: Chassis Intrusion Connector Pinouts

3.2.6 CRT FW Update Connector

CN Label: J_CRTFW1

CN Type: 3-pin header, p=2.00 mm

CN Location: See Figure 3-7

CN Pinouts: See Table 3-8

The CRT FW update connector is used to update the CRT firmware.

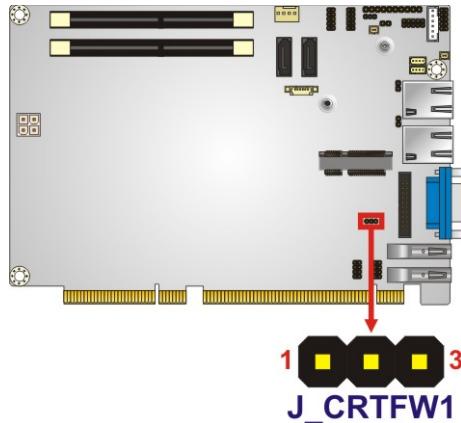


Figure 3-7: CRT FW Update Connector Location

HPCIE-C236 Half-size PICMG 1.3 CPU Card

Pin	Description
1	SPC
2	SPD
3	GND

Table 3-8: CRT FW Update Connector Pinouts

3.2.7 DDR4 SO-DIMM Slots

CN Label: DIMM1, DIMM2

CN Type: 260-pin DDR4 SO-DIMM slot

CN Location: See [Figure 3-8](#)

The SO-DIMM slots are for installing the DDR4 SO-DIMMs.

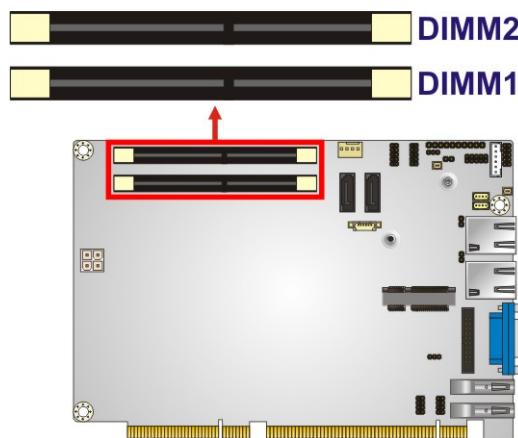


Figure 3-8: DDR4 SO-DIMM Slot Locations



CAUTION:

For dual channel configuration, always install two identical memory modules that feature the same capacity, timings, voltage, number of ranks and the same brand.

3.2.8 Digital I/O Connector

CN Label: DIO1

CN Type: 10-pin header, p=2.00 mm

CN Location: See **Figure 3-9**

CN Pinouts: See **Table 3-9**

The digital I/O connector provides programmable input and output for external devices.

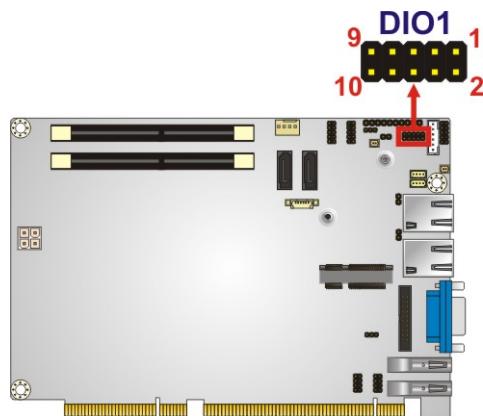


Figure 3-9: Digital I/O Connector Location

Pin	Description	Pin	Description
1	GND	2	VCC
3	Output 3	4	Output 2
5	Output 1	6	Output 0
7	Input 3	8	Input 2
9	Input 1	10	Input 0

Table 3-9: Digital I/O Connector Pinouts

3.2.9 EC Debug Connector

CN Label: CN1

CN Type: 20-pin wafer, p=0.5 mm

CN Location: See **Figure 3-10**

CN Pinouts: See **Table 3-10**

The EC debug connector is used for EC debug.

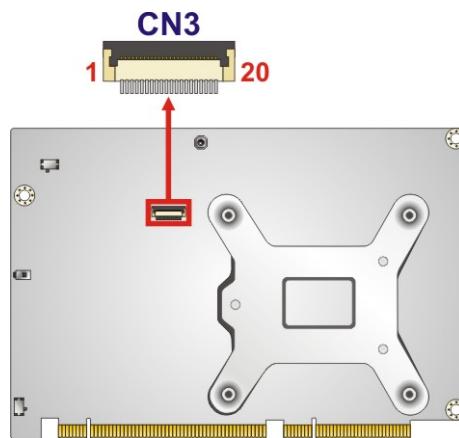


Figure 3-10: EC Debug Connector Location

Pin	Description	Pin	Description
1	EC_EPP_STB#	2	EC_EPP_PDO
3	EC_EPP_PD1	4	EC_EPP_PD2
5	EC_EPP_PD3	6	EC_EPP_PD4
7	EC_EPP_PD5	8	EC_EPP_PD6
9	EC_EPP_PD7	10	NC
11	EC_EPP_BUSY	12	EC_EPP_KSI5
13	EC_EPP_KSI4	14	EC_EPP_AFD#
15	NC	16	EC_EPP_INIT#
17	EC_EPP_SLIN#	18	GND
19	GND	20	GND

Table 3-10: EC Debug Connector Pinouts

3.2.10 Fan Connector (CPU)

CN Label: CPU_FAN1

CN Type: 4-pin wafer, p=2.54 mm

CN Location: See **Figure 3-11**

CN Pinouts: See **Table 3-11**

The fan connector attaches to a CPU cooling fan.

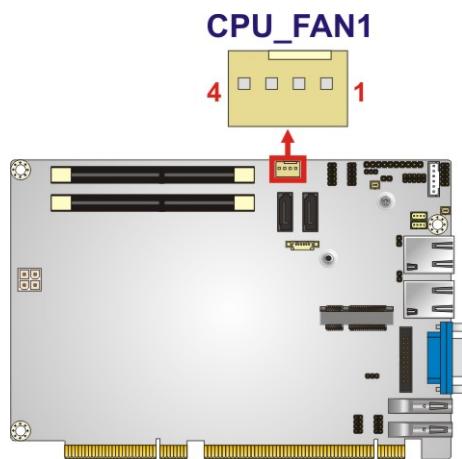


Figure 3-11: CPU Fan Connector Location

Pin	Description
1	GND
2	+12V
3	FANIO
4	PWM

Table 3-11: CPU Fan Connector Pinouts

3.2.11 Front Panel Connector

CN Label: F_PANEL1

CN Type: 10-pin header, p=2.54 mm

CN Location: See **Figure 3-12**

CN Pinouts: See **Table 3-12**

The front panel connector connects to the indicator LEDs and buttons on the computer's front panel.

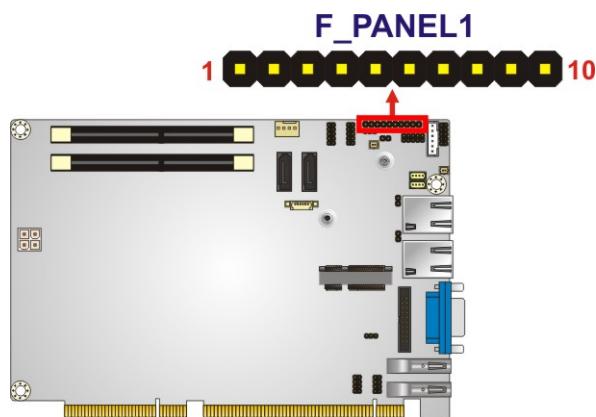


Figure 3-12: Front Panel Connector Location

Function	Pin	Description	Function	Pin	Description
Power Button	1	NC	Power LED	6	PWR_LED+
	2	PWRBTN_SW#		7	PWR_LED+
	3	GND		8	GND
HDD LED	4	+V5S	Reset	9	RESET+
	5	HDD_LED-		10	GND

Table 3-12: Front Panel Connector Pinouts

3.2.12 I²C Connector

CN Label: I2C1

CN Type: 4-pin wafer, p=1.25 mm

CN Location: See **Figure 3-13**

CN Pinouts: See **Table 3-13**

The I²C connector is used to connect I²C-bus devices to the motherboard.

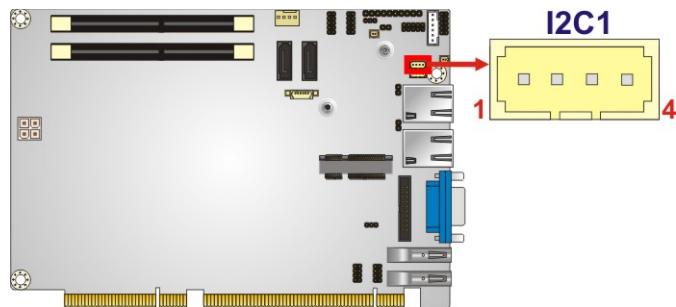


Figure 3-13: I²C Connector Location

Pin	Description
1	GND
2	I2C_DAT
3	I2C_CLK
4	+5V

Table 3-13: I²C Connector Pinouts

3.2.13 Internal DisplayPort Connector

CN Label: DP1

CN Type: 20-pin box header, p=2.00 mm

CN Location: See **Figure 3-14**

CN Pinouts: See **Table 3-14**

The DisplayPort connector supports HDMI, LVDS, VGA, DVI and DisplayPort graphics interfaces with up to 3840x2160 resolutions.

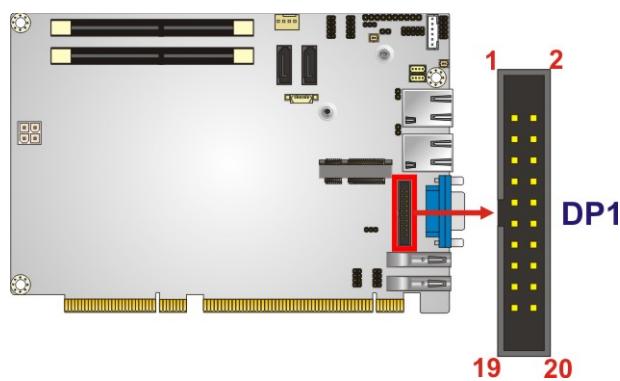


Figure 3-14: Internal DisplayPort Connector Location

Pin	Description	Pin	Description
1	HPD	11	LANE3N
2	AUXP	12	GND
3	GND	13	GND
4	AUXN	14	LANEOP
5	AUX_CTRL_DET_D	15	LANE1P
6	GND	16	LANEON
7	GND	17	LANE1N
8	LANE2P	18	+3.3V
9	LANE3P	19	+5V
10	LANE2N	20	N/A

Table 3-14: Internal DisplayPort Connector Pinouts

3.2.14 Keyboard and Mouse Connector

CN Label: KB_MS1

CN Type: 6-pin wafer, p=2.00 mm

CN Location: See **Figure 3-15**

CN Pinouts: See **Table 3-15**

The keyboard and mouse connector connects to a PS/2 Y-cable that can be connected to a PS/2 keyboard and mouse.

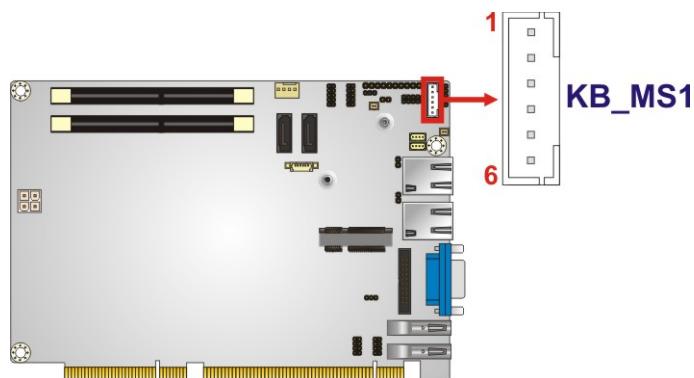


Figure 3-15: Keyboard and Mouse Connector Location

Pin	Description
1	VCC
2	Mouse Data
3	Mouse Clock
4	Keyboard Data
5	Keyboard Clock
6	GND

Table 3-15: Keyboard and Mouse Connector Pinouts

3.2.15 LAN LED Connectors

CN Label: LED_LAN1, LED_LAN2

CN Type: 2-pin header, p=2.54 mm

CN Location: See **Figure 3-16**

CN Pinouts: See **Table 3-16** and **Table 3-17**

The LAN LED connectors are used to connect to the LAN LED indicators on the chassis to indicate users the link activities of the two LAN ports.

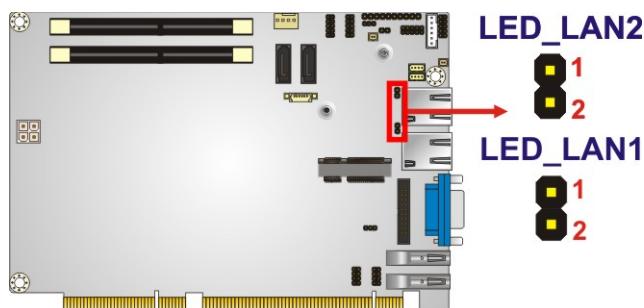


Figure 3-16: LAN LED Connector Locations

Pin	Description
1	+3.3V
2	LAN1_LED_LINK#_ACT

Table 3-16: LAN1 LED Connector (LED_LAN1) Pinouts

Pin	Description
1	+3.3V
2	LAN2_LED_LINK#_ACT

Table 3-17: LAN2 LED Connector (LED_LAN2) Pinouts

3.2.16 PCIe Mini Slot

CN Label: MSATA1

CN Type: PCIe Mini slot

CN Location: See **Figure 3-17**

CN Pinouts: See **Table 3-18**

The PCIe Mini slot is for installing a full-size/half-size PCIe Mini expansion card, such as an mSATA SSD or wireless LAN card.

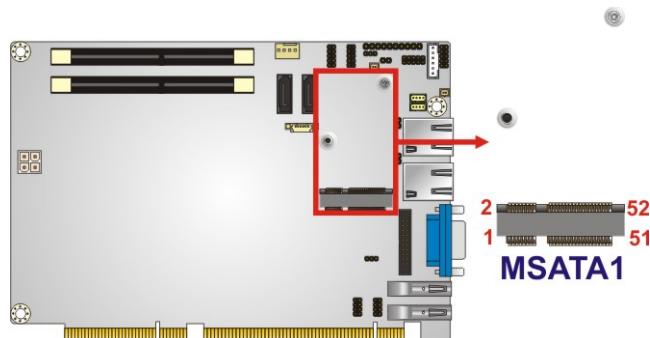


Figure 3-17: PCIe Mini Slot Location


Pin	Description	Pin	Description
1	PCIE_WAKE#	2	+3.3V
3	N/C	4	GND
5	N/C	6	1.5V
7	N/C	8	N/C
9	GND	10	N/C
11	MSATA_CLK#	12	N/C
13	MSATA_CLK	14	N/C
15	GND	16	N/C
17	PLTRST_N	18	GND
19	N/C	20	+3.3V
21	GND	22	PLTRST_N
23	SATA_RX+	24	+3.3V
25	SATA_RX-	26	GND
27	GND	28	1.5V

HPCIE-C236 Half-size PICMG 1.3 CPU Card

Pin	Description	Pin	Description
29	GND	30	SMB_CLK
31	SATA_TX-	32	SMB_DATA
33	SATA_TX+	34	GND
35	GND	36	USB_DATA-
37	GND	38	USB_DATA+
39	+3.3V	40	GND
41	+3.3V	42	N/C
43	+3.3V	44	N/C
45	CLINK_CLK	46	N/C
47	CLINK_DATA	48	1.5V
49	CLINK_RST#	50	GND
51	MSATA_DET	52	+3.3V

Table 3-18: PCIe Mini Slot Pinouts**3.2.17 Power Button****CN Label:** PWR_SW1**CN Type:** Push button**CN Location:** See **Figure 3-18**

The on-board power button controls system power.

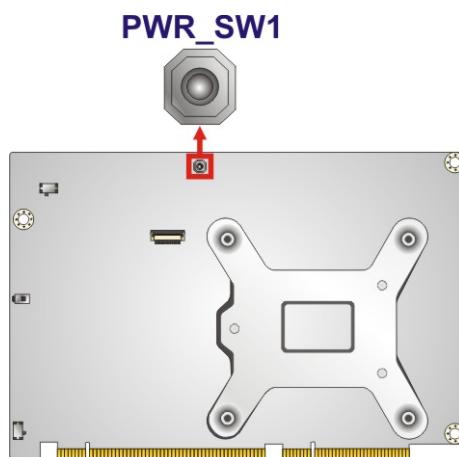**Figure 3-18: Power Button Location**

3.2.18 RS-232/422/485 Serial Port Connectors

CN Label: COM1, COM2

CN Type: 10-pin header, p=2.00 mm

CN Location: See **Figure 3-19**

CN Pinouts: See **Table 3-19**

Each of these connectors provides RS-232/422/485 connections.

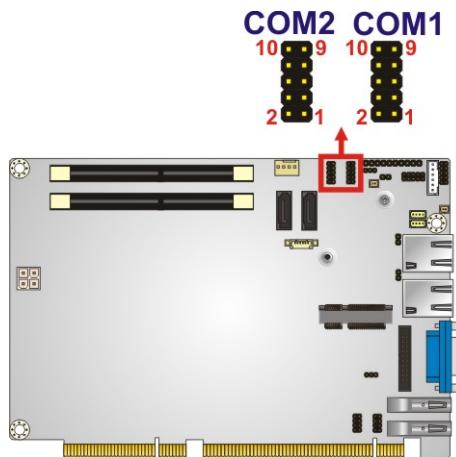


Figure 3-19: RS-232/422/485 Serial Port Connector Locations

Pin	Description	Pin	Description
1	DCD	2	DSR
3	SIN	4	RTS
5	SOUT	6	CTS
7	DTR	8	RI
9	GND	10	GND

Table 3-19: RS-232/422/485 Serial Port Connector Pinouts

The user may use the RS-232/422/485 cable to connect to a serial device. The pinouts of the DB-9 connector are listed below.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

RS-232 Pinouts	RS-422 Pinouts	RS-485 Pinouts

Table 3-20: DB-9 RS-232/422/485 Pinouts

3.2.19 SATA 6Gb/s Drive Connector

CN Label: S_ATA1, S_ATA2

CN Type: 7-pin SATA drive connector

CN Location: See Figure 3-20

CN Pinouts: See Table 3-21

The SATA drive connectors can be connected to SATA drives and supports up to 6Gb/s data transfer rate.

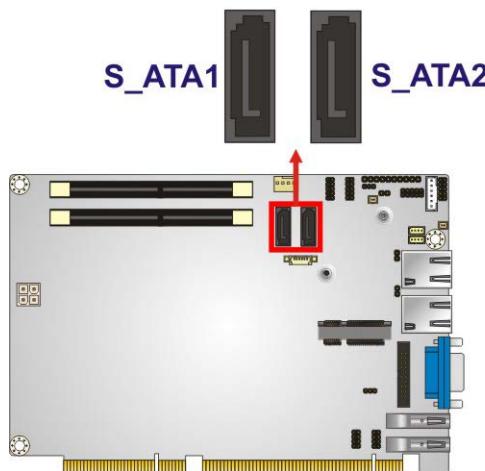


Figure 3-20: SATA 6Gb/s Drive Connector Locations

Pin	Description	Pin	Description
1	GND	2	TX+
3	TX-	4	GND
5	RX-	6	RX+
7	GND		

Table 3-21: SATA 6Gb/s Drive Connector Pinouts

3.2.20 SMBus Connector

CN Label: SMB1

CN Type: 4-pin wafer, p=1.25 mm

CN Location: See **Figure 3-21**

CN Pinouts: See **Table 3-22**

The SMBus (System Management Bus) connector provides low-speed system management communications.

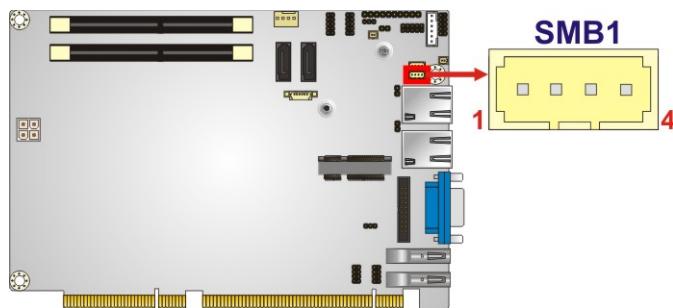


Figure 3-21: SMBus Connector Location

Pin	Description
1	GND
2	SMB_DATA
3	SMB_CLK
4	+5V

Table 3-22: SMBus Connector Pinouts

3.2.21 SPI Flash Connector

CN Label: JSPI1

CN Type: 6-pin wafer, p=1.25 mm

CN Location: See **Figure 3-22**

CN Pinouts: See **Table 3-23**

The SPI flash connector is used to flash the SPI ROM.

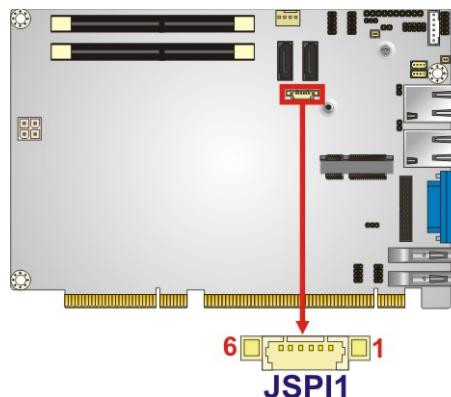


Figure 3-22: SPI Flash Connector Location

Pin	Description	Pin	Description
1	+V3.3M_SPI_CON	2	SPI_CS
3	SPI_SO_SW	4	SPI_CLK_SW
5	SPI_SI_SW	6	GND

Table 3-23: SPI Flash Connector Pinouts

3.2.22 USB 2.0 Connectors

CN Label: USB1, USB2

CN Type: 8-pin header, p=2.00 mm

CN Location: See **Figure 3-23**

CN Pinouts: See **Table 3-24**

The USB 2.0 connectors connect to USB 2.0 devices. Each pin header provides two USB 2.0 ports.

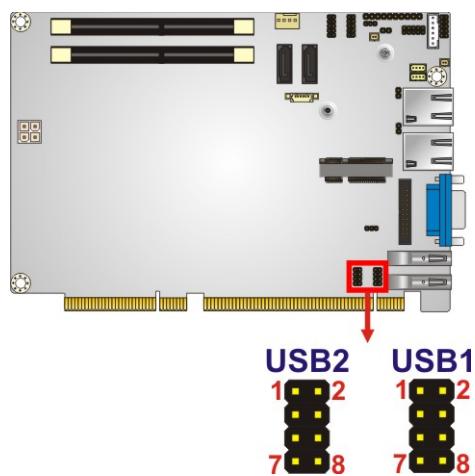


Figure 3-23: USB 2.0 Connector Locations

Pin	Description	Pin	Description
1	VCC	2	GND
3	USB_DATA-	4	USB_DATA+
5	USB_DATA+	6	USB_DATA-
7	GND	8	VCC

Table 3-24: USB 2.0 Connector Pinouts

3.3 External Peripheral Interface Connector Panel

The figure below shows the external peripheral interface connector (EPIC) panel. The EPIC panel consists of the following:

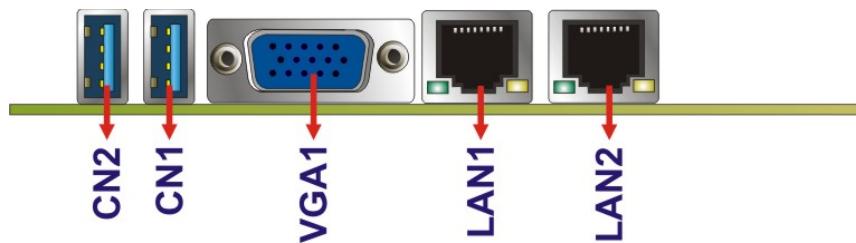


Figure 3-24: External Peripheral Interface Connector

3.3.1 Ethernet Connectors

CN Label: LAN1, LAN2

CN Type: RJ-45

CN Location: See Figure 3-24

CN Pinouts: See Table 3-25

Each LAN connector connects to a local network

Pin	Description	Pin	Description
1	LAN_MDIOP	5	LAN_MDI2P
2	LAN_MDION	6	LAN_MDI2N
3	LAN_MDI1P	7	LAN_MDI3P
4	LAN_MDI1N	8	LAN_MDI3N

Table 3-25: LAN Pinouts

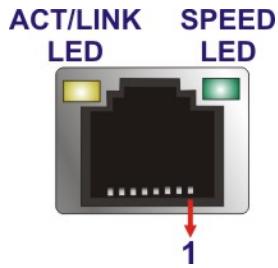


Figure 3-25: Ethernet Connector

3.3.2 USB 3.2 Gen 1 Connectors

CN Label: CN1, CN2

CN Type: USB Type-A

CN Location: See **Figure 3-24**

CN Pinouts: See **Table 3-26**

There is one external USB 3.2 Gen 1 (5Gb/s) connector on the HPCIE-C236.

Pin	Description	Pin	Description
1	VBUS	2	D-
3	D+	4	GND
5	STDA_SSRX_N	6	STDA_SSRX_P
7	GND_DRAIN	8	STDA_SSTX_N
9	STDA_SSTX_P		

Table 3-26: USB 3.2 Gen 1 Port Pinouts

3.3.3 VGA Connector

CN Label: VGA1

CN Type: 15-pin VGA

CN Location: See **Figure 3-24**

CN Pinouts: See **Table 3-27**

The 15-pin VGA connector connects to a monitor that accepts a standard VGA input.




NOTE:

The user has to connect the VGA connector to the monitor before system booting as the VGA output function is supported via the eDP to VGA converter.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

Pin	Description	Pin	Description
1	RED	2	GREEN
3	BLUE	4	NC
5	GND	6	HOT PLUG DETECT
7	GND	8	GND
9	VCC	10	GND
11	NC	12	DDCDA
13	HSYNC	14	VSYNC
15	DDCCLK		

Table 3-27: VGA Connector Pinouts**Figure 3-26: VGA Connector**

Chapter

4

Installation

4.1 Anti-static Precautions



WARNING:

Failure to take ESD precautions during the installation of the HPCIE-C236 may result in permanent damage to the HPCIE-C236 and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the HPCIE-C236. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the HPCIE-C236 or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** - Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- ***Self-grounding:*** - Before handling the board touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** When configuring the HPCIE-C236, place it on an anti-static pad. This reduces the possibility of ESD damaging the HPCIE-C236.
- ***Only handle the edges of the PCB:*** - When handling the PCB, hold the PCB by the edges.

4.2 Installation Considerations



NOTE:

The following installation notices and installation considerations should be read and understood before installation. All installation notices must be strictly adhered to. Failing to adhere to these precautions may lead to severe damage and injury to the person performing the installation.

**WARNING:**

The installation instructions described in this manual should be carefully followed in order to prevent damage to the components and injury to the user.

Before and during the installation please **DO** the following:

- Read the user manual:
 - The user manual provides a complete description of the HPCIE-C236 installation instructions and configuration options.
- Wear an electrostatic discharge cuff (ESD):
 - Electronic components are easily damaged by ESD. Wearing an ESD cuff removes ESD from the body and helps prevent ESD damage.
- Place the HPCIE-C236 on an anti-static pad:
 - When installing or configuring the motherboard, place it on an anti-static pad. This helps to prevent potential ESD damage.
- Turn all power to the HPCIE-C236 off:
 - When working with the HPCIE-C236, make sure that it is disconnected from all power supplies and that no electricity is being fed into the system.

Before and during the installation of the HPCIE-C236, **DO NOT**:

- Remove any of the stickers on the PCB board. These stickers are required for warranty validation.
- Use the product before verifying all the cables and power connectors are properly connected.
- Allow screws to come in contact with the PCB circuit, connector pins, or its components.

4.3 Socket LGA1151 CPU Installation



WARNING:

CPUs are expensive and sensitive components. When installing the CPU please be careful not to damage it in anyway. Make sure the CPU is installed properly and ensure the correct cooling kit is properly installed.

DO NOT touch the pins at the bottom of the CPU. When handling the CPU, only hold it on the sides.

To install the CPU, follow the steps below.

Step 1: **Disengage the load lever** by pressing the lever down and slightly outward to clear the retention tab. Fully open the lever. See **Figure 4-1**.

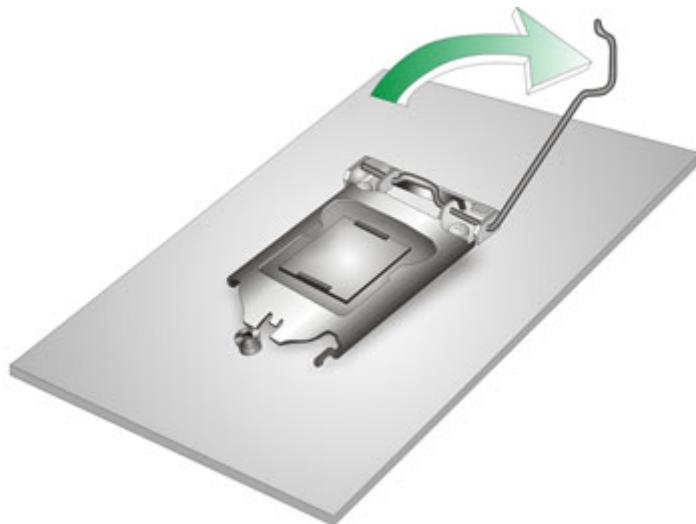


Figure 4-1: Disengage the CPU Socket Load Lever

Step 2: **Open the socket and remove the protective cover.** The black protective cover can be removed by pulling up on the tab labeled "Remove". See **Figure 4-2**.

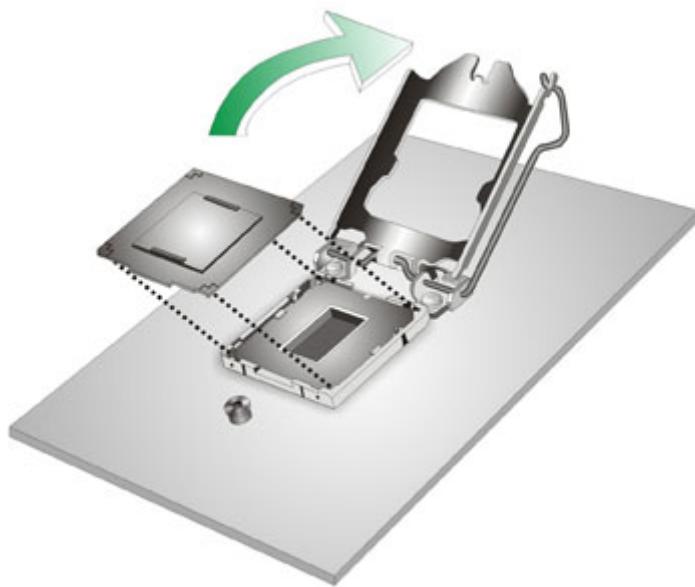


Figure 4-2: Remove Protective Cover

Step 3: Inspect the CPU socket. Make sure there are no bent pins and make sure the socket contacts are free of foreign material. If any debris is found, remove it with compressed air.

Step 4: Orientate the CPU properly. The contact array should be facing the CPU socket.



WARNING:

DO NOT touch the pins at the bottom of the CPU. When handling the CPU, only hold it on the sides.

Step 5: Correctly position the CPU. Match the Pin 1 mark with the cut edge on the CPU socket.

Step 6: Align the CPU pins. Locate pin 1 and the two orientation notches on the CPU. Carefully match the two orientation notches on the CPU with the socket alignment keys.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

Step 7: Insert the CPU. Gently insert the CPU into the socket. If the CPU pins are properly aligned, the CPU should slide into the CPU socket smoothly. See **Figure 4-3.**

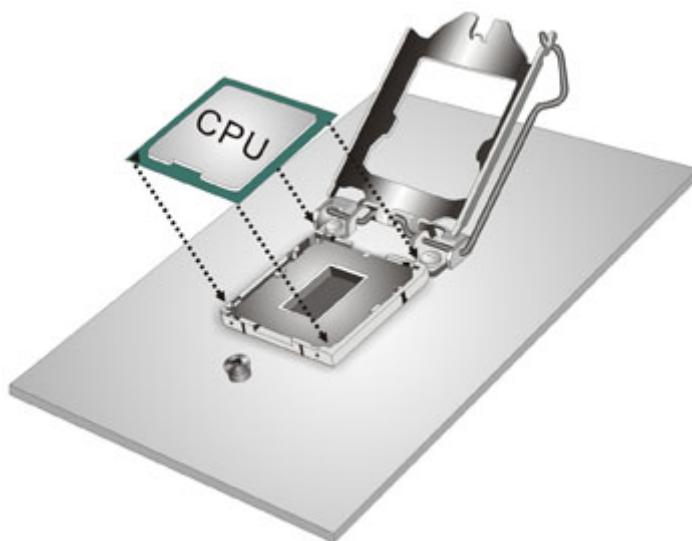


Figure 4-3: Insert the Socket LGA1151 CPU

Step 8: Close the CPU socket. Close the load plate and pull the load lever back a little to have the load plate be able to secure to the knob. Engage the load lever by pushing it back to its original position (**Figure 4-4**). There will be some resistance, but will not require extreme pressure.

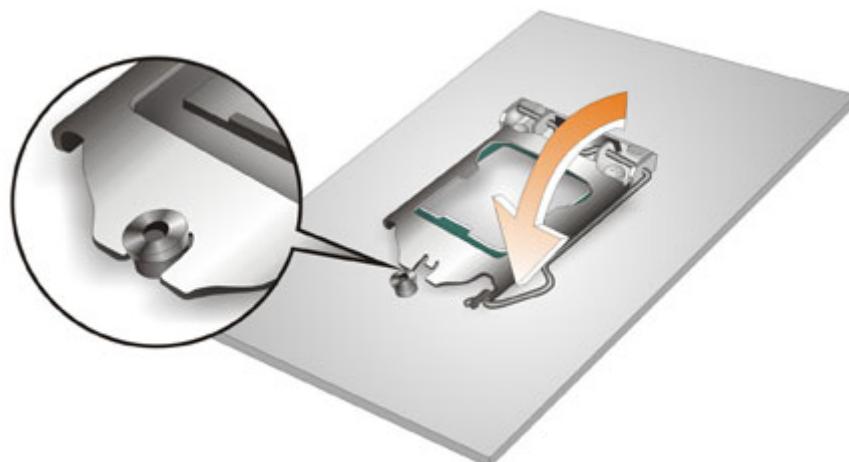


Figure 4-4: Close the Socket LGA1151

Step 9: Connect the 12 V power to the board. Connect the 12 V power from the power supply to the board.

4.4 Socket LGA1151 Cooling Kit Installation

**WARNING:**

DO NOT attempt to install a push-pin cooling fan.

The pre-installed support bracket prevents the board from bending and is ONLY compatible with captive screw type cooling fans.

The cooling kit can be bought from IEI. The cooling kit has a heat sink and fan.

**WARNING:**

Do not wipe off (accidentally or otherwise) the pre-sprayed layer of thermal paste on the bottom of the heat sink. The thermal paste between the CPU and the heat sink is important for optimum heat dissipation.

To install the cooling kit, follow the instructions below.

Step 1: A cooling kit bracket is pre-installed on the rear of the motherboard. See **Figure 4-5**.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

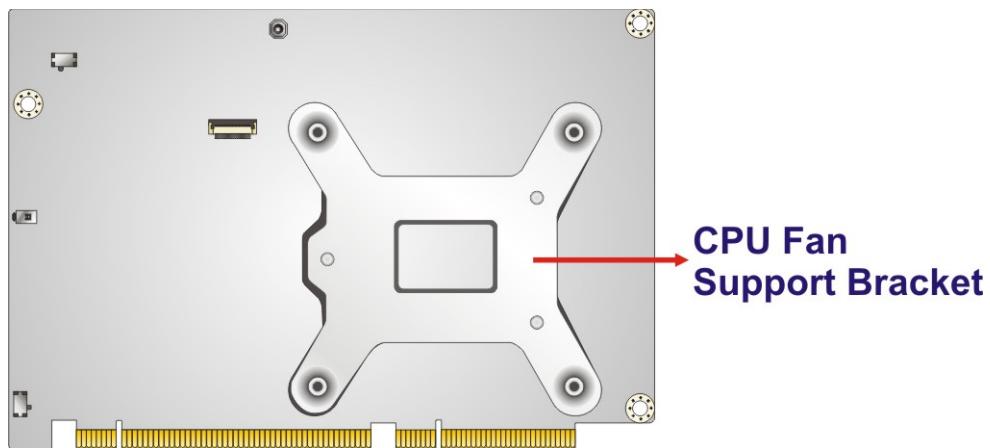


Figure 4-5: Cooling Kit Support Bracket

Step 2: Place the cooling kit onto the socket LGA1151 CPU. Make sure the CPU cable can be properly routed when the cooling kit is installed.

Step 3: Mount the cooling kit. Gently place the cooling kit on top of the CPU. Make sure the four threaded screws on the corners of the cooling kit properly pass through the holes of the cooling kit bracket.

Step 4: Tighten the screws. Use a screwdriver to tighten the four screws. In a diagonal pattern, tighten each screw a few turns then move to the next one, until they are all secured. Do not overtighten the screws.

Step 5: Connect the fan cable. Connect the cooling kit fan cable to the CPU fan connector on the HPCIE-C236. Carefully route the cable and avoid heat generating chips and fan blades.

4.5 SO-DIMM Installation

To install a SO-DIMM, please follow the steps below and refer to **Figure 4-6**.



CAUTION:

For dual channel configuration, always install two identical memory modules that feature the same capacity, timings, voltage, number of ranks and the same brand.

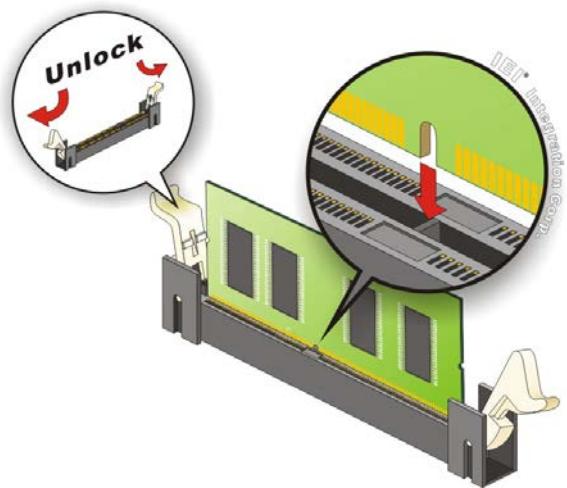


Figure 4-6: SO-DIMM Installation

Step 1: Open the SO-DIMM socket handles. Open the two handles outwards as far as they can. See **Figure 4-6**.

Step 2: Align the SO-DIMM with the socket. Align the SO-DIMM so the notch on the memory lines up with the notch on the memory socket. See **Figure 4-6**.

Step 3: Insert the SO-DIMM. Once aligned, press down until the SO-DIMM is properly seated. Clip the two handles into place. See **Figure 4-6**.

Step 4: To remove a SO-DIMM, push both handles outward. The memory module is ejected by a mechanism in the socket.

4.6 Full-size PCIe Mini Card Installation

The PCIe Mini card slot allows installation of either a full-size or half-size PCIe Mini card.

To install a full-size PCIe Mini card, please follow the steps below.

Step 1: Locate the PCIe Mini card slot. See Chapter 3.

Step 2: Remove the retention screw. Remove the retention screw as shown in

Figure 4-7.

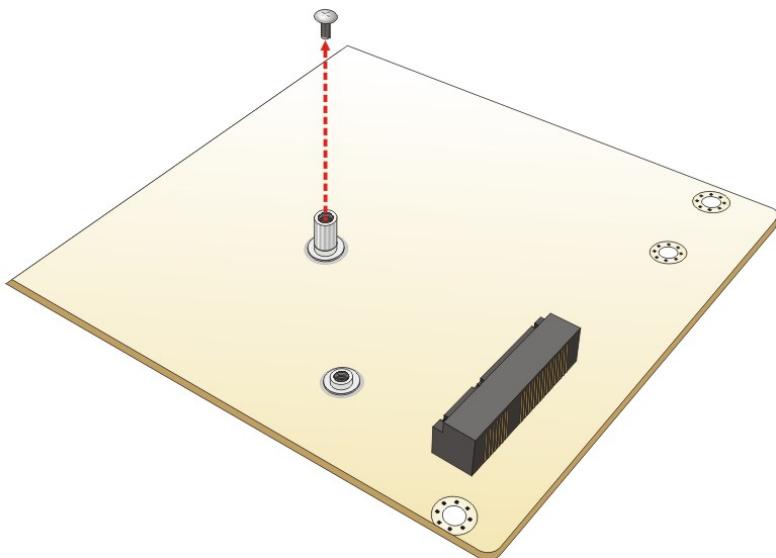


Figure 4-7: Removing the Retention Screw

Step 3: Insert into the socket at an angle. Line up the notch on the card with the notch on the slot. Slide the PCIe Mini card into the socket at an angle of about 20° (Figure 4-8).

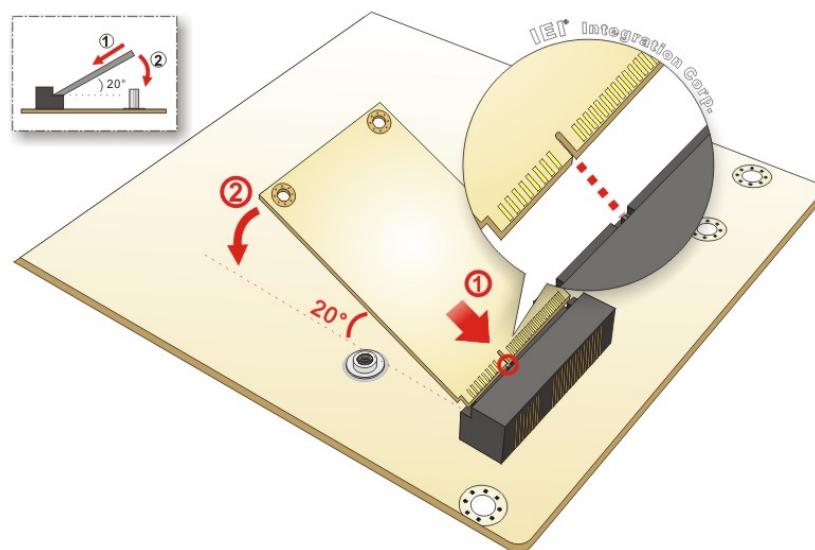


Figure 4-8: Inserting the Full-size PCIe Mini Card into the Slot at an Angle

Step 4: Secure the full-size PCIe Mini card. Secure the full-size PCIe Mini card with the retention screw previously removed (Figure 4-9).

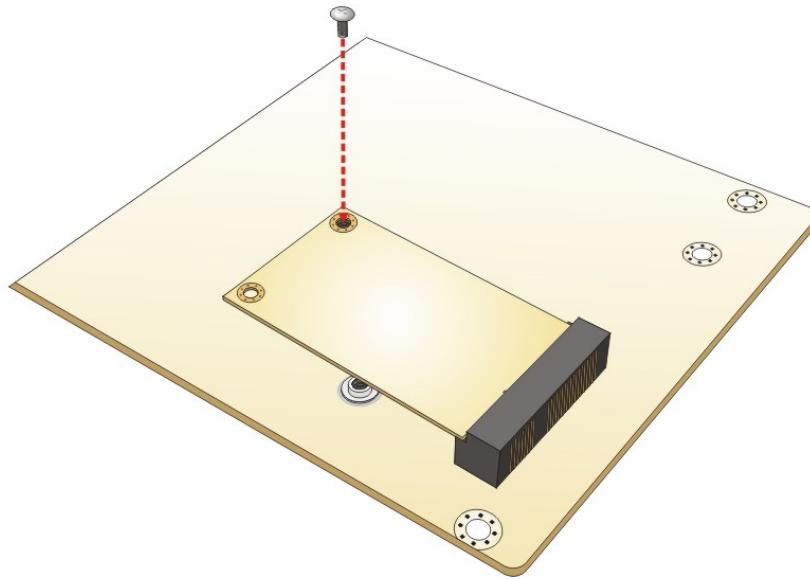


Figure 4-9: Securing the Full-size PCIe Mini Card

4.7 Half-size PCIe Mini Card Installation

The PCIe Mini card slot allows installation of either a full-size or half-size PCIe Mini card. To install a half-size PCIe Mini card, please follow the steps below.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

Step 1: Locate the PCIe Mini card slot. See Chapter 3.

Step 2: Remove the retention screw. Remove the retention screw as shown in **Figure 4-7**.

Step 3: Remove the standoff. Unscrew and remove the standoff secured on the motherboard as shown in **Figure 4-10**.

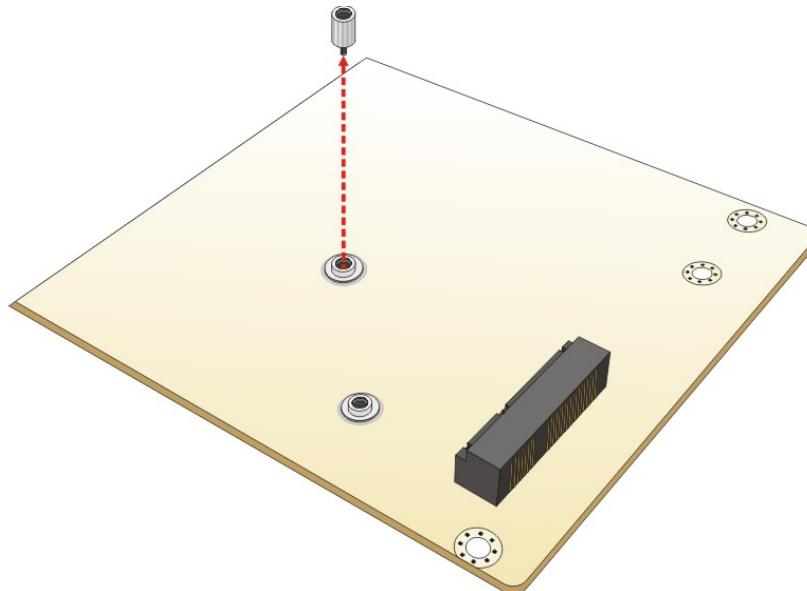


Figure 4-10: Removing the Standoff

Step 4: Install the standoff to the screw hole for the half-size PCIe Mini card. Install the previously removed standoff to the screw hole for the half-size PCIe Mini card (**Figure 4-11**).

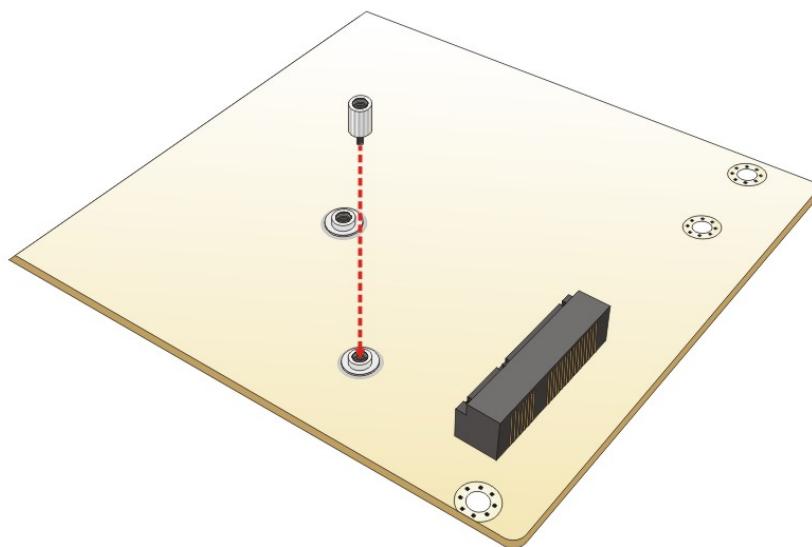


Figure 4-11: Installing the Standoff

Step 5: Insert into the socket at an angle. Line up the notch on the card with the notch on the slot. Slide the PCIe Mini card into the slot at an angle of about 20° (Figure 4-12).

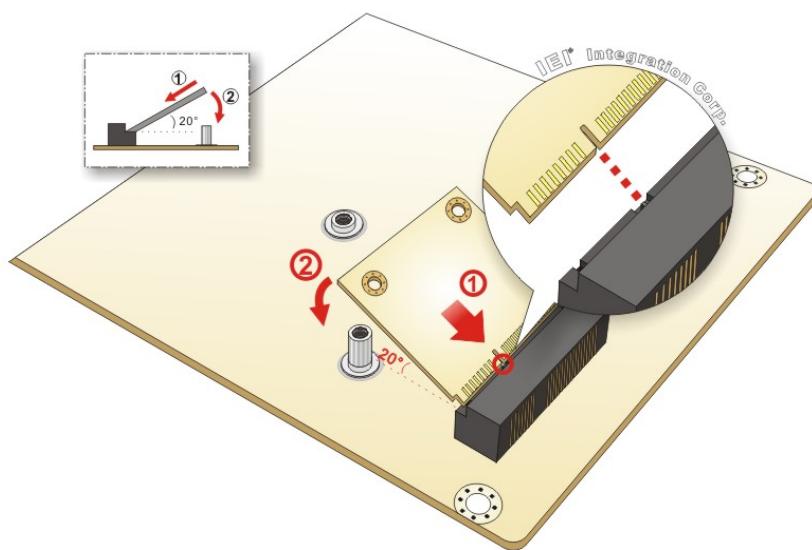


Figure 4-12: Inserting the Half-size PCIe Mini Card into the Slot at an Angle

Step 6: Secure the half-size PCIe Mini card. Secure the half-size PCIe Mini card with the retention screw previously removed (Figure 4-13).

HPCIE-C236 Half-size PICMG 1.3 CPU Card

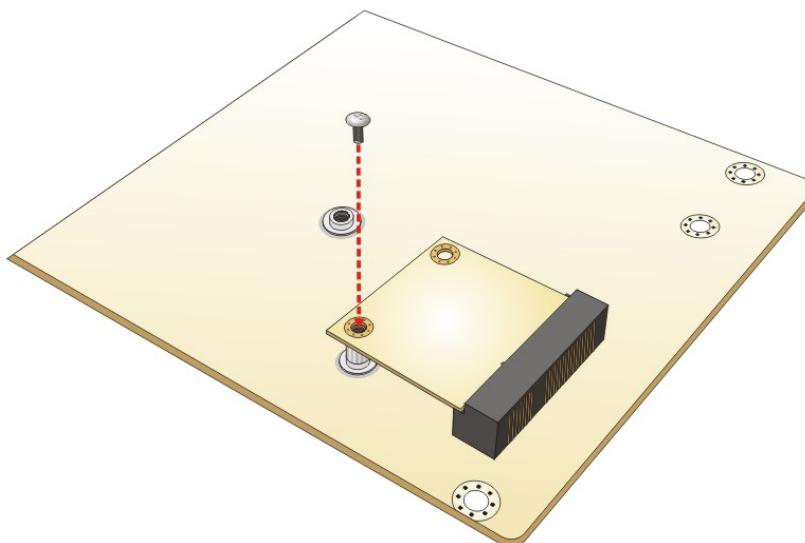


Figure 4-13: Securing the Half-size PCIe Mini Card

4.8 System Configuration

The system configuration should be performed before installation.

4.8.1 AT/ATX Power Mode Setting

The AT and ATX power mode selection is made through the AT/ATX power mode switch which is shown in **Figure 4-14**.

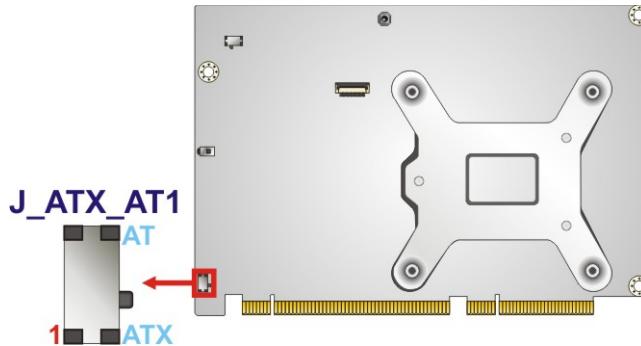


Figure 4-14: AT/ATX Power Mode Switch Location

Setting	Description
1-2 (down)	ATX power mode (default)
2-3 (up)	AT power mode

Table 4-1: AT/ATX Power Mode Switch Settings

4.8.2 Clear CMOS Button

To reset the BIOS, remove the on-board battery and press the clear CMOS button for three seconds or more. The clear CMOS button location is shown in **Figure 4-15**.

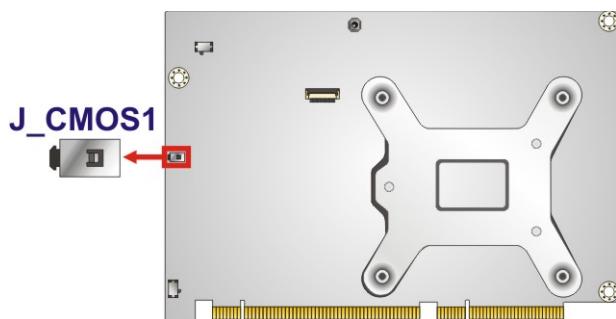


Figure 4-15: Clear CMOS Button Location

4.8.3 PCIe x4 Channel Mode Setup

The user can select to use either one PCIe x4 slot or four PCIe x1 slots on the backplane via the BIOS switch. Refer to below table for the BIOS switch settings.

Setting	Description
1-2 (BIOS1)	Sets the PCIe x4 link width as four PCIe x1 slots (default)
2-3 (BIOS2)	Sets the PCIe x4 link width as one PCIe x4 slot

Table 4-2: BIOS Switch Settings

HPCIE-C236 Half-size PICMG 1.3 CPU Card

To switch BIOS1 to BIOS2 or BIOS2 to BIOS1 successfully, please follow the steps below.

Step 1: Unplug the system power cord.

Step 2: Switch BIOS1 to BIOS2 or BIOS2 to BIOS1 by moving the BIOS switch to BIOS1 or BIOS2 position as shown in **Figure 4-16**.

Step 3: Remove the on-board battery, and then reinstall it.

Step 4: Clear CMOS by pressing the clear CMOS button for three seconds or more.

Step 5: Perform the system booting.



NOTE:

The user can check which BIOS is being used from the **BIOS Number** item in the **Main** BIOS menu (**BIOS Menu 1**).

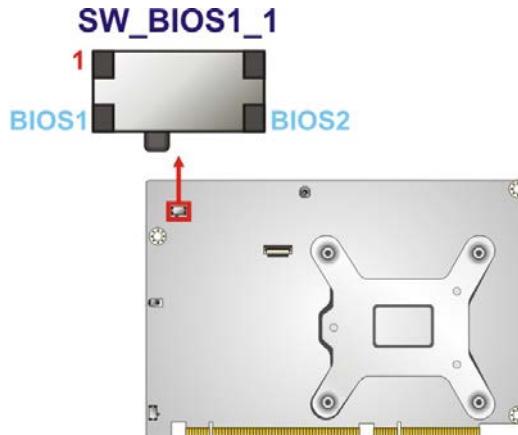


Figure 4-16: BIOS Switch Location

4.8.4 PCIe x16 Channel Mode Setup

The HPCIE-C236 supports one PCIe x16 interface on the backplane. The PCIe x16 channel mode setup is made through the BIOS menu in “Chipset → System Agent (SA) Configuration → PEG Port Configuration”. Use the **PEG Link Width Configuration** BIOS option to configure the PCIe x16 channel mode.

Options	Description
1x16	Sets the PCIe x16 link width as one PCIe x16 slot (default)
2x8	Sets the PCIe x16 link width as two PCIe x8 slots
1x8, 2x4	Sets the PCIe x16 link width as one PCIe x8 and two PCIe x4

Table 4-3: PCIe x16 Channel Mode Setup

Please refer to **Section 5.4.1.2** for detailed information.

4.8.5 Flash Descriptor Security Override Jumper

The flash descriptor security override jumper (J_FLASH1) allows to enable or disable the ME firmware update. Refer to **Table 4-4** and **Figure 4-17** for the jumper location and settings.

Setting	Description
Short 1-2	Disabled (default)
Short 2-3	Enabled

Table 4-4: Flash Descriptor Security Override Jumper Settings

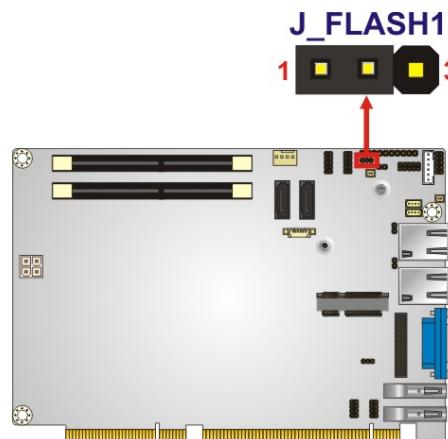


Figure 4-17: Flash Descriptor Security Override Jumper Location

HPCIE-C236 Half-size PICMG 1.3 CPU Card

To update the ME firmware, please follow the steps below.

- Step 1:** Before turning on the system power, short pin 2-3 of the flash descriptor security override jumper.
- Step 2:** Update the BIOS and ME firmware, and then turn off the system power.
- Step 3:** Remove the metal clip on the flash descriptor security override jumper or return to its default setting (short pin 1-2).
- Step 4:** Restart the system. The system will reboot 2 ~ 3 times to complete the ME firmware update.

4.8.6 USB Power Selection

The USB power selection is made through the BIOS menu in “Chipset → PCH-IO Configuration”. Use the **USB Power SW1** and the **USB Power SW2** BIOS options to configure the correspondent USB ports (see **Table 4-5**) and refer to **Table 4-6** to select the USB power source.

BIOS Options	Configured USB Ports
USB Power SW1	CN1 (external USB 3.2 Gen 1 port) CN2 (external USB 3.2 Gen 1 port)
USB Power SW2	USB1 (internal USB 2.0 ports) USB2 (internal USB 2.0 ports)

Table 4-5: BIOS Options and Configured USB Ports

Options	Description
+5V DUAL	+5V dual (default)
+5V	+5V

Table 4-6: USB Power Source Setup

Please refer to **Section 5.4.2** for BIOS setup.

4.9 Internal Peripheral Device Connections

This section outlines the installation of peripheral devices to the onboard connectors.

4.9.1 SATA Drive Connection

The HPCIE-C236 is shipped with two SATA drive cables. To connect the SATA drives to the connectors, please follow the steps below.

Step 1: Locate the connectors. The locations of the SATA drive connectors are shown in Chapter 3.

Step 2: Insert the cable connector. Insert the cable connector into the on-board SATA drive connector until it clips into place. See **Figure 4-18**.

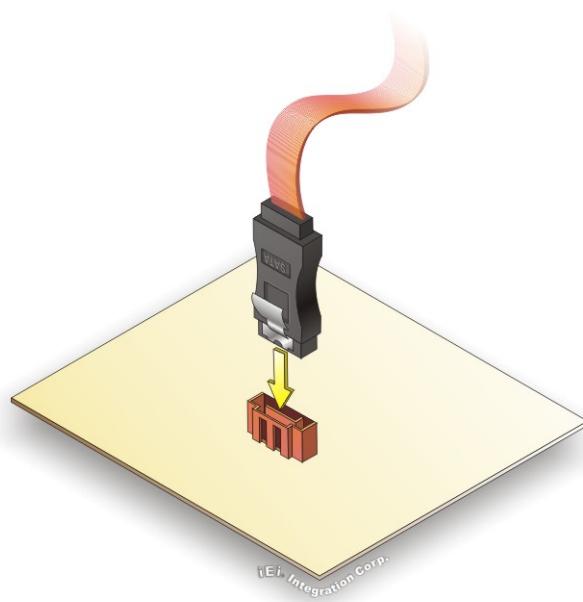


Figure 4-18: SATA Drive Cable Connection

Step 3: Connect the cable to the SATA disk. Connect the connector on the other end of the cable to the connector at the back of the SATA drive. See **Figure 4-19**.

Step 4: Connect the SATA power cable. Connect the SATA power connector to the back of the SATA drive. See **Figure 4-19**.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

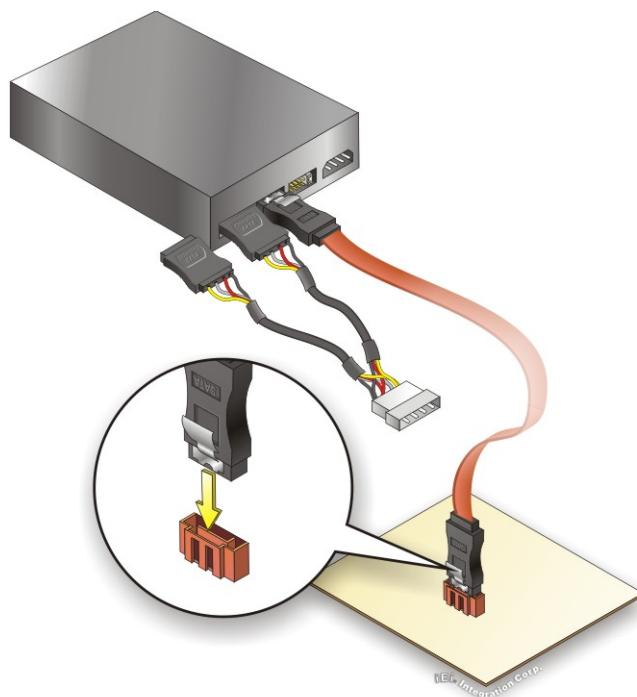


Figure 4-19: SATA Power Drive Connection

The SATA power cable can be bought from IEI. See Optional Items in Section 2.4.

4.10 Adding USB 3.0 Drivers to a Windows 7 Installation Image

The Windows 7 installation media does not include native driver support for USB 3.0. In order to use the USB keyboard or mouse connected to a USB 3.0 port during OS installation, the user has to update the Windows 7 installation image so that it contains USB 3.0 drivers. Please follow the instructions below to complete the task.

Step 1: Prepare a USB flash drive installer.

On a working computer, use your Windows 7 DVD or ISO image to create a bootable USB flash drive.

Step 2: Download the Windows 7 USB 3.0 Creator Utility from:

<https://downloadcenter.intel.com/download/25476/Windows-7-USB-3-0-Creator-Utility>.

Step 3: Extract the downloaded file to a temporary folder on a computer where the user has logged in as the administrator.



NOTE:

The OS version of the computer can be Windows 7, Windows 8.1 or Windows 10.

Step 4: Connect the USB drive containing the Windows 7 installation image to the computer.

Step 5: Right click on **Installer_Creator.exe** from the extracted files and select **Run as administrator**.

Step 6: The Windows 7 USB 3.0 Creator Utility screen appears (**Figure 4-20**). Click to browse to the root of the USB drive containing the Windows 7 image.

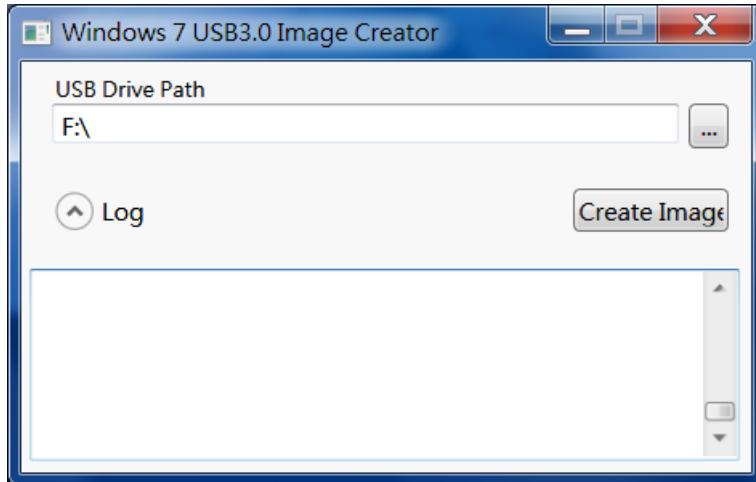


Figure 4-20: Windows 7 USB 3.0 Creator Utility

Step 7: Click **Create Image** to start the update process.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

Step 8: Wait for the process to finish. It may take up to 15 minutes.

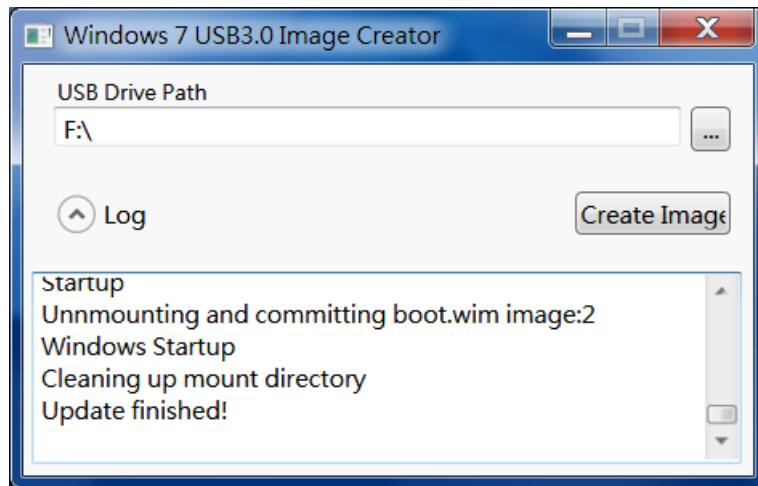


Figure 4-21: Update Process is Complete

Step 9: Now the user can proceed with the Windows 7 installation using the updated installer.

4.11 Intel® AMT Setup Procedure

The HPCIE-C236 is featured with the Intel® Active Management Technology (AMT). To enable the Intel® AMT function, follow the steps below.

Step 1: Make sure at least one of the memory sockets is installed with a DDR4 SO-DIMM.

Step 2: Connect an Ethernet cable to the RJ-45 connector labeled **LAN1**.

Step 3: The AMI BIOS options regarding the Intel® ME or Intel® AMT must be enabled,

Step 4: Properly install the Intel® Management Engine Components drivers from the iAMT Driver & Utility directory in the driver CD.

Step 5: Configure the Intel® Management Engine BIOS extension (MEBx). To get into the Intel® MEBx settings, press **<Ctrl+P>** after a single beep during boot-up process. Enter the Intel® current ME password as it requires (the Intel® default password is **admin**).

**NOTE:**

To change the password, enter a new password following the strong password rule (containing at least one upper case letter, one lower case letter, one digit and one special character, and be at least eight characters).

Chapter

5

BIOS

5.1 Introduction

The BIOS is programmed onto the BIOS chip. The BIOS setup program allows changes to certain system settings. This chapter outlines the options that can be changed.



NOTE:

Some of the BIOS options may vary throughout the life cycle of the product and are subject to change without prior notice.

5.1.1 Starting Setup

The UEFI BIOS is activated when the computer is turned on. The setup program can be activated in one of two ways.

1. Press the **DEL** or **F2** key as soon as the system is turned on or
2. Press the **DEL** or **F2** key when the “**Press DEL or F2 to enter SETUP**” message appears on the screen.

If the message disappears before the **DEL** or **F2** key is pressed, restart the computer and try again.

5.1.2 Using Setup

Use the arrow keys to highlight items, press **ENTER** to select, use the **PageUp** and **PageDown** keys to change entries, press **F1** for help and press **Esc** to quit. Navigation keys are shown in the following table.

Key	Function
Up arrow	Move to previous item
Down arrow	Move to next item
Left arrow	Move to the item on the left hand side
Right arrow	Move to the item on the right hand side
+	Increase the numeric value or make changes
-	Decrease the numeric value or make changes
Page Up	Move to the previous page
Page Dn	Move to the next page

Key	Function
Esc	Main Menu – Quit and not save changes into CMOS Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
F1	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2	Load previous values
F3	Load optimized defaults
F4	Save changes and Exit BIOS

Table 5-1: BIOS Navigation Keys

5.1.3 Getting Help

When **F1** is pressed, a small help window describing the appropriate keys to use and the possible selections for the highlighted item appears. To exit the Help Window, press **Esc**.

5.1.4 Unable to Reboot after Configuration Changes

If the computer cannot boot after changes to the system configuration is made, CMOS defaults. Use the clear CMOS button described in **Chapter 4**.

5.1.5 BIOS Menu Bar

The **menu bar** on top of the BIOS screen has the following main items:

- Main – Changes the basic system configuration.
- Advanced – Changes the advanced system settings.
- Chipset – Changes the chipset settings.
- Security – Sets User and Supervisor Passwords.
- Boot – Changes the system boot configuration.
- Save & Exit – Selects exit options and loads default settings

The following sections completely describe the configuration options found in the menu items at the top of the BIOS screen and listed above.

5.2 Main

The **Main** BIOS menu (**BIOS Menu 1**) appears when the **BIOS Setup** program is entered.

The **Main** menu gives an overview of the basic system information.

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.					
Main	Advanced	Chipset	Security	Boot	Save & Exit
BIOS Information					Set the Date. Use Tab to switch between Date elements.
BIOS Vendor	American Megatrends				
Core Version	5.11				
Compliance	UEFI 2.4; PI 1.3				
Project Version	B408AR10.ROM				
Build Date and Time	05/03/2016 16:20:22				
BIOS Number	BIOS No.1				
iWDD Vendor	iEI				
iWDD Version	B408ER10.bin				
IPMI Module	N/A				
Processor Information					-----
Name	SkyLake DT				→←: Select Screen
Brand String	Intel(R) Xeon(R) CPU				↑↓: Select Item
Frequency	E3-1268L v5 @ 2.40GHz				Enter: Select
Processor ID	2400 MHz				+/-: Change Opt.
Stepping	506E3				F1: General Help
Number of Processors	R0/S0/N0				F2: Previous Values
Microcode Revision	4Core(s) / 8Thread(s)				F3: Optimized Defaults
GT Info	7C				F4: Save & Exit
Memory RC Version	GT2				ESC: Exit
Total Memory	1.8.0.1				
Memory Frequency	4096 MB				
	2133 MHz				
PCH Information					
Name	SKL PCH-H				
PCH SKU	Server SKU Intel C236				
Stepping	B2				
LAN PHY Revision	31/D1				
ME FW Version	Corporate SKU				
ME Firmware SKU	11.0.0.1205				
SPI Clock Frequency					
DOFR Support	Unsupported				
Read Status Clock Frequency	17 MHz				
Write Status Clock Frequency	48 MHz				
Fast Read Status Clock Frequency	48 MHz				
Access Level	Administrator				
System Date	[Thu 05/19/2016]				
System Time	[15:10:27]				

Version 2.17.1255. Copyright (C) 2016 American Megatrends, Inc.

BIOS Menu 1: Main

HPCIE-C236 Half-size PICMG 1.3 CPU Card

The **Main** menu has two user configurable fields:

→ **System Date [xx/xx/xx]**

Use the **System Date** option to set the system date. Manually enter the day, month and year.

→ **System Time [xx:xx:xx]**

Use the **System Time** option to set the system time. Manually enter the hours, minutes and seconds.

5.3 Advanced

Use the **Advanced** menu (**BIOS Menu 2**) to configure the CPU and peripheral devices through the following sub-menus:



WARNING!


Setting the wrong values in the sections below may cause the system to malfunction. Make sure that the settings made are compatible with the hardware.

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.	
Main Advanced Chipset Security Boot Save & Exit	
> ACPI Settings > AMT Configuration > Super IO Configuration > iWDD H/M Monitor > RTC Wake Settings > Serial Port Console Redirection > CPU Configuration > SATA Configuration > NVMe Configuration > USB Configuration > iEi Feature	Configure Active Management Technology Parameters ----- →←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Version 2.17.1255. Copyright (C) 2016 American Megatrends, Inc.	

BIOS Menu 2: Advanced

5.3.1 ACPI Settings

The **ACPI Settings** menu (**BIOS Menu 3**) configures the Advanced Configuration and Power Interface (ACPI) options.

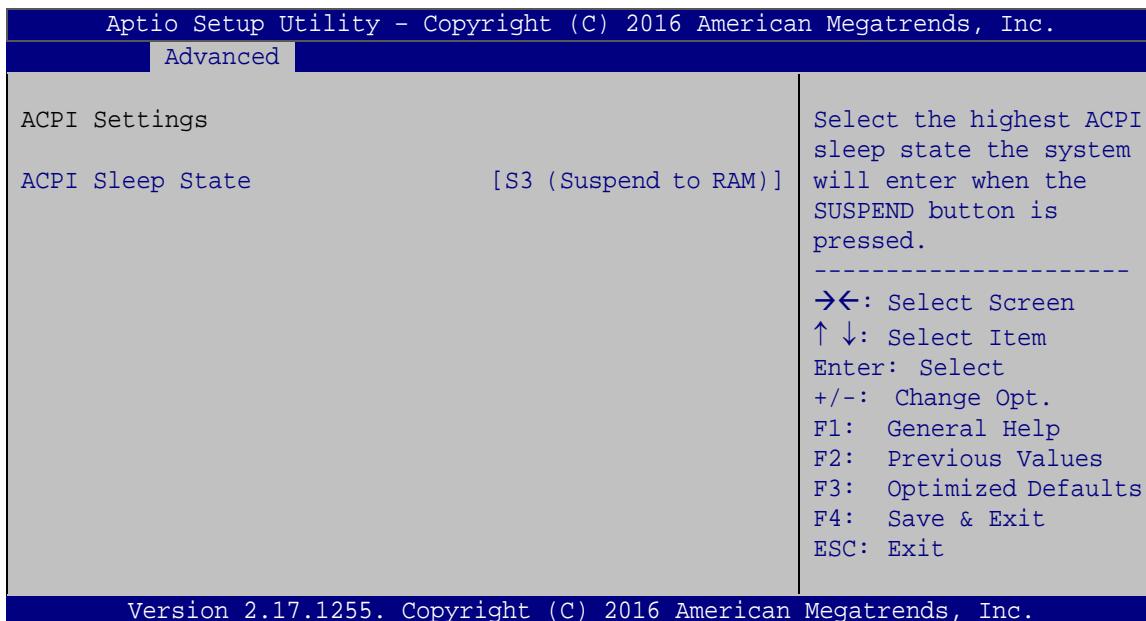

BIOS Menu 3: ACPI Configuration


→ **ACPI Sleep State [S3 (Suspend to RAM)]**

Use the **ACPI Sleep State** option to specify the sleep state the system enters when it is not being used.

- **S3 (Suspend to RAM)** **DEFAULT** The caches are flushed and the CPU is powered off. Power to the RAM is maintained. The computer returns slower to a working state, but more power is saved.

5.3.2 AMT Configuration

The **AMT Configuration** menu (**BIOS Menu 4**) allows the Intel® AMT options to be configured.

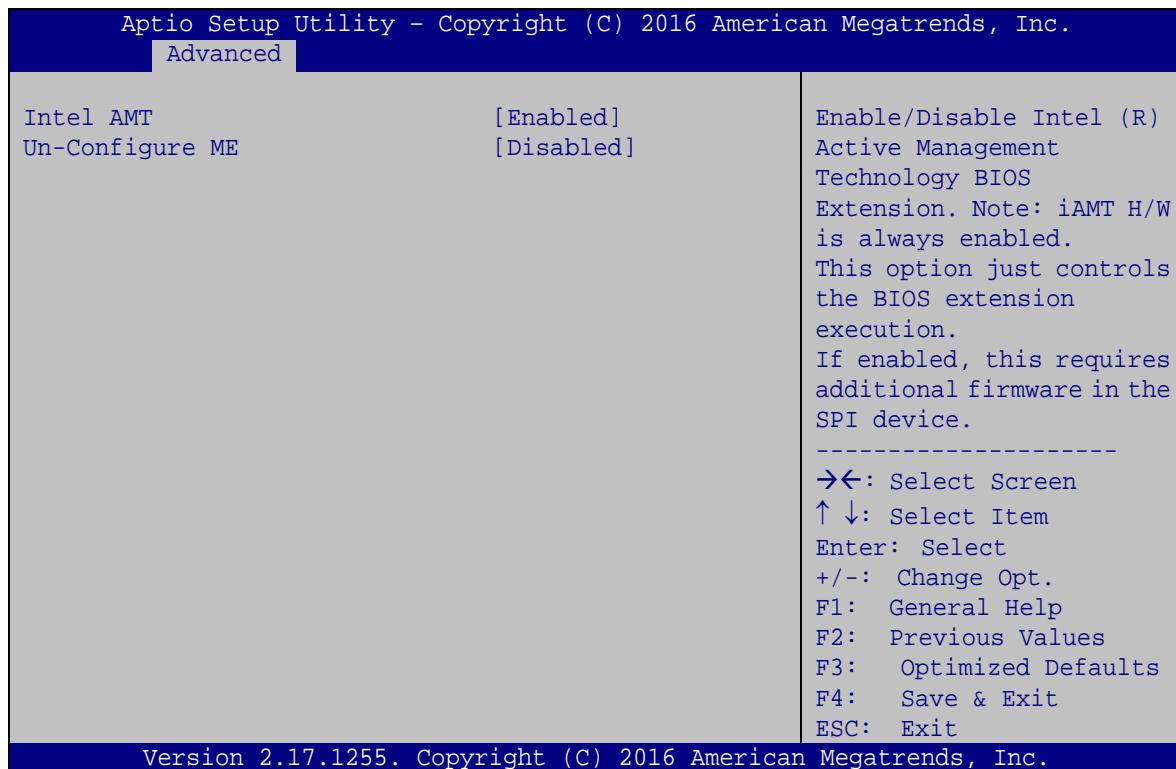

BIOS Menu 4: AMT Configuration

→ Intel AMT [Enabled]

Use **Intel AMT** option to enable or disable the Intel® AMT function.

→ **Disabled** Intel® AMT is disabled

→ **Enabled DEFAULT** Intel® AMT is enabled

→ Un-Configure ME [Disabled]


Use the **Un-Configure ME** option to perform ME unconfigure without password operation.

→ **Disabled DEFAULT** Not perform ME unconfigure

→ **Enabled** To perform ME unconfigure

5.3.3 Super IO Configuration

Use the **Super IO Configuration** menu (**BIOS Menu 5**) to set or change the configurations for the serial ports and parallel port.

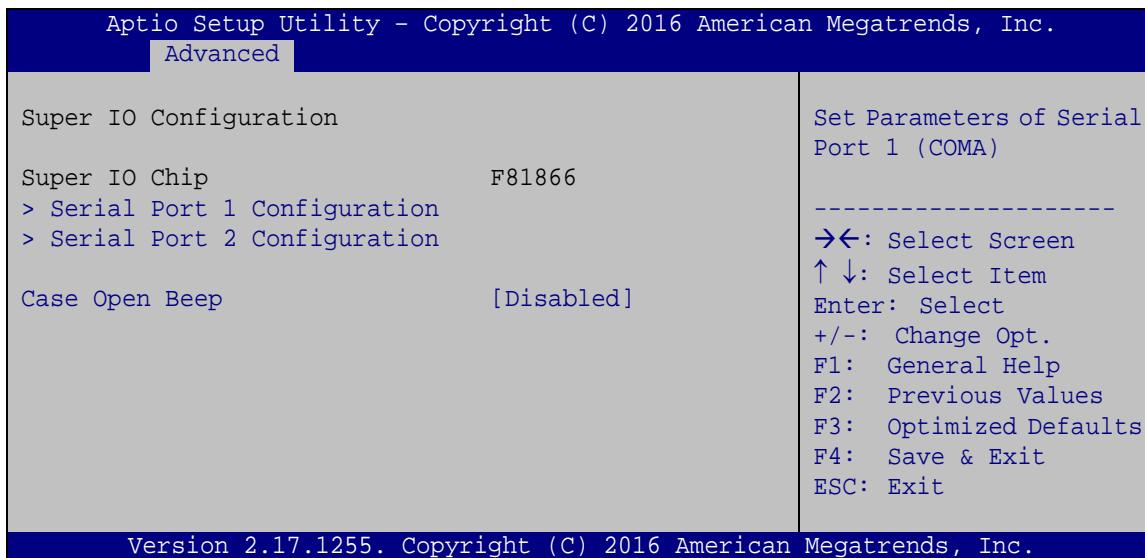

BIOS Menu 5: Super IO Configuration

→ Case Open Beep [Disabled]

Use the **Case Open Beep** option to enable or disable the case open beep function.


→ **Disabled** **DEFAULT** Disable the case open beep function

→ **Enabled** Enable the case open beep function

HPCIE-C236 Half-size PICMG 1.3 CPU Card

5.3.3.1 Serial Port n Configuration

Use the **Serial Port n Configuration** menu (**BIOS Menu 6**) to configure the serial port n.

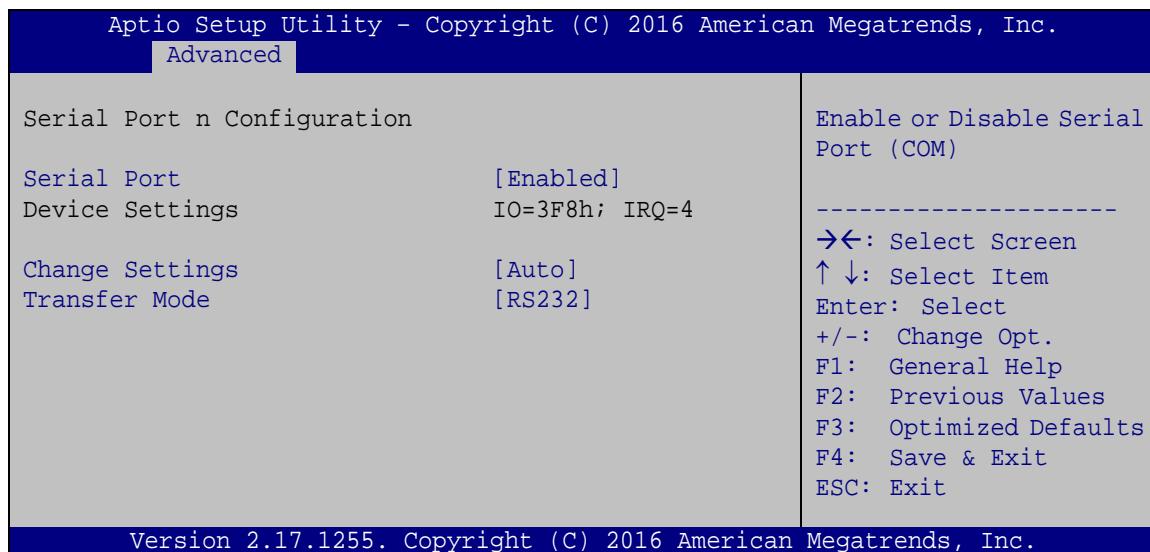

BIOS Menu 6: Serial Port n Configuration Menu

5.3.3.1.1 Serial Port 1 Configuration

→ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

→ **Disabled** Disable the serial port

→ **Enabled DEFAULT** Enable the serial port

→ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

→ **Auto DEFAULT** The serial port IO port address and interrupt address are automatically detected.

→ **IO=3F8h; IRQ=4** Serial Port I/O port address is 3F8h and the interrupt address is IRQ4

- ➔ **IO=3F8h;
IRQ=3, 4, 11** Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2F8h;
IRQ=3, 4, 11** Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=3E8h;
IRQ=3, 4, 11** Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2E8h;
IRQ=3, 4, 11** Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2D0h;
IRQ=3, 4, 11** Serial Port I/O port address is 2D0h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2E0h;
IRQ=3, 4, 11** Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 11

➔ Transfer Mode [RS232]

The serial port allows setting the data transfer mode to RS-232, RS-422 or RS-485.

5.3.3.1.2 Serial Port 2 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled DEFAULT** Enable the serial port

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto DEFAULT** The serial port IO port address and interrupt address are automatically detected.

HPCIE-C236 Half-size PICMG 1.3 CPU Card


- ➔ IO=2F8h;
IRQ=3
Serial Port I/O port address is 2F8h and the interrupt address is IRQ3
- ➔ IO=3F8h;
IRQ=3, 4, 11
Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 11
- ➔ IO=2F8h;
IRQ=3, 4, 11
Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 11
- ➔ IO=3E8h;
IRQ=3, 4, 11
Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 11
- ➔ IO=2E8h;
IRQ=3, 4, 11
Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 11
- ➔ IO=2D0h;
IRQ=3, 4, 11
Serial Port I/O port address is 2D0h and the interrupt address is IRQ3, 4, 11
- ➔ IO=2E0h;
IRQ=3, 4, 11
Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 11

➔ Transfer Mode [RS232]

The serial port allows setting the data transfer mode to RS-232, RS-422 or RS-485.

5.3.4 iWDD H/W Monitor

The **iWDD H/W Monitor** menu (**BIOS Menu 7**) contains the fan configuration submenu, and displays operating temperature, fan speeds and system voltages.

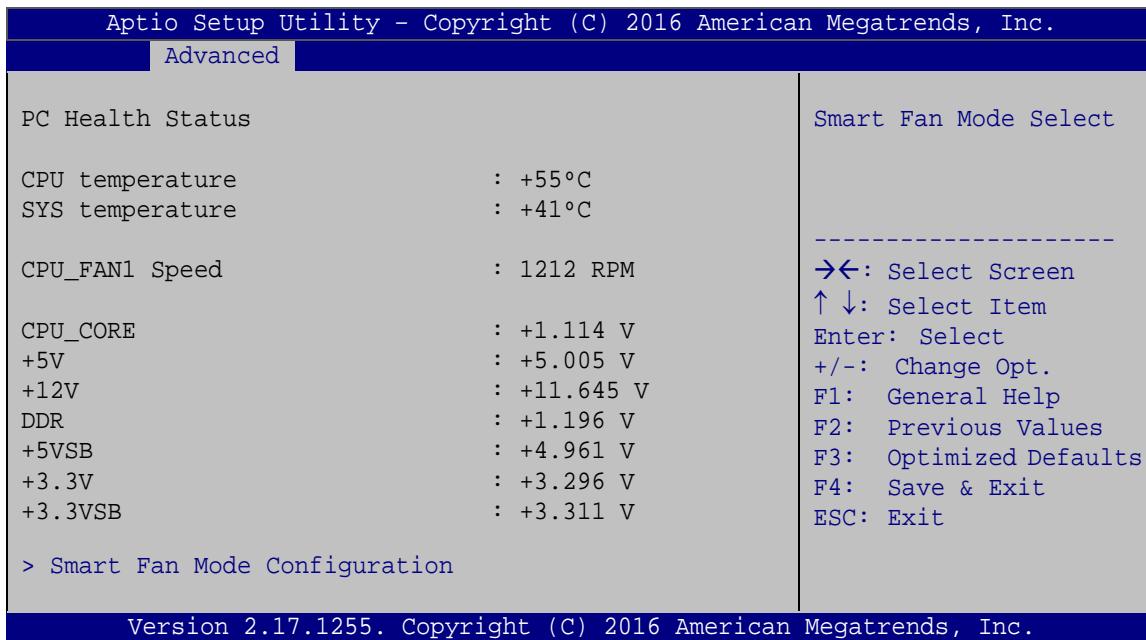

BIOS Menu 7: iWDD H/W Monitor

→ PC Health Status


The following system parameters and values are shown. The system parameters that are monitored are:

- System Temperatures:
 - CPU Temperature
 - System Temperature
- Fan Speed:
 - CPU Fan Speed
- Voltages:
 - CPU_CORE
 - +5V
 - +12V
 - DDR
 - +5VSB
 - +3.3V
 - +3.3VSB

HPCIE-C236 Half-size PICMG 1.3 CPU Card

5.3.4.1 Smart Fan Mode Configuration

Use the **Smart Fan Mode Configuration** submenu (**BIOS Menu 8**) to configure fan speed settings.

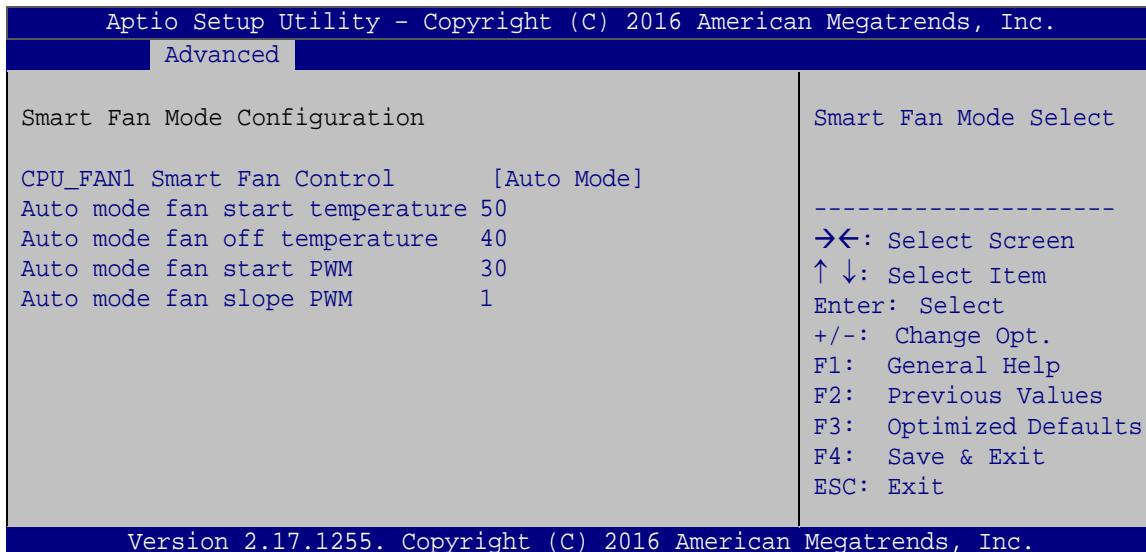**BIOS Menu 8: Smart Fan Mode Configuration****→ CPU_FAN1 Smart Fan Control [Auto Mode]**

Use the **CPU_FAN1 Smart Fan Control** option to configure the CPU fan.

→ Auto Mode **DEFAULT** The fan adjusts its speed using Auto Mode settings.

→ Manual Mode The fan spins at the speed set in Manual Mode settings.

→ Auto mode fan start/off temperature

Use the + or – key to change the **Auto mode fan start/off temperature** value. Enter a decimal number between 1 and 100.

→ Auto mode fan start PWM


Use the + or – key to change the **Auto mode fan start PWM** value. Enter a decimal number between 1 and 100.

→ Auto mode fan slope PWM

Use the + or – key to change the **Auto mode fan slope PWM** value. Enter a decimal number between 1 and 8.

5.3.5 RTC Wake Settings

The **RTC Wake Settings** menu (**BIOS Menu 9**) enables the system to wake at the specified time.

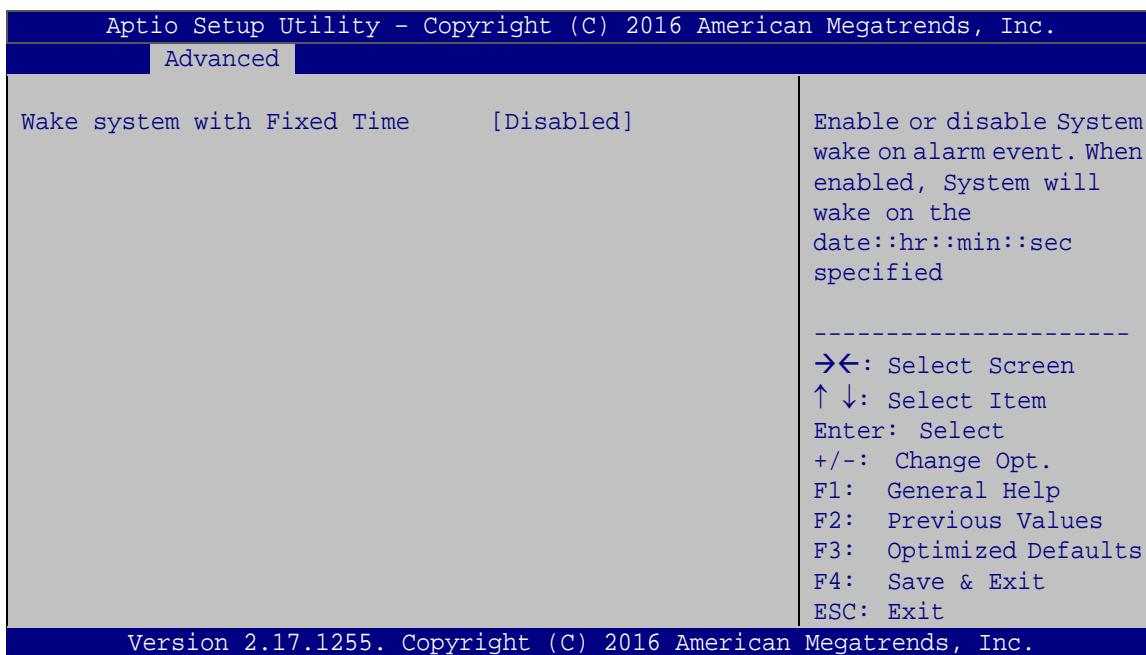

BIOS Menu 9: RTC Wake Settings

→ Wake system with Fixed Time [Disabled]

Use the **Wake system with Fixed Time** option to enable or disable the system wake on alarm event.

→ **Disabled** **DEFAULT** The real time clock (RTC) cannot generate a wake event.

→ **Enabled** If selected, the **Wake up every day** option appears allowing you to enable to disable the system to wake every day at the specified time. Besides, the following options appear with values that can be selected:

Wake up date

Wake up hour


Wake up minute

Wake up second

After setting the alarm, the computer turns itself on from a suspend state when the alarm goes off.

5.3.6 Serial Port Console Redirection

The **Serial Port Console Redirection** menu (**BIOS Menu 10**) allows the console redirection options to be configured. Console redirection allows users to maintain a system remotely by re-directing keyboard input and text output through the serial port.

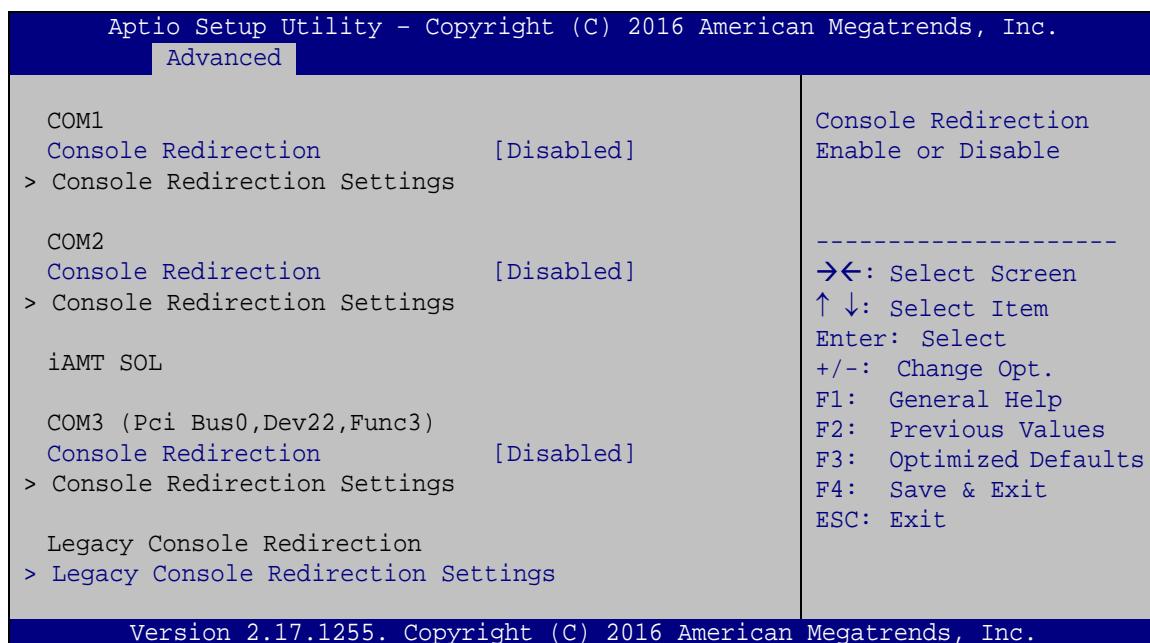

BIOS Menu 10: Serial Port Console Redirection

→ **Console Redirection [Disabled]**

Use **Console Redirection** option to enable or disable the console redirection function.

- **Disabled** **DEFAULT** Disabled the console redirection function
- **Enabled** Enabled the console redirection function

The following options are available in the **Console Redirection Settings** submenu when the **Console Redirection** option is enabled.

→ **Terminal Type [ANSI]**

Use the **Terminal Type** option to specify the remote terminal type.

- **VT100** The target terminal type is VT100
- **VT100+** The target terminal type is VT100+
- **VT-UTF8** The target terminal type is VT-UTF8
- **ANSI** **DEFAULT** The target terminal type is ANSI

→ **Bits per second [115200]**

Use the **Bits per second** option to specify the serial port transmission speed. The speed must match the other side. Long or noisy lines may require lower speeds.

- **9600** Sets the serial port transmission speed at 9600.
- **19200** Sets the serial port transmission speed at 19200.
- **57600** Sets the serial port transmission speed at 57600.
- **115200** **DEFAULT** Sets the serial port transmission speed at 115200.

→ **Data Bits [8]**

Use the **Data Bits** option to specify the number of data bits.

- **7** Sets the data bits at 7.
- **8** **DEFAULT** Sets the data bits at 8.

→ **Parity [None]**

Use the **Parity** option to specify the parity bit that can be sent with the data bits for detecting the transmission errors.

- **None** **DEFAULT** No parity bit is sent with the data bits.
- **Even** The parity bit is 0 if the number of ones in the data bits is even.

HPCIE-C236 Half-size PICMG 1.3 CPU Card


- ➔ **Odd** The parity bit is 0 if the number of ones in the data bits is odd.
- ➔ **Mark** The parity bit is always 1. This option does not provide error detection.
- ➔ **Space** The parity bit is always 0. This option does not provide error detection.

➔ Stop Bits [1]

Use the **Stop Bits** option to specify the number of stop bits used to indicate the end of a serial data packet. Communication with slow devices may require more than 1 stop bit.

- ➔ **1** **DEFAULT** Sets the number of stop bits at 1.
- ➔ **2** Sets the number of stop bits at 2.

5.3.6.1 Legacy Console Redirection Settings

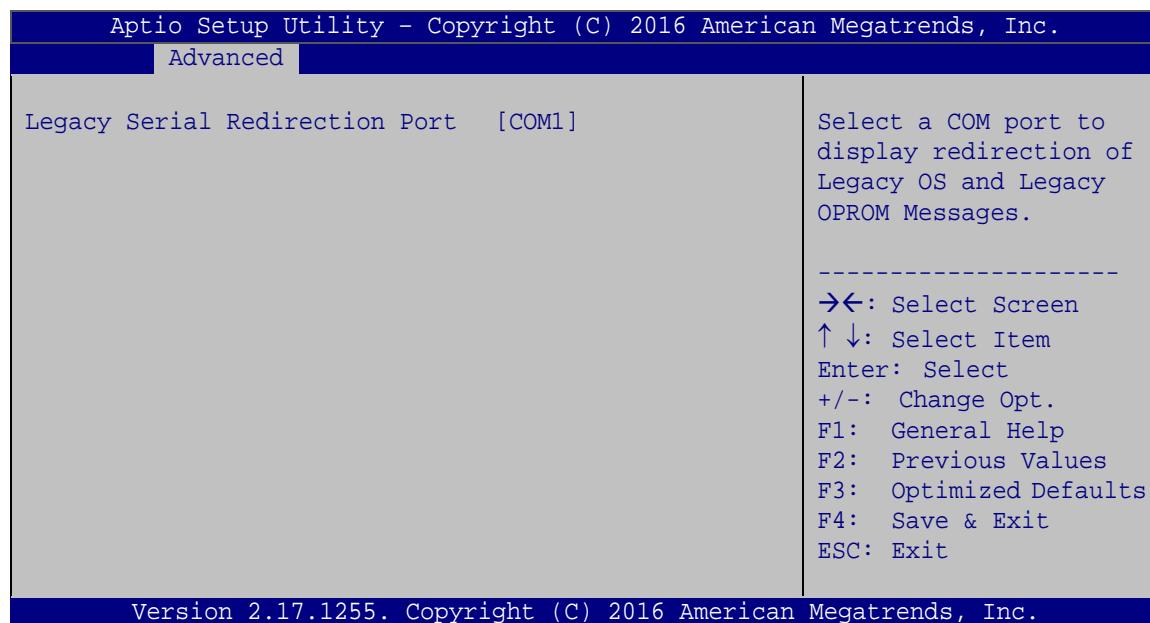

BIOS Menu 11: Legacy Console Redirection Settings


→ Legacy Serial Redirection Port [COM1]

Use the **Legacy Serial Redirection Port** option to select a COM port to display redirection of legacy OS and legacy OPROM messages. Configuration options are listed below.

- COM1
 - COM2
 - COM3 (Pci Bus0,Dev22,Func3)

5.3.7 CPU Configuration

Use the **CPU Configuration** menu (**BIOS Menu 12**) to view detailed CPU specifications or enable the Intel Virtualization Technology.

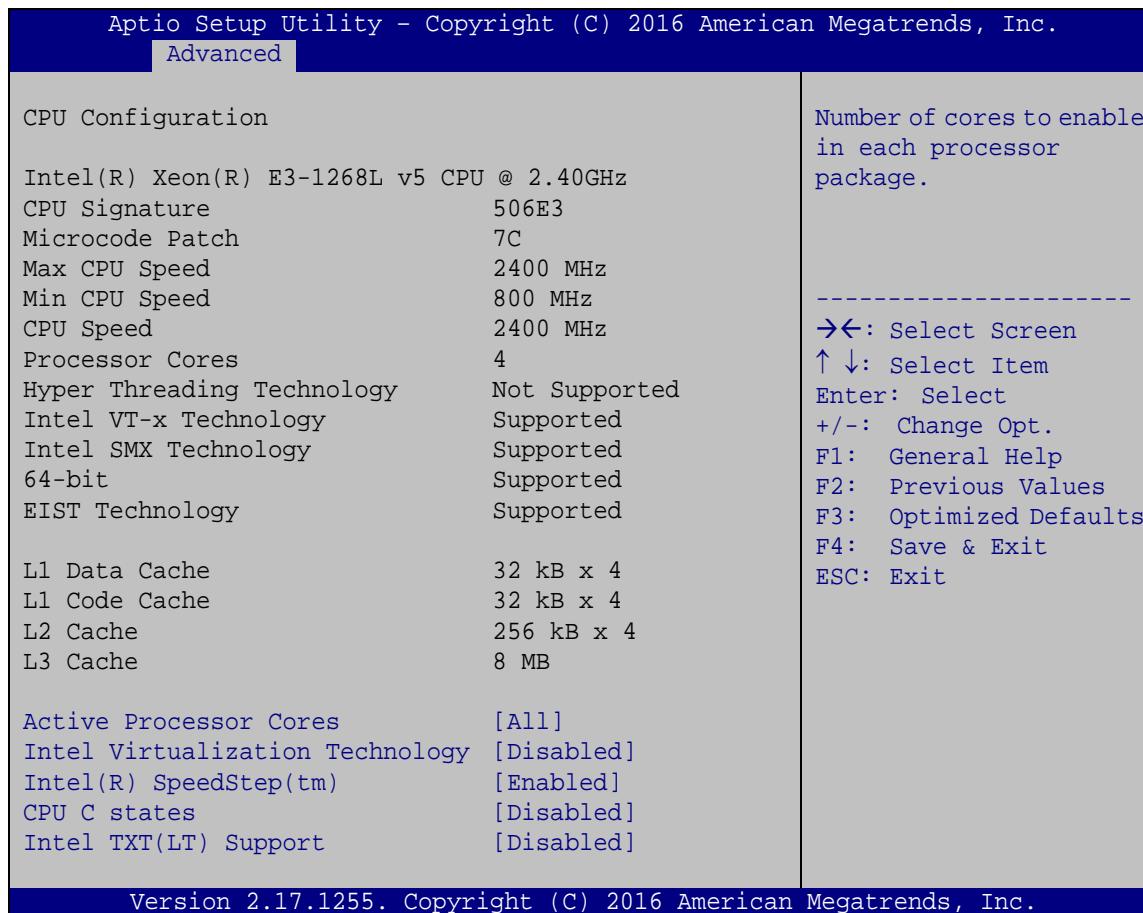

BIOS Menu 12: CPU Configuration

HPCIE-C236 Half-size PICMG 1.3 CPU Card

→ Active Processor Cores [All]

Use the **Active Processor Cores** BIOS option to enable numbers of cores in the processor package.

- **All** **DEFAULT** Enable all cores in the processor package.
- **1** Enable one core in the processor package.
- **2** Enable two cores in the processor package.
- **3** Enable three cores in the processor package.

→ Intel Virtualization Technology [Disabled]

Use the **Intel Virtualization Technology** option to enable or disable virtualization on the system. When combined with third party software, Intel® Virtualization technology allows several OSs to run on the same system at the same time.

- **Disabled** **DEFAULT** Disables Intel Virtualization Technology.
- **Enabled** Enables Intel Virtualization Technology.

→ Intel(R) SpeedStep(tm) [Enabled]

Use the **Intel(R) SpeedStep(tm)** option to enable or disable the Intel® SpeedStep Technology which allows more than two frequency ranges to be supported.

- **Disabled** Disables Intel® SpeedStep Technology
- **Enabled** **DEFAULT** Enables Intel® SpeedStep Technology

→ CPU C states [Disabled]

Use the **CPU C states** option to enable or disable the CPU C states.

- **Disabled** **DEFAULT** Disables the CPU C states.
- **Enabled** Enables the CPU C states.


→ Intel TXT(LT) Support [Disabled]

Use the **Intel TXT(LT) Support** option to enable or disable the Intel(R) TXT(LT) support.

- | | |
|-------------------|---|
| → Disabled | Disables Intel® TXT(LT) support |
| → Enabled | DEFAULT Enables Intel® TXT(LT) support |

5.3.8 SATA Configuration

Use the **SATA Configuration** menu (**BIOS Menu 13**) to change and/or set the configuration of the SATA devices installed in the system.

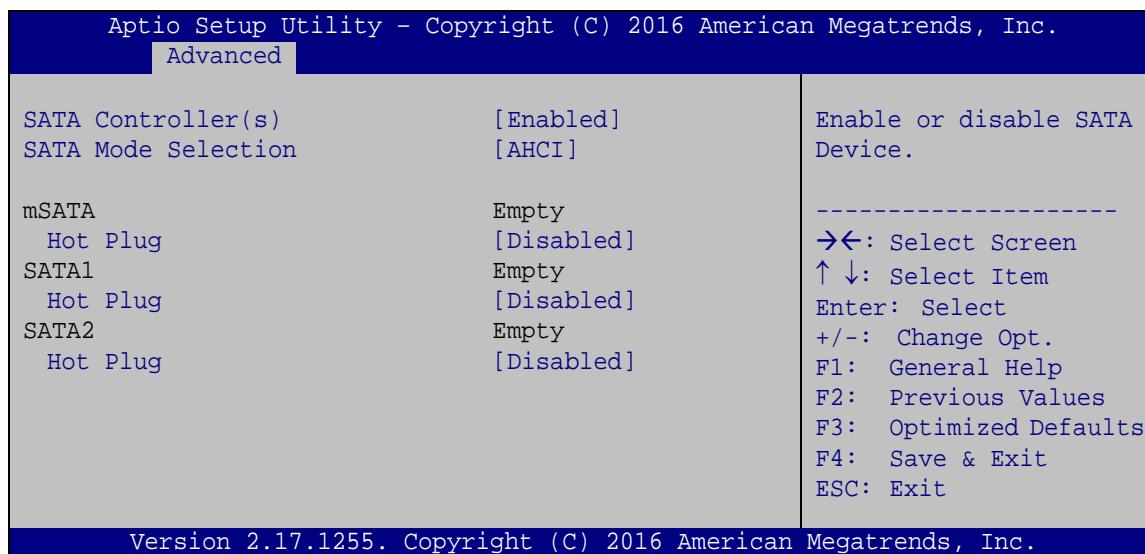

BIOS Menu 13: SATA Configuration

→ **SATA Controller(s) [Enabled]**

Use the **SATA Controller(s)** option to configure the SATA controller(s).

- | | | |
|-------------------|----------------|---|
| → Enabled | DEFAULT | Enables the on-board SATA controller(s). |
| → Disabled | | Disables the on-board SATA controller(s). |

→ **SATA Mode Selection [AHCI]**

Use the **SATA Mode Selection** option to determine how the SATA devices operate.

- | | | |
|---------------|----------------|---|
| → AHCI | DEFAULT | Configures SATA devices as AHCI device. |
| → RAID | | Configures SATA devices as RAID device. |

HPCIE-C236 Half-size PICMG 1.3 CPU Card


→ Hot Plug [Disabled]

Use the **Hot Plug** option to designate the correspondent SATA port as hot-pluggable.

- | | | |
|-------------------|--|---|
| → Disabled | DEFAULT | Disables the hot-pluggable function of the SATA port. |
| → Enabled | Designates the SATA port as hot-pluggable. | |

5.3.9 NVMe Configuration


Use the **NVMe Configuration (BIOS Menu 14)** menu to display the NVMe controller and device information.

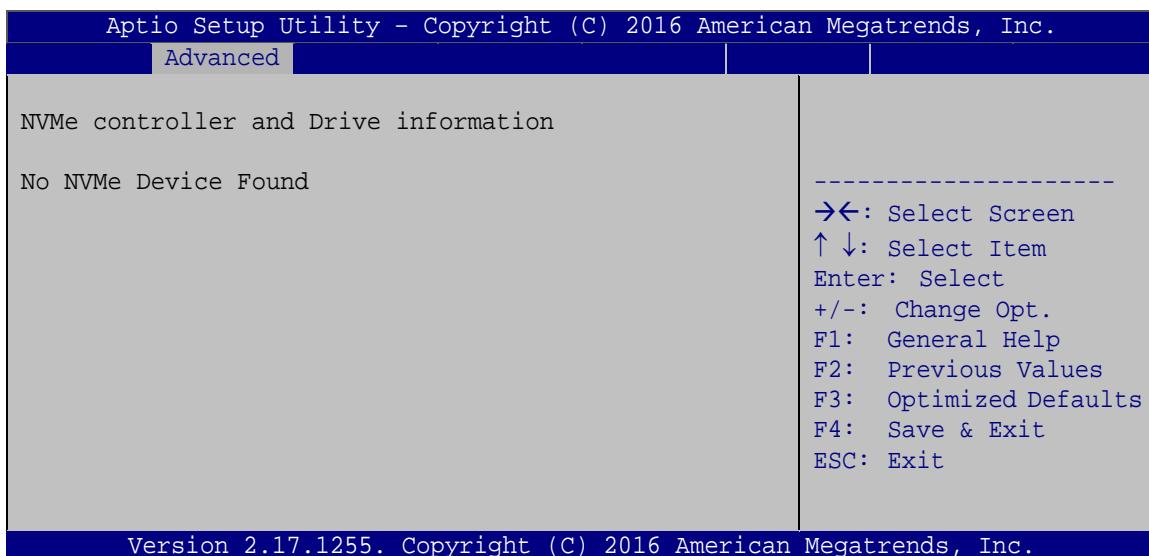

BIOS Menu 14: NVMe Configuration

5.3.10 USB Configuration

Use the **USB Configuration** menu (**BIOS Menu 15**) to read USB configuration information and configure the USB settings.

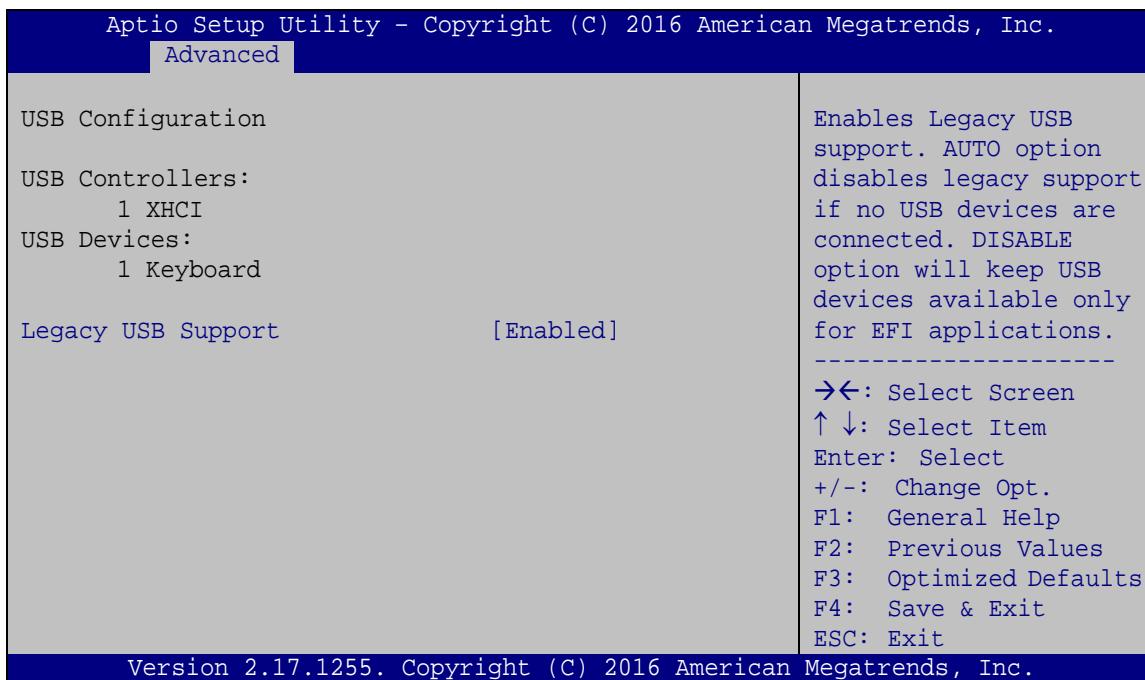

BIOS Menu 15: USB Configuration


→ Legacy USB Support [Enabled]

Use the **Legacy USB Support** BIOS option to enable USB mouse and USB keyboard support. Normally if this option is not enabled, any attached USB mouse or USB keyboard does not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB driver loaded onto the system.

- | | | |
|-------------------|---------|---|
| → Enabled | DEFAULT | Legacy USB support enabled |
| → Disabled | | Legacy USB support disabled |
| → Auto | | Legacy USB support disabled if no USB devices are connected |

5.3.11 iEI Feature

Use the **iEI Feature** menu (**BIOS Menu 16**) to configure One Key Recovery function.

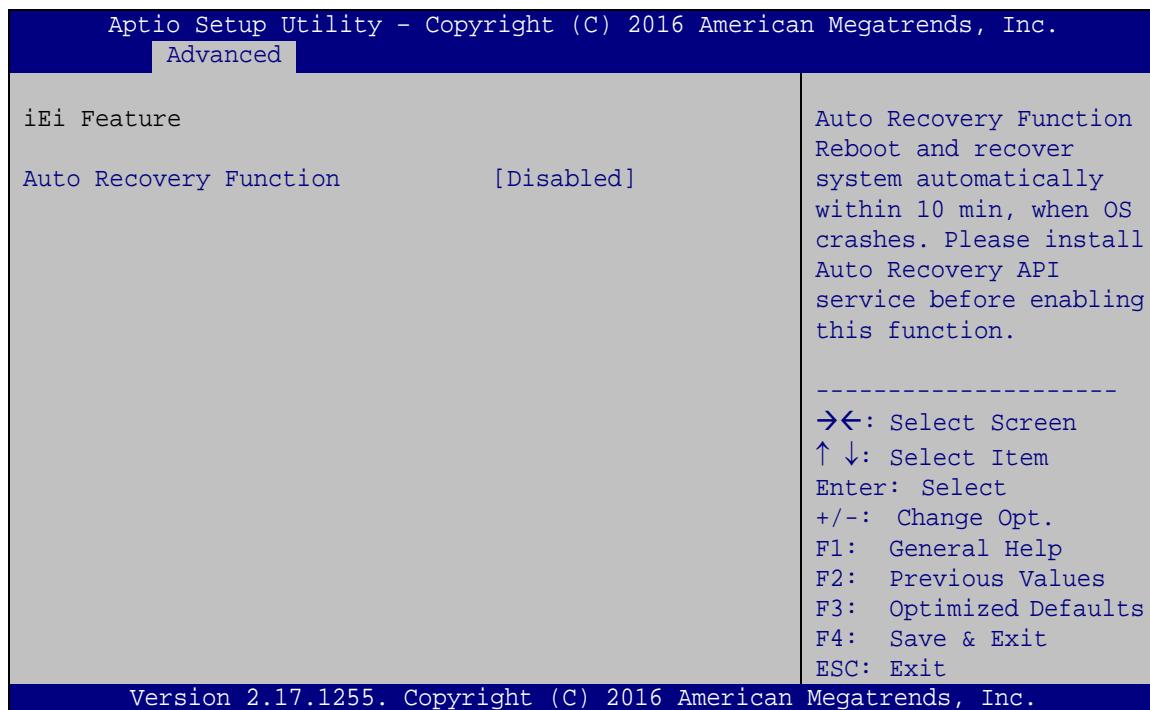

BIOS Menu 16: iEI Feature

→ Auto Recovery Function [Disabled]

Use the **Auto Recovery Function** BIOS option to enable or disable the auto recovery function of the IEI One Key Recovery.

→ **Disabled** DEFAULT Auto recovery function disabled

→ **Enabled** Auto recovery function enabled

5.4 Chipset

Use the **Chipset** menu (**BIOS Menu 17**) to access the PCH IO and System Agent (SA) configuration menus.



WARNING!

Setting the wrong values for the Chipset BIOS selections in the Chipset BIOS menu may cause the system to malfunction.

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.

Main	Advanced	Chipset	Security	Boot	Save & Exit
> System Agent (SA) Configuration			System Agent (SA) Parameters		
> PCH-IO Configuration			<hr/> →←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit		


Version 2.17.1255. Copyright (C) 2016 American Megatrends, Inc.

BIOS Menu 17: Chipset

HPCIE-C236 Half-size PICMG 1.3 CPU Card

5.4.1 System Agent (SA) Configuration

Use the **System Agent (SA) Configuration** menu (**BIOS Menu 18**) to configure the System Agent (SA) parameters.

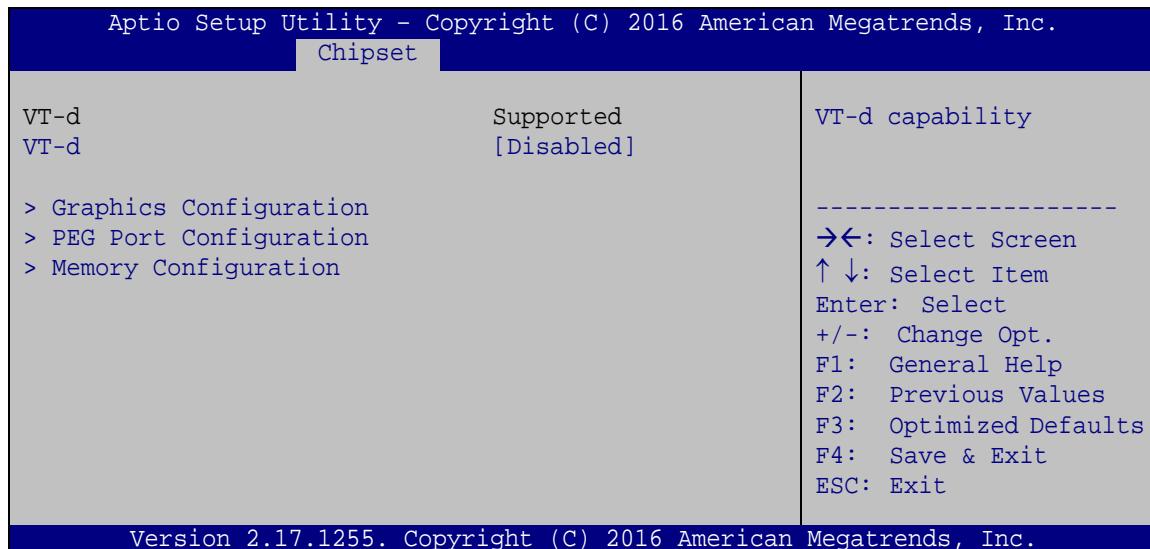

BIOS Menu 18: System Agent (SA) Configuration


→ VT-d [Disabled]

Use the **VT-d** option to enable or disable VT-d capability.

- | | | |
|-------------------|----------------|---------------------------|
| → Disabled | DEFAULT | Disables VT-d capability. |
| → Enabled | | Enables VT-d capability. |

5.4.1.1 Graphics Configuration

Use the **Graphics Configuration (BIOS Menu 19)** menu to configure the video device connected to the system.

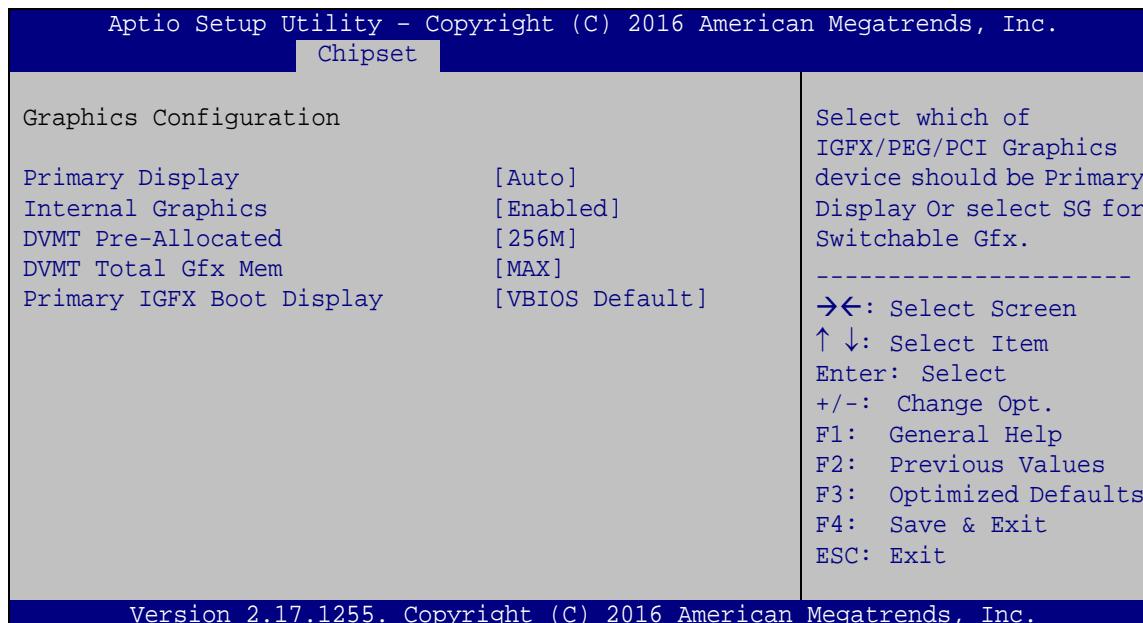

BIOS Menu 19: Graphics Configuration

→ Primary Display [Auto]

Use the **Primary Display** option to select the primary graphics controller the system uses.

The following options are available:

- Auto **Default**
- IGFX
- PEG
- PCIE

→ Internal Graphics [Enabled]

Use the **Internal Graphics** option to keep IGFX enabled basing on the setup options. The following options are available:

- Auto
- Disabled
- Enabled **Default**

HPCIE-C236 Half-size PICMG 1.3 CPU Card

→ DVMT Pre-Allocated [256M]

Use the **DVMT Pre-Allocated** option to set the amount of system memory allocated to the integrated graphics processor when the system boots. The system memory allocated can then only be used as graphics memory, and is no longer available to applications or the operating system. Configuration options are listed below:

- 32M
- 64M
- 128M
- 256M **Default**
- 512M

→ DVMT Total Gfx Mem [MAX]

Use the **DVMT Total Gfx Mem** option to select DVMT5.0 total graphic memory size used by the internal graphic device. The following options are available:


- 128M
- 256M
- MAX **Default**

→ Primary IGFX Boot Display [VBIOS Default]

Use the **Primary IGFX Boot Display** option to select the display device used by the system when it boots. Configuration options are listed below.

- VBIOS Default **Default**
- CRT
- IDP

5.4.1.2 PEG Port Configuration

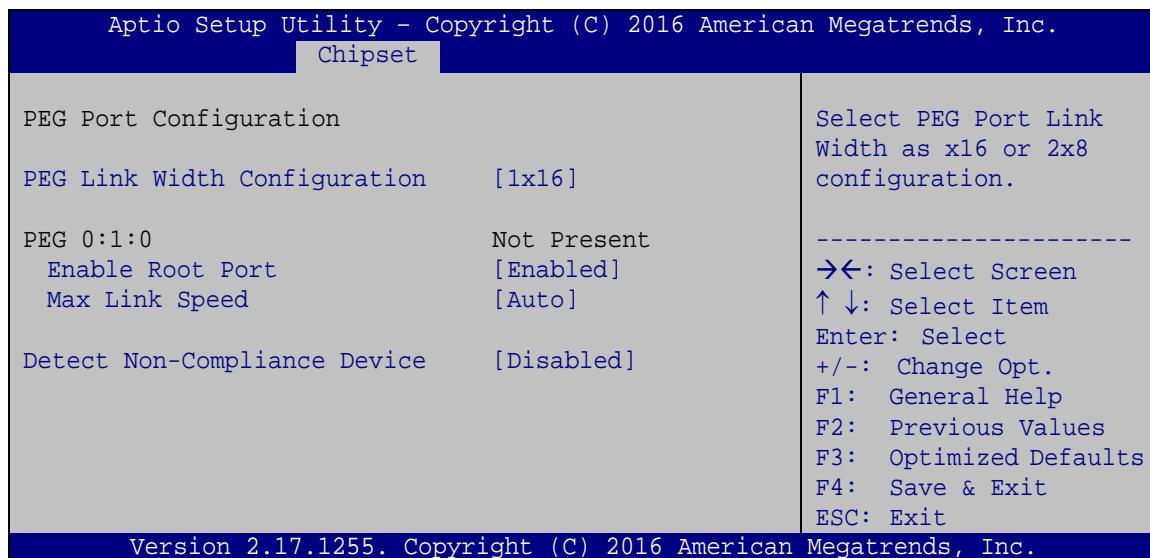

BIOS Menu 20: PEG Port Configuration

→ PEG Link Width Configuration [1x16]

Use the **PEG Link Width Configuration** option to configure the PCIe x16 channel mode on the backplane.

- **1x16** **DEFAULT** Sets the PCIe x16 link width as one PCIe x16 slot
- **2x8** Sets the PCIe x16 link width as two PCIe x8 slots
- **1x8, 2x4** Sets the PCIe x16 link width as one PCIe x8 and two PCIe x4 slots

→ Enable Root Port [Enabled]

Use the **Enable Root Port** option to enable or disable the PCI Express (PEG) controller.

- **Disabled** Disables the PCI Express (PEG) controller.
- **Enabled** **DEFAULT** Enables the PCI Express (PEG) controller.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

→ Max Link Speed [Auto]

Use the **Max Link Speed** option to select the maximum link speed of the PCI Express slot.

The following options are available:

- Auto **Default**
- Gen1
- Gen2
- Gen3


→ Detect Non-Compliance Device [Disabled]

Use the **Detect Non-Compliance Device** option to enable or disable detecting if a non-compliance PCI Express device is connected to the PCI Express slot.

- | | | |
|-------------------|----------------|---|
| → Disabled | DEFAULT | Disables to detect if a non-compliance PCI Express device is connected to the PCI Express slot. |
| → Enabled | | Enables to detect if a non-compliance PCI Express device is connected to the PCI Express slot. |

5.4.1.3 Memory Configuration


Use the **Memory Configuration** submenu (**BIOS Menu 21**) to view memory information.

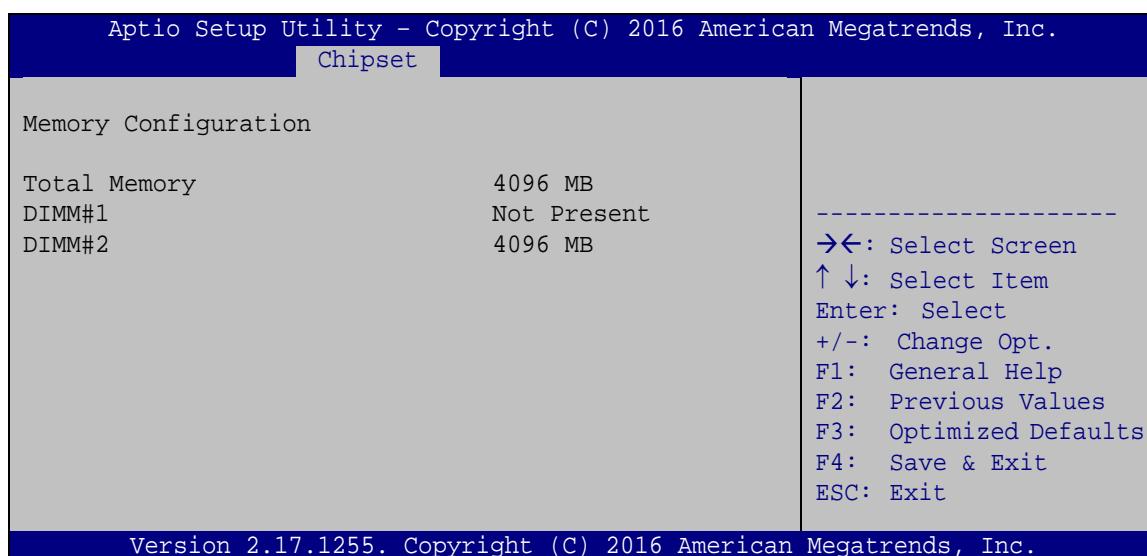

BIOS Menu 21: Memory Configuration

5.4.2 PCH-IO Configuration

Use the **PCH-IO Configuration** menu (**BIOS Menu 22**) to configure the PCH parameters.

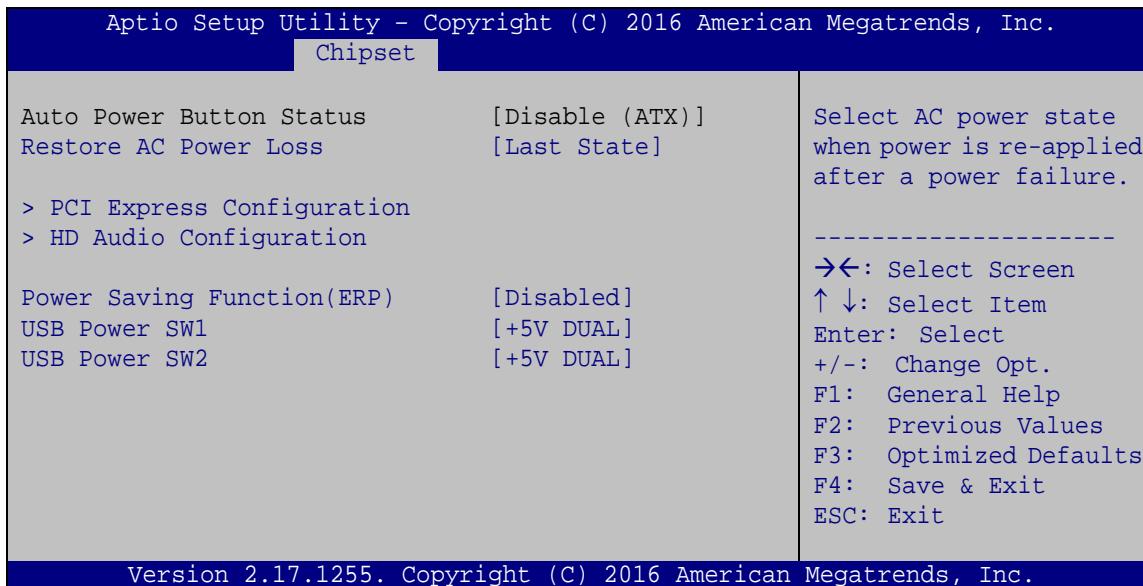

BIOS Menu 22: PCH-IO Configuration

→ **Restore AC Power Loss [Last State]**

Use the **Restore AC Power Loss** BIOS option to specify what state the system returns to if there is a sudden loss of power to the system.

- **Power Off** The system remains turned off
- **Power On** The system turns on
- **Last State** **DEFAULT** The system returns to its previous state. If it was on, it turns itself on. If it was off, it remains off.

→ **Power Saving Function(ERP) [Disabled]**

Use the **Power Saving Function(ERP)** BIOS option to enable or disable the power saving function.

- **Disabled** **DEFAULT** Power saving function is disabled.
- **Enabled** Power saving function is enabled. It will reduce power consumption when the system is off.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

→ USB Power SW1 [+5V DUAL]

Use the **USB Power SW1** BIOS option to configure the USB power source for the corresponding USB connectors (**Table 5-2**).

- **+5V** Sets the USB power source to +5V
- **+5V DUAL DEFAULT** Sets the USB power source to +5V dual

→ USB Power SW2 [+5V DUAL]

Use the **USB Power SW2** BIOS option to configure the USB power source for the corresponding USB connectors (**Table 5-2**).

- **+5V** Sets the USB power source to +5V
- **+5V DUAL DEFAULT** Sets the USB power source to +5V dual


BIOS Options	Configured USB Ports
USB Power SW1	CN1 (external USB 3.2 Gen 1 port) CN2 (external USB 3.2 Gen 1 port)
USB Power SW2	USB1 (internal USB 2.0 ports) USB2 (internal USB 2.0 ports)

Table 5-2: BIOS Options and Configured USB Ports

5.4.2.1 PCI Express Configuration


The PCI Express port number in the **PCI Express Configuration** menu varies by BIOS (BIOS1 or BIOS2). For detailed information, please refer to **Section 4.8.3**.

For BIOS1:

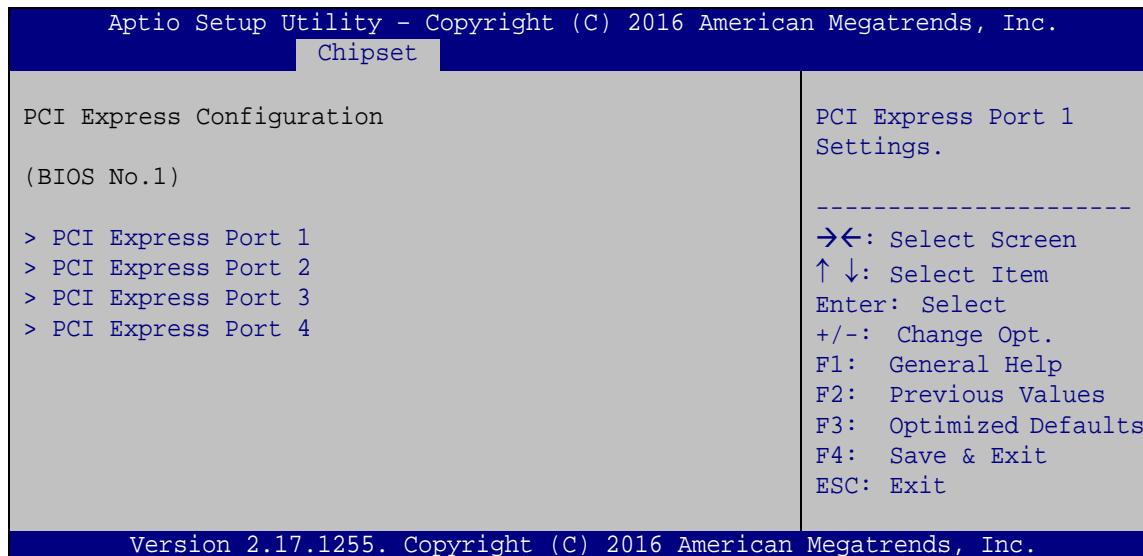

BIOS Menu 23: PCI Express Configuration (For BIOS1)


For BIOS2:

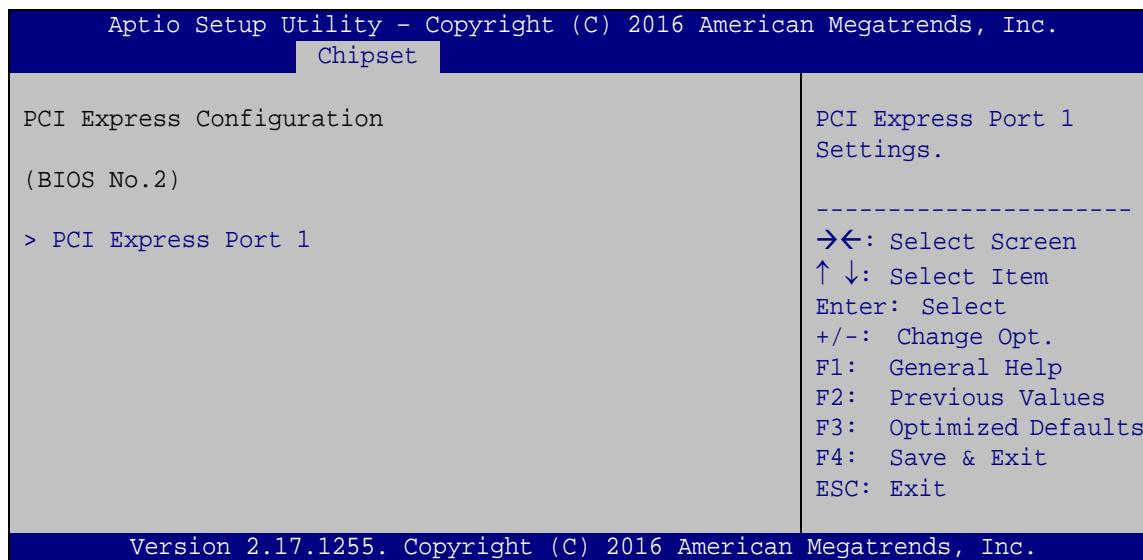

BIOS Menu 24: PCI Express Configuration (For BIOS2)

HPCIE-C236 Half-size PICMG 1.3 CPU Card

5.4.2.1.1 PCI Express Port 1/2/3/4

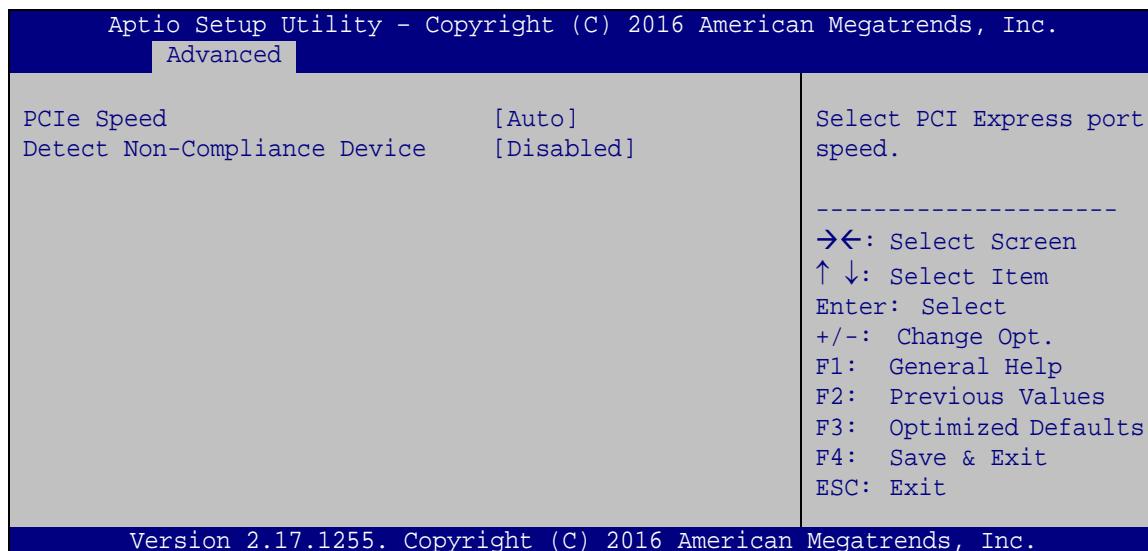

BIOS Menu 25: PCI Express Port 1/2/3/4

→ PCIe Speed [Auto]

Use this option to select the support type of the PCI Express slots. The following options are available:

- Auto **Default**
- Gen1
- Gen2
- Gen3


→ Detect Non-Compliance Device [Disabled]

Use the **Detect Non-Compliance Device** option to enable or disable detecting if a non-compliance PCI Express device is connected to the PCI Express slot.

- | | | |
|-------------------|----------------|---|
| → Disabled | DEFAULT | Disables to detect if a non-compliance PCI Express device is connected to the PCI Express slot. |
| → Enabled | | Enables to detect if a non-compliance PCI Express device is connected to the PCI Express slot. |

5.4.2.2 HD Audio Configuration

Use the **HD Audio Configuration** menu (**BIOS Menu 26**) to configure the PCH Azalia settings.

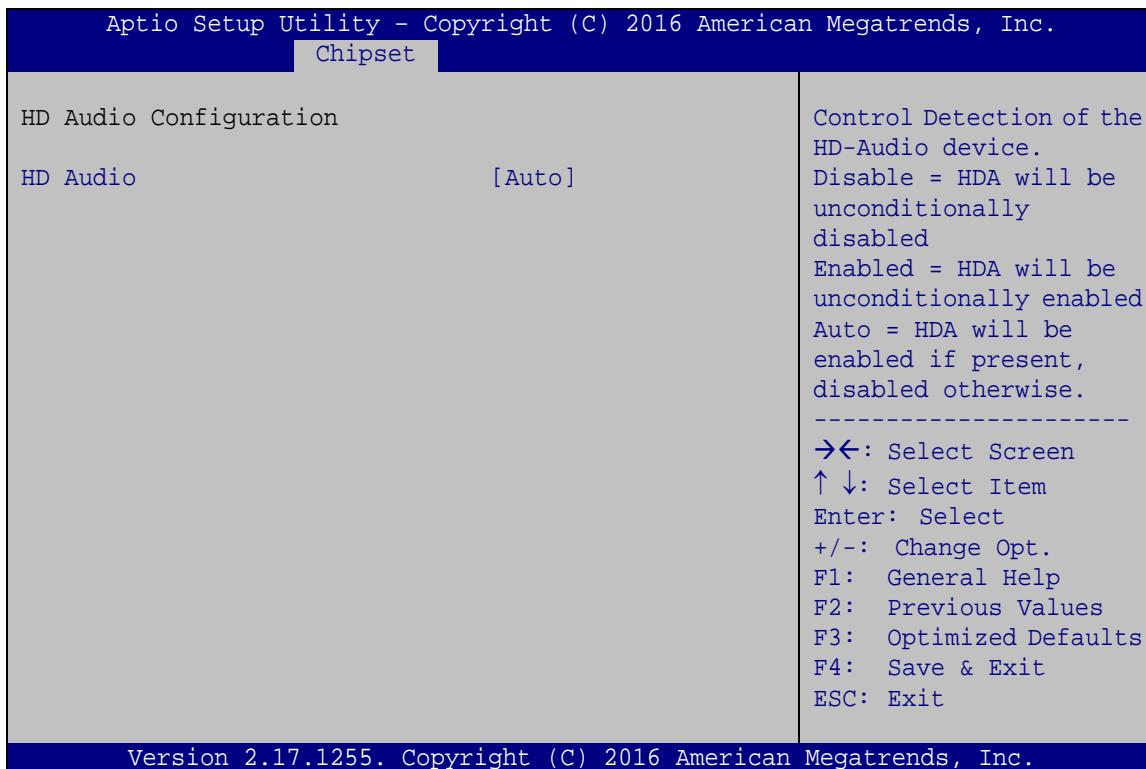

BIOS Menu 26: HD Audio Configuration


→ **HD Audio [Auto]**

Use the **HD Audio** option to enable or disable the High Definition Audio controller.

- **Disabled** The onboard High Definition Audio controller is disabled.
- **Enabled** The onboard High Definition Audio controller is enabled.
- **Auto DEFAULT** The onboard High Definition Audio controller automatically detected and enabled

5.5 Security

Use the **Security** menu (**BIOS Menu 27**) to set system and user passwords.

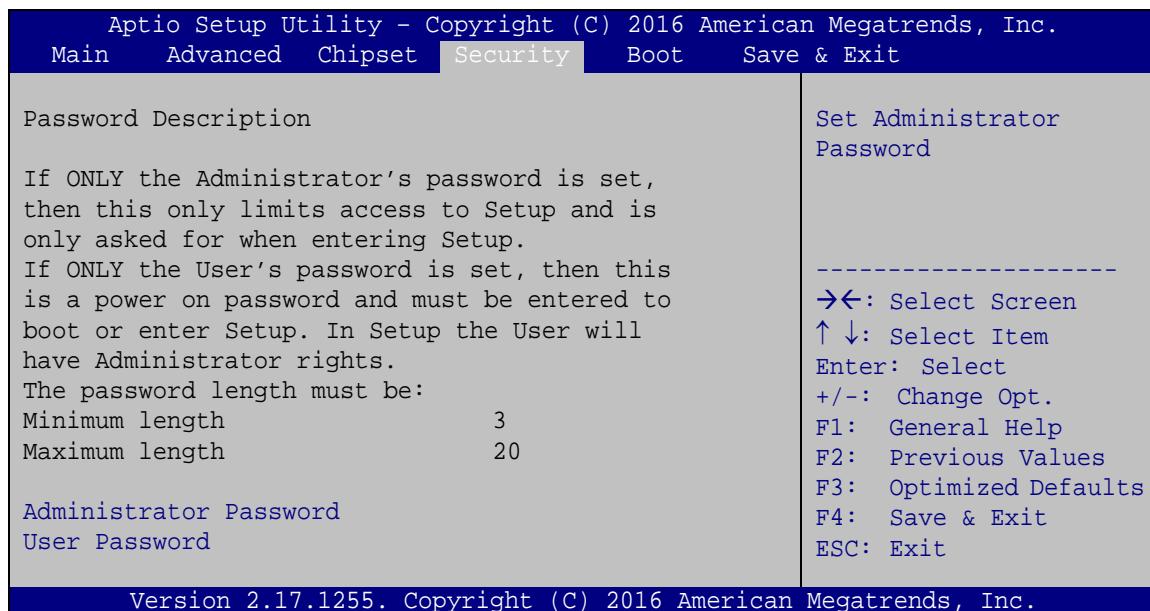

BIOS Menu 27: Security

→ Administrator Password


Use the **Administrator Password** to set or change a administrator password.

→ User Password

Use the **User Password** to set or change a user password.

5.6 Boot

Use the **Boot** menu (**BIOS Menu 28**) to configure system boot options.

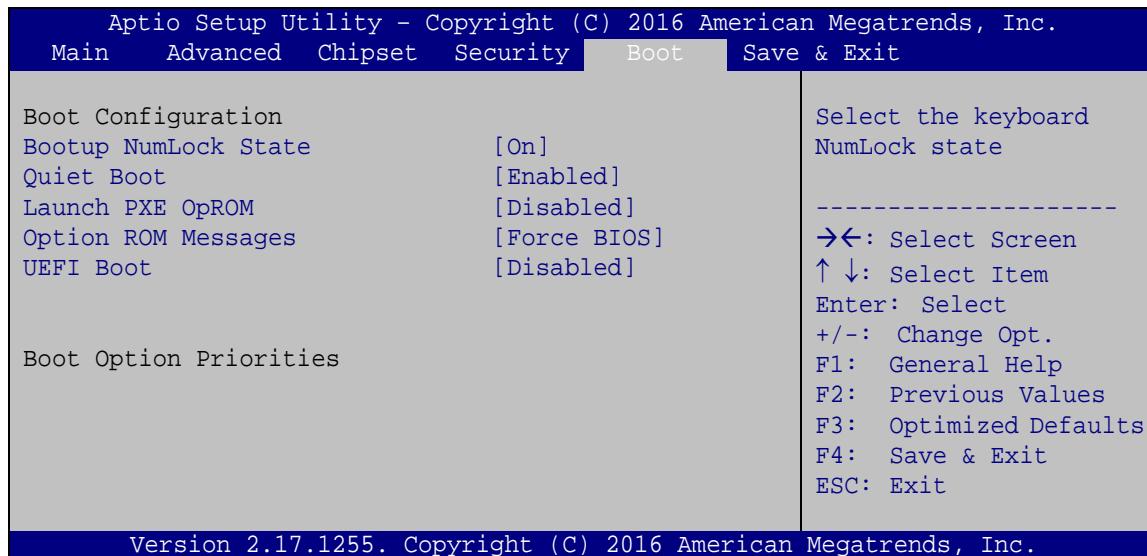

BIOS Menu 28: Boot

→ Bootup NumLock State [On]

Use the **Bootup NumLock State** BIOS option to specify if the number lock setting must be modified during boot up.

- | | | |
|--------------|----------------|--|
| → On | DEFAULT | Allows the Number Lock on the keyboard to be enabled automatically when the computer system boots up. This allows the immediate use of the 10-key numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard is lit. |
| → Off | | Does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard lights up when the Number Lock is engaged. |

→ Quiet Boot [Enabled]

Use the **Quiet Boot** BIOS option to select the screen display when the system boots.

- ➔ **Disabled** Normal POST messages displayed
 - ➔ **Enabled** **DEFAULT** OEM Logo displayed instead of POST messages

→ Launch PXE OpROM [Disabled]

Use the **Launch PXE OpROM** option to enable or disable boot option for legacy network devices.

- **Disabled** **DEFAULT** Ignore all PXE Option ROMs.
 - **Enabled** Load PXE Option ROMs.

→ Option ROM Messages [Force BIOS]

Use the **Option ROM Messages** option to set the Option ROM display mode.

- **Force BIOS** **DEFAULT** Sets display mode to force BIOS.
 - **Keep Current** Sets display mode to current.


→ UEFI Boot [Disabled]

Use the **UEFI Boot** option to enable or disable to boot from the UEFI devices.

- **Enabled** Boot from UEFI devices is enabled.
 - **Disabled** **DEFAULT** Boot from UEFI devices is disabled.

5.7 Save & Exit

Use the **Safe & Exit** menu (**BIOS Menu 29**) to load default BIOS values, optimal failsafe values and to save configuration changes.

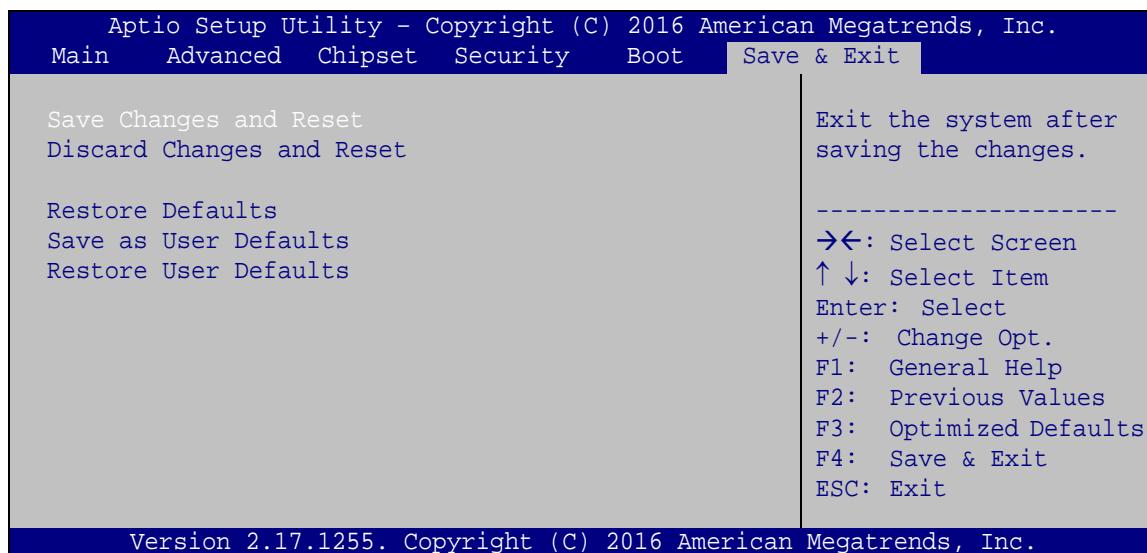

BIOS Menu 29: Save & Exit

→ Save Changes and Reset

Use the **Save Changes and Reset** option to save the changes made to the BIOS options and reset the system.

→ Discard Changes and Reset

Use the **Discard Changes and Reset** option to exit the system without saving the changes made to the BIOS configuration setup program.

→ Restore Defaults

Use the **Restore Defaults** option to load the optimal default values for each of the parameters on the Setup menus. **F3 key can be used for this operation.**

→ Save as User Defaults

Use the **Save as User Defaults** option to save the changes done so far as user defaults.

→ Restore User Defaults

Use the **Restore User Defaults** option to restore the user defaults to all the setup options.

Chapter

6

Software Drivers

6.1 Available Drivers

All the drivers for the HPCIE-C236 are available on IEI Resource Download Center (<https://download.ieeworld.com>). Type HPCIE-C236 and press Enter to find all the relevant software, utilities, and documentation.


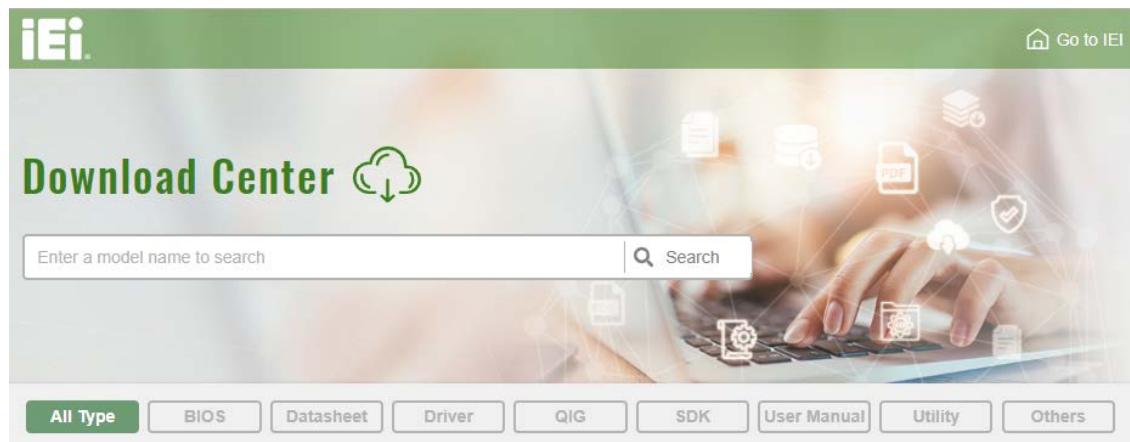


Figure 6-1: IEI Resource Download Center

6.2 Driver Download

To download drivers from IEI Resource Download Center, follow the steps below.

Step 1: Go to <https://download.ieeworld.com>. Type HPCIE-C236 and press Enter.

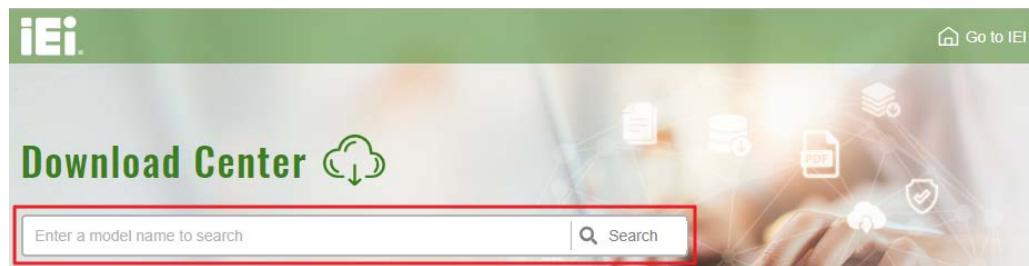

Step 2: All product-related software, utilities, and documentation will be listed. You can choose **Driver** to filter the result.

HPCIE-C236 Half-size PICMG 1.3 CPU Card

[All Type](#) [BIOS](#) [Datasheet](#) [Driver](#) [QIG](#) [SDK](#) [User Manual](#) [Utility](#) [Others](#)

(i) Keyword: "HPCIE-C236", Searching Result : 14 Records.

HPCIE-C236


Product Info ▶

Embedded Computer ▶ Single Board Computer ▶ Half Size Single Board Computer

Half-size PICMG 1.3 CPU Card supports LGA1151 Intel® Xeon® E3, Core™ i3/ Pentium®/Celeron® CPU per Intel® C236

Driver	File Name	Published	Version	File Checksum
	7B000-001167-RS_V1.8.iso (1.13 GB)	2017/10/16	1.80	114B70CE3AE5F6E58D3E61586F2D255A

Step 3: Click the driver file name on the page and you will be prompted with the following window. You can download the entire ISO file (①), or double click an individual item to find its driver file and click the file name to download (②).

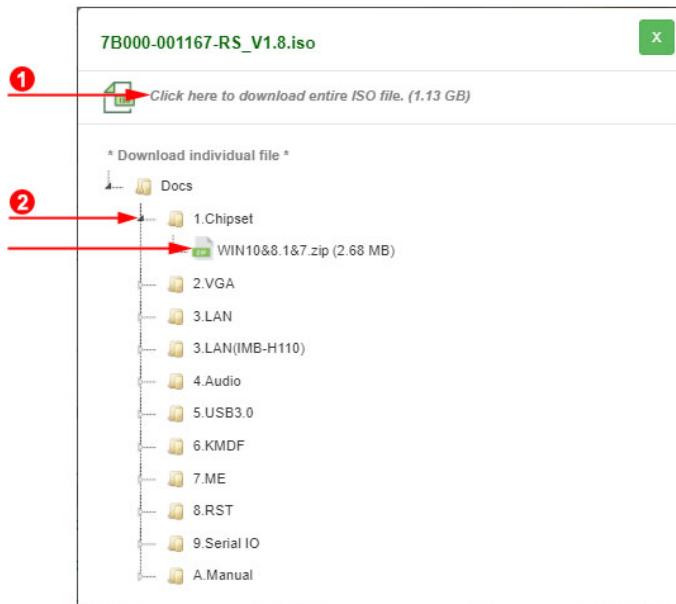

NOTE:

To install software from the downloaded ISO image file in Windows 8, 8.1 or 10, double-click the ISO file to mount it as a virtual drive to view its content. On Windows 7 system, an additional tool (such as Virtual CD-ROM Control Panel from Microsoft) is needed to mount the file.

Appendix

A

Regulatory Compliance

DECLARATION OF CONFORMITY

This equipment has been tested and found to comply with specifications for CE marking. If the user modifies and/or installs other devices in the equipment, the CE conformity declaration may no longer apply.

FCC WARNING

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Appendix

B


Product Disposal

**CAUTION:**

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

- Outside the European Union—If you wish to dispose of used electrical and electronic products outside the European Union, please contact your local authority so as to comply with the correct disposal method.
- Within the European Union—The device that produces less waste and is easier to recycle is classified as electronic device in terms of the European Directive 2012/19/EU (WEEE), and must not be disposed of as domestic garbage.



EU-wide legislation, as implemented in each Member State, requires that waste electrical and electronic products carrying the mark (left) must be disposed of separately from normal household waste. This includes monitors and electrical accessories, such as signal cables or power cords. When you need to dispose of your device, please follow the guidance of your local authority, or ask the shop where you purchased the product. The mark on electrical and electronic products only applies to the current European Union Member States.

Please follow the national guidelines for electrical and electronic product disposal.

Appendix

C

BIOS Options

HPCIE-C236 Half-size PICMG 1.3 CPU Card

Below is a list of BIOS configuration options in the BIOS chapter.

<input type="checkbox"/> System Date [xx/xx/xx]	69
<input type="checkbox"/> System Time [xx:xx:xx]	69
<input type="checkbox"/> ACPI Sleep State [S3 (Suspend to RAM)]	70
<input type="checkbox"/> Intel AMT [Enabled]	71
<input type="checkbox"/> Un-Configure ME [Disabled]	71
<input type="checkbox"/> Case Open Beep [Disabled]	72
<input type="checkbox"/> Serial Port [Enabled]	73
<input type="checkbox"/> Change Settings [Auto]	73
<input type="checkbox"/> Transfer Mode [RS232]	74
<input type="checkbox"/> Serial Port [Enabled]	74
<input type="checkbox"/> Change Settings [Auto]	74
<input type="checkbox"/> Transfer Mode [RS232]	75
<input type="checkbox"/> PC Health Status	76
<input type="checkbox"/> CPU_FAN1 Smart Fan Control [Auto Mode]	77
<input type="checkbox"/> Auto mode fan start/off temperature	77
<input type="checkbox"/> Auto mode fan start PWM	77
<input type="checkbox"/> Auto mode fan slope PWM	77
<input type="checkbox"/> Wake system with Fixed Time [Disabled]	78
<input type="checkbox"/> Console Redirection [Disabled]	79
<input type="checkbox"/> Terminal Type [ANSI]	80
<input type="checkbox"/> Bits per second [115200]	80
<input type="checkbox"/> Data Bits [8]	80
<input type="checkbox"/> Parity [None]	80
<input type="checkbox"/> Stop Bits [1]	81
<input type="checkbox"/> Legacy Serial Redirection Port [COM1]	82
<input type="checkbox"/> Active Processor Cores [All]	83
<input type="checkbox"/> Intel Virtualization Technology [Disabled]	83
<input type="checkbox"/> Intel(R) SpeedStep(tm) [Enabled]	83
<input type="checkbox"/> CPU C states [Disabled]	83
<input type="checkbox"/> Intel TXT(LT) Support [Disabled]	84
<input type="checkbox"/> SATA Controller(s) [Enabled]	84
<input type="checkbox"/> SATA Mode Selection [AHCI]	84
<input type="checkbox"/> Hot Plug [Disabled]	85

□ Legacy USB Support [Enabled].....	86
□ Auto Recovery Function [Disabled].....	87
□ VT-d [Disabled].....	89
□ Primary Display [Auto]	90
□ Internal Graphics [Enabled]	90
□ DVMT Pre-Allocated [256M]	91
□ DVMT Total Gfx Mem [MAX].....	91
□ Primary IGFX Boot Display [VBIOS Default]	91
□ PEG Link Width Configuration [1x16].....	92
□ Enable Root Port [Enabled]	92
□ Max Link Speed [Auto]	93
□ Detect Non-Compliance Device [Disabled]	93
□ Restore AC Power Loss [Last State]	94
□ Power Saving Function(ERP) [Disabled].....	94
□ USB Power SW1 [+5V DUAL].....	95
□ USB Power SW2 [+5V DUAL].....	95
□ PCIe Speed [Auto].....	97
□ Detect Non-Compliance Device [Disabled]	97
□ HD Audio [Auto]	98
□ Administrator Password	99
□ User Password	99
□ Bootup NumLock State [On].....	100
□ Quiet Boot [Enabled]	101
□ Launch PXE OpROM [Disabled]	101
□ Option ROM Messages [Force BIOS].....	101
□ UEFI Boot [Disabled]	101
□ Save Changes and Reset	102
□ Discard Changes and Reset	102
□ Restore Defaults	102
□ Save as User Defaults	102
□ Restore User Defaults	102

Appendix

D

Digital I/O Interface

D.1 Introduction

The DIO connector on the HPCIE-C236 is interfaced to GPIO ports on the Super I/O chipset. The digital inputs and digital outputs are generally control signals that control the on/off circuit of external devices or TTL devices. Data can be read or written to the selected address to enable the DIO functions.



NOTE:

For further information, please refer to the datasheet for the Super I/O chipset.

The BIOS interrupt call **INT 15H** controls the digital I/O.

INT 15H:

AH – 6FH

Sub-function:

AL – 8 : Set the digital port as INPUT

AL : Digital I/O input value

D.2 Assembly Language Sample 1

```
MOV      AX, 6F08H      ;setting the digital port as input  
INT      15H          ;
```

AL low byte = value

AH – 6FH

Sub-function:

AL – 9	:Set the digital port as OUTPUT
BL	:Digital I/O input value

D.3 Assembly Language Sample 2

```
MOV      AX, 6F09H      ;setting the digital port as output  
MOV      BL, 09H        ;digital value is 09H  
INT      15H          ;
```

Digital Output is 1001b

Appendix

E

Watchdog Timer

**NOTE:**

The following discussion applies to DOS environment. Contact IEI support or visit the IEI website for specific drivers for other operating systems.

The Watchdog Timer is provided to ensure that standalone systems can always recover from catastrophic conditions that cause the CPU to crash. This condition may have occurred by external EMIs or a software bug. When the CPU stops working correctly, Watchdog Timer either performs a hardware reset (cold boot) or a Non-Maskable Interrupt (NMI) to bring the system back to a known state.

A BIOS function call (INT 15H) is used to control the Watchdog Timer.

INT 15H:

AH – 6FH Sub-function:	
AL – 2:	Sets the Watchdog Timer's period.
BL:	Time-out value (Its unit-second is dependent on the item "Watchdog Timer unit select" in CMOS setup).

Table E-1: AH-6FH Sub-function

Call sub-function 2 to set the time-out period of Watchdog Timer first. If the time-out value is not zero, the Watchdog Timer starts counting down. When the timer value reaches zero, the system resets. To ensure that this reset condition does not occur, calling sub-function 2 must periodically refresh the Watchdog Timer. However, the watchdog timer is disabled if the time-out value is set to zero.

A tolerance of at least 10% must be maintained to avoid unknown routines within the operating system (DOS), such as disk I/O that can be very time-consuming.

**NOTE:**

When exiting a program it is necessary to disable the Watchdog Timer, otherwise the system resets.

EXAMPLE PROGRAM:

```
; INITIAL TIMER PERIOD COUNTER  
;  
W_LOOP:  
;  
    MOV      AX, 6F02H      ;setting the time-out value  
    MOV      BL, 30         ;time-out value is 48 seconds  
    INT      15H  
;  
; ADD THE APPLICATION PROGRAM HERE  
;  
    CMP      EXIT_AP, 1      ;is the application over?  
    JNE      W_LOOP          ;No, restart the application  
;  
    MOV      AX, 6F02H      ;disable Watchdog Timer  
    MOV      BL, 0           ;  
    INT      15H  
;  
; EXIT ;
```

Appendix

F

Error Beep Code

F.1 PEI Beep Codes

Number of Beeps	Description
1	Memory not Installed
1	Memory was installed twice (InstallPeiMemory routine in PEI Core called twice)
2	Recovery started
3	DXE IPL was not found
3	DXE Core Firmware Volume was not found
4	Recovery failed
4	S3 Resume failed
7	Reset PPI is not available

F.2 DXE Beep Codes

Number of Beeps	Description
1	Invalid password
4	Some of the Architectural Protocols are not available
5	No Console Output Devices are found
5	No Console Input Devices are found
6	Flash update is failed
7	Reset protocol is not available
8	Platform PCI resource requirements cannot be met



NOTE:

If you have any question, please contact IEI for further assistance.

Appendix

G

Hazardous Materials Disclosure

G.1 RoHS II Directive (2015/863/EU)

The details provided in this appendix are to ensure that the product is compliant with the RoHS II Directive (2015/863/EU). The table below acknowledges the presences of small quantities of certain substances in the product, and is applicable to RoHS II Directive (2015/863/EU).

Please refer to the following table.

Part Name	Toxic or Hazardous Substances and Elements									
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)	Bis(2-ethylhexyl) phthalate (DEHP)	Butyl benzyl phthalate (BBP)	Dibutyl phthalate (DBP)	Diisobutyl phthalate (DIBP)
Housing	O	O	O	O	O	O	O	O	O	O
Display	O	O	O	O	O	O	O	O	O	O
Printed Circuit Board	O	O	O	O	O	O	O	O	O	O
Metal Fasteners	O	O	O	O	O	O	O	O	O	O
Cable Assembly	O	O	O	O	O	O	O	O	O	O
Fan Assembly	O	O	O	O	O	O	O	O	O	O
Power Supply Assemblies	O	O	O	O	O	O	O	O	O	O
Battery	O	O	O	O	O	O	O	O	O	O
O: This toxic or hazardous substance is contained in all of the homogeneous materials for the part is below the limit requirement in Directive (EU) 2015/863. X: This toxic or hazardous substance is contained in at least one of the homogeneous materials for this part is above the limit requirement in Directive (EU) 2015/863.										

G.2 China RoHS

此附件旨在确保本产品符合中国 RoHS 标准。以下表格标示此产品中某有毒物质的含量符合中国 RoHS 标准规定的限量要求。

本产品上会附有“环境友好使用期限”的标签，此期限是估算这些物质“不会有泄漏或突变”的年限。本产品可能包含有较短的环境友好使用期限的可替换元件，像是电池或灯管，这些元件将会单独标示出来。

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
壳体	○	○	○	○	○	○
显示	○	○	○	○	○	○
印刷电路板	○	○	○	○	○	○
金属螺帽	○	○	○	○	○	○
电缆组装	○	○	○	○	○	○
风扇组装	○	○	○	○	○	○
电力供应组装	○	○	○	○	○	○
电池	○	○	○	○	○	○

O: 表示该有毒有害物质在该部件所有物质材料中的含量均在 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求。