

3.5" SBC Supports Intel® Celeron® J6412 on-board SoC with 8GB LPDDR4x, HDMI, DP, iDPM, Dual 2.5GbE LAN, M.2, PCIe x4 Slot, SATA 6Gb/s, 10 COM, USB 3.2 Gen 2, iAUDIO, 0°C~60°C and RoHS

WAFER-EHL2-J6412

Quick Installation Guide

Version 1.0

July 14, 2023

Package List

WAFER-EHL2-J6412 package includes the following items:

- 1 x WAFER-EHL2-J6412 single board computer
- 1 x Power cable
- 1 x SATA with power cable
- 1 x QIG



©2023 Copyright by IEI Integration Corp.
All rights reserved.

Specifications

- CPU:
Intel® Celeron® J6412 onboard SoC
(up to 2.6GHz, quad-core, 1.5M cache, TDP=10W)
Support onboard Intel® Atom™ x6000 series / Pentium® / Celeron® processor (Elkhart Lake platform)
- Memory:
Onboard 8GB 3200 MHz LPDDR4x, up to 16GB
- BIOS:
AMI UEFI BIOS
- Graphics Engine:
Intel® UHD Graphics
- Display Output:
Triple independent display
1 x HDMI 1.4a (up to 4096 x 2160@30Hz)
1 x DP 1.2 (up to 4096 x 2160 @60Hz)
1 x IEI iDPM 3040 slot (only for IEI eDP/LVDS/VGA module)
- Ethernet:
2 x PCIe 2.5GbE by Intel® I225V
- External I/O Interface:
2 x USB 3.2 Gen 2 (10Gb/s)
- Internal I/O Interface:
1 x SATA 6Gb/s with 5V SATA power connector
4 x USB 2.0 (2x4 pin, p=2.0)
2 x RS-232/422/485 (1x9 pin, p=1.25)
4 x RS-232 (1x9 pin, p=1.25)
- I²C:
1 x I²C (1x4 pin, p=1.25)
- SMBus:
1 x SMBus (1x4 pin, p=1.25)
- Audio:
1 x iAUDIO (2x5 pin), supporting IEI AC-KIT-888S kit

- Front Panel:
 - 1 x Power LED & HDD LED (1x6 pin, p=2.0)
 - 1 x Power button (1x2 pin, p=2.0)
 - 1 x Reset button (1x2 pin, p=2.0)
- Expansions:
 - 1 x M.2 A key 2230 for Wi-Fi & Bluetooth (PCIe Gen3 x1 / USB 2.0 signal)
 - 1 x M.2 B key 3042/2242 (PCIe Gen3 x2 / USB 2.0 signal)
 - 1 x Onboard SIM card socket (hinge type) for M.2 B key
 - 1 x PCIe Gen3 x4 (x2 signal: x2 or x1+x1)
- Digital I/O:
 - 1 x 12-bit digital I/O (2x7 pin, p=2.0)
- TPM:
 - Intel® PTT (TPM 2.0)
- Fan Connector:
 - 1 x CPU fan connector (1x4 pin, p=2.54)
- Power Supply:
 - +12V DC input power (AT/ATX mode)
- Power Consumption:
 - 12V@3.24A (Intel® Celeron® J6412 2.0GHz with on-board 8GB 3200MHz LPDDR4 memory and EUP enabled)
- Watchdog Timer:
 - Software programmable support 1–255 sec. system reset
- Operation Temperature: 0°C – 60°C
- Storage Temperature: -30°C – 70°C
- Operation Humidity: 5% – 95%, non-condensing
- Dimensions: 146 mm x 102 mm
- Weight: GW:850 g / NW:350 g
- Certification: CE/FCC compliant

Ordering Information

- **WAFER-EHL2-J6412-R10:**
3.5" SBC Supports Intel® Celeron® J6412 on-board SoC with 8GB LPDDR4x, HDMI, DP, iDPM, Dual 2.5GbE LAN, M.2, PCIe x4 Slot, SATA 6Gb/s, 10 COM, USB 3.2 Gen 2, iAUDIO, 0°C~60°C and RoHS
- **CB-USB02A-RS:**
Dual-port USB cable with bracket, 300mm, p=2.0
- **AC-KIT-888S-R10:**
Realtek ALC888S 7.1 Channel HD Audio peripheral board, RoHS
- **32102-000100-200-RS:**
SATA power cable, MOLEX 5264-4P to SATA 15P
- **32005-003500-200-RS:**
RS-232/422/485 cable, 300mm, p=1.25
- **iDPM-eDP-R10:**
eDP to eDP converter board (for IEI iDPM slot)
- **iDPM-LVDS-R10:**
eDP to LVDS converter board (for IEI iDPM slot)
- **iDPM-VGA-R10:**
eDP to VGA converter board (for IEI iDPM slot)
- **NWR-L2S-R10:**
PCIe x2 to two PCIe x1 riser card
- **NWR-R2S-R10:**
PCIe x2 to two PCIe x1 riser card
- **CM-WAFER-WF-R10:**
Cooler module (w/ fan) for 3.5" WAFER series, RoHS
- **CM-WAFER-WOF-R10:**
Cooler module (w/o fan) for 3.5" WAFER series, RoHS

Jumpers Setting and Connectors

LABEL	FUNCTION
J_CMOS2	Clear CMOS button
J_ATX_AT1	AT/ATX power mode setting jumper
J_DNX1	DNX mode setting jumper
J_FLASH1	Flash descriptor override setting jumper
IAUDIO1	Audio connector for IEI AC-KIT-888S kit
PWR1	ATX 12V power connector
BAT1	Battery connector
BZ1	Buzzer connector
CHASSIS1	Chassis status connector
J_DIO1	Digital I/O connector
CPU_FAN1	Fan connector
F_PANEL1	Power LED & HDD LED connector
PWR_BTN1	Power button connector
RST_BTN1	Reset button connector
COM1, COM2, COM3, COM4	RS-232 serial port connectors
COM5, COM6	RS-232/422/485 serial port connectors
S_ATA1	SATA 6Gb/s connectors
SATA_PWR1	SATA power connector
I2C1	I ² C connector
SMB1	SMBus connector
JBIOS1	Flash SPI ROM connector
DEBUG_SPI1	EC debug connector
USB_CONN2, USB_CONN3	Internal USB 2.0 connectors

M2_A1	M.2 A-key slot
M2_B1	M.2 B-key slot
PCIEX4_1	PCIe x4 slot (x2 signal)
SIM1	SIM slot (solder side)
IDPM1	IEI iDPM slot
J_LAN1, J_LAN2	External 2.5GbE RJ-45 connectors
USB_CONN1	External USB 3.2 Gen 2x1 Type-A connector
DP1	External DisplayPort connector
J_HDMI1	External dual HDMI connector

J_CMOS2: Clear CMOS Button	
PIN NO.	DESCRIPTION
NC (default)	Keep CMOS Setup (Normal Operation)
Press button	Clear CMOS Setup

J_ATX_AT1: AT/ATX Power Mode Setting Jumper	
PIN NO.	DESCRIPTION
Short 1 - 2	ATX Power Mode (default)
Short 2 - 3	AT Power Mode

J_DNX1: DNX Mode Setting Jumper	
PIN NO.	DESCRIPTION
Open	Normal (default)
Short	Enable DNX Boot

J_FLASH1: Flash Descriptor Override Setting Jumper	
PIN NO.	DESCRIPTION
Short 1 - 2	Disable (default)
Short 2 - 3	Enable

IAUDIO1: Internal Audio Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	HDA_SYNC	2	HDA_CLK
3	HDA_SDOUT	4	HDA_SPKR
5	HDA_SDIN	6	HDA_RST#
7	+5V	8	GND
9	+12V	10	GND

PWR1: ATX 12V Power Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	3	+12V
2	GND	4	+12V

BAT1: RTC Battery Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	VBATT	2	GND

BZ1: Buzzer Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	+5V	2	PC_BEEP

CHASSIS1: Chassis Status Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	Chassis Open	2	GND

CPU_FAN1: Fan Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	3	FANIO
2	+12V	4	PWM

J_DIO1: Digital Input/Output Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	2	VCC
3	DOUT5	4	DOUT4
5	DOUT3	6	DOUT2
7	DOUT1	8	DOUT0
9	DIN5	10	DIN4
11	DIN3	12	DIN2
13	DIN1	14	DIN0

F_PANEL1: Power LED & HDD LED Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+5V	4	PWR_LED-
2	GND	5	HDD_LED+
3	PWR_LED+	6	HDD_LED-

PWR_BTN1: Power Button Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	PWR_BTN+	2	PWR_BTN-

RST_BTN1: Reset Button Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	Reset+	2	Reset-

COM1, COM2, COM3, COM4: RS-232 Serial Port Connectors			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DCD	6	CTS
2	DSR	7	DTR
3	RXD	8	RI
4	RTS	9	GND
5	TXD		

COM5, COM6: RS-232/422/485 Serial Port Connectors			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DCD	6	CTS
2	DSR	7	DTR
3	RXD	8	RI
4	RTS	9	GND
5	TXD		

<p>RS-422</p> <p>D-SUB 9PIN MALE MODE 00</p>	<p>RS-485</p> <p>D-SUB 9PIN MALE MODE 10/11</p>	<p>RS-232</p> <p>D-SUB 9PIN MALE MODE 01</p>
---	--	---

S_ATA1: SATA 6Gb/s Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	5	SATA_RX-
2	SATA_TX+	6	SATA_RX+
3	SATA_TX-	7	GND
4	GND	8	N/C

SATA_PWR1: SATA Power Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+5V	2	GND

I2C1: I²C Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	3	I2C_CLK
2	I2C_DATA	4	+5V

SMB1: SMBus Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	3	SMB_CLK
2	SMB_DATA	4	+5V

JBIOS1: Flash SPI ROM Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+3.3V	4	SPI_CLK
2	SPI_CS#	5	SPI_SI
3	SPI_SO	6	GND

DEBUG_SPI1: EC Debug Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	NC	4	EDICLK
2	EDICS	5	EDIDI
3	EDIDO	6	GND

USB_CONN2, USB_CONN3: Internal USB 2.0 Connectors			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	VCC	2	GND
3	USB_DATA-	4	USB_DATA+
5	USB_DATA+	6	USB_DATA-
7	GND	8	VCC

M2_A1: M.2 A-key Slot			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	2	+V3.3A
3	USB+	4	+V3.3A
5	USB-	6	NC
7	GND	8	Module Key
9	Module Key	10	Module Key
11	Module Key	12	Module Key
13	Module Key	14	Module Key

15	Module Key	16	NC
17	NC	18	GND
19	NC	20	NC
21	NC	22	NC
23	GND	24	GND
25	NC	26	NC
27	NC	28	NC
29	GND	30	GND
31	NC	32	NC
33	GND	34	NC
35	PCIE_TX6+	36	GND
37	PCIE_TX6-	38	NC
39	GND	40	NC
41	PCIE_RX6+	42	NC
43	PCIE_RX6-	44	NC
45	GND	46	NC
47	CLK_M2_A+	48	NC
49	CLK_M2_A-	50	BTWIFI_SUS_CLK
51	GND	52	NC
53	NC	54	NC
55	M.2_A_WAKE	56	NC
57	GND	58	NC
59	NC	60	NC
61	NC	62	NC
63	GND	64	NC
65	NC	66	NC
67	NC	68	NC
69	GND	70	NC
71	NC	72	+V3.3A
73	NC	74	+V3.3A
75	GND		

M2_B1: M.2 B-key Slot			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	NC	2	+3.3V
3	GND	4	+3.3V
5	GND	6	NC
7	USB_D+	8	WWAN_DISABLE
9	USB_D-	10	NC
11	GND	12	Module Key
13	Module Key	14	Module Key
15	Module Key	16	Module Key
17	Module Key	18	Module Key
19	Module Key	20	NC
21	NC	22	NC
23	NC	24	NC
25	NC	26	NC
27	GND	28	NC
29	PCIE_RXN5	30	SIM_RST
31	PCIE_RXP5	32	SIM_CLK
33	GND	34	SIM_CIO
35	PCIE_TXN5	36	SIM_VCC
37	PCIE_TXP5	38	NC
39	GND	40	NC
41	PCIE_RXN4	42	NC
43	PCIE_RXP4	44	NC
45	GND	46	NC
47	PCIE_TXN4	48	NC
49	PCIE_TXP4	50	NC
51	GND	52	N/C
53	CLK_M2_B_N	54	M.2_B_WAKE
55	CLK_M2_B_P	56	NC
57	GND	58	NC
59	NC	60	NC
61	NC	62	NC
63	NC	64	NC
65	NC	66	NC

67	NC	68	NC
69	NC	70	+3.3V
71	GND	72	+3.3V
73	GND	74	+3.3V
75	NC		

SIM1: SIM Card Slot			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
C1	SIM_VCC	C5	GND
C2	SIM_RST	C6	NC
C3	SIM_CLOCK	C7	SIM_DATA

J_LAN1, J_LAN2: External 2.5GbE RJ-45 Connectors			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	MDI0P	5	MDI2P
2	MDI0N	6	MDI2N
3	MDI1P	7	MDI3P
4	MDI1N	8	MDI3N

DP1: External DP Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DATA_0P	11	GND
2	GND	12	DATA_3N
3	DATA_0N	13	CONFIG1
4	DATA_1P	14	CONFIG2
5	GND	15	AUX_P
6	DATA_1N	16	GND
7	DATA_2P	17	AUX_N
8	GND	18	DP HPD
9	DATA_2N	19	GND
10	DATA_3P	20	DP PWR

J_HDMI1: External HDMI Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	HDMI2_DATA2	2	GND
3	HDMI2_DATA2#	4	HDMI2_DATA1
5	GND	6	HDMI2_DATA1#
7	HDMI2_DATA0	8	GND
9	HDMI2_DATA0#	10	HDMI2_CLK
11	GND	12	HDMI2_CLK#
13	N/C	14	N/C
15	HDMI2_SCL	16	HDMI2_SDA
17	GND	18	+5V
19	HDMI2_HPD		

USB_CONN1: External USB 3.2 Gen 2 Connectors			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	VCC	10	VCC
2	USB_DATA0-	11	USB_DATA1-
3	USB_DATA0+	12	USB_DATA1+
4	GND	13	GND
5	USB3_RX0-	14	USB3_RX1-
6	USB3_RX0+	15	USB3_RX1+
7	GND	16	GND
8	USB3_TX0-	17	USB3_TX1-
9	USB3_TX0+	18	USB3_TX1+


All the drivers and utility for the WAFER-EHL2-J6412 are available on IEI Resource Download Center. Type WAFER-EHL2-J6412 and press Enter to find all the relevant software, utilities, and documentation. To install software from the downloaded ISO file, mount the file as a virtual drive to view its content.

IEI Resource Download Center

<https://download.ieiworld.com>



Board Layout: Jumper and Connector Locations

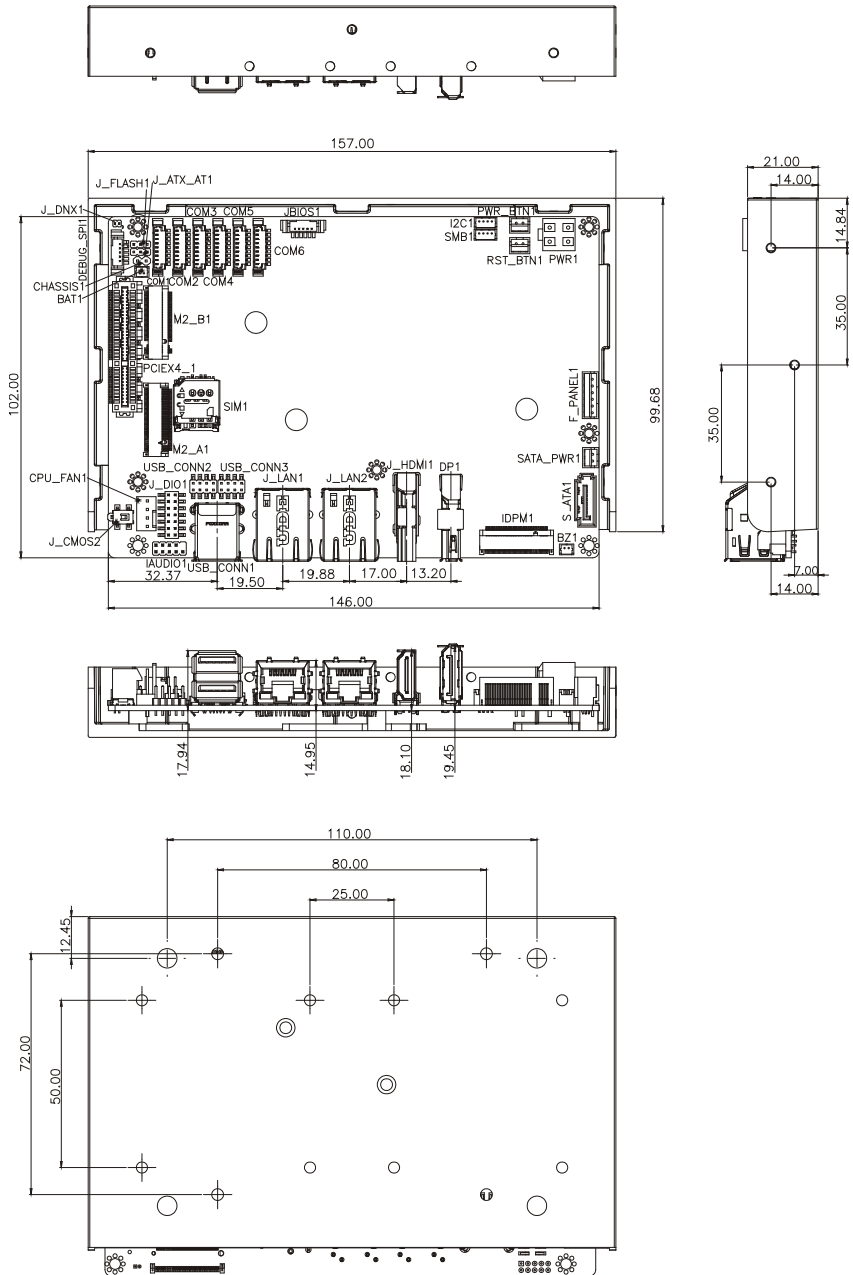

(Unit: mm)

