

**ATX Motherboard supports 32nm LGA1155 Intel® Core™
i7/i5/i3 CPU per Intel® Q67, DDR3, VGA/DVI-D/HDMI,
Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and
RoHS**

IMBA-Q670

Quick Installation Guide

Version 2.0

Aug. 15, 2011

Package List

IMBA-Q670 package includes the following items:

- 1 x IMBA-Q670 Single Board Computer
- 4 x SATA Cable
- 1 x I/O Shielding
- 1 x Mini Jumper Pack
- 1 x Utility CD(within manual)
- 1 x QIG (Quick Installation Guide)
- 1 x One Key Recovery CD



©2011 Copyright by IEI Technology corp.
All rights reserved.

Specifications

- CPU:
LGA1155 socket supports Intel®Core™ i7/i5 Quad cores and i3 Dual core processor
- System chipset: Intel®Q67
- BIOS: UEFI BIOS
- System memory:
Four 240-pin 1333/1066MHz Dual-Channel DDR3 SDRAM Unbuffered DIMM supported (system max. 32GB)
- Ethernet:
Intel®82583V PCIe controller
Intel®82579 PHY with Intel®AMT 7.0 supported
- Super IO: Fintek F81866
- I/O Interface:
5 x RS-232
1 x RS-422/485
2 x SATA 6Gb/s
4 x SATA 3Gb/s
1 x LPT
2 x USB 3.0 by NEC D720200F1
10 x USB 2.0 (2 on rear, 8 by pin header)
1 x PS/2 KB/MB
- Expansion:
1 x PCIe x16 slot
1 x PCIe x4 slot
1 x PCIe x1 slot
4 x PCI slots
- Digital I/O: 8-bit digital I/O (4-bit input, 4-bit output)
- Display Output:
VGA/ HDMI/ DVI-D Integrated in the Intel®Q67
- Graphic Engine:
Support for DX10.1 and OpenGL3.0
Full MPEG2, VC1, AVC Decode
- Audio: Realtek ALC888 HD Audio Codec (Line-in, Line-out, Mic)

- Front Audio: 10-pin (2x5) header
- TPM: 20-pin (2x10) header
- SMBus: 4-pin (1x4) wafer
- I2C: 4-pin (1x4) wafer
- Watchdog Timer:
Software programmable supports 1~255sec. System reset
- Power supply: 5V/12V, AT/ATX supported
- Power Consumption:
3.3V@1.65A, 5V@6.31A, 12V@0.18A, Vcore@7.88A,
5VSb@0.15 (Intel®Core™ i5-2400 3.10GHz CPU with 1333MHz
DDR3 4GB x 4 memory)
- Temperature: Operation: -10°C~60°C
- Humidity: Operation: 5%~95% non-condensing
- Dimensions: 244mm x 305mm

Ordering Information

- IMBA-Q670-R10 :
ATX Motherboard supports 32nm LGA1155 Intel®Core™ i7/i5/i3
CPU per Intel®Q67, DDR3, VGA/DVI-D/HDMI, Dual Intel®PCIe GbE,
USB 3.0, SATA 6Gb/s, HD Audio and RoHS
- CB-USB02-RS : Dual ports USB cable with bracket
- 32200-074800-RS : RS-422/485 cable, 200mm
- 19800-000051-RS : RS-232 cable, 230mm
- 32102-000100-200-RS : SATA power Cable
- 19800-000049-RS : LPT Cable
- CF-1156A-RS : High performance LGA1155/LGA1156 Cooler kit, 1U
Chassis compatible, 73W
- CF-1156B-RS : High performance LGA1155/LGA1156 Cooler kit, 95W
- TPM-IN01-R11 : 20-pin INFINEON TPM module, software
management Tool, Firmware V3.17

Jumpers setting and Connectors

LABEL	FUNCTION
J_CMOS1	CMOS State Setting
JATX_AT1	AT mode or ATX mode Selection
WOL_SEL1	Wake On LAN Selection
SATA1~2&3~6	Serial ATA 6Gb/s & 3Gb/s Connector
F_PANEL1	Front Panel connector
JSPI1	SPI Flash Program Connector
TPM1	Trusted Platform Module connector
COM1,2,3,5	Internal Serial Port Connectors
LPT1	Parallel Port Connector
DIO1	Digital I/O Connector
SYS_FAN1	System Fan Connector
SPDIF1	SPDIF Connector
FP_AUDIO1	Front Panel Audio Connector
ATX1	24-Pin ATX Power Supply Connector
CPU12V1	+12V Power Source Connector
CPU_FAN1	CPU FAN
KB_MS1	Internal PS/2 Mouse & Keyboard Connector
I2C_1	I2C Connector
SMBUS_1	SMBus Connector
USB1~4	Internal USB2.0 Connectors
KB_MS2	PS/2 Mouse & Keyboard Connector
HDMI1	HDMI Connector
COM6	External Serial Port DB-9 Connectors
LAN1_USB01	RJ-45 LAN and USB2.0 Connector
LAN2_USB23	RJ-45 LAN and USB3.0 Connector
AUDIO_CV1	Audio Connector
COM4	Internal Serial Port RS-422/RS485 Connectors

J_COMS1 : Clear CMOS Setup	
PIN NO.	DESCRIPTION
Short 1-2	Keep CMOS Setup(default)
Short 2-3	Clear CMOS Setup

JATX_AT1 : ATX mode or AT mode Selection	
PIN NO.	DESCRIPTION
OPEN	AT Mode
SHORT	ATX Mode

WOL_SEL1 : Wake On LAN	
PIN NO.	DESCRIPTION
1-2 (default)*	Enable
Short 2-3	Disable

SYS_FAN1、SYS_FAN2 : System Fan Connector	
PIN NO.	DESCRIPTION
1	FANIO
2	+12V (PWM)
3	GND

SATA1、SATA2 : Serial ATA 6Gb/sConnector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	5	RXN
2	TXP	6	RXP
3	TXN	7	GND
4	GND	8	N/C

SATA3-6 : Serial ATA 3Gb/sConnector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	5	RXN_A
2	TXP_A	6	RXP_A
3	TXN_A	7	GND
4	GND	8	GND
9	TXP_B	10	TXN_B
11	GND	12	RXN_B
13	RXP_B	14	GND

COM1,2,3,5 : Internal Serial Port Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	-NDCD1	6	-NCTS1
2	-NDSR1	7	-NDTR1
3	NSIN1	8	-XRI1
4	-NRTS1	9	GND
5	NSOUT1	10	GND

F_PANEL1 : PWR & RST Buttons and Indicators panel					
	PIN	DESCRIPTION	PIN	DESCRIPTION	
PWR_LED	1	ACPILED	2	BEEP_PWR	BUZZER
	3	NC	4	NC	
	5	GND	6	NC	
PWR_BTN	7	PWRBTN_SW#_C	8	PC_BEEP	RESET
	9	GND	10	NC	
HDD_LED	11	IDELED	12	EXTRST-	
	13	IDELED-	14	GND	

JSPI1 : Flash SPI ROM Connector			
USB01, USB23, USB45			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+3.3V	2	GND
3	CS0	4	CLK
5	SO0	6	SI
7	NC	8	NC

TPM1 : TPM Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	Clock	2	GND
3	Frame#	4	NC(KEY)
5	Reset#	6	+5V
7	LAD3	8	LAD2
9	+3.3V	10	LAD1
11	LAD0	12	GND
13	SMB CLK	14	SMB DATA
15	+3.3V Standby	16	Serial IRQ
17	GND	18	Clock Run#
19	Power Down#	20	DREQ#

DIO1 : Digital Input / Output Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	2	VCC
3	Output 3	4	Output 2
5	Output 1	6	Output 0
7	Input 3	8	Input 2
9	Input 1	10	Input 0

LPT1 : Parallel Port Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	STROBE#	14	AUTO FORM FEED #
2	DATA0	15	ERROR#
3	DATA1	16	INITIALIZE#
4	DATA2	17	PRINTER SELECT LN#
5	DATA3	18	GND
6	DATA4	19	GND
7	DATA5	20	GND
8	DATA6	21	GND
9	DATA7	22	GND
10	ACKNOWLEDG E#	23	GND
11	BUSY	24	GND
12	PAPER EMPTY	25	GND
13	PRINTER SELECT	26	N/C

SPDIF1 : SPDIF CONNECTOR	
PIN NO.	DESCRIPTION
1	5V
2	NC
3	SPDIFOUT
4	GND
5	SPDIFIN

CPU_FAN1: CPU Fan Connector	
PIN	DESCRIPTION
1	GND
2	+12V
3	FANIO1
4	PWM

AP_AUDIO1 : Audio Source Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	LMIC2_L	2	AUD GND
3	LMIC2_R	4	PRESENCE#
5	LLINE2-R	6	MIC2-JD
7	F_SENSE	8	NC
9	LLINE2-L	10	LINE2-JD

COM4	
PIN	DESCRIPTION
1	RXD485#
2	RXD485+
3	TXD485+
4	TXD485#

I2C_1	
PIN	DESCRIPTION
1	+5V_DUAL
2	PCH_GP38_PU
3	PCH_GP39_PU
4	GND

ATX1: 20Pin ATX Power Supply Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+3.3Vdc	11	+3.3Vdc
2	+3.3Vdc	12	-12Vdc
3	GND	13	GND
4	+5Vdc	14	PS-ON
5	GND	15	GND
6	+5Vdc	16	GND
7	GND	17	GND
8	PWR-OK	18	-5Vdc
9	+5VSby	19	+5Vdc
10	+12Vdc	20	+5Vdc

ATX12V1 : +12V MAIN POWER Connector	
PIN	DESCRIPTION
1	+5V
2	GND
3	GND
4	+12V

SMBus :	
PIN	DESCRIPTION
1	+5V_DUAL
2	SMBCLK
3	SMBDATA
4	GND

KB_MS1: 6-pin Wafer Keyboard Connector	
PIN NO.	DESCRIPTION
1	VCC5_KBMS
2	MSDATA
3	MSCLK
4	KBDATA
5	KBCLK
6	KBGND

USB1-4: Internal USB Connectors			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	VCC	2	GND
3	DATA-	4	DATA+
5	DATA+	6	DATA-
7	GND	8	VCC

KB_MS2 : Mouse & Keyboard Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	Keyboard Data	7	Mouse Data
2	NC	8	NC
3	GND	9	GND
4	VCC	10	VCC
5	Keyboard Clock	11	Mouse Clock
6	NC	12	NC

HDMI1 : HDMI Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	HDMI_DATA2	13	N/C
2	GND	14	N/C
3	HDMI_DATA2#	15	HDMI_SCL
4	HDMI_DATA1	16	HDMI_SDA
5	GND	17	GND
6	HDMI_DATA1#	18	+5V
7	HDMI_DATA0	19	HDMI_HP D
8	GND	20	HDMI_GND
9	HDMI_DATA0#	21	HDMI_GND
10	HDMI_CLK	22	HDMI_GND
11	GND	23	HDMI_GND

AUDIO_CV1: Audio input and output connector	
PIN NO.	DESCRIPTION
Line-in	CD/DVD or other audio source input port
Line_ot	Connect this port to headphone or speaker
Microphone	Connect this port to microphone


COM1 : External Serial Port Connector	
PIN	DESCRIPTION
1	DATA CARRIER DETECT (DCD1)
2	RECEIVE DATA (RXD1)
3	TRANSMIT DATA (TXD1)
4	DATA TERMINAL READY (DTR 1)
5	GND (GND1)
6	DATA SET READY (DSR1)
7	REQUEST TO SEND (RTS 1)
8	CLEAR TO SEND (CTS 1)
9	RING INDICATOR (RI1)

LAN1、 LAN2 : LAN port connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	MDIA3-	2	MDIA3+
3	MDIA2-	4	MDIA1-
5	MDIA1+	6	MDIA2+
7	MDIA0-	8	MDIA0+

USB 3.0 : USB 3.0 port connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	VCC	2	DATA-
3	DATA+	4	GND
5	StdA_SSRX-	6	StdA_SSRX+
7	GND_DRAIN	8	StdA_SSTX-
9	StdA_SSTX+		

USB 2.0 : USB 2.0 port connector	
PIN NO.	DESCRIPTION
1	VCC
2	DATA-
3	DATA+
4	GND

Board Layout: Jumper and Connector Locations

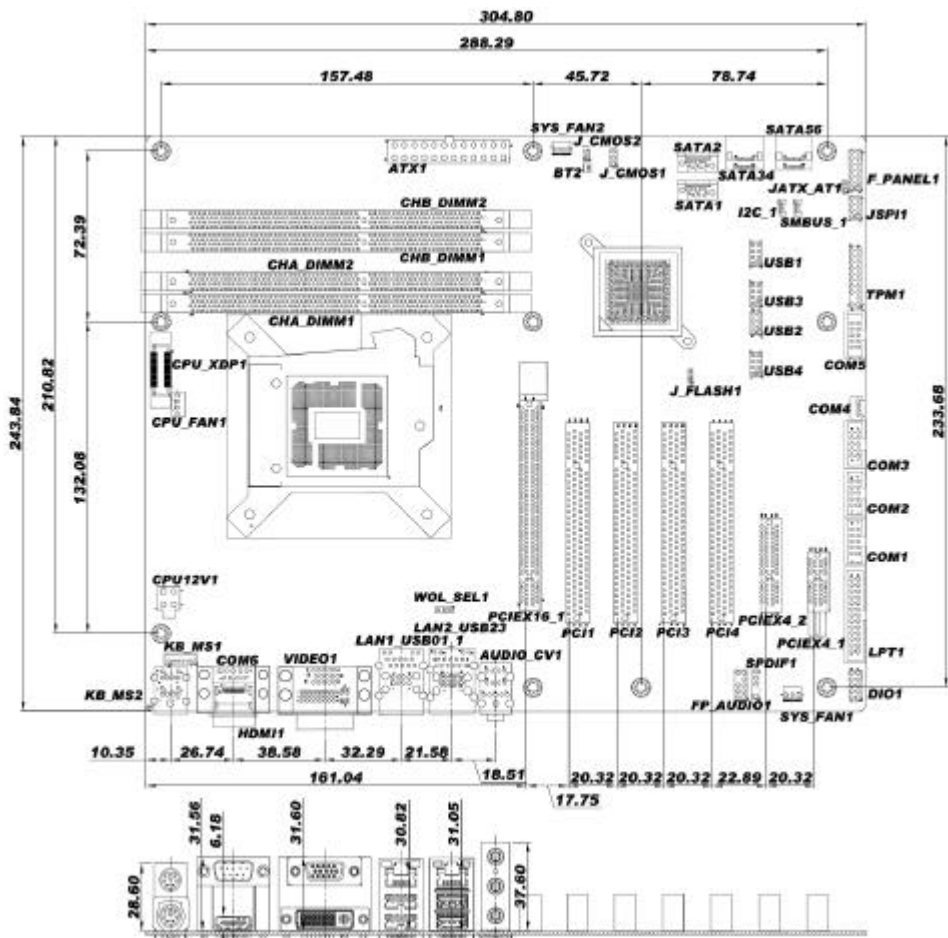

(Unit:mm)