

1U AC Input ATX Type

ACE-818APM 180 W 1U Type ATX Power Supply




Medical



Specifications

| | | | | | | |
|------------------|--|----------------------|----------------------|------|-------|--------|
| Input Type | 90 ~ 265 VAC Full Range | | | | | |
| Output Voltage | +3.3 V | +5 V | +12 V | -5 V | -12 V | +5 Vsb |
| | 16.8 A (0.3 A min.) | 12 A (0.5 A min.) | 12 A (1.5 A min.) | | 0.8 A | 2 A |
| Efficiency | 68% | | | | | |
| Temperature | Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C | | | | | |
| MTBF (hrs) | 100,000 | | | | | |
| Output Connector | 20-pin ATX, 4-pin 12 V CPU, 2 x FDD, 3 x HDD | | | | | |
| Dimensions (mm) | 190 x 81.5 x 40.5 | | | | | |

Dimensions (Unit: mm)

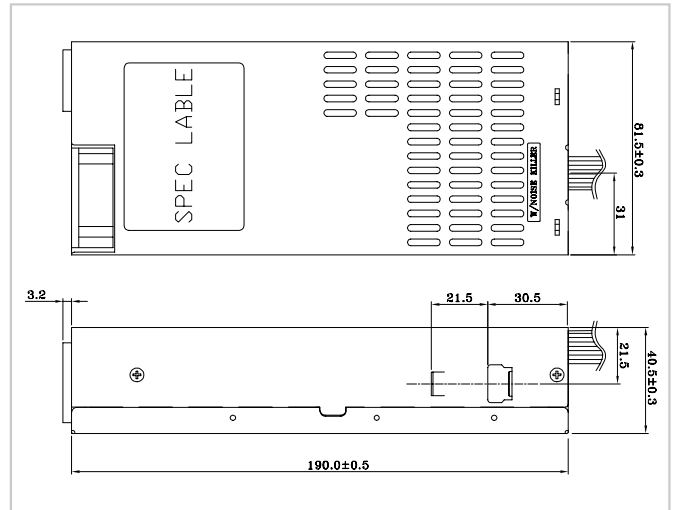

Ordering Information

| Part No. | Description |
|---------------|---|
| ACE-818APM-RS | 180W AC-DC 1U ATX Power Supply with PFC, meets medical standard |


ACE-A630B 1U Flex ATX 300 W Power Supply



Specifications

| | | | | | |
|------------------|--|----------------------|----------------------|-------|--------|
| Input Type | 90~264VAC Full Range | | | | |
| Output Voltage | +3.3 V | +5 V | +12 V | -12 V | +5 Vsb |
| | 16 A (0.5 A min.) | 18 A (0.5 A min.) | 15 A (0.5 A min.) | 0.5 A | 3 A |
| Efficiency | 82% | | | | |
| Temperature | Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C | | | | |
| MTBF (hrs) | 100,000 | | | | |
| Output Connector | 20+4-pin ATX, 4-pin 12V CPU, 1x FDD, 2 x HDD, 2 x SATA | | | | |
| Dimensions (mm) | 150 x 81.5 x 40.5 | | | | |

Dimensions (Unit: mm)

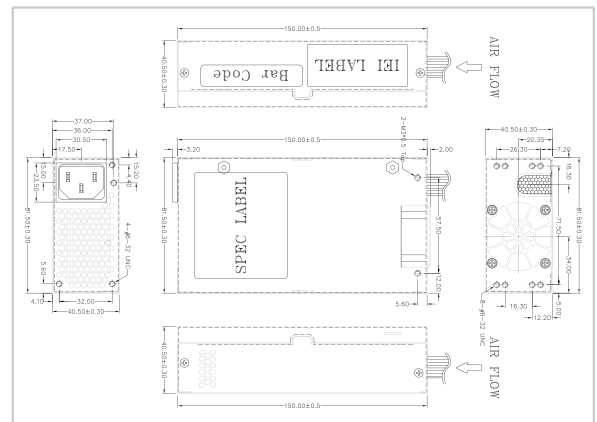

Ordering Information

| Part No. | Description |
|------------------|---|
| ACE-A630B-RS-R10 | 1U Flex ATX 300W Power Supply, 90~264 VAC, ErP, CCL, RoHS |