


IOVU-751R

7" TFT WVGA LCD with resistive touchscreen




Features

- 7" TFT WVGA LCD with resistive touchscreen
- Alchemy™ AU1250 500 MHz CPU
- Powered by Windows® CE 5.0
- Built-in Ethernet LAN
- Built-in RS-232/422/485 Port
- Supports Power over Ethernet (PoE)
- Multimedia support for MPEG 1/2/4 and WMV9

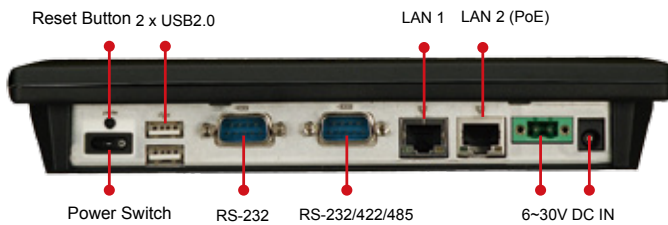

IOVU-751R Dimensions (Unit: mm)

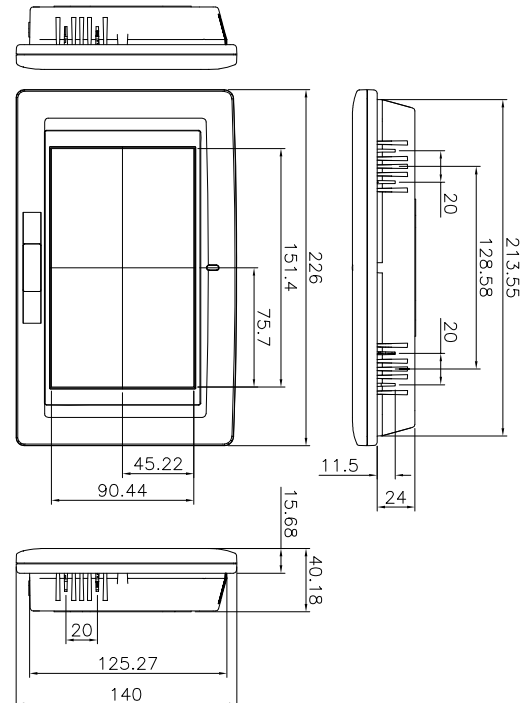

Ordering Information

Part No.	Description
IOVU-751R-CE5/-R10	7", WVGA fan-less touch panel PC with RMI Alchemy AU1250 CPU, 256MB DDR2 SDRAM, LAN supports PoE function and built-in Windows® CE5.0 Operating System

Packing List

1 x IOVU-751R
1 x Utility CD includes application tools, SDK, and technical document
1 x Null modem cable
1 x Touch pen
1 x Screw kit

Options

Part No.	Description
AFLPK-12	Panel mount kit
AFLWK-12	VESA 75 wall mount kit
ARM-11-RS	LCD Monitor/PPC Arm kit loading capacity from 3kg~7kg
STAND-B08	LCD MONITOR/PPC STAND, FOR AFL and ACT SERIES, VESA 75, SUPPORT UP TO 5 KG, ROHS
VSTAND-A07	LCD Monitor/PPC Stand V type for VESA 75, 0~90 degree adjustable hinge and support up to 2.5 kg
63040-010060-130-RS	Adapter Power; FSP; FSP060-DIBAN2; 9NA0605309; Vin: 90~264VAC; 60W; Dim: 62.0*110*31.5mm; Plug=9.5mm; Cable=1500mm; Erp(NO LOAD 0.21W); Vout: 12VDC; Φ2.5/Φ5.5; CCL; RoHS
63040-010060-140-RS	Adapter Power; FSP; FSP060-DIBAN2; 9NA0605310; Vin: 90~264VAC; 60W; Dim: 62.0*110*31.5mm; Cable=1200mm; Erp(NO LOAD 0.21W); Vout: 12VDC; Bare Wire; CCL; RoHS