www.ieiworld.com

PAC-400G 5-slot Half-size Compact Chassis Power LED Reset Button 2 x USB Ports I PT Opening 7G000-ST1110L-RS СОМ SATA removable drive Opening g ar -3.5" SATA removable drive bay compatible FDD and HDD are not included in package

Features

- RoHS compliant design
- Two USB ports on the front panel
- One 8 cm hot swappable fan
- One 3.5" internal HDD bay
- One 3.5" drive bay, for optional removable drive
- Supports Pentium® 4 half-size CPU card


Specifications

♦ Construction	Heavy duty metal			
♦ SBC Form Factor	Half-size, slot SBC			
♦ Drive Bays	1 x 3.5" HDD			
♦ Cooling Fans	1 x 8 cm			
♦ I/O Ports	2 x USB			
♦ I/O Openings	1 x LPT, 1 x COM			
♦ Expansion Slots	5 slots			
♦ Indicators	Power, HDD			
♦ Buttons	Power switch, reset			
Operating Temperature	0°C ~ 50°C			
 Operation Humidity 	10% ~ 90%			
♦ Color	W: White			
♦ Weight (Net/Gross)	3.8 kg/5.6 kg			
Dimensions (DxWxH)	269 mm x 140 mm x 230.5mm			

Ordering Information

Part No.	Description
PAC-400GW-R11/916AP	5-slot half-size chassis, white, with ACE-916AP-RS, RoHS
PAC-400GW-R11/A618A	5-slot half-size compact chassis, white, 1 x 8 cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS
7G000-ST1110L-RS	3.5" SATA removable drive bay with keylock, white, RoHS



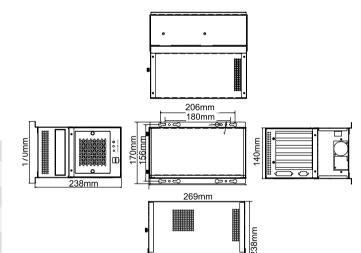

Backplane Options

Model No.	SBC Type	PCI ISA	PCle			PSU Connector	
Model No. 3BC Type	SBC Type		134	x1	x4	x16	F30 Connector
BP-4S-RS	ISA	0	4	0	0	0	AT
IP-4S-RS	PCISA	3	0	0	0	0	AT
IP-4S2-RS	PCISA	2	1	0	0	0	AT
IP-4S3-RS	PCISA	0	3	0	0	0	AT
IP-4S4-RS	PCISA	0	3	0	0	0	AT
IP-4SA-RS	PCISA	3	0	0	0	0	ATX
IP-4S2A-RS	PCISA	3	0	0	0	0	ATX
HPE-4S1	PCI/PICOe	3	0	0	0	0	ATX
HPE-4S2	PCI/PICOe	2	0	0	1	0	ATX

.

Power Supply Options

Туре	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-A618A-RS-R11	180W

PAC-400G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.