
# PAC-53GH

#### 3-slot Half-size Compact Chassis

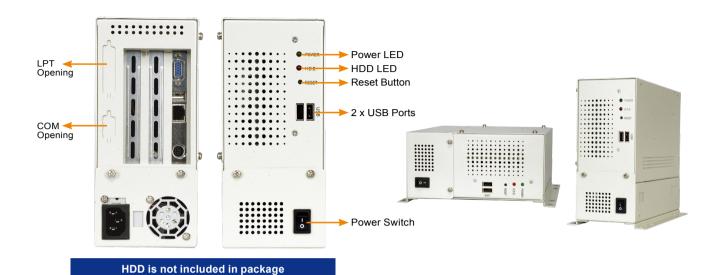

• RoHS compliant design


**Features** 

- Two USB ports on the front panel
- One 2.5" internal HDD bay

# **Specifications**

♦ Construction	Heavy duty metal
♦ SBC Form Factor	Half-size, slot CPU cards
♦ Drive Bays	1 x 2.5" HDD
♦ I/O Ports	2 x USB
♦ I/O Openings	1 x LPT, 1 x COM
♦ Expansion Slots	3 slots
♦ Indicators	Power, HDD
♦ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
♦ Color	W: White
♦ Weight (Net/Gross)	2 kg/3.8 kg
♦ Dimensions (DxWxH)	218 mm x 95 mm x 200 mm

#### Dimensions (Unit: mm)

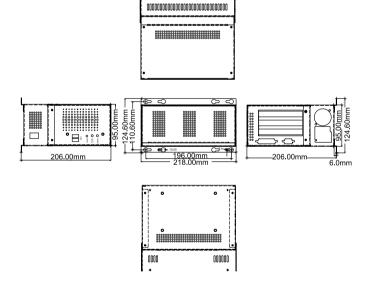

# **Backplane Options**

	Model No.	SPC Tuno	PCI	ISA	PCle			PSU Connector
ı	Model No.	SBC Type	FCI	ISA	x1	x4	x16	PSU Connector
ſ	BP-3S-RS	ISA	0	3	0	0	0	AT
ſ	IP-3S-RS	PCISA	2	0	0	0	0	AT
I	IP-3SA-RS	PCISA	2	0	0	0	0	ATX

### **Ordering Information**

Part No.	Description		
PAC-53GHW-R11/916AP/IP-3S	3-slot half-size chassis, with ACE-916AP-RS and IP-3S-RS-R40, RoHS		
PAC-53GHW-R11/916AP/BP-3S	3-slot half-size chassis, with ACE-916AP-RS and BP-3S-RS-R40, RoHS		
PAC-53GHW-R11/A618A	3-slot half-size compact chassis, white, with ACE-A618A-RS-R11 (180W ATX model), RoHS		

## **Power Supply Options**

Туре	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-A618A-RS-R11	180W
AIX	ACE-4520C-RS	200W

PAC-53GH supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.