

Full-size PICMG 1.3 CPU Card supports LGA1155 Intel® Xeon® E3 and Intel® Core™ i3/Pentium®/Celeron® CPU per Intel® C216, DDR3, VGA/DVI-D, Dual Intel® PCIe GbE, SATA 6Gb/s, mini PCIe, Audio and RoHS

SPCIE-C2160

Quick Installation Guide

Version 1.03

Jun. 25, 2013

Package Contents

SPCIE-C2160 package includes the following items:

- 1 x SPCIE-C2160 Single Board Computer
- 1 x Dual RS-232 Cable (P/N:19800-000051-RS)
- 4 x SATA Cable (P/N:32000-0628000-RS)
- 1 x USB Cable (P/N: CB-USB02-RS)
- 1 x DVI and USB Kit (P/N:IO-KIT-001-R20)(DVI SKU only)
- 1 x Mini Jumper Pack
- 1 x Utility CD
- 1 x QIG (Quick Installation Guide)



©2006 Copyright by IEI Technology corp.
All rights reserved.

Specifications

- LGA1155 socket supports Intel® Xeon® E3/ Intel® Core™ i3/Pentium®/Celeron® processor
- System Chipset: Intel® C216
- BIOS: UEFI BIOS
- System Memory: Two 240-pin 1333/1600 MHz Dual-Channel DDR3 SDRAM ECC and non-ECC Unbuffered DIMM supported (system max.16GB)
- Graphic: VGA Integrated in Intel® C216
- Display Output:
 - 1 x VGA
 - 1 x DVI-D (DVI SKU only)
 - (2 x 13-pin pin header via IO-KIT-001-R20 DVI-D/USB Module)
- Ethernet:
 - Intel® 82574L PCIe controller
 - Intel® 82579 PHY with Intel® AMT 8.0 supported
- Super I/O: Fintek F81866
- I/O Interface:
 - 4 x RS-232
 - 1 x RS-422/485
 - 10 x USB 2.0 (2 by Rear IO, 8 by pin header)
 - 4 x SATA 3Gb/s
 - 2 x SATA 6Gb/s
 - Raid 0/1/5/10 supported
 - 1 x LPT
 - 1 x 6-pin wafer for KB/MS
- Digital I/O: 8-bit Digital I/O (4-bit input, 4-bit output)
- Infrared Interface: 1 x 5-pin infrared connector
- Audio: Supports by IEI AC-KIT-888HD Audio Kit
- Front Audio:2 x 5-pin pin header
- TPM: 2 x 10-pin pin header
- SMBus: 1 x 4-pin wafer
- I2C: 1 x 4-pin wafer
- Infrared Interface: 1 x 5-pin pin header
- Expansion:
 - PCIe signal and PCI signal via golden finger
 - 1 x mini PCIe slot

- Watchdog Timer: software Programmable support 1~255 sec. System reset
- FAN connector: 1 x 4-pin Smart FAN Connector
- Power Supply: 5V/12V, AT/ATX support
Power Consumption: 3.3V@1.69A, 5V@3.45A, 12V@0.32A, Vcore@5.24A, 5VSb@0.17 (Intel® Core™ i7-2600 3.40GHz CPU with 1333MHz DDR3 2GB x 2 memory)
- Operation Temperature: -10 ~ 60°C (14°F ~ 140°F)
- Operation Humidity: 5% ~ 95%, non-condensing
- Dimensions: 338mm X 126mm
- Weight: 1.2Kg

Ordering Information

SPCIE-C2160-R10: Full-size PICMG 1.3 CPU Card supports LGA1155 Intel® Xeon® E3 and Intel® Core™ i3/Pentium®/Celeron® CPU per Intel® C216, DDR3, VGA, Dual Intel® PCIe GbE, SATA 6Gb/s, mini PCIe, Audio and RoHS

SPCIE-C2160-DVI-R10: Full-size PICMG 1.3 CPU Card supports LGA1155 Intel® Xeon® E3 and Intel® Core™ i3/Pentium®/Celeron® CPU per Intel® C216, DDR3, VGA/DVI-D, Dual Intel® PCIe GbE, SATA 6Gb/s, mini PCIe, Audio and RoHS

32200-074800-RS: RS-422/485 cable, 200mm

19800-000075-RS: KB/MS cable with Bracket

SAIDE-KIT01-R10: SATA to IDE/CF Converter board

IO-KIT-001-R20: DVI and four USB 1.1/2.0 translation daughter board

32102-000100-200-RS: SATA Power Cable

32200-015100-RS: LPT Cable

AC-KIT-892HD-R10: 7.1 channel HD Audio kit with Realtek ALC892 support dual audio streams

CF-1156A-RS-R11: High-performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W

CF-1156B-RS: High-performance LGA1155/LGA1156 cooler kit, 95W

CF-1156C-RS: LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W

CF-1156D-RS: LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W

Jumpers setting and Connectors

Table of Jumpers

LABEL	FUNCTION
J_CMOS1	CMOS state setting
WOL_SEL1	WOL Enable setting
JATX_AT1	Power Mode Setting

Table of Connectors

LABEL	FUNCTION
VGA1	VGA 15-pin Female Connector
USB_C1	USB Port Connector
USB_C2	
LAN1、LAN2	RJ45 LAN Connector
KB_MS1	Internal PS/2 KEYBOARD/MOUSE Connector
COM1 COM2	Internal Serial Port DB-9 Connectors
USB1 USB2 USB3 USB4 USB5 USB6	Internal USB Connectors
J_AUDIO1	Extend Audio Module Connector
SATA1 SATA2 SATA3 SATA4 SATA5 SATA6	Serial ATA Connectors
IR1	IrDA Infrared Interface Connector
LPT1	Internal LPT Connector
DVI1	DVI-D connector (DVI SKU only)
CPU_FAN1	Fan Connector
DIO1	Digital I/O Connector
F_PANEL1	PWR & RST Buttons and Indicators
CPU12V1	ATX-12V CPU Power Source
MINI-PCIE1	PCI-E Mini Card
I2C_1	I2C Connector
SMBUS_1	SMBUS Connector
TPM1	TPM Connector(80 port CONN)
COM 4	RS422/485 Serial Port

J_CMOS1 : Clear CMOS setting Jumper	
J_CMOS1	DESCRIPTION
1-2 (Default)	Normal
2-3	Clear CMOS Data

JATX_AT1 : Power Mode Setting by ATX or AT	
JATX_AT1	DESCRIPTION
1-2 (ON)	ATX Power Mode
1-2 (OFF)	AT Power Mode

VGA1 : 15-pin Female Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	RED	2	GREEN
3	BLUE	4	NC
5	GND	6	GND
7	GND	8	GND
9	VCC	10	GND
11	NC	12	DDCCDAT
13	HSYNC	14	VSYNC
15	DDCCLK		

USB_C01,USB_C02	
PIN NO.	DESCRIPTION
1	VCC
2	DATA-
3	DATA+
4	GROUND

LAN1、LAN2: RJ45 LAN Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	MDIA3-	5	MDIA1+
2	MDIA3+	6	MDIA2+-
3.	MDIA2-	7	MDIA0-
4.	MDIA1-	8	MDIA0+

MS/KB1: Internal 6-pin Keyboard Connector	
PIN	DESCRIPTION
1	VCC(+5V)
2	Mouse Data
3	Mouse Clock
4	Keyboard Data
5	Keyboard Clock
6	Ground

COM1,COM2, COM3,COM4 : Internal Serial Port Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	DCD#	2	DSR#
3	RXD	4	RTS#
5	TXD	6	CTS#
7	DTR#	8	RI#
9	GND	10	NC

USB1-USB6: Internal USB Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	VCC	2	GND
3	DATA-	4	DATA+
5	DATA+	6	DATA-
7	GND	8	VCC

J_AUDIO1 : External Audio Module Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	ACZ_SYNC	2	ACZ_BITCLK
3	ACZ_SDOOUT	4	ACZ_PCBEEP
5	ACZ_SDIN	6	ACZ_RST#
7	ACZ_VCC(+5V)	8	ACZ_GND
9	ACZ_12V	10	ACZ_GND

SATA1-SATA6 : Serial ATA Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	GND	5	RX-
2	TX+	6	RX+
3	TX-	7	GND
4	GND		

SATA1-SATA6 : Serial ATA Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	GND	5	RX-
2	TX+	6	RX+
3	TX-	7	GND
4	GND		

IR1: IrDA connector	
PIN NO.	DESCRIPTION
1	VCC
2	NC
3	IR-RX
4	GND
5	IR-TX

LPT1 : Parallel Port Connector			
PIN	DESCRIPTION	PIN	DESCRIPTION
1	STROBE#	14	AUTO FORM FEED #
2	DATA0	15	ERROR#
3	DATA1	16	INITIALIZE#
4	DATA2	17	PRINTER SELECT LN#
5	DATA3	18	GND
6	DATA4	19	GND
7	DATA5	20	GND
8	DATA6	21	GND
9	DATA7	22	GND
10	ACKNOWLEDGE#	23	GND
11	BUSY	24	GND
12	PAPER EMPTY	25	GND
13	PRINTER SELECT		

CPU12V1: ATX-12V CPU Power Input connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	2	GND
3	+12V	4	+12V

DVI Connector (DVI SKU only)			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	Data 2-	14	VCC
2	Data 2+	15	GND
3	GND	16	Hot Plug Detect.
4	N/C	17	Data 0-
5	N/C	18	Data 0+
6	DDC Clock	19	GND
7	DDC Data	20	N/C
8	N/C	21	N/C
9	Data 1-	22	GND
10	Data 1+	23	Clock +
11	GND	24	Clock -
12	N/C	25	GND
13	N/C		

F_PANEL1 : External Switches and Indicators panel

	PIN	DESCRIPTION	PIN	DESCRIPTION	
Power LED	1	+5V	2	+5V	Speaker
	3	N/C	4	N/C	
	5	GROUND	6	N/C	
PWRBTN	7	PWRBTN+	8	Speaker	RESET
	9	PWRBTN-	10	N/C	
HDDLED	11	+5V	12	Reset-	RESET
	13	HDLED-	14	GND	

DIO1 : Digital Input / Output Connector

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	Ground	2	VCC
3	Output 3	4	Output 2
5	Output 1	6	Output 0
7	Input 3	8	Input 2
9	Input 1	10	Input 0

CPU_FAN1 : CPU Fan Connector

PIN NO.	DESCRIPTION
1	Ground
2	+12V
3	Rotation Signal
4	Control

MINI-PCIE1 : PCI-E Mini Card Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	PCIE_WAKE#	2	VCC3
3	N/C	4	GND
5	N/C	6	1.5V
7	CLKREQ#	8	LFRAME#
9	GND	10	LAD3
11	CLK-	12	LAD2
13	CLK+	14	LAD1
15	GND	16	LAD0
17	PCIRST#	18	GND
19	LPC	20	VCC3
21	GND	22	PCIRST#
23	PERN2	24	3VDual
25	PERP2	26	GND
27	GND	28	1.5V
29	GND	30	SMBCLK
31	PETN2	32	SMBDATA
33	PETP2	34	GND
35	GND	36	USB-
37	N/C	38	USB+
39	N/C	40	GND
41	N/C	42	N/C
43	N/C	44	RF_LINK#
45	N/C	46	BLUELED#
47	N/C	48	1.5V
49	N/C	50	GND
51	N/C	52	VCC3

I2C_1	
PIN NO.	DESCRIPTION
1	GND
2	PCH_GP38_PU
3	PCH_GP39_PU
4	+V5S


SMBUS Connector	
PIN NO.	DESCRIPTION
1	GND
2	SMB_DATA
3	SMB_CLK
4	+V5S

TPM1 Connector			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	CLK	2	GND
3	FRAME#	4	NC
5	RERST#	6	+5V
7	AD3	8	AD2
9	+3V	10	AD1
11	AD0	12	GND
13	SMB_CLK	14	SMB_DATA
15	SB3V	16	SERIRQ
17	GND	18	CLKRUN#
19	PM_SUS_STAT#	20	DRQ#

COM5 : Internal Serial Port Connector (RS422/485)	
PIN NO.	DESCRIPTION
1	RXD485#
2	RXD485+
3	TXD485+
4	TXD485#


RS422/485

RS422 Pin define

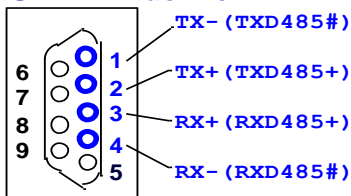

D-SUB 9PIN MALE

RS485 Pin define

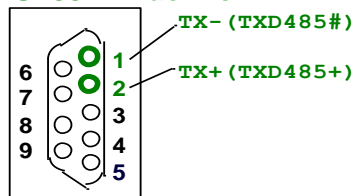

D-SUB 9PIN MALE

Board Layout: Jumper and Connector Locations

