


# IOVU-430S

4.3" TFT WQVGA LCD with resistive touchscreen




## Features

- 4.3" TFT WQVGA LCD with resistive touchscreen
- Samsung S3C2416 400MHz CPU
- Powered by Windows® CE 6.0
- Built-in Ethernet LAN and optional Wi-Fi
- Built-in CAN-bus 2.0b and GPIO
- Built-in RS-232/422/485 Port
- Support .Net Frame Work V3.5

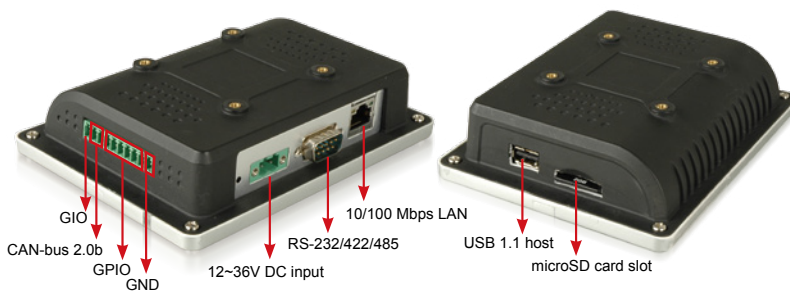

## Dimensions (Unit: mm)

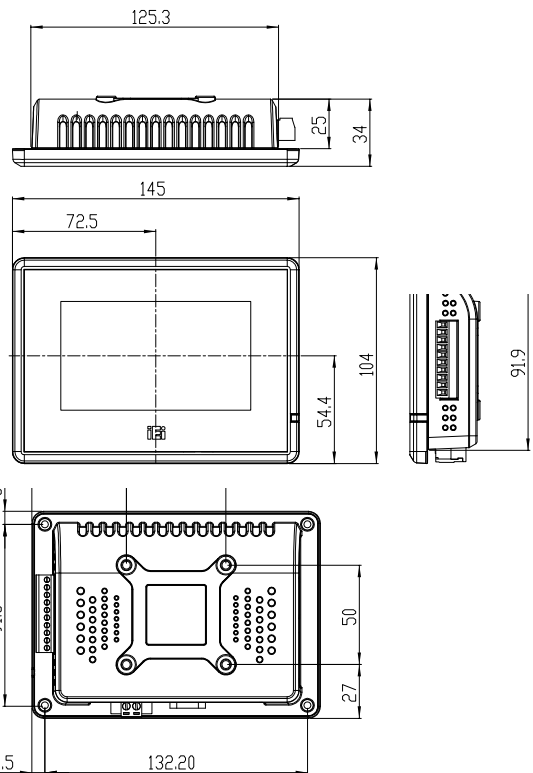

## Ordering Information

Part No.	Description
IOVU-430S-CE6/ST-R11	RISC Panel PC, 4.3" LCD, ARM S3C2416X40-Y640 400MHz CPU, 128MB SDRAM, Win CE6.0, RoHS
IOVU-430S-CE6/ST/WL-R11	RISC Panel PC, 4.3" LCD, ARM S3C2416X40-Y640 400MHz CPU, 128MB SDRAM with 802.11a/b/g/n Wi-Fi function, Win CE6.0, RoHS

## Packing List

- 1 x IOVU-430S
- 1 x Null modem cable
- 1 x Screw kits
- 1 x Utility CD includes SDK, utilities, and technical document
- 1 x Touch pen (only for single touch mode)

## Options

Part No.	Description
63040-010060-140-RS	Adapter Power;FSP;FSP060-DIBAN2;9NA0605310;;Vin:90~264VAC;60W;Dim:62.0*110*31.5mm;;Cable=1200mm;Erp(NO LOAD 0.21W);Vout:12VDC;Bare Wire;CCL;RoHS
IOVU-430M-IWC/B-R10	In-wall cage (Black)
IOVU-430M-IWC/W-R10	In-wall cage (White)