

# IOVU-752S

7" TFT WVGA LCD with resistive touchscreen





## Features

- 7" TFT WVGA LCD with resistive touchscreen
- Samsung S3C6410 ARM11 677MHz CPU
- Powered by Windows® CE 6.0
- Built-in Ethernet LAN
- Built-in RS-232/422/485 Port
- Supports Power over Ethernet (PoE)
- Multimedia support for MPEG-4/H.263/H.264
- Support .Net Frame Work V3.5



## IOVU-752S Dimensions (Unit: mm)

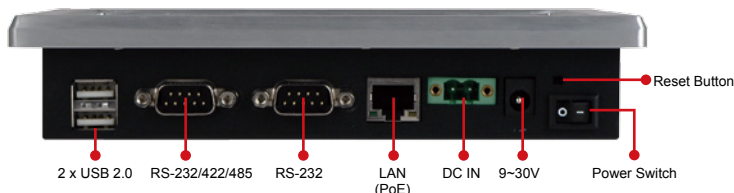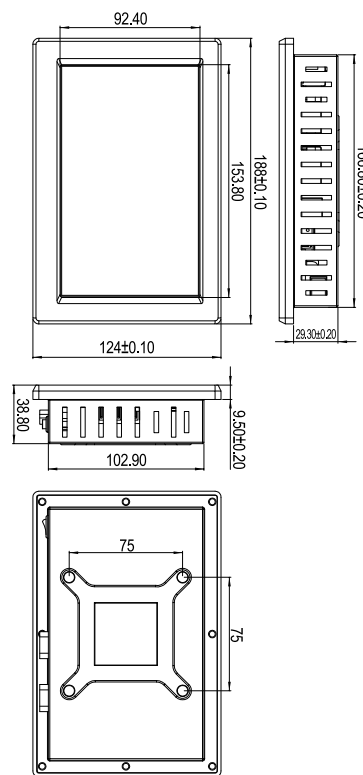

## Ordering Information

Part No.	Description
IOVU-752S-CE6/-R10	7" LCD, SAMSUNG S3C6410X66-YB40 667MHz with PoE function, WIN CE6.0, RoHS

## Packing List

1 x Utility CD includes application tools, SDK, and technical document
1 x Null modem cable
1 x Touch pen
1 x Screw kit

## Options

Part No.	Description
AFLPK-12	Panel mounting kit
AFLWK-12	VESA 75 wall mounting kit
ARM-11-RS	LCD monitor/PPC arm kit, loading capacity from 3kg~7kg
STAND-B08	LCD MONITOR/PPC STAND, FOR AFL and ACT SERIES, VESA 75, SUPPORT UP TO 5 KG, ROHS
VSTAND-A07	LCD monitor/PPC Stand V type for VESA 75, 0~90 degree adjustable hinge and support up to 2.5 Kg
63040-010060-130-RS	Adapter Power; FSP; FSP060-DIBAN2; 9NA0605309;; Vin: 90~264VAC; 60W; Dim: 62.0*110*31.5mm; Plug=9.5mm; Cable=1500mm; Erp( NO LOAD 0.21W); Vout: 12VDC; Φ2.5/Φ5.5; CCL; RoHS
63040-010060-140-RS	Adapter Power; FSP; FSP060-DIBAN2; 9NA0605310;; Vin: 90~264VAC; 60W; Dim: 62.0*110*31.5mm;; Cable=1200mm; Erp(NO LOAD 0.21W); Vout: 12VDC; Bare Wire; CCL; RoHS