



# WAFER-BT



3.5" SBC with Intel® 22nm Atom™/Celeron® on-board SoC, VGA/LVDS/iDP, Dual PCIe GbE, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA 3Gb/s, mSATA, COM, Audio and RoHS

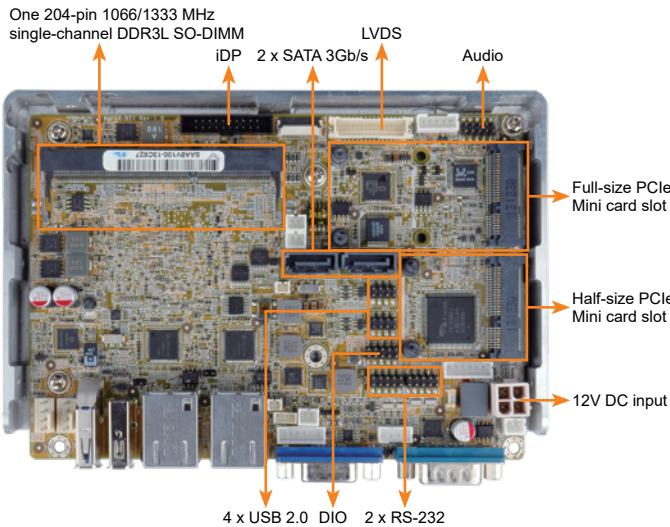

Intel® Atom™ Bay Trail SoC processor on solder side



1 x Full-size PCIe Mini slot for Wi-Fi expansion  
2 x SATA connector for storage

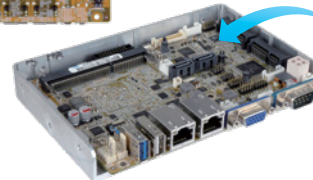


Dual independent display (max. support 1920x1200@60Hz)



## Specifications

- ◆ SoC
  - Intel® Celeron® J1900 on-board SoC (2GHz, quad-core, 2MB cache, TDP=10W)
  - Intel® Celeron® N2930 on-board SoC (1.83GHz, quad-core, 2MB cache, TDP=7.5W)
  - Intel® Celeron® N2807 on-board SoC (1.58GHz, dual-core, 2MB cache, TDP=4.3W)
- ◆ BIOS
  - AMI UEFI BIOS
- ◆ Memory
  - One 204-pin 1066/1333 MHz single-channel DDR3L SO-DIMM slot supports up to 8 GB (J1900, N2930) or 4 GB (N2807)
- ◆ Graphics Engine
  - Intel® HD Graphics Gen 7 Engine with 4 execution units, supports DX11.1, OpenGL 4.2 and OpenCL 1.2
- ◆ Display Output
  - Dual independent display
  - 1 x VGA (up to 2560x1600@60Hz)
  - 1 x 24-bit dual-channel LVDS connector (up to 1920x1200@60Hz)
  - 1 x iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 2560x1600@60Hz)
- ◆ Ethernet
  - LAN1: Intel® I210-AT PCIe controller with NCSI support
  - LAN2: Intel® I211-AT PCIe controller
- ◆ External I/O Interface
  - 1 x RS-232
  - 1 x USB 2.0
  - 1 x USB 3.2 Gen 1 (5Gb/s)
- ◆ Internal I/O Interface
  - 1 x KB/MS (1x6 pin)
  - 1 x RS-422/485 (1x4 pin, P=2.0)
  - 2 x RS-232 (2x5 pin, P=2.0)
  - 2 x SATA 3Gb/s with 5V SATA power connector
  - 4 x USB 2.0 (2x4 pin, P=2.0)
- ◆ SMBus
  - 1 x SMBus (1x4 pin)
- ◆ Audio
  - Realtek ALC888S HD Audio codec
  - 1 x Front audio (2x5 pin)
- ◆ Front Panel
  - 1 x Power LED & HDD LED (1x6 pin)
  - 1 x Power button (1x2 pin)
  - 1 x Reset button (1x2 pin)
- ◆ LAN LED
  - 2 x LAN LED (1x2 pin)
- ◆ Expansion
  - 1 x Full-size PCIe Mini card slot (supports mSATA, colay with SATA port 2)
  - 1 x Half-size PCIe Mini card slot (except for ECO sku)
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ Fan Connector
  - 1 x CPU smart fan (1x4 pin)
  - 1 x System smart fan (1x4 pin)
- ◆ Power Supply
  - 12V only DC input
  - 1 x Internal power connector (2x2 pin)
  - Support AT/ATX mode
- ◆ Watchdog Timer: Software programmable, supports 1~255 sec. system reset
- ◆ Power Consumption
  - 12V@1.45A (Intel® Celeron® J1900 with one 8 GB 1333 MHz DDR3 memory)
- ◆ Operating Temperature: -20°C ~ 60°C
- ◆ Storage Temperature: -30°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 146mm x 102mm
- ◆ Weight: GW: 600g / NW: 250g
- ◆ CE/FCC compliant

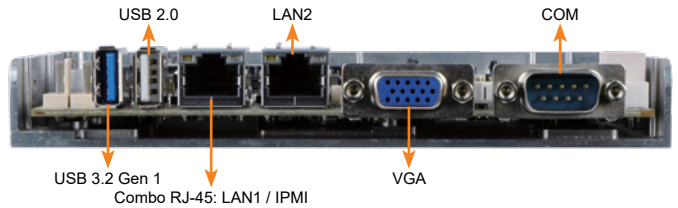

## Features

- 3.5" SBC supports Intel® 22nm Atom™ on-board SoC
- Dual independent display support
- 1333/1066 MHz 1.35V DDR3L SDRAM up to 8 GB
- COM, USB 3.2 Gen 1 (5Gb/s), SATA 3Gb/s, PCIe Mini, mSATA and Audio support

## Packing List

1 x WAFER-BT-i1 single board computer	
1 x Audio cable	1 x SATA with power cable kit
1 x Power cable	1 x QIG

## Ordering Information

Part No.	Description
WAFER-BT-J19001-R20	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ J1900 2.0GHz (10W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA, mSATA, COM, Audio and RoHS
WAFER-BT-N28071-R20	3.5" SBC supports Intel® 22nm Dual-Core Celeron™ N2807 1.58GHz (4.5W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA, mSATA, COM, Audio and RoHS
WAFER-BT-N29301-R20	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ N2920 1.86GHz (7.5W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA, mSATA, COM, Audio and RoHS
WAFER-BT-J19001-ECO-R20	3.5" SBC supports Intel® 22nm Quad-Core Celeron™ J1900 2.0GHz (10W) on-board SoC with VGA/LVDS/iDP, Dual PCIe GbE, USB 3.2 Gen 1 (5Gb/s), PCIe Mini, SATA, mSATA, COM, Audio, ECO packing and RoHS (10 pcs/pack)
19800-000300-100-RS	RS-232 cable, 300mm, P=2.0
32001-008600-200-RS	Dual-port USB cable, 210mm, P=2.0
32006-001100-201-RS	PS/2 KB/MS cable, 135mm/110mm, P=2.0
32205-003800-300-RS	RS-422/485 cable, 200mm, P=2.0