

# IDS-310AI

- Ultra Compact Size
- Fanless Digital Signage System
- Intel Vision Accelerator Design for AI Deep Learning

**New**



## Features

- Intel® Celeron® J3455 1.5GHz (up to 2.3 GHz)
- Two GbE LAN ports
- Triple USB 3.2 Gen1
- M.2 A-key slot for expansion
- Pre-installed a Mustang-MPCIE-MX2 that has two Intel Myriad X VPU for AI deep learning workload consolidation



## Application

The IDS-310AI is pre-installed with a Mustang-MPCIE-MX2 AI accelerator card, which includes two Intel® Movidius™ Myriad™ X VPU, to provide a flexible AI inference solution.

VPU is short for vision processing unit. It can run AI faster, and is well suited for low power consumption applications such as surveillance, retail and transportation. With the advantage of power efficiency and high performance to dedicate Deep Neural Networks (DNN) topologies, it is perfect to be implemented in AI edge computing device to reduce total power usage, providing longer duty time for the rechargeable edge computing equipment.



Surveillance



Retail



Transportation

## Key Features of Intel® Movidius™ Myriad™ X VPU

- Native FP16 support
- Rapidly port and deploy neural networks in Caffe and Tensorflow formats
- End-to-End acceleration for many common deep neural networks
- Industry-leading Inferences/S/Watt performance

## Ultra-compact Size

Space limitation is one of the constraints commonly seen in today's industrial environment. Under tight restrictions, the IDS-310AI not only provides palm-sized design to meet the space requirement, but also comes with adequate basic I/O interfaces for various applications.

10X Higher Performance  
1 Trillion operations per second

1 TOPS  
1 Trillion operations per second of dedicated neural networks compute

Movidius MA2485 Myriad X

ULTRA Low power



## Specifications

Model Name	IDS-310AI		
AI Accelerator Card	Model Name	Mustang-MPCIE-MX2	
	Main Chip	2 x Intel® Movidius™ Myriad™ X MA2485 VPU	
	Supported Topology	AlexNet, GoogleNetV1/V2, Mobile_SSD, MobileNetV1/V2, MTCNN, Squeezenet1.0/1.1, Tiny Yolo V1 & V2, Yolo V2, ResNet-18/50/101	
Chassis	Color	Brown & Silver	
	Dimensions (WxDxH)(mm)	137 x 102.8 x 49.2	
	System Fan	Fanless	
	Chassis Construction	Extruded aluminum alloy	
Motherboard	CPU	Intel® Celeron® J3455 (up to 2.3GHz, quad-core, TDP 10W)	
	Chipset	SoC	
	System Memory	1 x 204-pin DDR3L SO-DIMM slot, pre-installed with 8 GB memory	
Storage	SATADOM	Pre-installed 128GB	
	Micro SD	1 x Micro SD Slot	
I/O Interfaces	USB 3.2 Gen 1 (5Gb/s)	3	
	Ethernet	2 x RJ-45 PCIe GbE by RTL8111 controller	
	COM Port	1 x RS-232/422/485 with AFC	
	Display	3 x HDMI 1.4b (3840x2160@30Hz) <sup>1,2</sup>	
	Audio	1 x Line-out, 1 x Mic-in	
	Wireless	1 x 802.11a/b/g/n/ac (optional)	
	TPM	TPM2.0	
	Others	1 x Power button, 1 x Reset button, 1 x AT/ATX switch, 1 x LED for HDD (yellow), 1 x LED for power (green)	
	Expansions	M.2	1 x 2230 A key (PCIe x1/ USB 2.0)
	Power	Power Input	DC Jack: 12V DC (9 ~ 36V DC BOM optional) <sup>3</sup>
Power Consumption		12V @ 2.6A (Intel® Celeron® J3455 with 8GB memory)	
Reliability	Mounting	Wall mount	
	Operating Temperature	-20°C ~ 45°C with air flow, 10% ~ 95%, non-condensing	
	Storage Temperature	-30°C ~ 80°C with air flow, 10% ~ 90%, non-condensing	
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis, IEC68-2-27	
	Operation Vibration	MIL-STD-810G 514.6C-1	
	Weight (Net/Gross)	910 g/ 1.7 kg	
	Safety / EMC	CE/FCC	
	Watchdog Timer	Programmable 1 ~ 255 sec/min	
	OS	Supported OS	Win10/Linux

- Due to chipset limitation, audio is not supported over the HDMI3 connector.
- Fully support of triple 4K display output may vary in different system environment setting. Contact an IEI sales representative for detailed information.
- By order production, MOQ:100

## Ordering Information


Part No.	Description
IDS-310AI-AL-J1/8GB-R10	Fanless embedded system with Intel® Celeron® J3455 1.5GHz (up to 2.3GHz, quad core, TDP 10W), pre-installed 8GB DDR3L memory, triple HDMI display, 12V DC, 128G SATADOM, Mustang-MPCIE-MX2 and RoHS

## Options


Item	Part No.	Description
Wi-Fi Module	27319-000009-RS*	Wireless Lan Module; Wireless LAN & Bluetooth M.2 Module; Sparklan; R9701810011; IEEE802.11a/b/g/n/ac; 2.412GHz~2.4835GHz, 5.15GHz~5.85GHz; M.2 2230; ;3.3V; 22*30*2.15mm; QCNFA364A; QC A6174A-5; 2x2 MIMO; Dual Band; WCBN808A-Q2; CCL; CCL; RoHS
Antenna	32505-000900-100-RS*	External Antenna; WLAN; RG 178; 108MM; TANK-700-QM67-R10; PEAK GAIN 2.0DBI; Exceltek; 2.4-2.5GHz/5.15-5.85GHz; REVERSE SMA PLUG; RoHS
RF Cable	32501-004000-100-RS*	RF; RF CABLE; LINE DIAMETER:0.81mm; 250MM ;;; 50Ω; Sparklan; 0-6GHz; VSWR≤1.3; I-PEX MHF-4 Plug; REVERSE SMA JACK; NUT*1; WASHER*1; ;RoHS

\* Each Wi-Fi module needs two antennas and two RF cables to fully support Wi-Fi function.

## Fully Integrated I/O

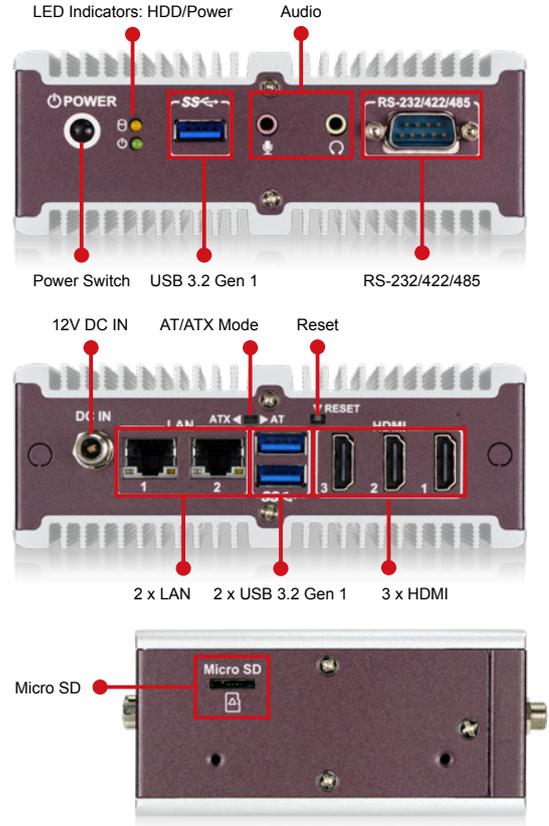

## Dimensions (Unit: mm)

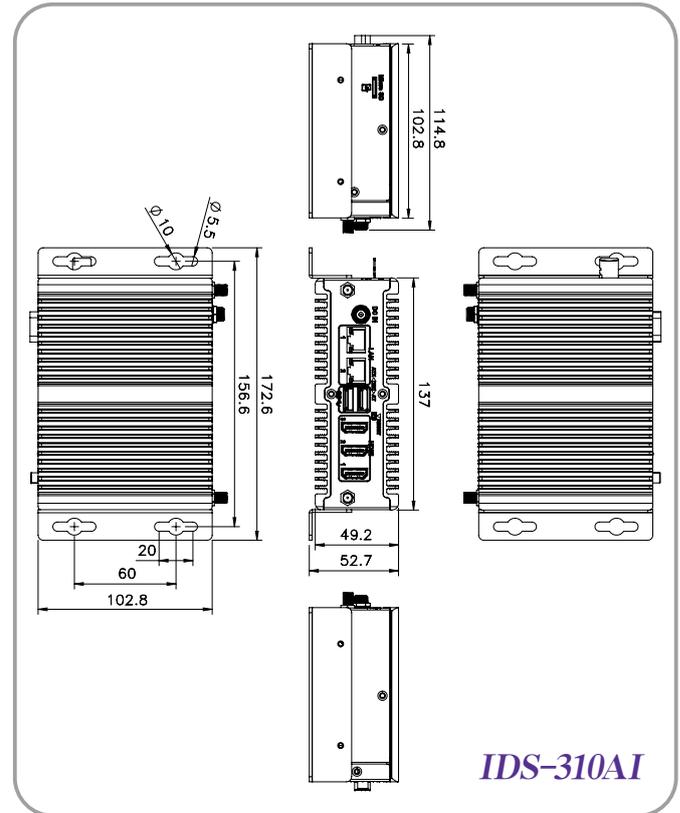

## Packing List

1 x Screw kit	1 x 36W power adapter
1 x Wall mounting bracket	1 x Power Cord