


PuIM-2P1M

Two Mini-PCle and One M.2 Expansion Card Support the Wi-Fi or LTE Module, RoHS

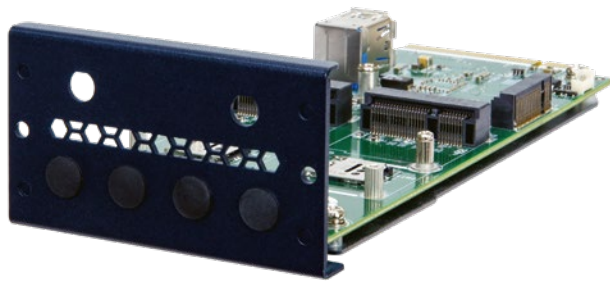

Features

- Supports 2 x PCIe mini and 1 x 2230/2242 M.2 B key
- Mini PCIe and M.2 with SIM card slots
- 2 PCIe 3.0 x4
- RoHS compliant

Specifications

Model Name	PuIM-2P1M	
Interface	IEI Networking Module - PuIM	
Onboard IC	ASM1812 (PCIe Gen2x4) FL1100EX (PCI-E To USB 3.0 (4 Port))	
M.2	1 x 2230/2242 M.2 B key (PCIe 2.0, USB 3.2 Gen1) with SIM card slot	
PCIe	2 x PCIe Mini (PCIe, USB 2.0) with SIM card slots	
Storage Temp.	-20°C ~ 75°C (-4°F ~ 167°F)	
Operating Temp.	0°C ~ 40°C (32°F ~ 104°F)	
Humidity	5% ~ 90% RH, Non-condensing	
Dimensions (mm)	165.50 (L) x 77.8 (W) x 44.2 (H)	
Compliance	RoHS	
Support Device	PUZZLE-IN001 PUZZLE-IN001A PUZZLE-IN004	PUZZLE-A001 PUZZLE-A001A


Ordering Information

Part No.	Description
PuIM-2P1M-R10	Two Mini-PCle and One M.2 Expansion Card Support the Wi-Fi or LTE Module, RoHS

Packing List

Part No.	L-shaped T10 PuIM Wrench	Torx Screws	QIG
PuIM-2P1M-R10	1	2	1

Dimensions (Unit: mm)

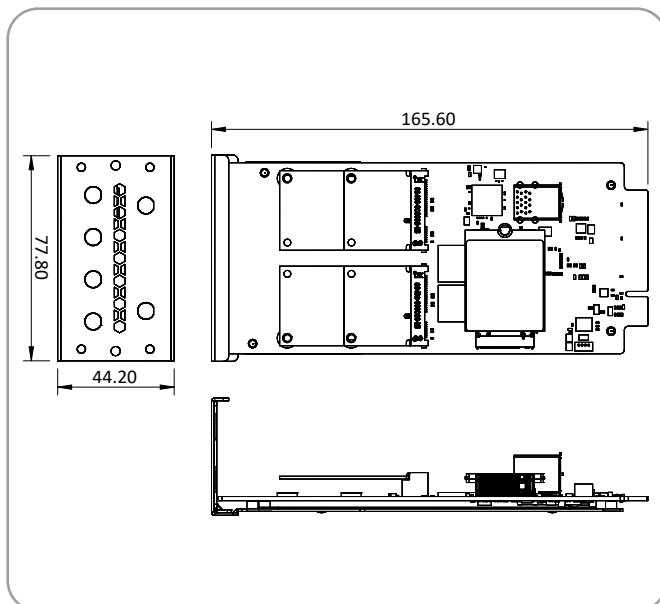

Block Diagram

