

PE4-4S

4-slot backplane with two PCIe x16 slot and one PCIe x4 slot

Features


- 4-slot PICMG 1.3 backplane supporting high-performance expansion
- Dual PCIe x16 slots for accelerator integration
- Wide operating temperature range for industrial environments



Specifications

MODEL NAME	PE4-4S
Expansion Slot	PICMG1.3 2 x PCIe x 16 (with PCIe Gen4 x8 signal) 1 x PCIe x 4 (with PCIe Gen4 x4 signal)
ATX power connector	24 + 4pin
SYS Fan Connector	2 x System fan connector (1x4 pin) 2 x System fan connector (1x3 pin)
Power on button connector	2 pin, p=2.54
Reset button connector	2 pin, p=2.54
USB	4 x USB 2.0 (p=2.54mm)
SATA	2 x SATA
SM-BUS	2 pin, p=1.25mm
Operating Temperature	-10°C~60°C
Storage Temperature	-30°C ~ 70°C
Operating Humidity	5% ~95%, non-condensing

Dimensions (Unit: mm)

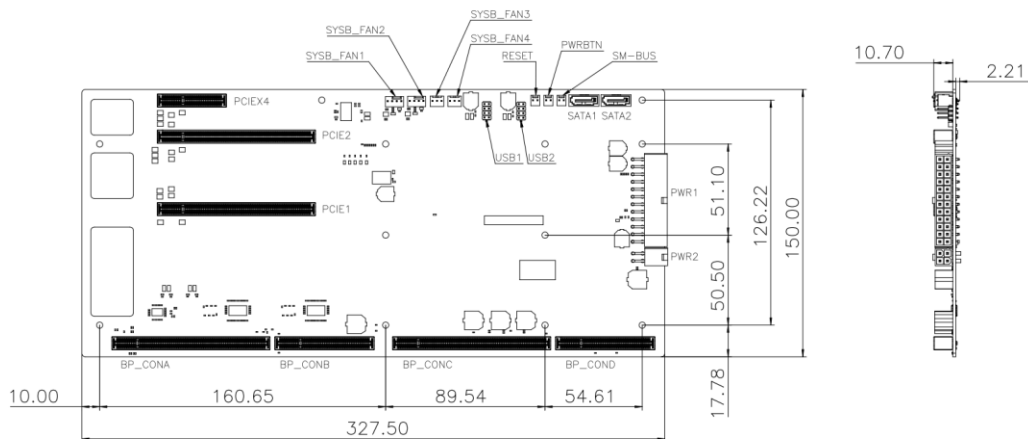

Ordering Information

PART NO.	DESCRIPTION
PE4-4S-R10	4-slot backplane with two PCIe x16 slot and one PCIe x4 slot, RoHS