


iUCOM-2D

USB Module supports two RS-232/422/485 Port, RoHs

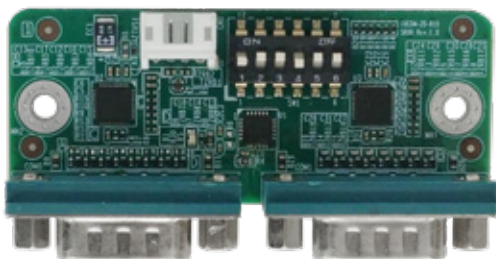

Features

- Two-port RS-232/422/485 (DB-9)
- 1024 bytes transmit/ 512 bytes receive FIFO
- High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- Baud rate supports 115.2K, max. up to 6M

Specifications

Model Name	iUCOM-2D
Form Factor	USB2.0 (1*4pin, P=2.0)
USB Bridge to Quad Serial Port	WCH CH342
Buffer/Transceiver Series	F81435
IO	2 x RS-232/422/485 (DB-9)
Operating Temperature	0°C ~ 60°C
Operating Humidity	10% ~ 95%, non-condensing
Dimensions (LxW)	65mm x 35mm

Packing List

1 x iUCOM-2D peripheral board	1 x USB Cable (P=2.0)
1 x USB Cable (P=2.54)	1 x QIG

Ordering Information

Part No.	Description
iUCOM-2D-R10	USB module supports two RS-232/422/485 port (DB9), RoHs