

# EBC-3220 Compact Embedded Chassis for IEI Single Voltage Mini-ITX SBC



## Features

- Designed for Mini-ITX SBC with single voltage input
- Space critical application
- One 2.5" hard drive capacity
- Cost-effective, RoHS compliant design

## Specifications


<b>Model Name</b>		<b>EBC-3220</b>
<b>Platform</b>		Case only
<b>Chassis</b>	<b>Color</b>	Black
	<b>Dimensions (WxDxH) (mm)</b>	190 x 180 x 55
	<b>System Fan (WxDxH) (mm)</b>	40 x 40 x 10 (optional)
<b>Motherboard</b>	<b>Motherboard Model</b>	Refer to KINO Series
	<b>SBC Size (mm)</b>	Mini-ITX (170 x 170)
<b>Storage</b>	<b>Hard Drive</b>	1 x 2.5" SATA 6Gb/s HDD/SSD Bay
<b>Button</b>		Power switch
<b>Reliability</b>	<b>Mounting</b>	Desktop, wall mount, VESA mount
	<b>Operating Temperature</b>	-10°C ~ 50°C with air flow*
	<b>Weight (Net/Gross)</b>	1 kg/2 kg

\*Ambient air speed follows IEC-68-2-2 standard

## Compatible Mini-ITX SBC

Part No.	Recommended CPU Cooler
KINO-TGL-U	TBD
gKINO-R1000	19100-000225-00-RS
KINO-DAL	Fanless
tKINO-AL	Fanless
tKINO-ULT3	19100-000224-00-RS, 34000-000645-RS
KINO-DH110	CF-115XA-R10, CF-1156C-R20, CF-1156D-R30
KINO-DH310	CF-115XA-R10, CF-1156C-R20, CF-1156D-R30
KINO-HM551	CF-989A-RS
KINO-QM57A	CF-989A-RS
KINO-QM670	CF-989A-RS
KINO-QM770	CF-989A-RS
KINO-DH610	CF-115XA-R10, CF-1156C-R20, CF-1156D-R30
KINO-DQM871-I1	19100-000203-00-RS
KINO-KBN/SE-i2	GX-424CC & GX415GA with fan
KINO-DA750-i2	CF-989A-RS
eKINO-BT	Fanless
KINO-DBT	Fanless
KINO-DH810	CF-115XA-R10, CF-1156C-R20, CF-1156D-R30
KINO-DQM170	19100-000203-00-RS (suitable for 25W CPU)
tKINO-BW	Fanless

## Dimensions (Unit: mm)

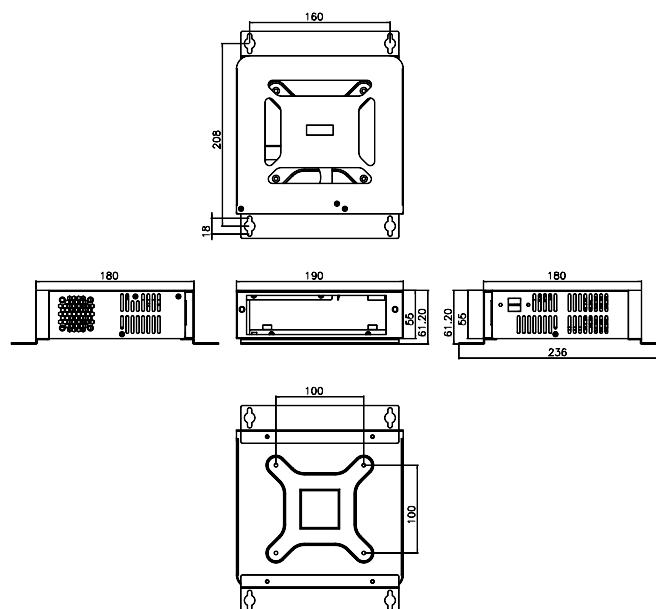

## Ordering Information

Part No.	Description
<b>EBC-3220-R11</b>	Mini-ITX embedded chassis, for DC input model only, with one 2.5" HDD bracket, w/o power adapter, black, RoHS

## Packing List

1 x QIG	1 x Wall mount bracket kit	1 x Screw set
---------	----------------------------	---------------

## Options

Part No.	Description
<b>32000-044300-RS</b>	Dual port USB cable, 210mm, w/o bracket
<b>19FR124010BL-000003-RS</b>	Fan module, L=200mm, 4cm, 3-pin, CCL, RoHS