


PAC-106G

6-slot Full-size Compact Chassis

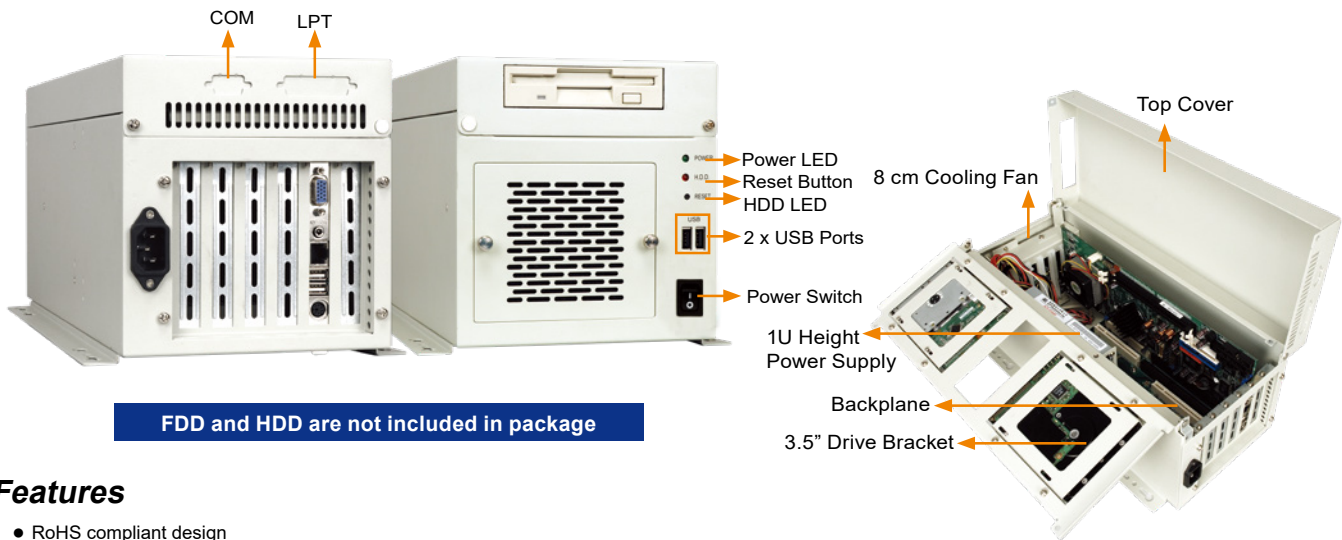

FDD and HDD are not included in package


Features

- RoHS compliant design
- Two USB ports on the front panel
- One 3.5" drive bay and one internal 3.5" HDD
- One 8 cm cooling fan

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x Front-accessible 3.5" 1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x COM, 1 x LPT
◆ Expansion Slots	6 slots
◆ Indicators	Power, HDD
◆ Button	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	5.2 kg/7.8 kg
◆ Dimensions (DxWxH)	400 mm x 166 mm x 175.5 mm

Dimensions (Unit: mm)

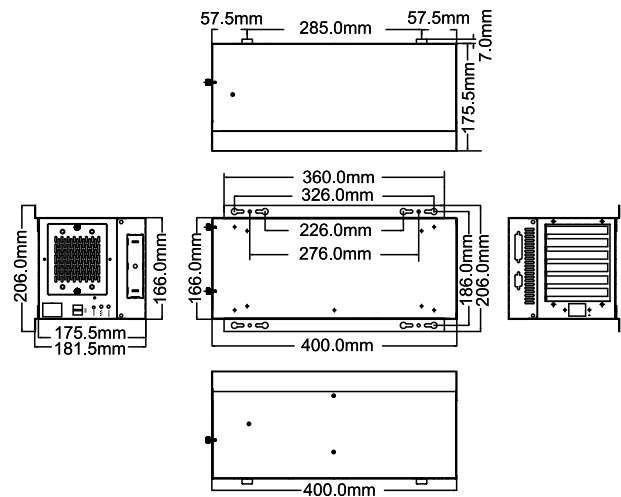

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
BP-6S-RS	ISA	0	6	0	0	0	0	AT
IP-6S-RS	PCISA	3	2	0	0	0	0	AT
IP-6SA-RS	PCISA	3	2	0	0	0	0	ATX
PCI-6S-RS	PICMG 1.0	4	2	0	0	0	0	AT/ATX
PE-6S2*	PICMG 1.3	3	0	0	1	0	1	ATX
SPE-4S	PICMG 1.3	0	0	0	1	2	0	ATX
SPE-6S	PICMG 1.3	0	0	0	5	0	0	ATX

*Only R20 or later versions support PICMG 1.3 backplane

Ordering Information

Part No.	Description
PAC-106GWPX-R30/180W	6-Slot Full size Chassis, White, Powder paint, 1x 8cm fan, with 180W ATX power supply, RoHS

Cable Options

Part No.	Description
32100-126600-RS (2.54mm→2.0mm)	This optional cable is required for motherboard with 2mm USB connector (the USB cable inside the chassis is with 2.54mm pitch). Refer to motherboard spec. for details.

Power Supply Options

Type	Model No.	Watt
ATX	63030-010180-000-RS	180W

PAC-106G supports single PS/2 PSU. For more IEI PSU models, please visit www.ieiworld.com.