PAC-106G

6-slot Full-size Compact Chassis

COM   LPT

Power LED
Reset Button
HDD LED
2 x USB Ports
Power Switch

Top Cover
8 cm Cooling Fan
1U Height Power Supply
Backplane
3.5" Drive Bracket
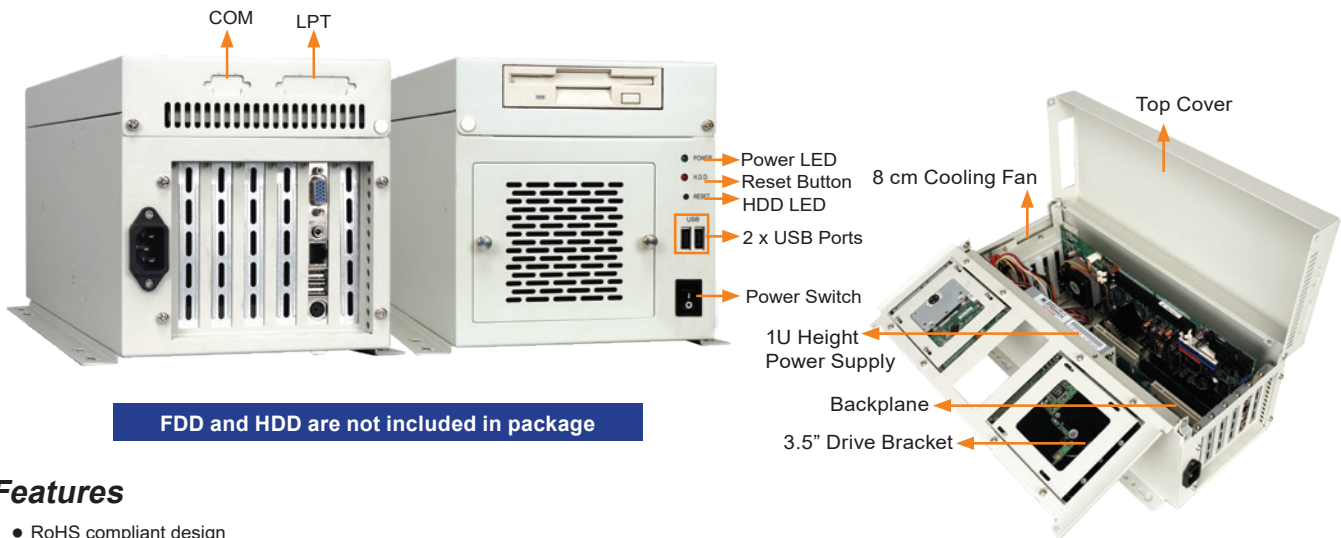
FDD and HDD are not included in package

Features

- RoHS compliant design
- Two USB ports on the front panel
- One 3.5" drive bay and one internal 3.5" HDD bay
- One 8 cm cooling fan

Specifications

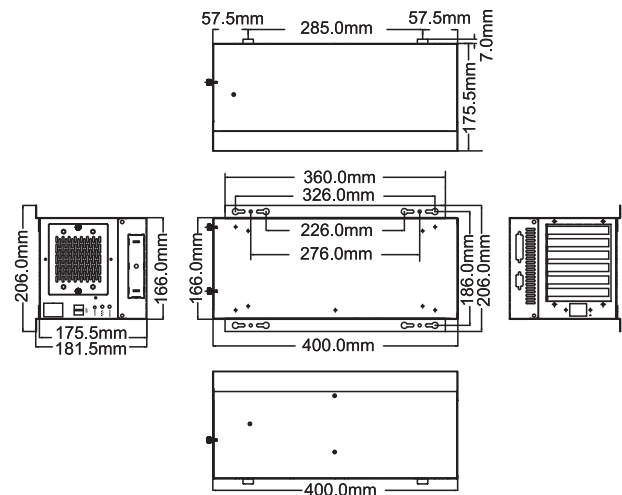|	
◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x Front-accessible 3.5"
	1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x COM, 1 x LPT
◆ Expansion Slots	6 slots
◆ Indicators	Power, HDD
◆ Button	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	5.2 kg/7.8 kg
◆ Dimensions (DxWxH)	400 mm x 166 mm x 175.5 mm

Ordering Information

Part No.	Description
PAC-106GWPX-R30/180W	6-Slot Full size Chassis, White, Powder paint, 1x 8cm fan, with 180W ATX power supply, RoHS
PAC-106GWPX-R30	6-Slot Full size Chassis,White,Powder paint,W/O PSU, ATX power switch,RoHS

Cable Options

Part No.	Description
32100-126600-RS (2.54mm→2.0mm)	This optional cable is required for motherboard with 2mm USB connector (the USB cable inside the chassis is with 2.54mm pitch). Refer to motherboard spec. for details.

Dimensions (Unit: mm)

57.5mm   285.0mm   57.5mm   7.0mm
175.5mm

360.0mm
326.0mm
226.0mm
276.0mm
206.0mm
166.0mm
166.0mm
186.0mm
206.0mm
175.5mm
181.5mm
400.0mm

400.0mm

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
BP-6S-RS	ISA	0	6	0	0	0	0	AT
IP-6S-RS	PCISA	3	2	0	0	0	0	AT
IP-6SA-RS	PCISA	3	2	0	0	0	0	ATX
PCI-6S-RS	PICMG 1.0	4	2	0	0	0	0	AT/ATX
PE-6S2*	PICMG 1.3	3	0	0	1	0	1	ATX
SPE-4S	PICMG 1.3	0	0	0	1	2	0	ATX
SPE-6S	PICMG 1.3	0	0	0	5	0	0	ATX

*Only R20 or later versions support PICMG 1.3 backplane

Power Supply Options

Type	Model No.	Watt
ATX	63030-010180-000-RS	180W

PAC-106G supports single FLEX PSU. For more IEI PSU models, please visit www.ieiworld.com.