

RACK-2040

■ 2U 7-slot ATX Rackmount Chassis




Features

- Compatible with ATX and microATX and Mini-ITX motherboards
- Two USB ports on the front panel
- Two 8 cm cooling fans
- Two 3.5" and two 2.5" drive bays
- RoHS compliant design

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	ATX and microATX and Mini-ITX motherboards
◆ PSU	1U FLEX or Redundant Power Supply
◆ Drive Bay	2 x 2.5" + 2 x 3.5" SATA 6Gb/s SSD bay
◆ I/O Port	2 x USB (Front Panel)
◆ Cooling Fans	2 x 8cm Fan
◆ Expansion Slots	7 slot (Half-height size)
◆ Indicators	Power Led
◆ Button	Power Button, Reset button
◆ Operating Temperature	-10°C ~ 60°C
◆ Operating Humidity	10% ~ 90%
◆ Color	Black
◆ Mounting	RACK Mount
◆ Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis (SSD)
◆ Operation Vibration	MIL-STD-810F 514.5C-1 (SSD)
◆ Weight (Net/Gross)	5.6kg / 9.6kg
◆ Dimensions (DxWxH)	431.6 x 495 x 88

Dimensions (Unit: mm)

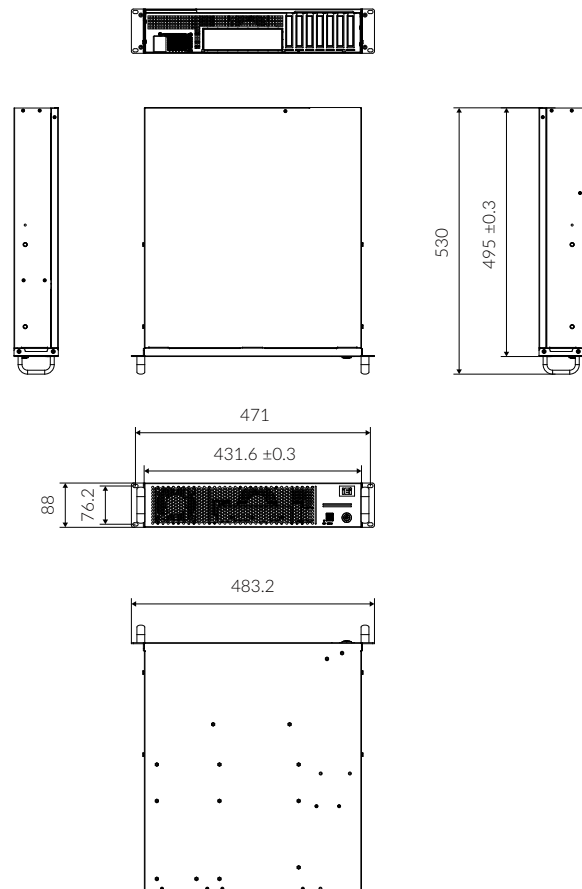

Ordering Information

Part No.	Description
RACK-2040-7S-R10	2U 7-slot half-height ATX Rackmount Chassis, 2 x USB 2.0, ATX Power Switch, 495mm depth, Powder paint, Black, RoHS

Packing List

2 x Rack mounting ears	1 x Mounting Screw
1 x Power Cord	

Power Supply Options

Type	Model No.	Watt
1U FLEX ATX	63030-010500-030-RS	FSP 500W
	63030-010400-010-RS	FSP 400W
	63030-010300-000-RS	FSP 300W
	63030-410500-000-RS	LITEON 500W