

63050-040300-020-RS


300 W ATX Mini Redundant Power Supply



Specifications

| | | | | |
|---|-------------------------|--|------------------|---------------------------|
| Input | Voltage | 90 ~ 264 VAC Full Range | | |
| | Frequency | 47 Hz ~ 63 Hz | | |
| | Input Current | 6 A (RMS) @110 VAC, 3 A (RMS) @220 VAC | | |
| | Inrush Current | 60 A max. for 110 VAC, 80 A max. for 220 VAC | | |
| Output | Voltage | Min. load | Max. load | Ripple & Noise |
| | +5 V | 3 A | 25 A | 50mV P-P |
| | +12 V | 2 A | 16 A | 120mV P-P |
| | -5 V | 0 A | 0.5 A | 150mV P-P |
| | -12 V | 0 A | 0.5 A | 150mV P-P |
| | +3.3 V | 1 A | 18 A | 50mV P-P |
| | +5 Vsb | 0.1 A | 2 A | 60mV P-P |
| *Total current of +5 V and + 3.3 V not exceed 35 A *Total current of +5 V, +3.3 V and +12 V not exceed 282 W | | | | |
| General Specifications | Watt | 300 W | | |
| | Hold-up Time | 16 ms min. | | |
| | Efficiency | 65% min. | | |
| | MTBF | 160,000 hours | | |
| | Temperature | Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C | | |
| | Dimensions | 185 x 150 x 86 (mm), 7.28 x 5.91 x 3.39 (inch) | | |
| | Output Connector | 1 x 20+4-pin ATX, 2 x 4-pin 12V CPU, 8 x HDD/CDROM, 2 x FDD, 2 x SATA, 1 x Buzzer reset, 1 x T.T.L signal, 1 x LED power | | |

Dimensions (Unit: mm)

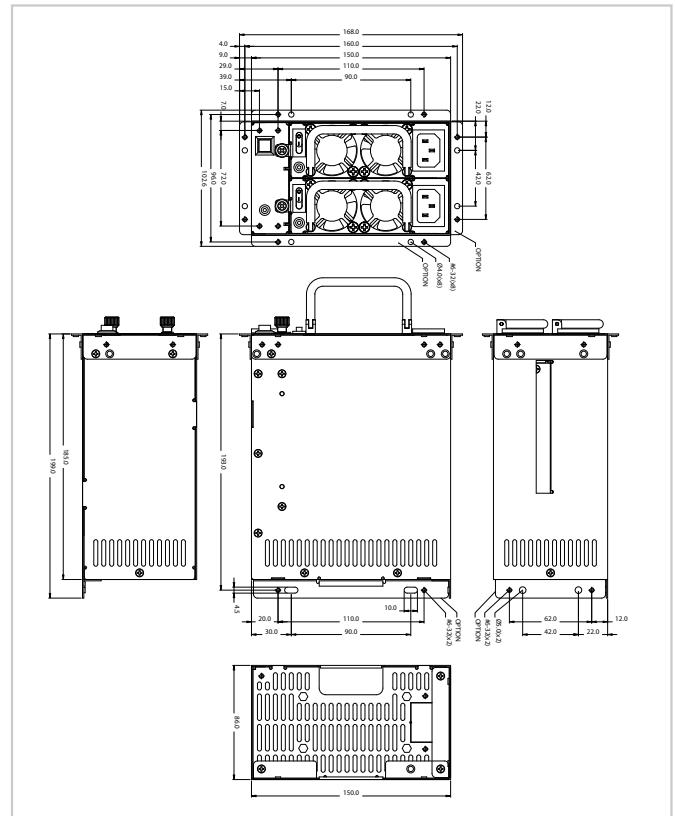

Ordering Information

| Part No. | Description |
|---------------------|---|
| 63050-040300-020-RS | 300 W Mini Redundant ATX Power Supply, with PFC |
| 63050-040300-030-RS | 300 W AC-DC ATX Redundant Module, for 63050-040300-030-RS, with PFC |