

# FSP065-RBBN3

65 W AC/DC Adapter



Plug Type:  $\phi$ in 2.1 mm /  $\phi$ out 5.5 mm

\*\*Meet ErP & PSE




## Ordering Information

Part No.	Description
63040-010065-710-RS	19 V 65W power adapter with $\Phi$ 2.1/ $\Phi$ 5.5/lock 90~264 VAC input, ErP, PSE

## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 19 V
- Output Current: 3.42 A
- Output Watts: 65 W
- Efficiency: 86%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 80°C

## Dimensions (Unit: mm)

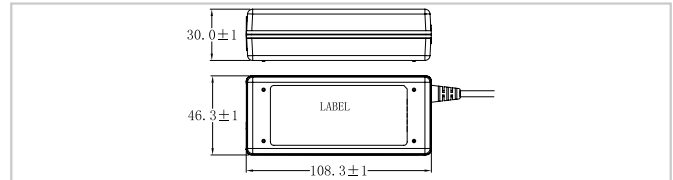


# FSP060-DHAN3

60 W AC/DC Adapter



Plug Type:  $\phi$ in 2.5 mm /  $\phi$ out 5.5 mm

\*\*Meet ErP & PSE



## Ordering Information

Part No.	Description
63040-010060-211-RS	12 V 60W power adapter with lock screw 90~264 VAC input, ErP, PSE
63040-010060-200-RS	12 V 60W power adapter with none lock 90~264 VAC input, ErP, PSE

## Specifications


- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 5 A
- Output Watts: 60 W
- Efficiency: 85%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 65°C

## Dimensions (Unit: mm)



# FSP036-RHBN3

36 W AC/DC Adapter



Plug Type:  $\phi$ in 2.5 mm /  $\phi$ out 5.5 mm

\*\*Meet ErP & PSE



## Ordering Information

Part No.	Description
63040-010036-210-RS	12 V 36W Power adapter with lock screw, 90~264VAC input, ErP, PSE
63040-010036-220-RS	12 V 36W Power adapter without lock, 90~264VAC input, ErP, PSE

## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 3 A
- Output Watts: 36 W
- Efficiency: 88.3%
- Operating Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 80°C

## Dimensions (Unit: mm)

