







## Drive Cage *Standard 3.5" Device in 5.25" Drive Bay Solutions*

Following the traditional industrial system needs for stability, durability and toughness for storage drive operating condition, IEI provides various kinds of standard 3.5" device in 5.25" removable drive bay and modules for different demands.

	SATA / IDE / SSD Solution		
			
<b>Model Name</b>	<b>41411-1014C2-00-HF</b>	<b>41411-1007C3-00-HF</b>	<b>RHD-302SATA-R30</b>
<b>Dimensions (L x W x H) (mm)</b>	150 x 146 x 42	150 x 146 x 42	202 x 146 x 86
<b>Material</b>	Aluminum	Aluminum	Aluminum alloy
<b>Interface</b>	SATA / IDE / SSD	SATA / IDE / SSD	SATA III / SAS III
<b>Data Transfer Rate</b>			SATA III / SAS III 12Gbps
<b>Drive Bay Space</b>	One 5.25" drive bay	One 5.25" drive bay	2 x 5.25" Device Bay for 3 x 2.5" or 3.5" Hard Drive
<b>HDD Type</b>	internal 2.5" or 3.5" device bay	internal 2.5" or 3.5" device bay	2.5" or 3.5" Hard Drive
<b>Cooling Fan</b>			8 cm
<b>Hot Swap</b>	No	No	Yes
<b>Keylock</b>	No	No	No
<b>Signal Out</b>	No	No	SATA III 7-Pin
<b>Color</b>	Black	White	Black
<b>Gross Weight</b>	0.2 kg	0.2 kg	1.3 kg

	SATA Solution			
				
<b>Model Name</b>	<b>RHD-102SATA-R20</b>	<b>RHD-102DW-R20</b>	<b>RHD-101SATA-R20</b>	<b>RHD-104SATA-R20</b>
<b>Dimensions (L x W x H) (mm)</b>	140 x 101.6 x 25	153 x 146 x 42	140 x 101.6 x 25	149.6 x 146 x 42.1
<b>Material</b>	Aluminum & SPCC	Aluminum	Aluminum & SPCC	Full Metal
<b>Interface</b>	SATA 7 + 15 Pin	SATA	SATA 7 + 15 Pin	SATA III
<b>Data Transfer Rate</b>	up to 6Gb/Sec	up to 6Gb/Sec	Up to 6Gb/Sec	SATA III 6Gbps
<b>Drive Bay Space</b>	One 3.5" drive bay	One 5.25" drive bay	One 3.5" drive bay	1 x 5.25" Device Bay for 4 x 2.5" Hard Drive
<b>HDD Type</b>	2.5" SATA/SAS 2 x HDD/SSD	2.5" SATA 2 x HDD/SSD	2.5" SATA/SAS 1 x HDD/SSD	2.5" Hard Drive
<b>Cooling Fan</b>	No	Yes	No	4CM
<b>Hot Swap</b>	Yes	Yes	Yes	Yes
<b>Keylock</b>	Yes	Yes	Yes	Yes
<b>Signal Out</b>	SATA 7 Pin	SATA 7 Pin	SATA 7 Pin	SATA III 7-Pin
<b>Color</b>	Black	Black	Black	Black
<b>Gross Weight</b>	0.304 Kg	0.534 Kg	0.236 Kg	0.56 kg

## FCD-301



Pin 1	Pin 2	Pin 3	Pin 4
+5V	Data-	Data+	GND

3.5" compact drive bay with USB port

- The most suitable USB cable for IEI's CPU boards
- Support standard 3.5" drive bay, 4-pin female connector to CPU boards' pin header, length: 60cm
- RoHS compliant
- Pin definition

### Ordering Information

Part No.	Description
FCD-301[C]-RS	3.5" compact drive bay with USB port, RoHS Color Code: B=Black, W=White

## AS-35A




- Resistant to shocks and vibrations from all directions
- Support 3.5" HDD into 5.25" drive bay (AS-35A)
- Meets the following standards:
  - » MIL-SLD-810F 514.5C-1 standard
  - » 5-20Hz, 1G peak to peak
  - » 60-200Hz, 3G peak to peak
- RoHS compliant

### Ordering Information

Part No.	Description
AS-35A-RS	3.5" drive anti-vibration kit, RoHS

## AS-25A

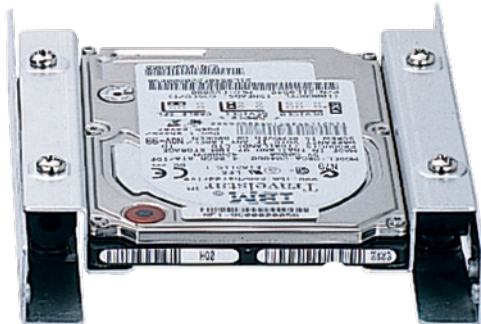

- Resistant to shocks and vibrations from all directions
- Support 2.5" HDD into 3.5" drive bay (AS-25A)
- Meets the following standards:
  - » MIL-SLD-810F 514.5C-1 standard
  - » 5-20Hz, 1G peak to peak
  - » 60-200Hz, 3G peak to peak
- RoHS compliant

### Ordering Information

Part No.	Description
AS-25A-RS	2.5" drive anti-vibration kit, RoHS