



**MODEL:
WSB-H810**

**Full-Size PICMG 1.0 CPU Card Supports 4th Generation
LGA1150 Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU,
Intel® H81 Chipset, DDR3, VGA, iDP, Dual Intel® GbE, USB,
SATA 6Gb/s, PCIe Mini, mSATA, RS-232, HD Audio and RoHS**

User Manual

Revision

Date	Version	Changes
July 14, 2021	1.03	Updated Section 2.3: Packing List Updated Chapter 6: Software Drivers
May 5, 2017	1.02	Modified the part number and description of the optional LPT cable
June 16, 2015	1.01	Added two RS-232 serial ports
March 10, 2015	1.00	Initial release

Copyright

COPYRIGHT NOTICE

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

TRADEMARKS

All registered trademarks and product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

Manual Conventions



WARNING

Warnings appear where overlooked details may cause damage to the equipment or result in personal injury. Warnings should be taken seriously.



CAUTION

Cautionary messages should be heeded to help reduce the chance of losing data or damaging the product.



NOTE

These messages inform the reader of essential but non-critical information. These messages should be read carefully as any directions or instructions contained therein can help avoid making mistakes.



HOT SURFACE

This symbol indicates a hot surface that should not be touched without taking care.

Table of Contents

1 INTRODUCTION.....	1
1.1 INTRODUCTION.....	2
1.2 FEATURES.....	3
1.3 CONNECTORS	4
1.4 DIMENSIONS.....	5
1.5 DATA FLOW	7
1.6 TECHNICAL SPECIFICATIONS	8
2 PACKING LIST	11
2.1 ANTI-STATIC PRECAUTIONS.....	12
2.2 UNPACKING PRECAUTIONS.....	12
2.3 PACKING LIST.....	13
2.4 OPTIONAL ITEMS	13
3 CONNECTORS	17
3.1 PERIPHERAL INTERFACE CONNECTORS.....	18
3.1.1 WSB-H810 Layout.....	18
3.1.2 Peripheral Interface Connectors	19
3.1.3 External Interface Panel Connectors.....	20
3.2 INTERNAL PERIPHERAL CONNECTORS	21
3.2.1 +12V Power Connector	21
3.2.2 ATX Power Supply Enable Connector.....	22
3.2.3 Audio Kit Connector	23
3.2.4 Battery Connector.....	24
3.2.5 Chassis Intrusion Connector.....	25
3.2.6 DDR3 DIMM Slots.....	26
3.2.7 Digital I/O Connector	27
3.2.8 EC Debug Connector.....	28
3.2.9 Fan Connector (CPU).....	29
3.2.10 Fan Connector (System)	30

3.2.11 Front Panel Connector.....	31
3.2.12 I ² C Connector	32
3.2.13 Infrared Connector (Reserved).....	33
3.2.14 Internal DisplayPort Connector	34
3.2.15 Keyboard and Mouse Connector	35
3.2.16 LAN LED Connectors	36
3.2.17 mSATA Slot.....	37
3.2.18 Parallel Port Connector	38
3.2.19 PCIe Mini Slot.....	40
3.2.20 SATA 3Gb/s Drive Connector	41
3.2.21 SATA 6Gb/s Drive Connectors.....	42
3.2.22 Serial Port Connectors, RS-232.....	43
3.2.23 Serial Port Connector, RS-422/485.....	44
3.2.24 SMBus Connector	45
3.2.25 SPI Flash Connector.....	46
3.2.26 SPI Flash Connector (EC).....	47
3.2.27 TPM Connector.....	48
3.2.28 USB 2.0 Connectors.....	49
3.2.29 USB 2.0 Connector (Type A).....	50
3.2.30 USB 3.2 Gen 1 Connector.....	51
3.3 EXTERNAL PERIPHERAL INTERFACE CONNECTOR PANEL	52
3.3.1 Ethernet Connectors	52
3.3.2 USB 2.0 Connectors.....	53
3.3.3 VGA Connector	54
4 INSTALLATION	55
4.1 ANTI-STATIC PRECAUTIONS	56
4.2 INSTALLATION CONSIDERATIONS.....	56
4.3 SOCKET LGA1150 CPU INSTALLATION	58
4.4 SOCKET LGA1150 COOLING KIT INSTALLATION	61
4.5 DIMM INSTALLATION	62
4.6 FULL-SIZE PCIE MINI CARD INSTALLATION	63
4.7 HALF-SIZE PCIE MINI CARD INSTALLATION.....	65
4.8 MSATA CARD INSTALLATION	67
4.9 SYSTEM CONFIGURATION.....	69

WSB-H810 PICMG 1.0 CPU Card

4.9.1 AT/ATX Power Mode Setting	69
4.9.2 Clear CMOS Button.....	70
4.9.3 Flash Descriptor Security Override.....	70
4.9.4 USB Power Selection	71
4.10 CHASSIS INSTALLATION.....	72
4.10.1 Airflow.....	72
4.10.2 CPU Card Installation	72
4.11 INTERNAL PERIPHERAL DEVICE CONNECTIONS	73
4.11.1 SATA Drive Connection.....	73
5 BIOS	75
5.1 INTRODUCTION.....	76
5.1.1 Starting Setup.....	76
5.1.2 Using Setup	76
5.1.3 Getting Help.....	77
5.1.4 Unable to Reboot after Configuration Changes	77
5.1.5 BIOS Menu Bar.....	77
5.2 MAIN.....	78
5.3 ADVANCED	79
5.3.1 ACPI Settings.....	80
5.3.2 RTC Wake Settings	81
5.3.3 Trusted Computing.....	83
5.3.4 CPU Configuration.....	84
5.3.5 SATA Configuration	86
5.3.6 USB Configuration.....	88
5.3.7 F81866 Super IO Configuration	89
5.3.7.1 Serial Port n Configuration	89
5.3.7.2 IrDA Configuration	94
5.3.7.3 Parallel Port Configuration	96
5.3.8 iWDD H/W Monitor	97
5.3.8.1 Smart Fan Mode Configuration	98
5.3.9 Serial Port Console Redirection	99
5.3.10 iEi Feature	102
5.4 CHIPSET	103
5.4.1 PCH-IO Configuration	104

5.4.1.1 PCI Express Configuration	106
5.4.1.2 PCH Azalia Configuration	108
<i>5.4.2 System Agent (SA) Configuration</i>	<i>109</i>
5.4.2.1 Graphics Configuration.....	109
5.4.2.2 NB PCIe Configuration.....	112
5.4.2.3 Memory Configuration	113
5.5 BOOT.....	114
5.6 SECURITY	116
5.7 SAVE & EXIT	116
6 SOFTWARE DRIVERS	118
6.1 AVAILABLE DRIVERS	119
6.2 DRIVER DOWNLOAD	119
A REGULATORY COMPLIANCE	121
B PRODUCT DISPOSAL	123
C BIOS OPTIONS	125
D DIGITAL I/O INTERFACE.....	129
D.1 INTRODUCTION.....	130
D.2 ASSEMBLY LANGUAGE SAMPLE 1.....	131
D.3 ASSEMBLY LANGUAGE SAMPLE 2.....	131
E WATCHDOG TIMER.....	132
F ERROR BEEP CODE	135
F.1 PEI BEEP CODES	136
F.2 DXE BEEP CODES	136
G HAZARDOUS MATERIALS DISCLOSURE	137
G.1 RoHS II DIRECTIVE (2015/863/EU).....	138
G.2 CHINA ROHS	139

List of Figures

Figure 1-1: WSB-H810	2
Figure 1-2: Connectors	4
Figure 1-3: WSB-H810 Dimensions (mm).....	5
Figure 1-4: External Interface Panel Dimensions (mm).....	6
Figure 1-5: Data Flow Diagram.....	7
Figure 3-1: Connectors and Jumpers.....	18
Figure 3-2: +12V Power Connector Pinout Location	21
Figure 3-3: ATX Power Supply Enable Connector Location	22
Figure 3-4: Audio Kit Connector Location	23
Figure 3-5: Battery Connector Location.....	24
Figure 3-6: Chassis Intrusion Connector Location.....	25
Figure 3-7: DDR3 DIMM Slot Locations	26
Figure 3-8: Digital I/O Connector Location	27
Figure 3-9: EC Debug Connector Location	28
Figure 3-10: CPU Fan Connector Location	29
Figure 3-11: System Fan Connector Location.....	30
Figure 3-12: Front Panel Connector Location	31
Figure 3-13: I ² C Connector Location	32
Figure 3-14: Infrared Connector Location.....	33
Figure 3-15: Internal DisplayPort Connector Location	34
Figure 3-16: Keyboard and Mouse Connector Location.....	35
Figure 3-17: LAN LED Connector Locations	36
Figure 3-18: mSATA Slot Location	37
Figure 3-19: Parallel Port Connector Location	39
Figure 3-20: PCIe Mini Slot Location	40
Figure 3-21: SATA 3Gb/s Drive Connector Location	41
Figure 3-22: SATA 6Gb/s Drive Connector Locations	42
Figure 3-23: Serial Port Connector Locations	43
Figure 3-24: RS-422/485 Connector Location.....	44
Figure 3-25: SMBus Connector Location.....	45

Figure 3-26: SPI Flash Connector Location.....	46
Figure 3-27: SPI EC Flash Connector Location.....	47
Figure 3-28: TPM Connector Location.....	48
Figure 3-29: USB 2.0 Connector Pinout Locations	49
Figure 3-30: USB 2.0 Connector (Type A) Pinout Location.....	50
Figure 3-31: USB 3.2 Gen 1 Connector Location	51
Figure 3-32: External Peripheral Interface Connector	52
Figure 3-33: Ethernet Connector.....	53
Figure 3-34: VGA Connector	54
Figure 4-1: Disengage the CPU Socket Load Lever.....	58
Figure 4-2: Remove Protective Cover.....	59
Figure 4-3: Insert the Socket LGA1150 CPU.....	60
Figure 4-4: Close the Socket LGA1150	60
Figure 4-5: Cooling Kit Support Bracket.....	61
Figure 4-6: DIMM Installation.....	62
Figure 4-7: Removing the Retention Screw and Standoff for a Half-size PCIe Mini Card....	63
Figure 4-8: Removing the Retention Screw	64
Figure 4-9: Inserting the Full-size PCIe Mini Card into the Slot at an Angle	65
Figure 4-10: Securing the Full-size PCIe Mini Card	65
Figure 4-11: Removing the Retention Screw	66
Figure 4-12: Inserting the Half-size PCIe Mini Card into the Slot at an Angle.....	66
Figure 4-13: Securing the Half-size PCIe Mini Card	67
Figure 4-14: Removing the Retention Screws	68
Figure 4-15: Inserting the mSATA Card into the Slot at an Angle.....	68
Figure 4-16: Securing the mSATA Card	69
Figure 4-17: AT/ATX Power Mode Switch Location	69
Figure 4-18: Clear CMOS Button Location.....	70
Figure 4-19: Flash Descriptor Security Override Jumper Location	71
Figure 4-20: SATA Drive Cable Connection.....	73
Figure 4-21: SATA Power Drive Connection.....	74
Figure 6-1: IEI Resource Download Center.....	119

List of Tables

Table 1-1: WSB-H810 Specifications	10
Table 2-1: Packing List.....	13
Table 2-2: Optional Items.....	16
Table 3-1: Peripheral Interface Connectors	20
Table 3-2: Rear Panel Connectors	20
Table 3-3: +12V Power Connector Pinouts	21
Table 3-4: ATX Power Supply Enable Connector Pinouts	22
Table 3-5: Audio Kit Connector Pinouts.....	23
Table 3-6: Battery Connector Pinouts	24
Table 3-7: Chassis Intrusion Connector Pinouts	25
Table 3-8: Digital I/O Connector Pinouts.....	27
Table 3-9: EC Debug Connector Pinouts	28
Table 3-10: CPU Fan Connector Pinouts	29
Table 3-11: System Fan Connector Pinouts	30
Table 3-12: Front Panel Connector Pinouts.....	31
Table 3-13: I ² C Connector Pinouts.....	32
Table 3-14: Infrared Connector Pinouts	33
Table 3-15: Internal DisplayPort Connector Pinouts	34
Table 3-16: Keyboard and Mouse Connector Pinouts.....	35
Table 3-17: LAN1 LED Connector (LED_LAN1) Pinouts.....	36
Table 3-18: LAN2 LED Connector (LED_LAN2) Pinouts.....	36
Table 3-19: mSATA Slot Pinouts.....	38
Table 3-20: Parallel Port Connector Pinouts	39
Table 3-21: PCIe Mini Slot Pinouts.....	41
Table 3-22: SATA 3Gb/s Drive Connector Pinouts.....	42
Table 3-23: SATA 6Gb/s Drive Connector Pinouts.....	42
Table 3-24: Serial Port Connector Pinouts	43
Table 3-25: RS-422/485 Connector Pinouts	44
Table 3-26: DB-9 RS-422/485 Pinouts	44
Table 3-27: SMBus Connector Pinouts	45

Table 3-28: SPI Flash Connector Pinouts	46
Table 3-29: SPI EC Flash Connector Pinouts	47
Table 3-30: TPM Connector Pinouts	48
Table 3-31: USB 2.0 Connector Pinouts	49
Table 3-32: USB 2.0 Connector (Type A) Pinouts	50
Table 3-33: USB 3.2 Gen 1 Connector Pinouts	51
Table 3-34: LAN Pinouts	52
Table 3-35: Connector LEDs	53
Table 3-36: USB 2.0 Port Pinouts	53
Table 3-37: VGA Connector Pinouts	54
Table 4-1: AT/ATX Power Mode Switch Settings	70
Table 4-2: Flash Descriptor Security Override Jumper Settings	70
Table 4-3: BIOS Options and Configured USB Ports	71
Table 4-4: USB Power Source Setup	72
Table 5-1: BIOS Navigation Keys	77
Table 5-2: BIOS Options and Configured USB Ports	105

BIOS Menus

BIOS Menu 1: Main	78
BIOS Menu 2: Advanced	80
BIOS Menu 3: ACPI Configuration	80
BIOS Menu 4: RTC Wake Settings	81
BIOS Menu 5: TPM Configuration	83
BIOS Menu 6: CPU Configuration	84
BIOS Menu 7: SATA Configuration	86
BIOS Menu 8: USB Configuration	88
BIOS Menu 9: F81866 Super IO Configuration	89
BIOS Menu 10: Serial Port n Configuration Menu	89
BIOS Menu 11: IrDA Configuration Menu	94
BIOS Menu 12: Parallel Port Configuration Menu	96
BIOS Menu 13: iWDD H/W Monitor	97
BIOS Menu 14: Smart Fan Mode Configuration	98
BIOS Menu 15: Serial Port Console Redirection	100
BIOS Menu 16: IEI Feature	102
BIOS Menu 17: Chipset	103
BIOS Menu 18: PCH-IO Configuration	104
BIOS Menu 19: PCI Express Configuration	106
BIOS Menu 20: MINI-PCIE	106
BIOS Menu 21: PCH Azalia Configuration	108
BIOS Menu 22: System Agent (SA) Configuration	109
BIOS Menu 23: Graphics Configuration	110
BIOS Menu 24: LCD Control	111
BIOS Menu 25: NB PCIe Configuration	112
BIOS Menu 26: Memory Configuration	113
BIOS Menu 27: Boot	114
BIOS Menu 28: Security	116
BIOS Menu 29: Save & Exit	117

Chapter

1

Introduction

1.1 Introduction



Figure 1-1: WSB-H810

The WSB-H810 PICMG 1.0 CPU card is a Socket LGA1150 Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor platform that supports two 240-pin 1600/1333 MHz dual-channel DDR3/DDR3L DIMMs up to 16 GB.

The WSB-H810 supports two GbE interfaces through the Intel® Gigabit Ethernet controllers. The integrated Intel® H81 chipset supports two SATA 6Gb/s and one SATA 3Gb/s drives. In addition, the WSB-H810 includes VGA and iDP interfaces for dual independent display.

Two USB 3.2 Gen 1 (5Gb/s) by pin header, two USB 2.0 on the rear panel, four USB 2.0 by pin header, one USB 2.0 by internal Type A connector, four RS-232, one PCIe Mini slot and one mSATA slot provide flexible expansion options. High Definition Audio (HDA) support ensures HDA devices can be easily implemented on the WSB-H810.


1.2 Features

Some of the WSB-H810 motherboard features are listed below:

- PICMG 1.0 full-size solution
- 4th generation LGA1150 Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- Intel® H81 PCH
- Two 240-pin 1600/1333 MHz dual-channel DDR3/DDR3L DIMMs support up to 16 GB
- Dual independent display by VGA and iDP interfaces
- Two Intel® Gigabit Ethernet connectors
- SATA 6Gb/s and USB 3.2 Gen 1 (5Gb/s) supported
- One PCIe Mini slot and one mSATA slot
- Stiffener bars prevent the PCB bending and damage of components on the solder side
- TPM V1.2 hardware security function supported by the TPM module
- High Definition Audio
- RoHS compliant

1.3 Connectors

The connectors on the WSB-H810 are shown in the figure below.

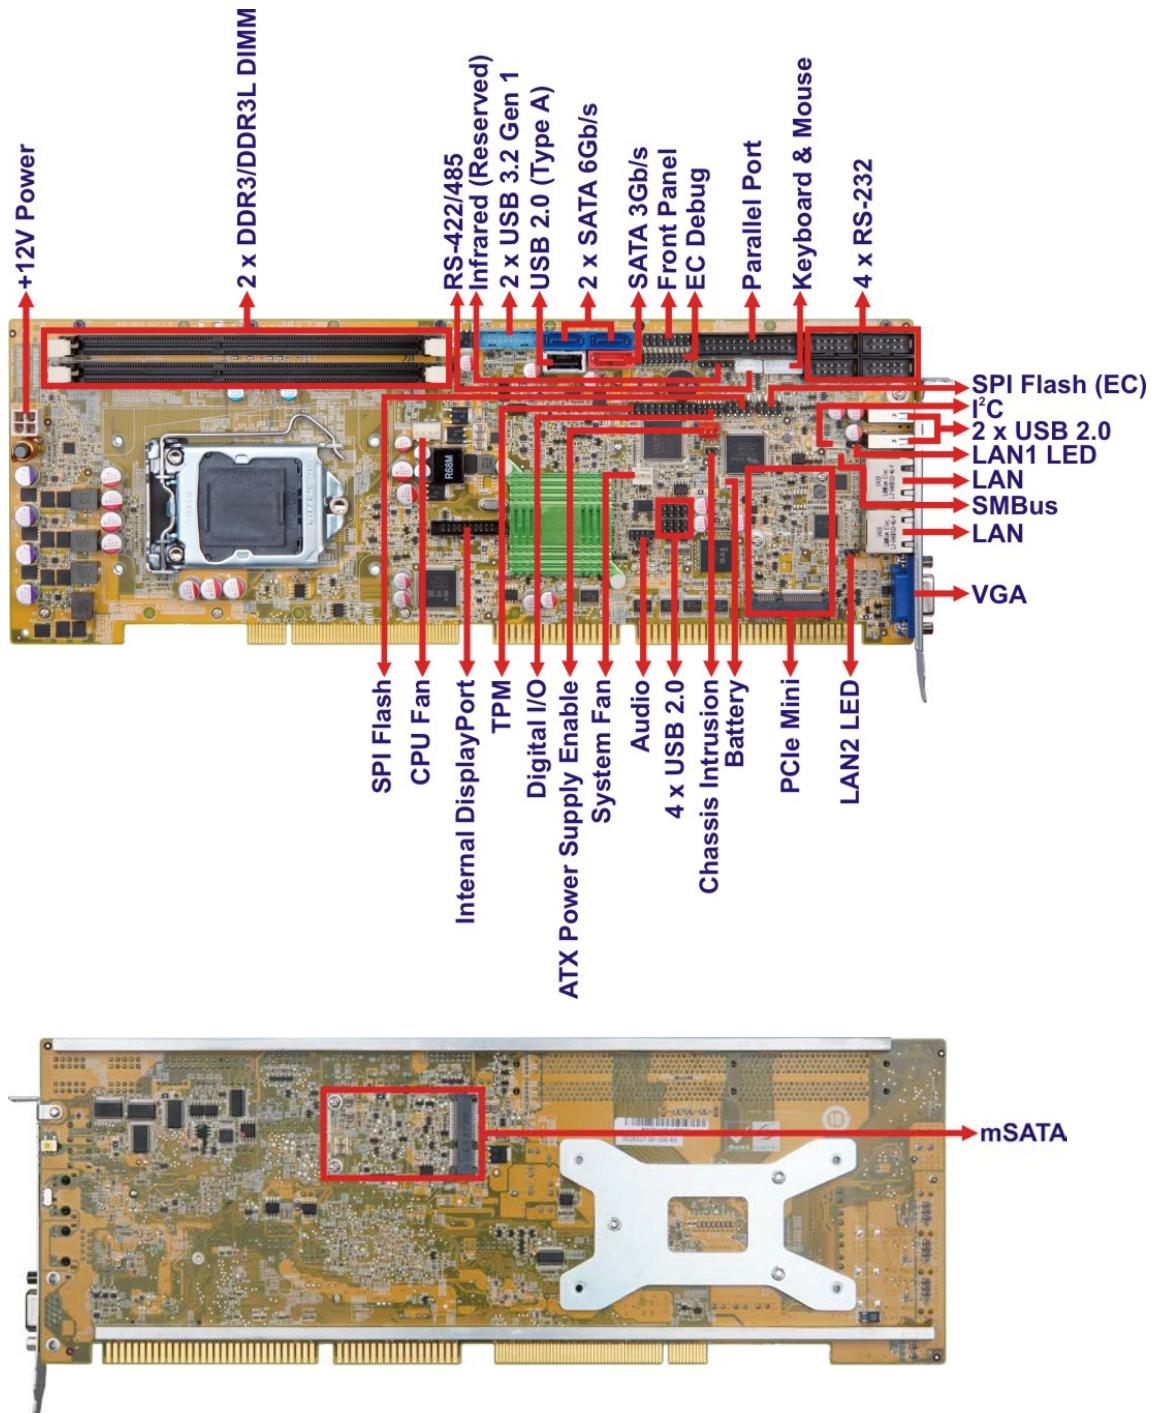

WSB-H810 PICMG 1.0 CPU Card

1.4 Dimensions

The main dimensions of the WSB-H810 are shown in the diagram below.

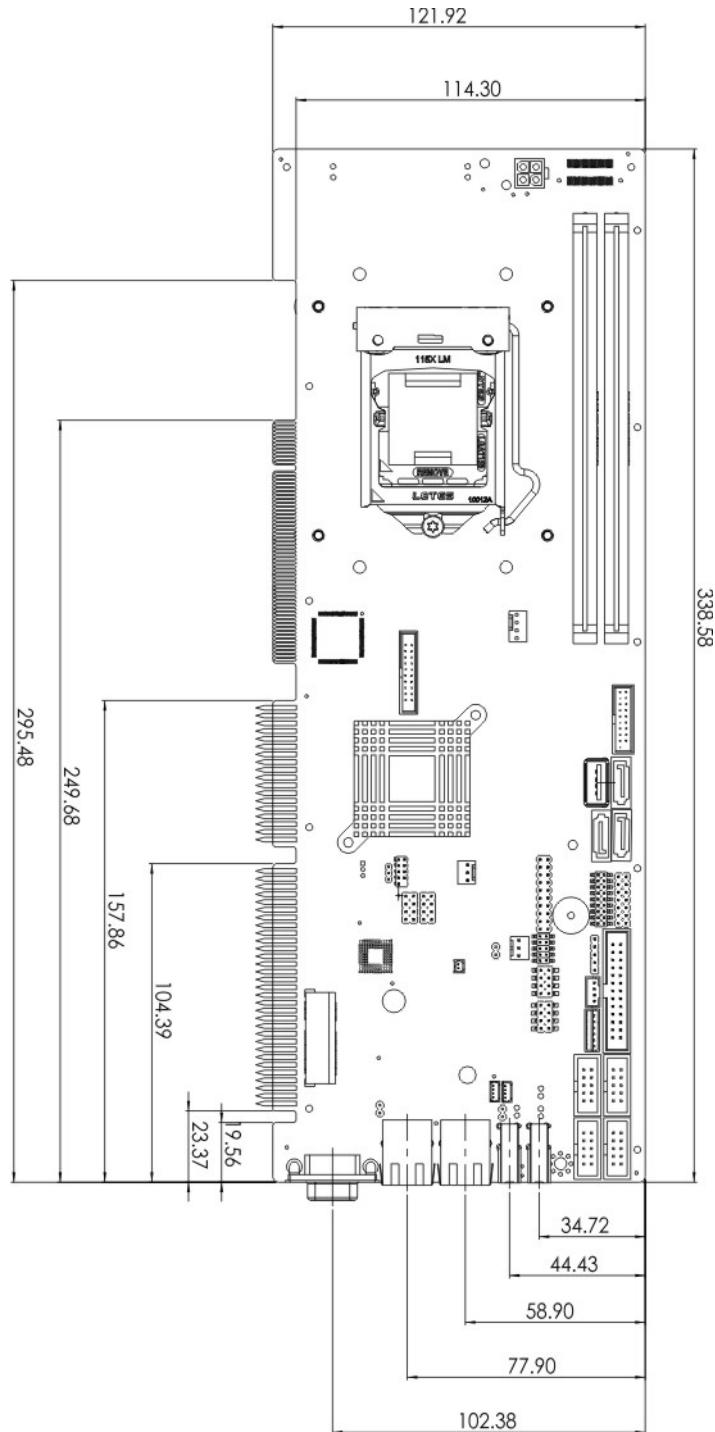


Figure 1-3: WSB-H810 Dimensions (mm)

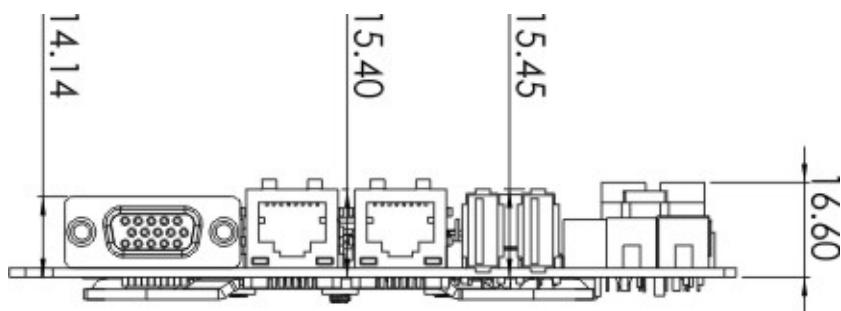


Figure 1-4: External Interface Panel Dimensions (mm)

WSB-H810 PICMG 1.0 CPU Card

1.5 Data Flow

Figure 1-5 shows the data flow between the system chipset, the CPU and other components installed on the motherboard.

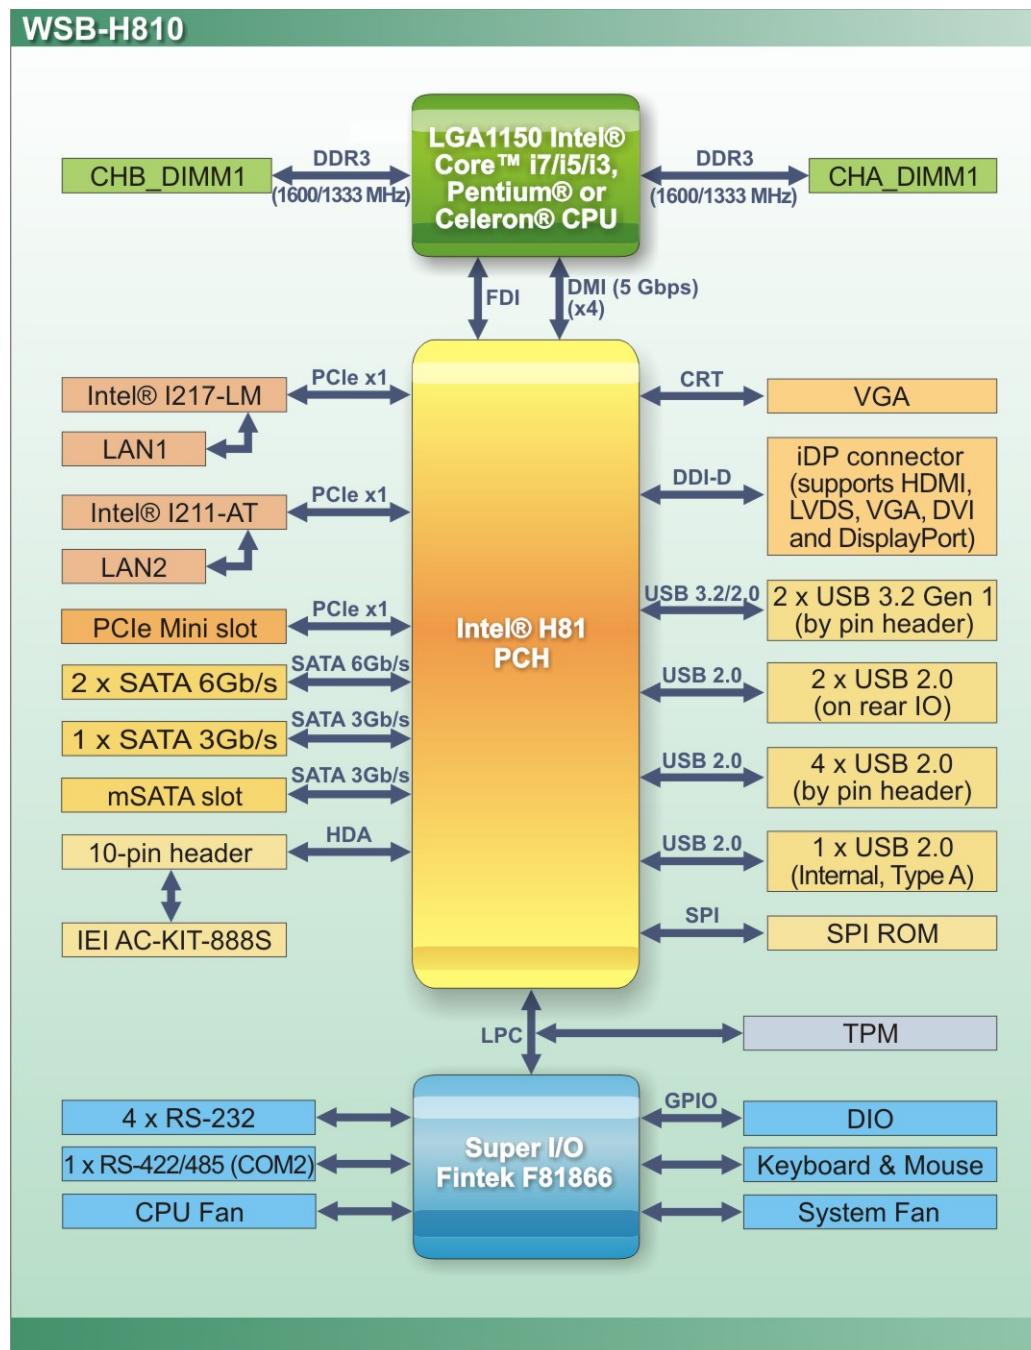


Figure 1-5: Data Flow Diagram

1.6 Technical Specifications

The WSB-H810 technical specifications are listed below.

Specification/Model	WSB-H810
Form Factor	PICMG 1.0
CPU Supported	4th generation LGA1150 Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU
PCH	Intel® H81
Memory	Two 240-pin 1600/1333 MHz dual-channel unbuffered DDR3/DDR3L SDRAM DIMMs support up to 16 GB
Graphics Engine	Intel® HD Graphics Gen 7.5 supports DirectX 11.1, OpenCL 1.2, OpenGL 3.2, Full MPEG2, VC1, AVC Decode
Display Output	Dual independent display One VGA (up to 1920x1200@60 Hz) One iDP interface for HDMI, LVDS, VGA, DVI and DisplayPort (up to 3840x2160@60 Hz)
Ethernet Controllers	LAN1: Intel® I217-LM Ethernet controller LAN2: Intel® I211-AT Ethernet controller
Audio	Supports 7.1 channel HD Audio by IEI AC-KIT-888S kit
BIOS	UEFI BIOS
Super I/O Controller	Fintek F81866
Watchdog Timer	Software programmable supports 1–255 sec. system reset
Expansion	One PCIe Mini slot One mSATA slot (SATA 3Gb/s signal) PCI signal and ISA signal via golden finger
I/O Interface Connectors	
Audio Connector	One internal audio connector (10-pin header)
Chassis Intrusion	One 2-pin header
Digital I/O	8-bit digital I/O

WSB-H810 PICMG 1.0 CPU Card

Specification/Model	WSB-H810
Ethernet	Two RJ-45 GbE ports
Fan	One 4-pin smart fan connector (CPU fan) One 3-pin smart fan connector (system fan)
Front Panel	One 14-pin header (power LED, HDD LED, speaker, power button, reset button)
I²C	One 4-pin wafer connector
Infrared (Reserved)	One via 5-pin header
Keyboard and Mouse	One 6-pin wafer connector
LAN LEDs	Two 2-pin headers
Parallel Port	One parallel port via internal 26-pin box header
Serial ATA	Two SATA 6Gb/s connectors (support AHCI, no RAID) One SATA 3Gb/s connector (supports AHCI, no RAID)
Serial Ports	Four RS-232 via internal box headers One RS-422/485 via internal 4-pin wafer connector
SMBus	One 4-pin wafer connector
TPM	One via 20-pin header
USB Ports	Two USB 3.2 Gen 1 (5Gb/s) ports by pin header Two USB 2.0 ports on rear IO Four USB 2.0 ports by two pin headers One USB 2.0 port by internal Type A connector
Environmental and Power Specifications	
Power Supply	5V/12V, AT/ATX power supported
Power Consumption	5V@3.4A , 12V@0.36A, Vcore_12V@7.48A, 3.3V@1.42A, 5VSB@0.13A (3.9 GHz Intel® Core™ i7-4770K CPU with two 4 GB 1333 MHz DDR3 memory)
Operating Temperature	-20°C – 60°C
Storage Temperature	-30°C – 70°C
Humidity	5% – 95% (non-condensing)

Specification/Model	WSB-H810
Physical Specifications	
Dimensions	338 mm x 122 mm
Weight (GW/NW)	1000 g/260 g

Table 1-1: WSB-H810 Specifications

Chapter

2

Packing List

2.1 Anti-static Precautions



WARNING!

Static electricity can destroy certain electronics. Make sure to follow the ESD precautions to prevent damage to the product, and injury to the user.

Make sure to adhere to the following guidelines:

- **Wear an anti-static wristband:** Wearing an anti-static wristband can prevent electrostatic discharge.
- **Self-grounding:** Touch a grounded conductor every few minutes to discharge any excess static buildup.
- **Use an anti-static pad:** When configuring any circuit board, place it on an anti-static mat.
- **Only handle the edges of the PCB:** Don't touch the surface of the motherboard. Hold the motherboard by the edges when handling.

2.2 Unpacking Precautions

When the WSB-H810 is unpacked, please do the following:

- Follow the anti-static guidelines above.
- Make sure the packing box is facing upwards when opening.
- Make sure all the packing list items are present.

2.3 Packing List



NOTE:

If any of the components listed in the checklist below are missing, do not proceed with the installation. Contact the IEI reseller or vendor the WSB-H810 was purchased from or contact an IEI sales representative directly by sending an email to sales@ieeworld.com.

The WSB-H810 is shipped with the following components:

Quantity	Item and Part Number	Image
1	WSB-H810 CPU card	
2	SATA cable	
1	Quick Installation Guide	

Table 2-1: Packing List

2.4 Optional Items

The following are optional components which may be separately purchased:

Item and Part Number	Image
Dual RS-232 cable, 230 mm, P=2.54 (P/N: 32205-000702-200-RS)	

Item and Part Number	Image
RS-422/485 cable, 200 mm (P/N: 32200-074800-RS)	
Dual-port USB 3.2 Gen 1 cable with bracket (P/N: 19800-010500-200-RS)	
Dual-port USB cable with bracket, 300 mm, P=2.54 (P/N: CB-USB02-RS)	
KB/MS cable with bracket (P/N: 19800-000075-RS)	
SATA power cable (P/N: 32102-000100-200-RS)	
LPT flat cable, 240 mm (P/N: 19800-000049-RS)	
LGA1150 cooler kit ,high-performance compatible, 65W (P/N: CF-1150SB-R11)	
LGA1150 cooler kit, 1U chassis compatible, 65W (P/N: CF-1150SC-R20)	

WSB-H810 PICMG 1.0 CPU Card

Item and Part Number	Image
LGA1150 cooler kit, high-performance compatible, 95W (P/N: CF-1150SE-R11)	
DisplayPort to HDMI converter board (for IEI iDP connector) (P/N: DP-HDMI-R10)	
DisplayPort to LVDS converter board (for IEI iDP connector) (P/N: DP-LVDS-R10)	
DisplayPort to VGA converter board (for IEI iDP connector) (P/N: DP-VGA-R10)	
DisplayPort to DVI-D converter board (for IEI iDP connector) (P/N: DP-DVI-R10)	
DisplayPort to DisplayPort converter board (for IEI iDP connector) (P/N: DP-DP-R10)	
7.1-channel HD audio kit with Realtek ALC888S audio codec supporting dual audio stream (P/N: AC-KIT-888S-R10)	

Item and Part Number	Image
20-pin Infineon TPM module, software management tool, firmware v4.4 (P/N: TPM-IN01-R20)	

Table 2-2: Optional Items

Chapter

3

Connectors

3.1 Peripheral Interface Connectors

This chapter details all the jumpers and connectors.

3.1.1 WSB-H810 Layout

The figures below show all the connectors and jumpers.

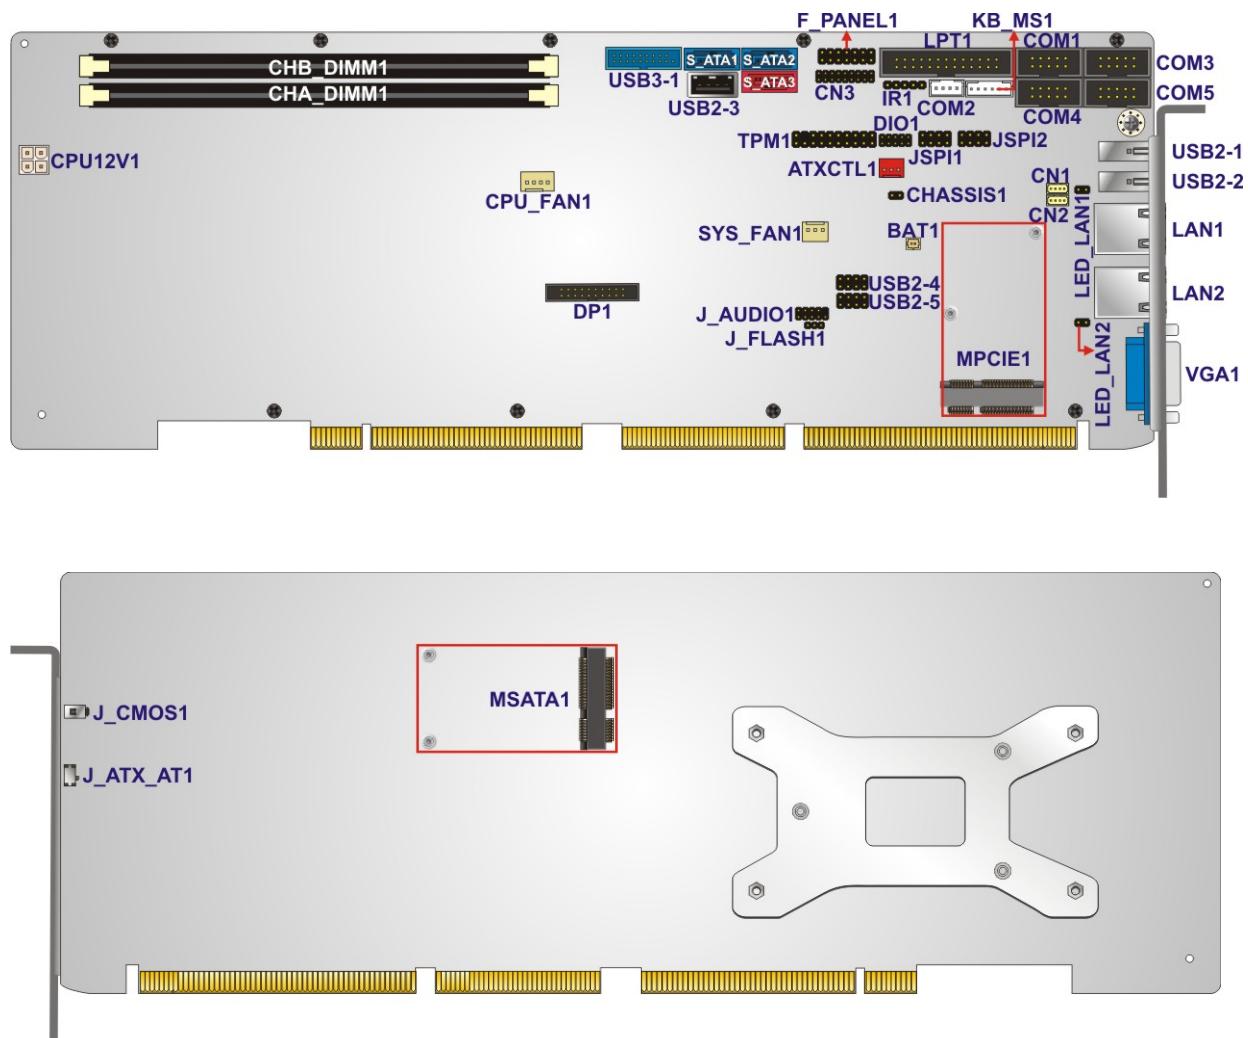


Figure 3-1: Connectors and Jumpers

WSB-H810 PICMG 1.0 CPU Card

3.1.2 Peripheral Interface Connectors

The table below lists all the connectors on the board.

Connector	Type	Label
+12V power connector	4-pin Molex power connector	CPU12V1
ATX power supply enable connector	3-pin wafer	ATXCTL1
Audio kit connector	10-pin header	J_AUDIO1
Battery connector	2-pin wafer	BAT1
Chassis intrusion connector	2-pin header	CHASSIS1
DDR3 DIMM sockets	240-pin socket	CHA_DIMM1 CHB_DIMM1
Digital I/O connector	10-pin header	DIO1
EC debug connector	18-pin header	CN3
Fan connector (CPU)	4-pin wafer	CPU_FAN1
Fan connector (system)	3-pin wafer	SYS_FAN1
Front panel connector	14-pin header	F_PANEL1
I ² C connector	4-pin wafer	CN1
Infrared connector (reserved)	5-pin header	IR1
Internal DisplayPort connector	19-pin box header	DP1
Keyboard and mouse connector	6-pin wafer	KB_MS1
LAN LED connectors	2-pin header	LED_LAN1, LED_LAN2
mSATA slot	PCIe Mini	MSATA1
Parallel port connector	26-pin box header	LPT1
PCIe Mini slot	PCIe Mini	MPCIE1
SATA 3Gb/s drive connector	7-pin SATA connector	SATA_3
SATA 6Gb/s drive connectors	7-pin SATA connector	S_ATA1, S_ATA2,

Connector	Type	Label
Serial port, RS-232	10-pin box header	COM1, COM3, COM4, COM5
Serial port, RS-422/485	4-pin wafer	COM2
SMBus connector	4-pin wafer	CN2
SPI flash connector	8-pin header	JSP1
SPI flash connector (EC)	8-pin header	JSP1
TPM connector	20-pin header	TPM1
USB 2.0 connector (Type A)	Type A	USB2-3
USB 2.0 connectors	8-pin header	USB2-4, USB2-5
USB 3.2 Gen 1 connector	19-pin box header	USB3-1

Table 3-1: Peripheral Interface Connectors

3.1.3 External Interface Panel Connectors

The table below lists the connectors on the external I/O panel.

Connector	Type	Label
Ethernet connectors	RJ-45	LAN1, LAN2
USB 2.0 ports	USB 2.0	USB2-1, USB2-2
VGA connector	15-pin female	VGA1

Table 3-2: Rear Panel Connectors

3.2 Internal Peripheral Connectors

The section describes all of the connectors on the WSB-H810.

3.2.1 +12V Power Connector

CN Label: CPU12V1

CN Type: 4-pin Molex power connector, p=4.2 mm

CN Location: See **Figure 3-2**

CN Pinouts: See **Table 3-3**

This connector provides power to the CPU.

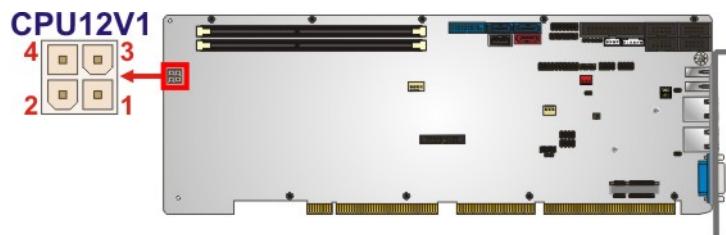


Figure 3-2: +12V Power Connector Pinout Location

Pin	Description	Pin	Description
1	GND	2	GND
3	+12V	4	+12V

Table 3-3: +12V Power Connector Pinouts

3.2.2 ATX Power Supply Enable Connector

CN Label: ATXCTL1

CN Type: 3-pin wafer, p=2.54 mm

CN Location: See **Figure 3-3**

CN Pinouts: See **Table 3-4**

The ATX power supply enable connector enables the WSB-H810 to be connected to an ATX power supply. To enable an ATX power supply, the AT and ATX power mode selection switch must also be configured. Please refer to Chapter 4 for more details.

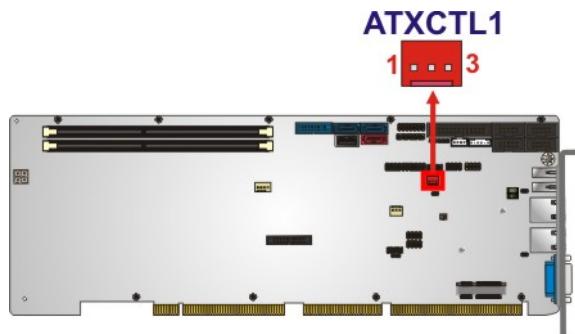


Figure 3-3: ATX Power Supply Enable Connector Location

Pin	Description
1	GND
2	PS_ON#
3	5VSB

Table 3-4: ATX Power Supply Enable Connector Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.3 Audio Kit Connector

CN Label: J_AUDIO1

CN Type: 10-pin header, p=2 mm

CN Location: See **Figure 3-4**

CN Pinouts: See **Table 3-5**

This connector connects to an external audio kit.

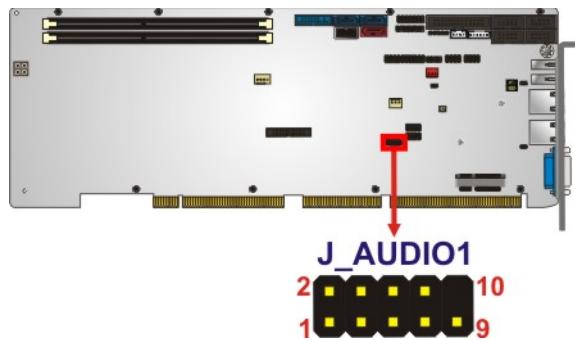


Figure 3-4: Audio Kit Connector Location

Pin	Description	Pin	Description
1	HDA_SYNC	2	HDA_BIT_CLK
3	HDA_SDOUT	4	HDA_SPKR
5	HDA_SDIN	6	HDA_RST#
7	HDA_VCC	8	HDA_GND
9	HDA_+12V	10	HDA_GND

Table 3-5: Audio Kit Connector Pinouts

3.2.4 Battery Connector



CAUTION:

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

CN Label: BAT1

CN Type: 2-pin wafer, p=1.25 mm

CN Location: See [Figure 3-5](#)

CN Pinouts: See [Table 3-6](#)

This is connected to the system battery. The battery provides power to the system clock to retain the time when power is turned off. **NOTE:** It is recommended to attach the RTC battery onto the system chassis in which the WSB-H810 is installed.

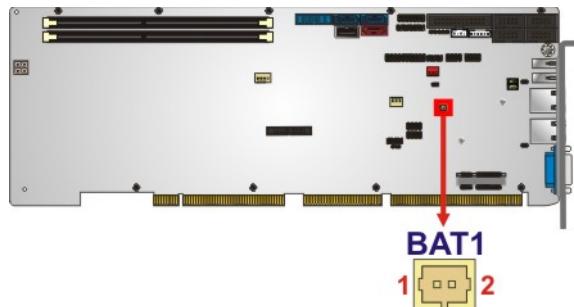


Figure 3-5: Battery Connector Location

Pin	Description
1	Battery+
2	GND

Table 3-6: Battery Connector Pinouts

3.2.5 Chassis Intrusion Connector

CN Label: CHASSIS1

CN Type: 2-pin header, p=2.54 mm

CN Location: See **Figure 3-6**

CN Pinouts: See **Table 3-7**

The chassis intrusion connector is for a chassis intrusion detection sensor or switch that detects if a chassis component is removed or replaced.

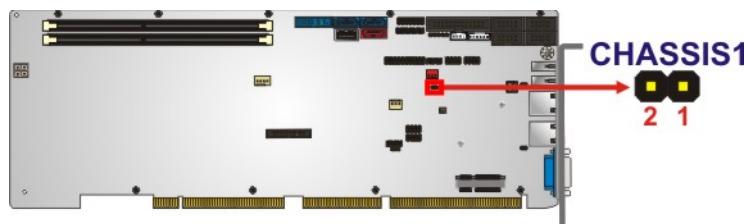


Figure 3-6: Chassis Intrusion Connector Location

Pin	Description
1	+3.3VSB
2	CHASSIS OPEN

Table 3-7: Chassis Intrusion Connector Pinouts

3.2.6 DDR3 DIMM Slots

CN Label: CHA_DIMM1, CHB_DIMM1

CN Type: DDR3 DIMM slot

CN Location: See **Figure 3-7**

The DIMM slots are for DDR3/DDR3L DIMM memory modules.



CAUTION:

For dual channel configuration, always install two identical memory modules that feature the same capacity, timings, voltage, number of ranks and the same brand.

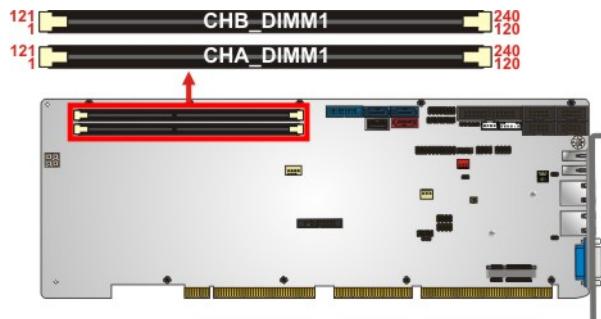


Figure 3-7: DDR3 DIMM Slot Locations

WSB-H810 PICMG 1.0 CPU Card

3.2.7 Digital I/O Connector

CN Label: DIO1

CN Type: 10-pin header, p=2 mm

CN Location: See **Figure 3-8**

CN Pinouts: See **Table 3-8**

The digital I/O connector provides programmable input and output for external devices.

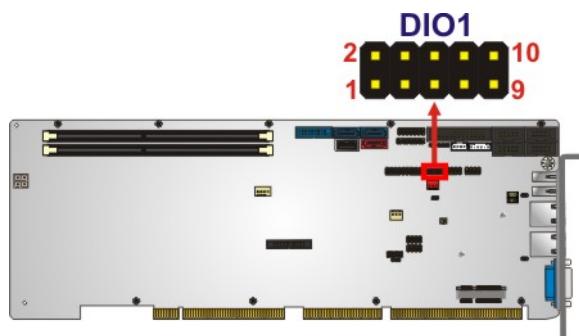


Figure 3-8: Digital I/O Connector Location

Pin	Description	Pin	Description
1	GND	2	VCC
3	Output 3	4	Output 2
5	Output 1	6	Output 0
7	Input 3	8	Input 2
9	Input 1	10	Input 0

Table 3-8: Digital I/O Connector Pinouts

3.2.8 EC Debug Connector

CN Label: CN3

CN Type: 18-pin header, p=2 mm

CN Location: See **Figure 3-9**

CN Pinouts: See **Table 3-9**

The EC debug connector is used for EC debug.

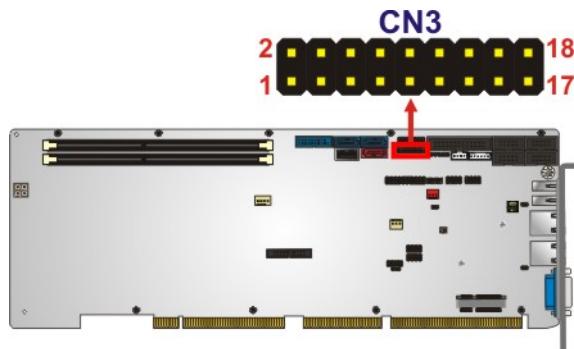


Figure 3-9: EC Debug Connector Location

Pin	Description	Pin	Description
1	EC_EPP_STB#	2	EC_EPP_AFD#
3	EC_EPP PDO	4	NC
5	EC_EPP PD1	6	EC_EPP_INIT#
7	EC_EPP PD2	8	EC_EPP_SLIN#
9	EC_EPP PD3	10	GND
11	EC_EPP PD4	12	NC
13	EC_EPP PD5	14	EC_EPP_BUSY
15	EC_EPP PD6	16	EC_EPP_KSI5
17	EC_EPP PD7	18	EC_EPP_KSI4

Table 3-9: EC Debug Connector Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.9 Fan Connector (CPU)

CN Label: CPU_FAN1

CN Type: 4-pin wafer, p=2.54 mm

CN Location: See **Figure 3-10**

CN Pinouts: See **Table 3-10**

The fan connector attaches to a CPU cooling fan.

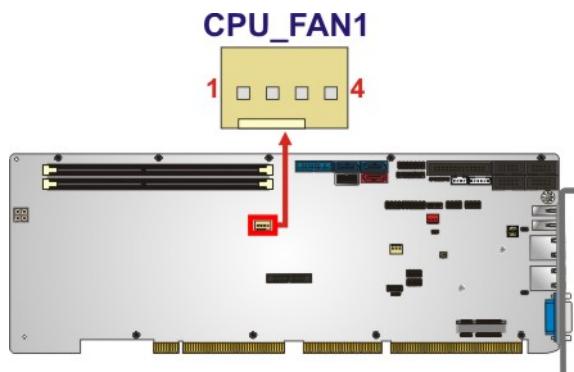


Figure 3-10: CPU Fan Connector Location

Pin	Description
1	GND
2	+12 V
3	FANIO
4	PWM

Table 3-10: CPU Fan Connector Pinouts

3.2.10 Fan Connector (System)

CN Label: SYS_FAN1

CN Type: 3-pin wafer, p=2.54 mm

CN Location: See **Figure 3-11**

CN Pinouts: See **Table 3-11**

The fan connector attaches to a system cooling fan.

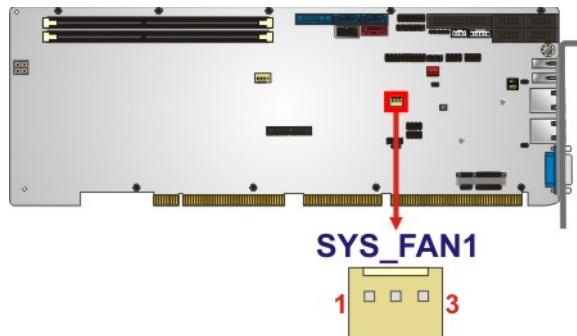


Figure 3-11: System Fan Connector Location

Pin	Description
1	FANIO
2	+12 V (PWM)
3	GND

Table 3-11: System Fan Connector Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.11 Front Panel Connector

CN Label: F_PANEL1

CN Type: 14-pin header, p=2.54 mm

CN Location: See **Figure 3-12**

CN Pinouts: See **Table 3-12**

The front panel connector connects to the indicator LEDs and buttons on the computer's front panel.

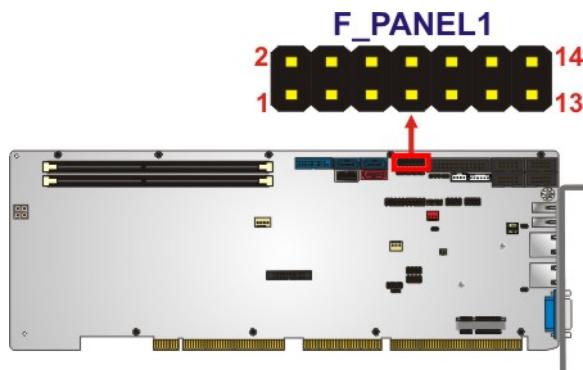


Figure 3-12: Front Panel Connector Location

Function	Pin	Description	Function	Pin	Description
Power LED	1	+5V	Speaker	2	BEEP_PWR
	3	N/C		4	N/C
	5	GND		6	N/C
Power Button	7	PWRBTN_SW#		8	PC_BEEP
	9	GND	Reset	10	N/C
HDD LED	11	+5V		12	EXTRST-
	13	SATA_LED#		14	GND

Table 3-12: Front Panel Connector Pinouts

3.2.12 I²C Connector

CN Label: CN1

CN Type: 4-pin wafer, p=1.25 mm

CN Location: See **Figure 3-13**

CN Pinouts: See **Table 3-13**

The I²C connector is for system debug.

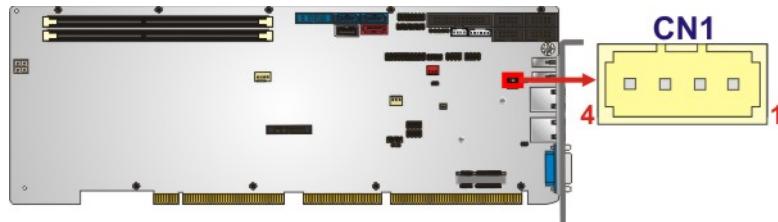


Figure 3-13: I²C Connector Location

Pin	Description
1	GND
2	I2C_DAT
3	I2C_CLK
4	+5V

Table 3-13: I²C Connector Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.13 Infrared Connector (Reserved)

CN Label: IR1

CN Type: 5-pin header, p=2.54 mm

CN Location: See **Figure 3-14**

CN Pinouts: See **Table 3-14**

The infrared connector attaches to an infrared receiver for use with remote controls.

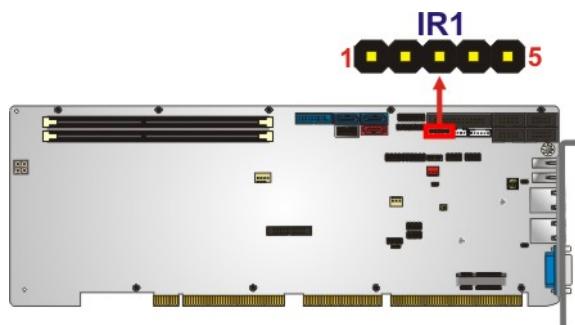


Figure 3-14: Infrared Connector Location

Pin	Description
1	+V5S
2	NC
3	IR-RX
4	GND
5	IR-TX

Table 3-14: Infrared Connector Pinouts

3.2.14 Internal DisplayPort Connector

CN Label: DP1

CN Type: 19-pin box header, p=2 mm

CN Location: See **Figure 3-15**

CN Pinouts: See **Table 3-15**

The DisplayPort connector supports HDMI, LVDS, VGA, DVI and DisplayPort graphics interfaces with up to 3840x2160 resolutions.

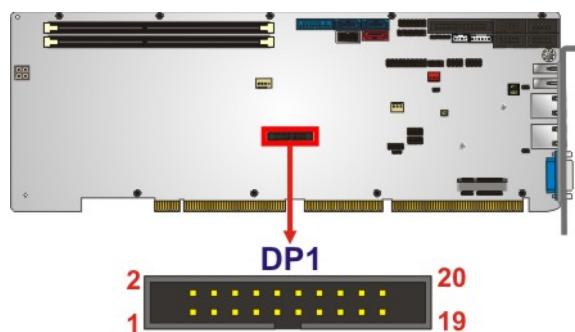


Figure 3-15: Internal DisplayPort Connector Location

Pin	Description	Pin	Description
1	HPD	2	AUX_P
3	GND	4	AUX_N
5	AUX_DET	6	GND
7	GND	8	LANE2P
9	LANE3P	10	LANE2N
11	LANE3N	12	GND
13	GND	14	LANEOP
15	LANE1P	16	LANEON
17	LANE1N	18	VCC3V
19	VCC5V	20	NC

Table 3-15: Internal DisplayPort Connector Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.15 Keyboard and Mouse Connector

CN Label: KB_MS1

CN Type: 6-pin wafer, p=2 mm

CN Location: See **Figure 3-16**

CN Pinouts: See **Table 3-16**

The keyboard/mouse connector connects to a PS/2 Y-cable that can be connected to a PS/2 keyboard and mouse.

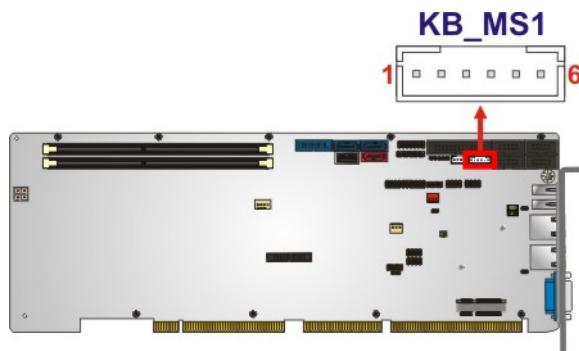


Figure 3-16: Keyboard and Mouse Connector Location

Pin	Description
1	+5 VCC
2	Mouse Data
3	Mouse Clock
4	Keyboard Data
5	Keyboard Clock
6	GROUND

Table 3-16: Keyboard and Mouse Connector Pinouts

3.2.16 LAN LED Connectors

CN Label: LED_LAN1, LED_LAN2

CN Type: 2-pin header, p=2.54 mm

CN Location: See **Figure 3-17**

CN Pinouts: See **Table 3-17** and **Table 3-18**

The LAN LED connectors are used to connect to the LAN LED indicators on the chassis to indicate users the link activities of the two LAN ports.

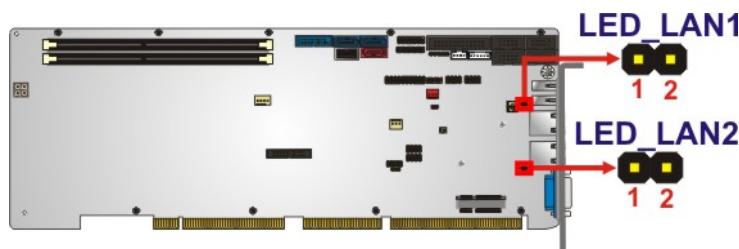


Figure 3-17: LAN LED Connector Locations

Pin	Description
1	+3.3V
2	LAN1_LED_LINK#_ACT

Table 3-17: LAN1 LED Connector (LED_LAN1) Pinouts

Pin	Description
1	+3.3V
2	LAN2_LED_LINK#_ACT

Table 3-18: LAN2 LED Connector (LED_LAN2) Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.17 mSATA Slot

CN Label: MSATA1

CN Type: PCIe Mini

CN Location: See **Figure 3-18**

CN Pinouts: See **Table 3-19**

The mSATA slot is for installing a full-size mSATA card.

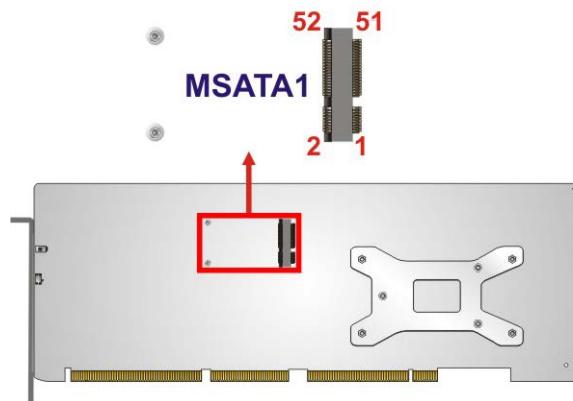


Figure 3-18: mSATA Slot Location

Pin	Description	Pin	Description
1	PCIE_WAKE#	2	+3.3V
3	N/C	4	GND
5	N/C	6	1.5V
7	N/C	8	N/C
9	GND	10	N/C
11	N/C	12	N/C
13	N/C	14	N/C
15	GND	16	N/C
17	N/C	18	GND
19	N/C	20	+3.3V
21	GND	22	PLTRST_N
23	SATA_RX+_C	24	+3.3V
25	SATA_RX-_C	26	GND

Pin	Description	Pin	Description
27	GND	28	1.5V
29	GND	30	SMB_CLK
31	SATA_TX-_C	32	SMB_DATA
33	SATA_TX+_C	34	GND
35	GND	36	N/C
37	GND	38	N/C
39	+3.3V	40	GND
41	+3.3V	42	N/C
43	+3.3V	44	N/C
45	N/C	46	N/C
47	N/C	48	1.5V
49	N/C	50	GND
51	N/C	52	+3.3V

Table 3-19: mSATA Slot Pinouts

3.2.18 Parallel Port Connector


CN Label: LPT1

CN Type: 26-pin box header, p=2.54 mm

CN Location: See Figure 3-19

CN Pinouts: See Table 3-20

The parallel port connector connects to a parallel port connector interface or some other parallel port device such as a printer.

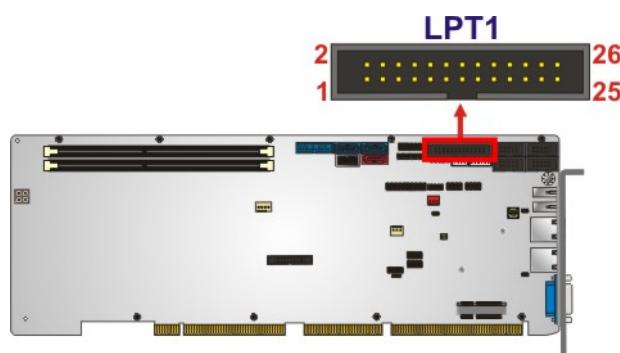WSB-H810 PICMG 1.0 CPU Card**Figure 3-19: Parallel Port Connector Location**

Pin	Description	Pin	Description
1	STB	2	AFD
3	PPD0	4	ERROR
5	PPD1	6	INIT
7	PPD2	8	SLIN
9	PPD3	10	GND
11	PPD4	12	GND
13	PPD5	14	GND
15	PPD6	16	GND
17	PPD7	18	GND
19	ACK	20	GND
21	BUSY	22	GND
23	PE	24	GND
25	SLCT		

Table 3-20: Parallel Port Connector Pinouts

3.2.19 PCIe Mini Slot

CN Label: MPCIE1

CN Type: PCIe Mini

CN Location: See **Figure 3-20**

CN Pinouts: See **Table 3-21**

The PCIe Mini slot is for installing a full-size or half-size PCIe Mini expansion card.

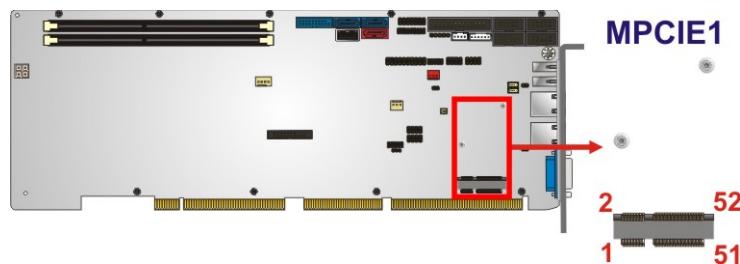


Figure 3-20: PCIe Mini Slot Location

Pin	Description	Pin	Description
1	PCIE_WAKE#	2	+3.3V
3	N/C	4	GND
5	N/C	6	1.5V
7	N/C	8	N/C
9	GND	10	N/C
11	N/C	12	N/C
13	N/C	14	N/C
15	GND	16	N/C
17	N/C	18	GND
19	N/C	20	WLAN_EN
21	GND	22	PLTRST_N
23	PCIE_RX-	24	+3.3V
25	PCIE_RX+	26	GND
27	GND	28	1.5V
29	GND	30	SMB_CLK
31	PCIE_TX-	32	SMB_DATA

WSB-H810 PICMG 1.0 CPU Card

Pin	Description	Pin	Description
33	PCIE_TX+	34	GND
35	GND	36	USB_D-
37	GND	38	USB_D+
39	+3.3V	40	GND
41	+3.3V	42	N/C
43	+3.3V	44	N/C
45	N/C	46	N/C
47	N/C	48	1.5V
49	N/C	50	GND
51	N/C	52	+3.3V

Table 3-21: PCIe Mini Slot Pinouts

3.2.20 SATA 3Gb/s Drive Connector

CN Label: S_ATA3

CN Type: 7-pin SATA drive connector

CN Location: See Figure 3-21

CN Pinouts: See Table 3-22

The SATA drive connector can be connected to SATA drive and supports up to 3Gb/s data transfer rate.

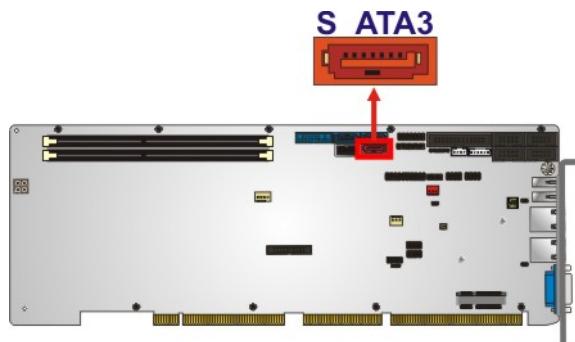


Figure 3-21: SATA 3Gb/s Drive Connector Location

Pin	Description	Pin	Description
1	GND	2	TX+
3	TX-	4	GND
5	RX-	6	RX+
7	GND		

Table 3-22: SATA 3Gb/s Drive Connector Pinouts

3.2.21 SATA 6Gb/s Drive Connectors


CN Label: S_ATA1, S_ATA2

CN Type: 7-pin SATA drive connector

CN Location: See Figure 3-22

CN Pinouts: See Table 3-23

The SATA drive connectors can be connected to SATA drives and support up to 6Gb/s data transfer rate.

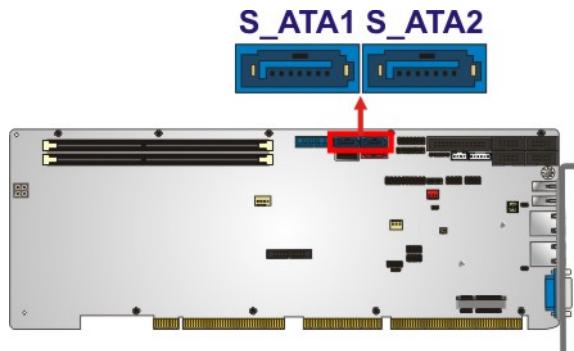**Figure 3-22: SATA 6Gb/s Drive Connector Locations**

Pin	Description	Pin	Description
1	GND	2	TX+
3	TX-	4	GND
5	RX-	6	RX+
7	GND		

Table 3-23: SATA 6Gb/s Drive Connector Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.22 Serial Port Connectors, RS-232

CN Label: COM1, COM3, COM4, COM5

CN Type: 10-pin box header, p=2.54 mm

CN Location: See **Figure 3-23**

CN Pinouts: See **Table 3-24**

Each of these connectors provides RS-232 connections.

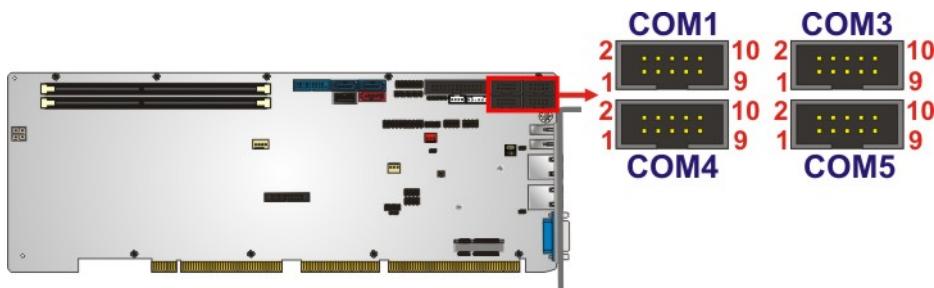


Figure 3-23: Serial Port Connector Locations

Pin	Description	Pin	Description
1	DCD	2	DSR
3	RXD	4	RTS
5	TXD	6	CTS
7	DTR	8	RI
9	GND	10	N/C

Table 3-24: Serial Port Connector Pinouts

3.2.23 Serial Port Connector, RS-422/485

CN Label: COM2

CN Type: 4-pin wafer, p=2 mm

CN Location: See **Figure 3-24**

CN Pinouts: See **Table 3-25**

This connector provides RS-422 or RS-485 communications.

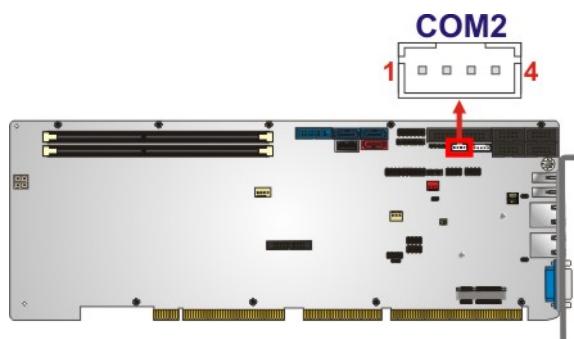


Figure 3-24: RS-422/485 Connector Location

Pin	Description
1	RXD422-
2	RXD422+
3	TXD422+/TXD485+
4	TXD422-/TXD485-

Table 3-25: RS-422/485 Connector Pinouts

Use the optional RS-422/485 cable to connect to a serial device. The pinouts of the DB-9 connector are listed below.

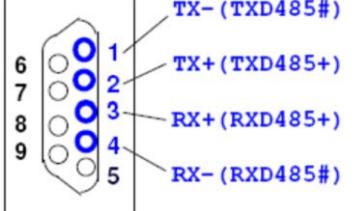
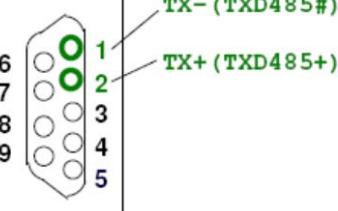
RS-422 Pinouts	RS-485 Pinouts
	

Table 3-26: DB-9 RS-422/485 Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.24 SMBus Connector

CN Label: CN2

CN Type: 4-pin wafer, p=1.25 mm

CN Location: See **Figure 3-25**

CN Pinouts: See **Table 3-27**

The SMBus (System Management Bus) connector provides low-speed system management communications.

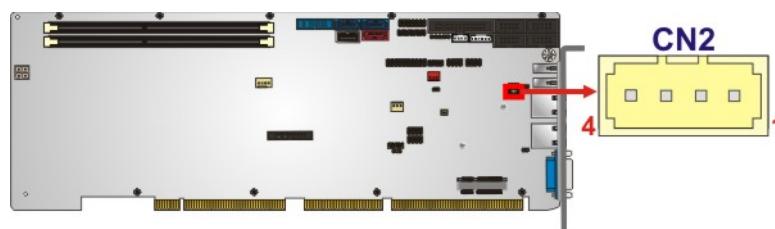


Figure 3-25: SMBus Connector Location

Pin	Description
1	GND
2	SMB_DATA
3	SMB_CLK
4	+5V

Table 3-27: SMBus Connector Pinouts

3.2.25 SPI Flash Connector

CN Label: JSPI1

CN Type: 8-pin header, p=2.54 mm

CN Location: See **Figure 3-26**

CN Pinouts: See **Table 3-28**

The SPI flash connector is used to flash the BIOS.

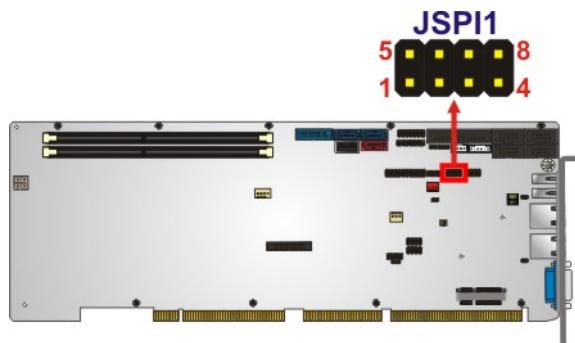


Figure 3-26: SPI Flash Connector Location

Pin	Description	Pin	Description
1	+3.3V	2	SPI_CS#
3	SPI_SO	4	NC
5	GND	6	SPI_CLK
7	SPI_SI	8	NC

Table 3-28: SPI Flash Connector Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.26 SPI Flash Connector (EC)

CN Label: JSPI2

CN Type: 8-pin header, p=2.54 mm

CN Location: See **Figure 3-27**

CN Pinouts: See **Table 3-29**

The SPI flash connector is used to flash the EC ROM.

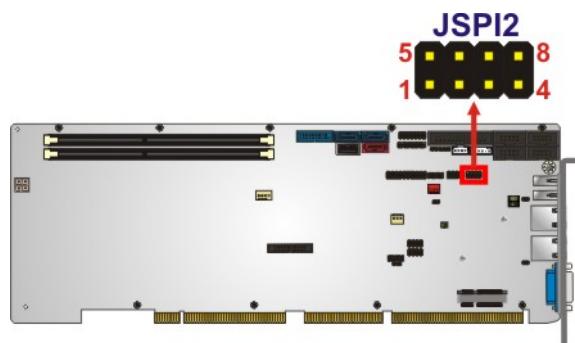


Figure 3-27: SPI EC Flash Connector Location

Pin	Description	Pin	Description
1	+3.3V	2	SPI_CS#
3	SPI_SO	4	NC
5	GND	6	SPI_CLK
7	SPI_SI	8	NC

Table 3-29: SPI EC Flash Connector Pinouts

3.2.27 TPM Connector

CN Label: TPM1

CN Type: 20-pin header, p=2.54 mm

CN Location: See **Figure 3-28**

CN Pinouts: See **Table 3-30**

The TPM connector connects to a TPM module.

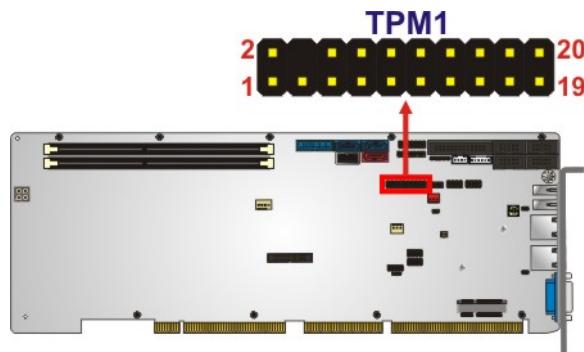


Figure 3-28: TPM Connector Location

Pin	Description	Pin	Description
1	LCLK	2	GND
3	LFRAME#	4	KEY
5	LRERST#	6	+5V
7	LAD3	8	LAD2
9	+3.3V	10	LAD1
11	LADO	12	GND
13	SCL	14	SDA
15	SB3V	16	SERIRQ
17	GND	18	GLKRUN#
19	LPCPD#	20	LDRQ#

Table 3-30: TPM Connector Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.28 USB 2.0 Connectors

CN Label: USB2-4, USB2-5

CN Type: 8-pin header, p=2.54 mm

CN Location: See **Figure 3-29**

CN Pinouts: See **Table 3-31**

The USB 2.0 connectors connect to USB 2.0/1.1 devices. Each pin header provides two USB 2.0 ports.

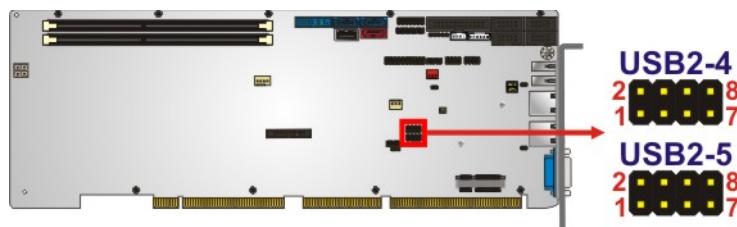


Figure 3-29: USB 2.0 Connector Pinout Locations

Pin	Description	Pin	Description
1	VCC	2	GND
3	DATA-	4	DATA+
5	DATA+	6	DATA-
7	GND	8	VCC

Table 3-31: USB 2.0 Connector Pinouts

3.2.29 USB 2.0 Connector (Type A)

CN Label: USB2-3

CN Type: USB Type A

CN Location: See **Figure 3-30**

CN Pinouts: See **Table 3-32**

The USB Type A connector connects to a USB 2.0/1.1 device.

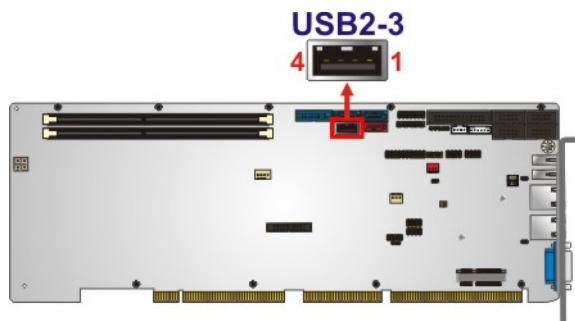


Figure 3-30: USB 2.0 Connector (Type A) Pinout Location

Pin	Description
1	VCC
2	DATA-
3	DATA+
4	GROUND

Table 3-32: USB 2.0 Connector (Type A) Pinouts

WSB-H810 PICMG 1.0 CPU Card

3.2.30 USB 3.2 Gen 1 Connector

CN Label: USB3-1

CN Type: 19-pin box header, p=2 mm

CN Location: See **Figure 3-31**

CN Pinouts: See **Table 3-33**

The USB 3.2 Gen 1 (5Gb/s) connector connects to USB 3.2 Gen 1 devices. This connector provides two USB 3.2 Gen 1 ports.

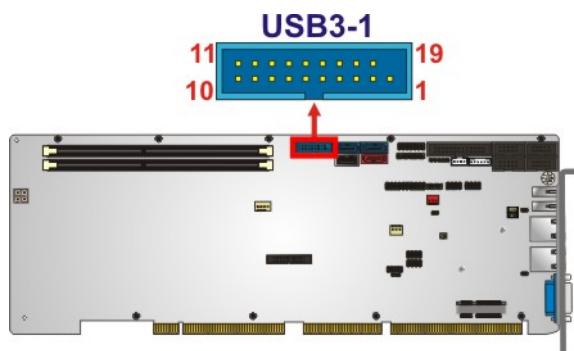


Figure 3-31: USB 3.2 Gen 1 Connector Location

Pin	Description	Pin	Description
1	VCC	11	USB_DATA+
2	USB3_RX-	12	USB_DATA-
3	USB3_RX+	13	GND
4	GND	14	USB3_TX+
5	USB3_TX-	15	USB3_TX-
6	USB3_TX+	16	GND
7	GND	17	USB3_RX+
8	USB_DATA-	18	USB3_RX-
9	USB_DATA+	19	VCC
10	NC		

Table 3-33: USB 3.2 Gen 1 Connector Pinouts

3.3 External Peripheral Interface Connector Panel

The figure below shows the external peripheral interface connector (EPIC) panel. The EPIC panel consists of the following:

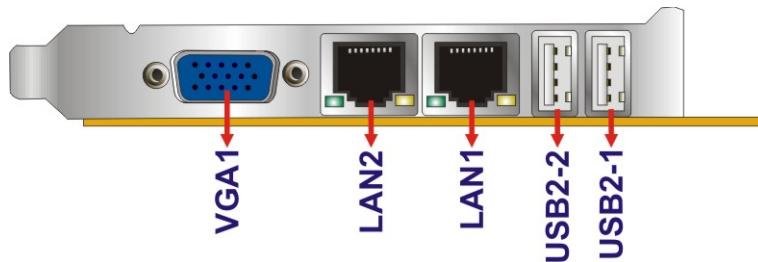


Figure 3-32: External Peripheral Interface Connector

3.3.1 Ethernet Connectors

CN Label: LAN1 and LAN2

CN Type: RJ-45

CN Location: See Figure 3-32

CN Pinouts: See Figure 3-33 and Table 3-34

The WSB-H810 is equipped with two built-in RJ-45 Ethernet controllers. Each controller can connect to the LAN through one RJ-45 LAN connector.

Pin	Description	Pin	Description
1	MDIA3-	5	MDIA2+
2	MDIA3+	6	MDIA1+
3	MDIA1-	7	MDIA0-
4	MDIA2-	8	MDIA0+

Table 3-34: LAN Pinouts

WSB-H810 PICMG 1.0 CPU Card

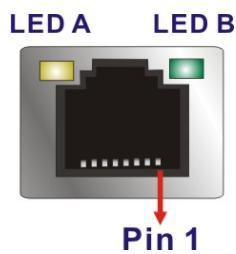


Figure 3-33: Ethernet Connector

LED	Description	LED	Description
A	on: linked blinking: data is being sent/received	B	off: 10 Mb/s green: 100 Mb/s orange: 1000 Mb/s

Table 3-35: Connector LEDs

3.3.2 USB 2.0 Connectors

CN Label: **USB2-1 and USB2-2**

CN Type: USB port

CN Location: See **Figure 3-32**

CN Pinouts: See **Table 3-36**

The WSB-H810 has two external USB 2.0 ports. The ports connect to both USB 2.0 and USB 1.1 devices.

Pin	Description
1	VCC
2	DATA-
3	DATA+
4	GROUND

Table 3-36: USB 2.0 Port Pinouts

3.3.3 VGA Connector

CN Label: VGA1

CN Type: 15-pin female

CN Location: See **Figure 3-32**

CN Pinouts: See **Figure 3-34** and **Table 3-37**

The VGA connector connects to a monitor that accepts a standard VGA input.

Pin	Description	Pin	Description
1	RED	2	GREEN
3	BLUE	4	NC
5	GND	6	GND
7	GND	8	GND
9	VCC	10	GND
11	NC	12	DDCDA
13	H SYNC	14	V SYNC
15	DDCCLK		

Table 3-37: VGA Connector Pinouts




Figure 3-34: VGA Connector

Chapter

4

Installation

4.1 Anti-static Precautions



WARNING:

Failure to take ESD precautions during the installation of the WSB-H810 may result in permanent damage to the WSB-H810 and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the WSB-H810. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the WSB-H810 or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** - Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- ***Self-grounding:*** - Before handling the board touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** When configuring the WSB-H810, place it on an anti-static pad. This reduces the possibility of ESD damaging the WSB-H810.
- ***Only handle the edges of the PCB:*** - When handling the PCB, hold the PCB by the edges.

4.2 Installation Considerations



NOTE:

The following installation notices and installation considerations should be read and understood before installation. All installation notices must be strictly adhered to. Failing to adhere to these precautions may lead to severe damage and injury to the person performing the installation.

WSB-H810 PICMG 1.0 CPU Card



WARNING:

The installation instructions described in this manual should be carefully followed in order to prevent damage to the components and injury to the user.

Before and during the installation please **DO** the following:

- Read the user manual:
 - The user manual provides a complete description of the WSB-H810 installation instructions and configuration options.
- Wear an electrostatic discharge cuff (ESD):
 - Electronic components are easily damaged by ESD. Wearing an ESD cuff removes ESD from the body and helps prevent ESD damage.
- Place the WSB-H810 on an anti-static pad:
 - When installing or configuring the motherboard, place it on an anti-static pad. This helps to prevent potential ESD damage.
- Turn all power to the WSB-H810 off:
 - When working with the WSB-H810, make sure that it is disconnected from all power supplies and that no electricity is being fed into the system.

Before and during the installation of the WSB-H810 **DO NOT**:

- Remove any of the stickers on the PCB board. These stickers are required for warranty validation.
- Use the product before verifying all the cables and power connectors are properly connected.
- Allow screws to come in contact with the PCB circuit, connector pins, or its components.

4.3 Socket LGA1150 CPU Installation



WARNING:

CPUs are expensive and sensitive components. When installing the CPU please be careful not to damage it in anyway. Make sure the CPU is installed properly and ensure the correct cooling kit is properly installed.

DO NOT touch the pins at the bottom of the CPU. When handling the CPU, only hold it on the sides.

To install the CPU, follow the steps below.

Step 1: **Disengage the load lever** by pressing the lever down and slightly outward to clear the retention tab. Fully open the lever. See **Figure 4-1**.

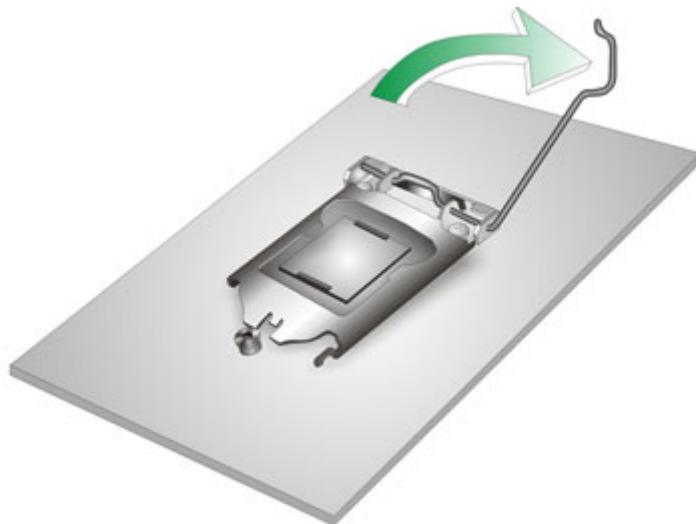


Figure 4-1: Disengage the CPU Socket Load Lever

Step 2: **Open the socket and remove the protective cover.** The black protective cover can be removed by pulling up on the tab labeled "Remove". See **Figure 4-2**.

WSB-H810 PICMG 1.0 CPU Card

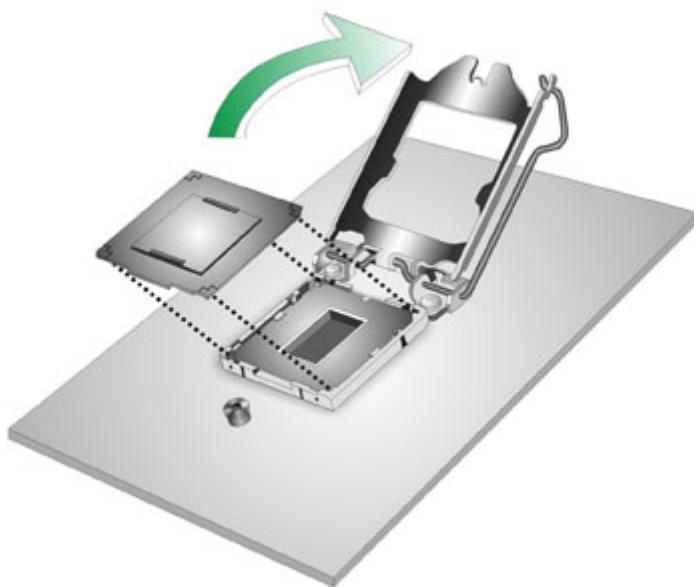


Figure 4-2: Remove Protective Cover

- Step 3: Inspect the CPU socket.** Make sure there are no bent pins and make sure the socket contacts are free of foreign material. If any debris is found, remove it with compressed air.
- Step 4: Orientate the CPU properly.** The contact array should be facing the CPU socket.
- Step 5: Correctly position the CPU.** Match the Pin 1 mark with the cut edge on the CPU socket.
- Step 6: Align the CPU pins.** Locate pin 1 and the two orientation notches on the CPU. Carefully match the two orientation notches on the CPU with the socket alignment keys.
- Step 7: Insert the CPU.** Gently insert the CPU into the socket. If the CPU pins are properly aligned, the CPU should slide into the CPU socket smoothly. See **Figure 4-3.**

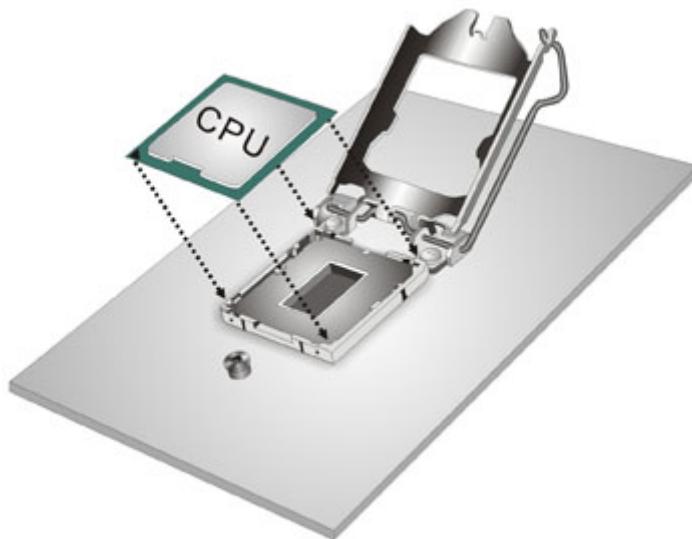


Figure 4-3: Insert the Socket LGA1150 CPU

Step 8: Close the CPU socket. Close the load plate and pull the load lever back a little to have the load plate be able to secure to the knob. Engage the load lever by pushing it back to its original position (**Figure 4-4**). There will be some resistance, but will not require extreme pressure.

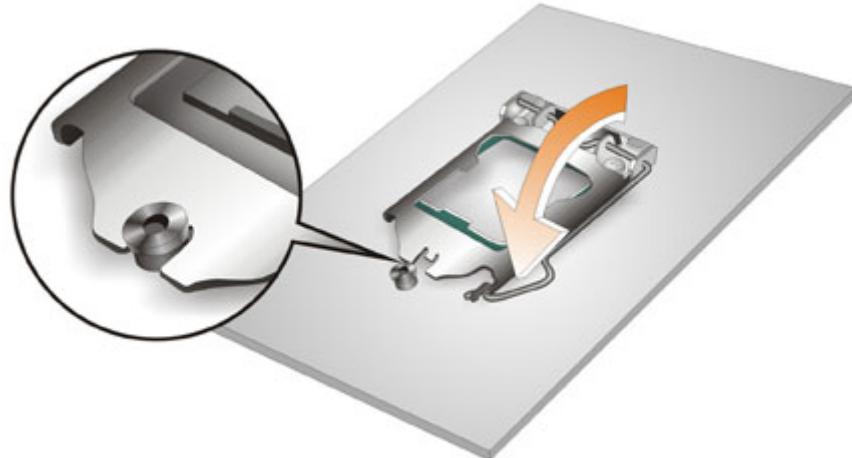


Figure 4-4: Close the Socket LGA1150

Step 9: Connect the 12 V power to the board. Connect the 12 V power from the power supply to the board.

4.4 Socket LGA1150 Cooling Kit Installation

The cooling kit can be bought from IEI. The cooling kit has a heatsink and fan.



WARNING:

Do not wipe off (accidentally or otherwise) the pre-sprayed layer of thermal paste on the bottom of the heat sink. The thermal paste between the CPU and the heat sink is important for optimum heat dissipation.

To install the cooling kit, follow the instructions below.

Step 1: A cooling kit bracket is pre-installed on the rear of the motherboard.

See **Figure 4-5**.



Figure 4-5: Cooling Kit Support Bracket

Step 2: Place the cooling kit onto the socket LGA1150 CPU. Make sure the CPU cable can be properly routed when the cooling kit is installed.

Step 3: Mount the cooling kit. Gently place the cooling kit on top of the CPU. Make sure the four threaded screws on the corners of the cooling kit properly pass through the holes of the cooling kit bracket.

Step 4: **Tighten the screws.** Use a screwdriver to tighten the four screws. In a diagonal pattern, tighten each screw a few turns then move to the next one, until they are all secured. Do not overtighten the screws.

Step 5: **Connect the fan cable.** Connect the cooling kit fan cable to the fan connector on the WSB-H810. Carefully route the cable and avoid heat generating chips and fan blades.

4.5 DIMM Installation

To install a DIMM, please follow the steps below and refer to **Figure 4-6**.



CAUTION:

For dual channel configuration, always install two identical memory modules that feature the same capacity, timings, voltage, number of ranks and the same brand.

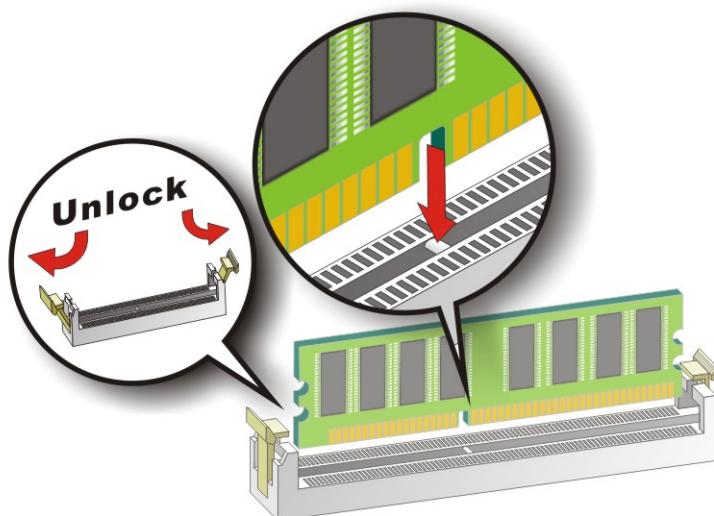


Figure 4-6: DIMM Installation

Step 1: Open the DIMM socket handles. Open the two handles outwards as far as they can. See **Figure 4-6**.

WSB-H810 PICMG 1.0 CPU Card

Step 2: Align the DIMM with the socket. Align the DIMM so the notch on the memory lines up with the notch on the memory socket. See **Figure 4-6**.

Step 3: Insert the DIMM. Once aligned, press down until the DIMM is properly seated. Clip the two handles into place. See **Figure 4-6**.

Step 4: Removing a DIMM. To remove a DIMM, push both handles outward. The memory module is ejected by a mechanism in the socket.

4.6 Full-size PCIe Mini Card Installation

The PCIe Mini slot allows installation of either a full-size or half-size PCIe Mini card. To install a full-size PCIe Mini card, please follow the steps below.

Step 1: Locate the PCIe Mini slot. See **Figure 3-20**.

Step 2: Remove the retention screw and standoff for a half-size PCIe Mini card. To avoid interference of the board circuit, remove the retention screw and standoff for a half-size PCIe Mini card as shown in **Figure 4-7**.

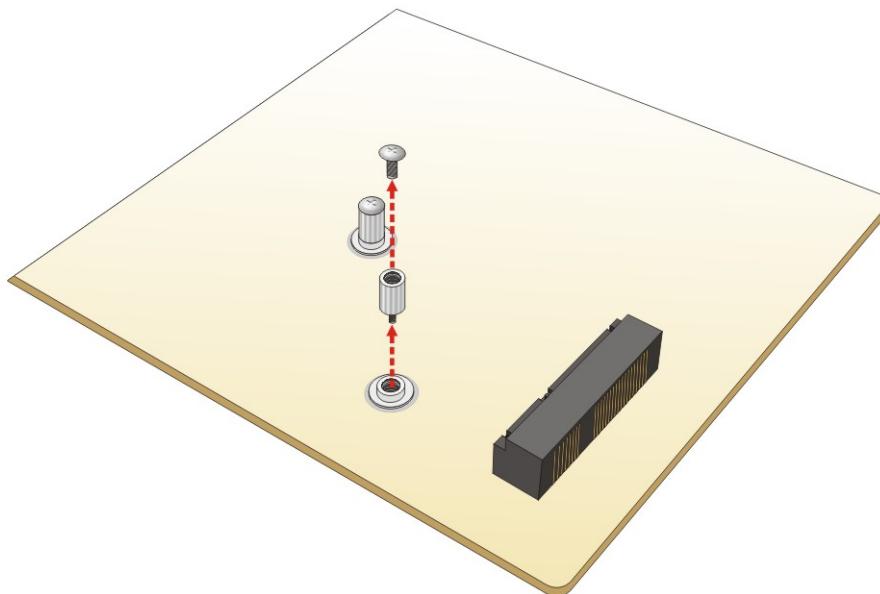


Figure 4-7: Removing the Retention Screw and Standoff for a Half-size PCIe Mini Card

Step 3: Remove the retention screw. Remove the retention screw as shown in Figure 4-8.


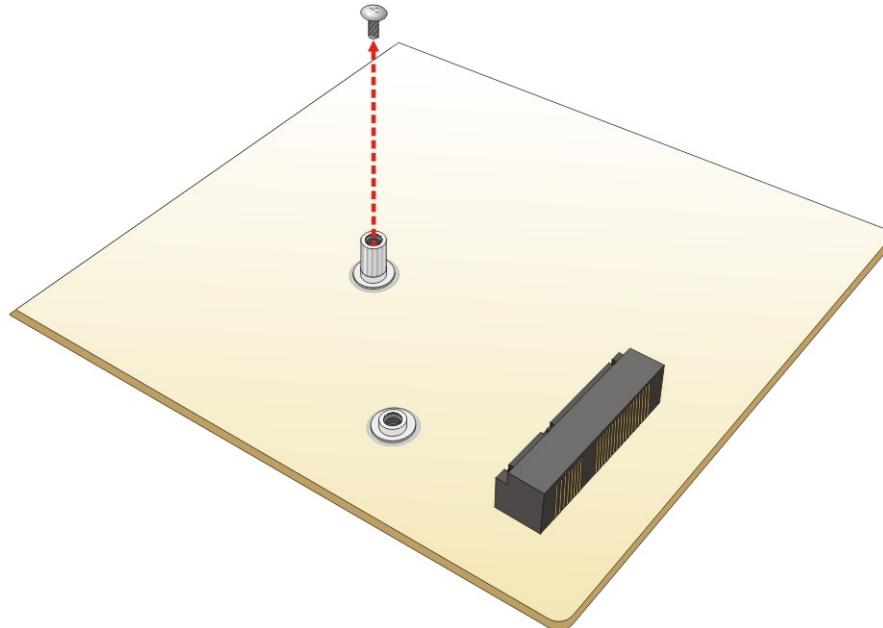


Figure 4-8: Removing the Retention Screw

Step 4: Insert into the socket at an angle. Line up the notch on the card with the notch on the slot. Slide the PCIe Mini card into the socket at an angle of about 20° (Figure 4-9).

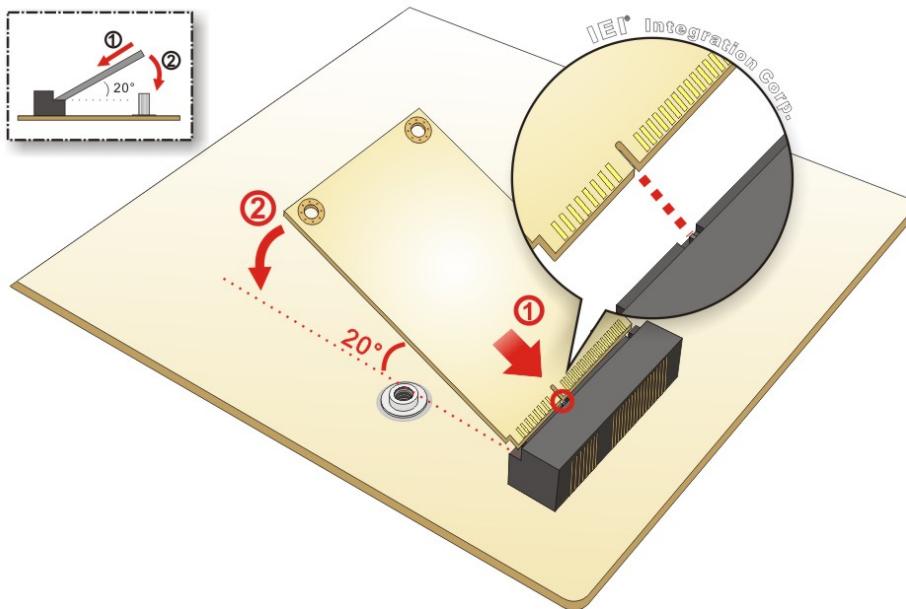

WSB-H810 PICMG 1.0 CPU Card

Figure 4-9: Inserting the Full-size PCIe Mini Card into the Slot at an Angle

Step 5: Secure the full-size PCIe Mini card. Secure the full-size PCIe Mini card with the retention screw previously removed (Figure 4-10).

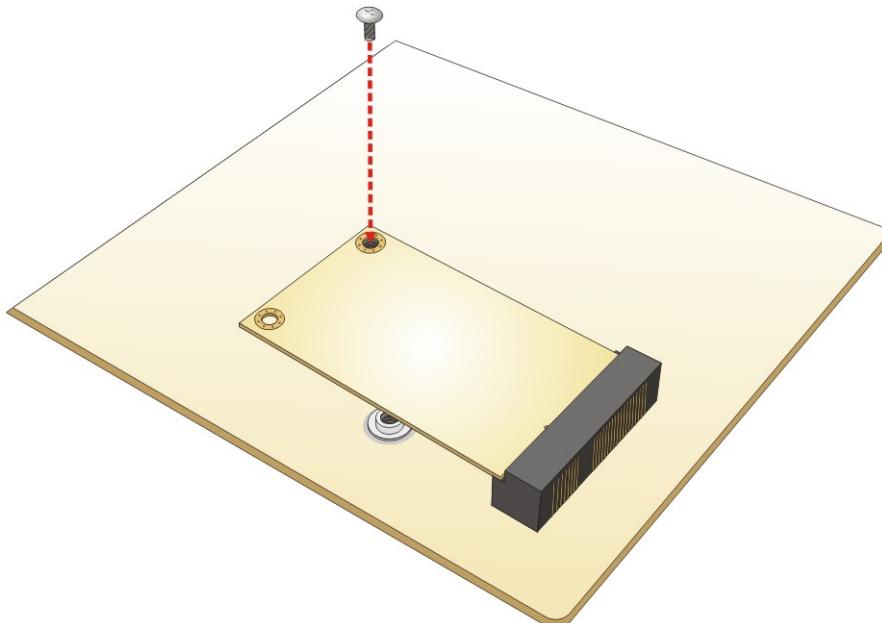


Figure 4-10: Securing the Full-size PCIe Mini Card

4.7 Half-size PCIe Mini Card Installation

The PCIe Mini card slot allows installation of either a full-size or half-size PCIe Mini card. To install a half-size PCIe Mini card, please follow the steps below.

Step 1: Locate the PCIe Mini card slot. See Figure 3-20.

Step 2: Remove the retention screw. Remove the retention screw as shown in Figure 4-11.

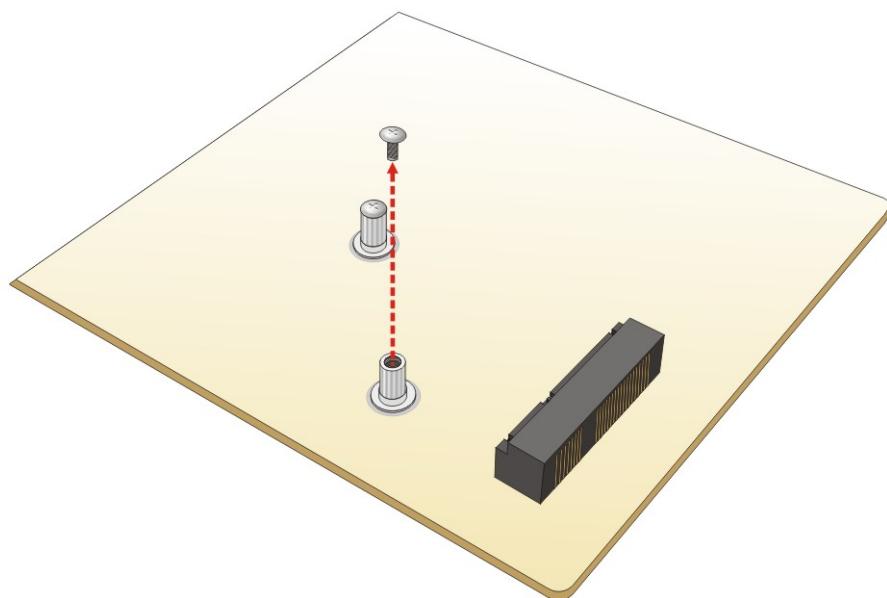


Figure 4-11: Removing the Retention Screw

Step 3: Insert into the socket at an angle. Line up the notch on the card with the notch on the slot. Slide the PCIe Mini card into the slot at an angle of about 20° (Figure 4-12).

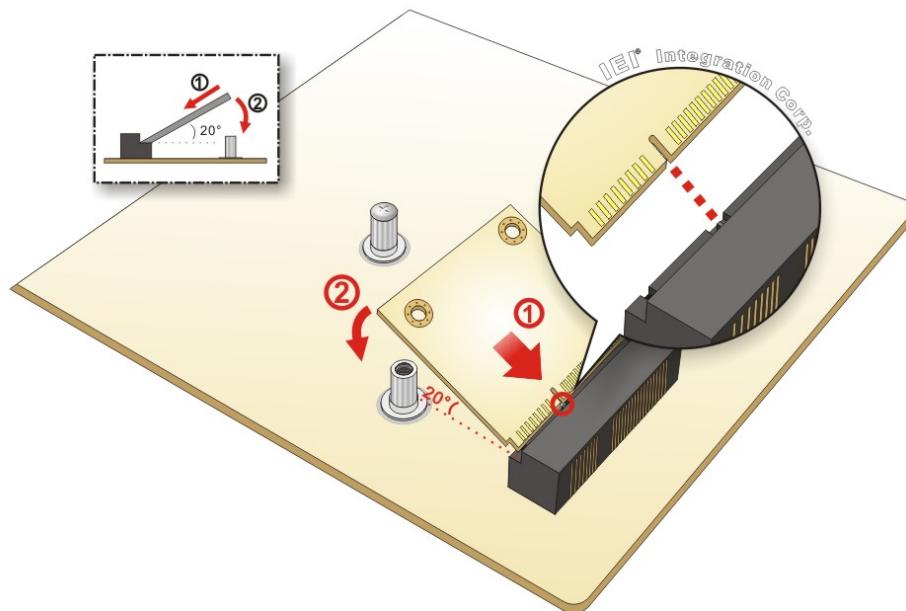


Figure 4-12: Inserting the Half-size PCIe Mini Card into the Slot at an Angle

WSB-H810 PICMG 1.0 CPU Card

Step 4: Secure the half-size PCIe Mini card. Secure the half-size PCIe Mini card with the retention screw previously removed (**Figure 4-13**).

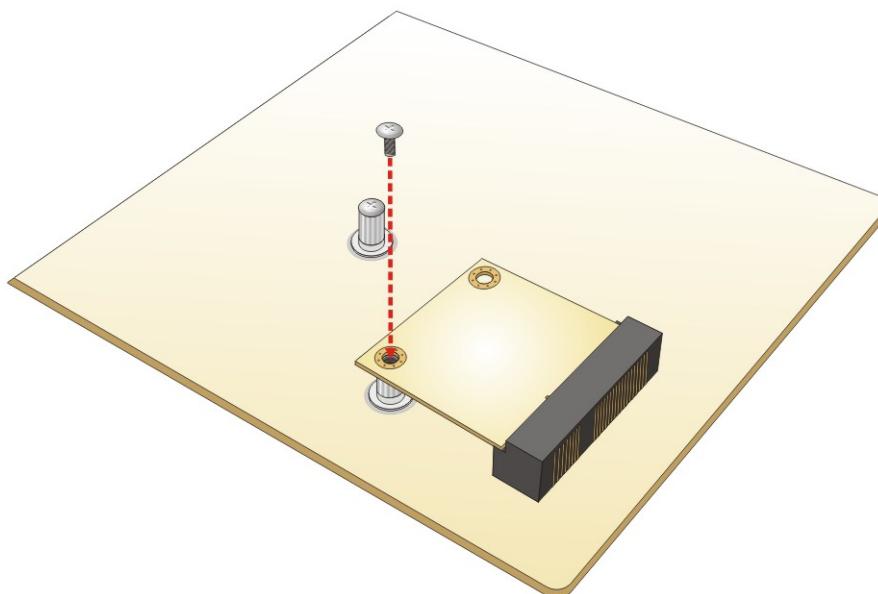


Figure 4-13: Securing the Half-size PCIe Mini Card

4.8 mSATA Card Installation

The mSATA slot allows installation of a full-size mSATA card. To install a full-size mSATA card, please follow the steps below.

Step 1: Locate the mSATA slot. The mSATA slot is located on the solder side of the WSB-H810. See **Figure 3-18**.

Step 2: Remove the retention screws. Remove the retention screws as shown in **Figure 4-14**.

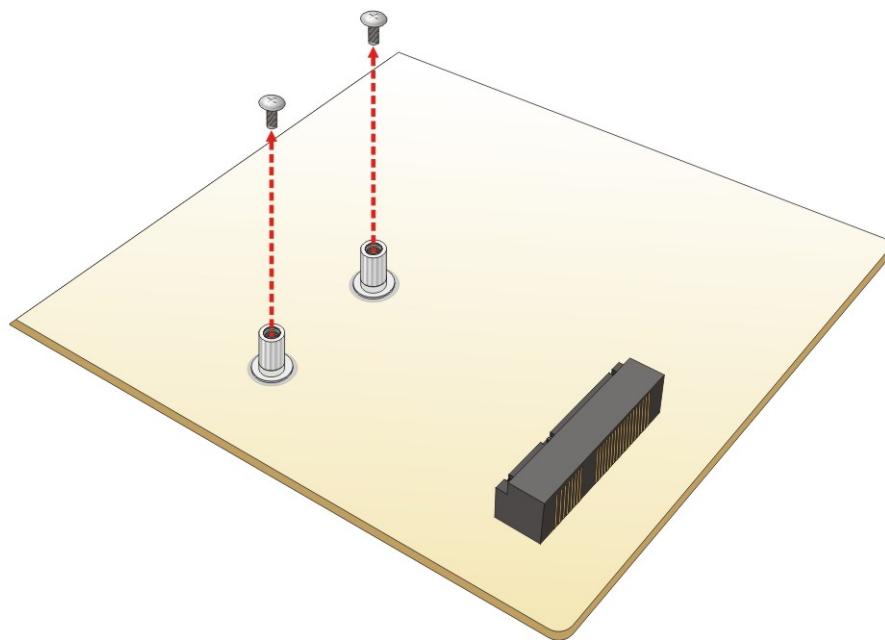


Figure 4-14: Removing the Retention Screws

Step 3: Insert into the socket at an angle. Line up the notch on the card with the notch on the slot. Slide the mSATA card into the slot at an angle of about 20° (Figure 4-15).

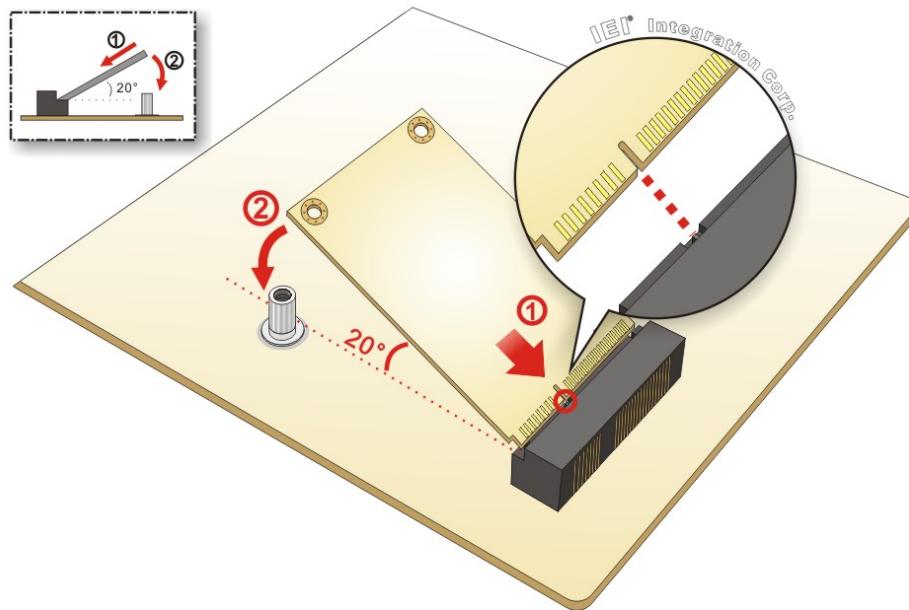


Figure 4-15: Inserting the mSATA Card into the Slot at an Angle

WSB-H810 PICMG 1.0 CPU Card

Step 4: Secure the mSATA card. Secure the mSATA card with the retention screws previously removed (**Figure 4-16**).

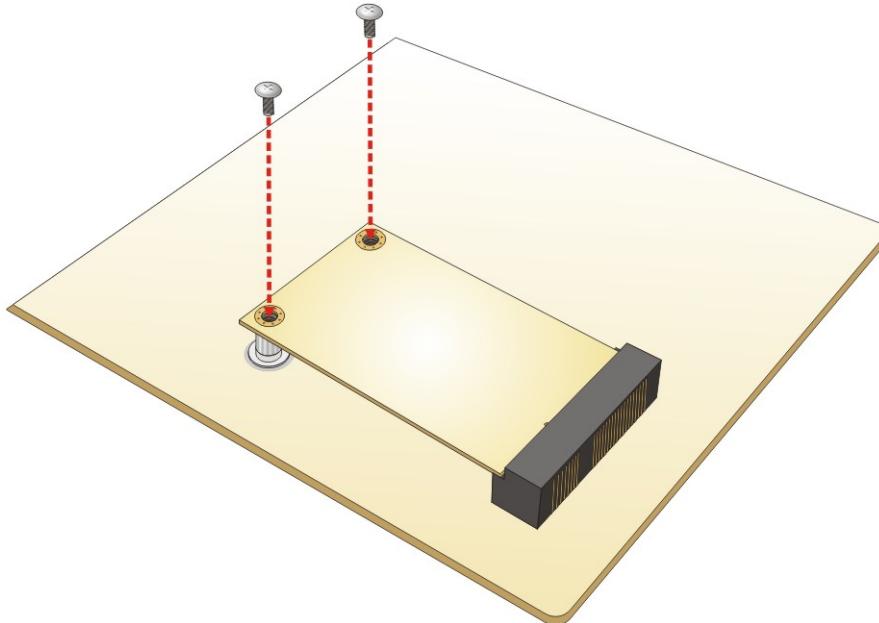


Figure 4-16: Securing the mSATA Card

4.9 System Configuration

The system configuration should be performed before installation.

4.9.1 AT/ATX Power Mode Setting

The AT and ATX power mode selection is made through the AT/ATX power mode switch which is shown in **Figure 4-17**.

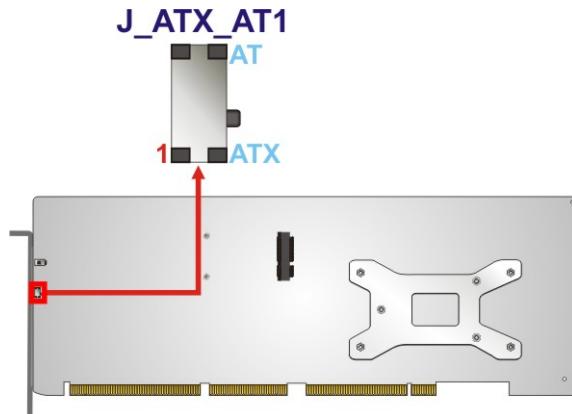


Figure 4-17: AT/ATX Power Mode Switch Location

Setting	Description
1-2 (down)	ATX power mode (default)
2-3 (up)	AT power mode

Table 4-1: AT/ATX Power Mode Switch Settings

4.9.2 Clear CMOS Button

To reset the BIOS, remove the on-board battery and press the clear CMOS button for three seconds or more. The clear CMOS button location is shown in **Figure 4-18**.

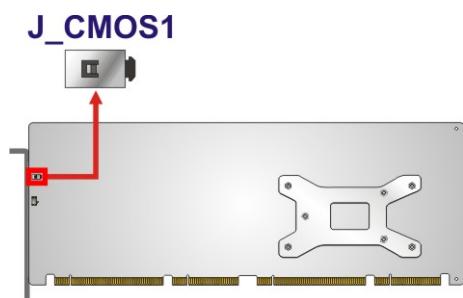


Figure 4-18: Clear CMOS Button Location

4.9.3 Flash Descriptor Security Override

The Flash Descriptor Security Override jumper (J_FLASH1) allows to enable or disable the ME firmware update. Refer to **Figure 4-19** and **Table 4-2** for the jumper location and settings.

Setting	Description
Short 1-2	Disabled (default)
Short 2-3	Enabled

Table 4-2: Flash Descriptor Security Override Jumper Settings

WSB-H810 PICMG 1.0 CPU Card

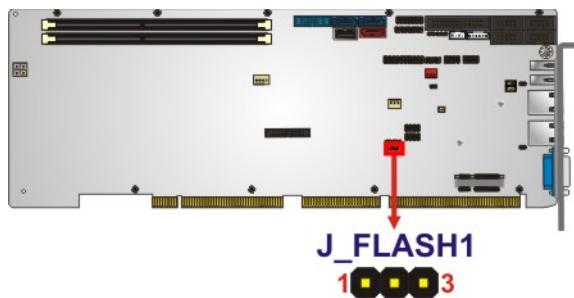


Figure 4-19: Flash Descriptor Security Override Jumper Location

To update the ME firmware, please follow the steps below.

- Step 1:** Before turning on the system power, short pin 2-3 of the Flash Descriptor Security Override jumper.
- Step 2:** Update the BIOS and ME firmware, and then turn off the system power.
- Step 3:** Remove the metal clip on the Flash Descriptor Security Override jumper or return to its default setting (short pin 1-2).
- Step 4:** Restart the system. The system will reboot 2–3 times to complete the ME firmware update.

4.9.4 USB Power Selection

The USB power selection is made through the BIOS menu in “Chipset → PCH-IO Configuration”. Use the **USB Power SW1** and the **USB Power SW2** BIOS options to configure the correspondent USB ports (see **Table 4-3**) and refer to **Table 4-4** to select the USB power source.

BIOS Options	Configured USB Ports
USB Power SW1	USB2-1 (external USB 2.0 port) USB2-2 (external USB 2.0 port)
USB Power SW2	USB2-4 (internal USB 2.0 ports) USB2-5 (internal USB 2.0 ports) USB2-3 (internal USB 2.0 port, Type A) USB3-1 (internal USB 3.2 Gen 1 ports)

Table 4-3: BIOS Options and Configured USB Ports

Options	Description
+5V DUAL	+5V dual (default)
+5V	+5V

Table 4-4: USB Power Source Setup

Please refer to Section **5.4.1** for detailed information.

4.10 Chassis Installation

4.10.1 Airflow

**WARNING:**

Airflow is critical to the cooling of the CPU and other onboard components. The chassis in which the WSB-H810 must have air vents to allow cool air to move into the system and hot air to move out.

The WSB-H810 must be installed in a chassis with ventilation holes on the sides allowing airflow to travel through the heat sink surface. In a system with an individual power supply unit, the cooling fan of a power supply can also help generate airflow through the board surface.

4.10.2 CPU Card Installation

To install the CPU card onto the backplane, carefully align the CPU card edge connector with the CPU card socket on the backplane. To do this, please refer to the reference material that came with the backplane. Next, secure the CPU card to the chassis. To do this, please refer to the reference material that came with the chassis.

4.11 Internal Peripheral Device Connections

This section outlines the installation of peripheral devices to the onboard connectors.

4.11.1 SATA Drive Connection

The WSB-H810 is shipped with four SATA drive cables. To connect the SATA drives to the connectors, please follow the steps below.

Step 1: Locate the connectors. The locations of the SATA drive connectors are shown in Chapter 3.

Step 2: Insert the cable connector. Insert the cable connector into the on-board SATA drive connector until it clips into place. See **Figure 4-20**.

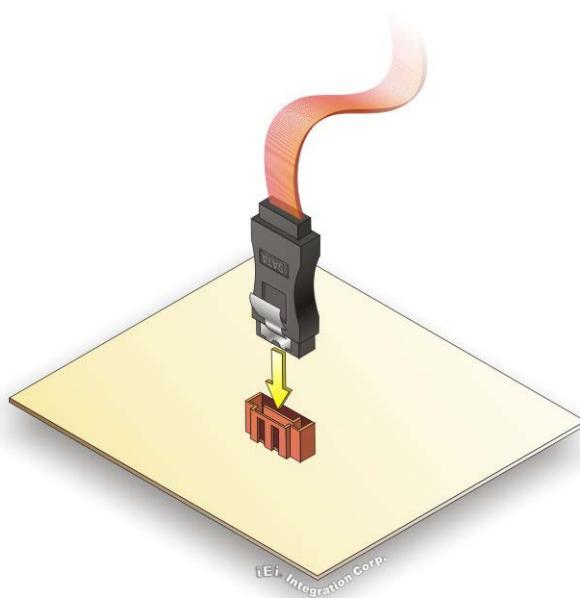


Figure 4-20: SATA Drive Cable Connection

Step 3: Connect the cable to the SATA disk. Connect the connector on the other end of the cable to the connector at the back of the SATA drive. See **Figure 4-21**.

Step 4: Connect the SATA power cable (optional). Connect the SATA power connector to the back of the SATA drive. See **Figure 4-21**.

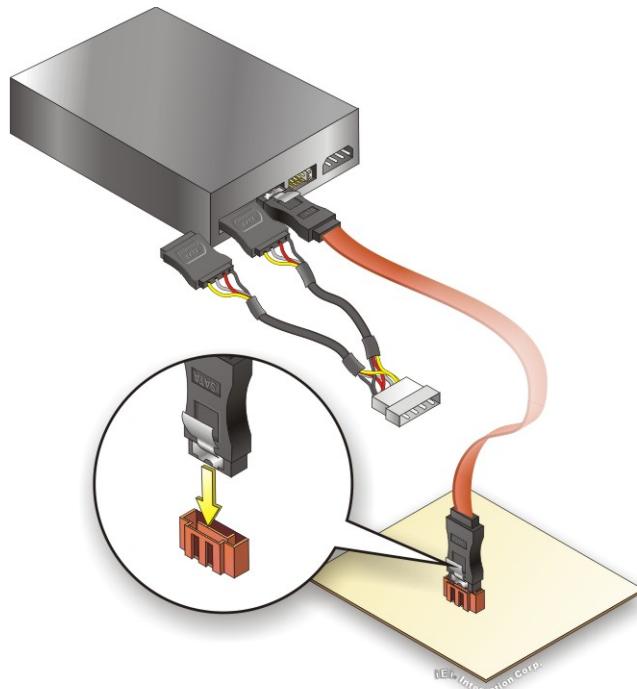


Figure 4-21: SATA Power Drive Connection

Chapter

5

BIOS

5.1 Introduction

The BIOS is programmed onto the BIOS chip. The BIOS setup program allows changes to certain system settings. This chapter outlines the options that can be changed.



NOTE:

Some of the BIOS options may vary throughout the life cycle of the product and are subject to change without prior notice.

5.1.1 Starting Setup

The UEFI BIOS is activated when the computer is turned on. The setup program can be activated in one of two ways.

1. Press the **DEL** or **F2** key as soon as the system is turned on or
2. Press the **DEL** or **F2** key when the “**Press DEL or F2 to enter SETUP**” message appears on the screen.

If the message disappears before the **DEL** or **F2** key is pressed, restart the computer and try again.

5.1.2 Using Setup

Use the arrow keys to highlight items, press **ENTER** to select, use the **PageUp** and **PageDown** keys to change entries, press **F1** for help and press **Esc** to quit. Navigation keys are shown in the following table.

Key	Function
Up arrow	Move to previous item
Down arrow	Move to next item
Left arrow	Move to the item on the left hand side
Right arrow	Move to the item on the right hand side
+	Increase the numeric value or make changes
-	Decrease the numeric value or make changes
Page Up	Move to the previous page

WSB-H810 PICMG 1.0 CPU Card

Key	Function
Page Dn	Move to the next page
Esc	Main Menu – Quit and not save changes into CMOS Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
F1	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2	Previous values
F3	Load optimized defaults
F4	Save changes and Exit BIOS

Table 5-1: BIOS Navigation Keys

5.1.3 Getting Help

When **F1** is pressed a small help window describing the appropriate keys to use and the possible selections for the highlighted item appears. To exit the Help Window press **Esc** or the **F1** key again.

5.1.4 Unable to Reboot after Configuration Changes

If the computer cannot boot after changes to the system configuration is made, CMOS defaults. Use the jumper described in Chapter 4.

5.1.5 BIOS Menu Bar

The **menu bar** on top of the BIOS screen has the following main items:

- Main – Changes the basic system configuration.
- Advanced – Changes the advanced system settings.
- Chipset – Changes the chipset settings.
- Boot – Changes the system boot configuration.
- Security – Sets User and Supervisor Passwords.
- Save & Exit – Selects exit options and loads default settings

The following sections completely describe the configuration options found in the menu items at the top of the BIOS screen and listed above.

5.2 Main

The **Main** BIOS menu (**BIOS Menu 1**) appears when the **BIOS Setup** program is entered.

The **Main** menu gives an overview of the basic system information.

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.					
Main	Advanced	Chipset	Boot	Security	Save & Exit
BIOS Information					Set the Date. Use Tab to switch between Date elements.
BIOS Vendor	American Megatrends				
Core Version	4.6.5.4				
Compliance	UEFI 2.3.1; PI 1.2				
Project Version	B327AT10.ROM				
Build Date and Time	01/08/2015 11:53:40				
iWDD Vendor	iEI				
iWDD Version	B327ER10.bin				
Processor Information					
Name	Haswell				
Brand String	Intel(R) Core(TM) i7-479				
Frequency	3600 MHz				
Processor ID	306c2				
Stepping	C0				
Number of Processors	4Core(s) / 8Thread(s)				
Microcode Revision	17				
GT Info	GT2 (700 MHz)				
IGFX VBIOS Version	2178				
Memory RC Version	1.6.2.1				
Total Memory	4096 MB (DDR3)				
Memory Frequency	1333 MHz				
PCH Information					
Name	LynxPoint				
PCH SKU	H81				
Stepping	05/C2				
LAN PHY Revision	N/A				
ME FW Version	9.1.10.1005				
ME Firmware SKU	1.5MB				
SPI Clock Frequency					
DOFR Support	Supported				
Read Status Clock Frequency	50 MHz				
Write Status Clock Frequency	50 MHz				
Fast Read Status Clock Frequency	50 MHz				
System Date	[Thu 02/05/2015]				
System Time	[15:10:27]				
Access Level	Administrator				
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.					

BIOS Menu 1: Main

WSB-H810 PICMG 1.0 CPU Card

→ System Overview

The system overview lists a brief summary of the BIOS. The fields in system overview cannot be changed. The items shown in the system overview include:

- BIOS Information
- Processor Information
- Memory Information
- PCH Information
- SPI Clock Frequency

The **Main** menu has two user configurable fields:

→ System Date [xx/xx/xx]

Use the **System Date** option to set the system date. Manually enter the day, month and year.

→ System Time [xx:xx:xx]

Use the **System Time** option to set the system time. Manually enter the hours, minutes and seconds.


5.3 Advanced

Use the **Advanced** menu (**BIOS Menu 2**) to configure the CPU and peripheral devices through the following sub-menus:



WARNING!


Setting the wrong values in the sections below may cause the system to malfunction. Make sure that the settings made are compatible with the hardware.

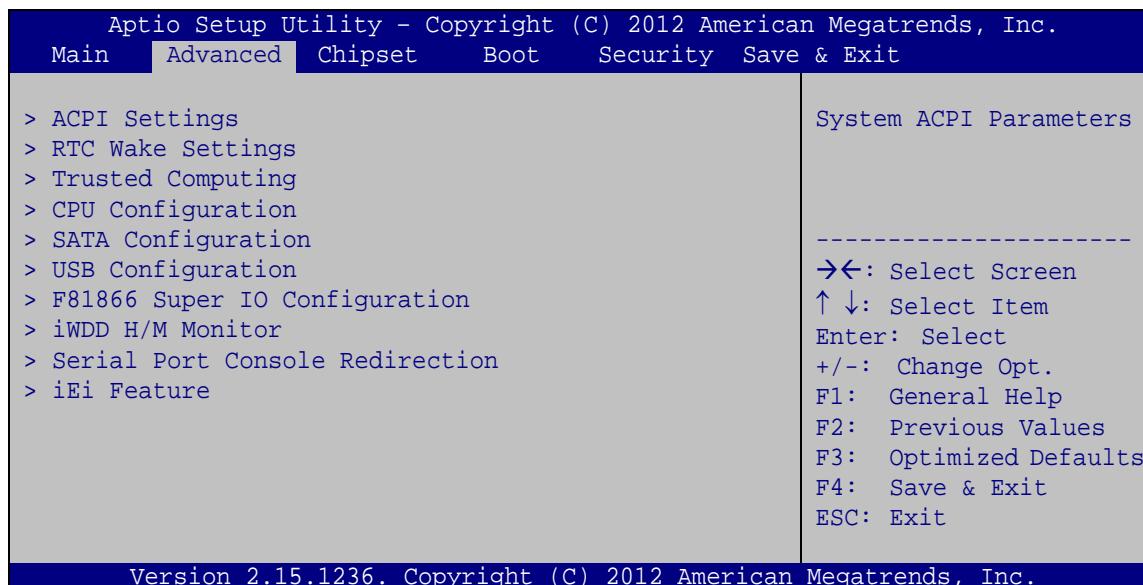

BIOS Menu 2: Advanced

5.3.1 ACPI Settings

The **ACPI Settings** menu (**BIOS Menu 3**) configures the Advanced Configuration and Power Interface (ACPI) options.

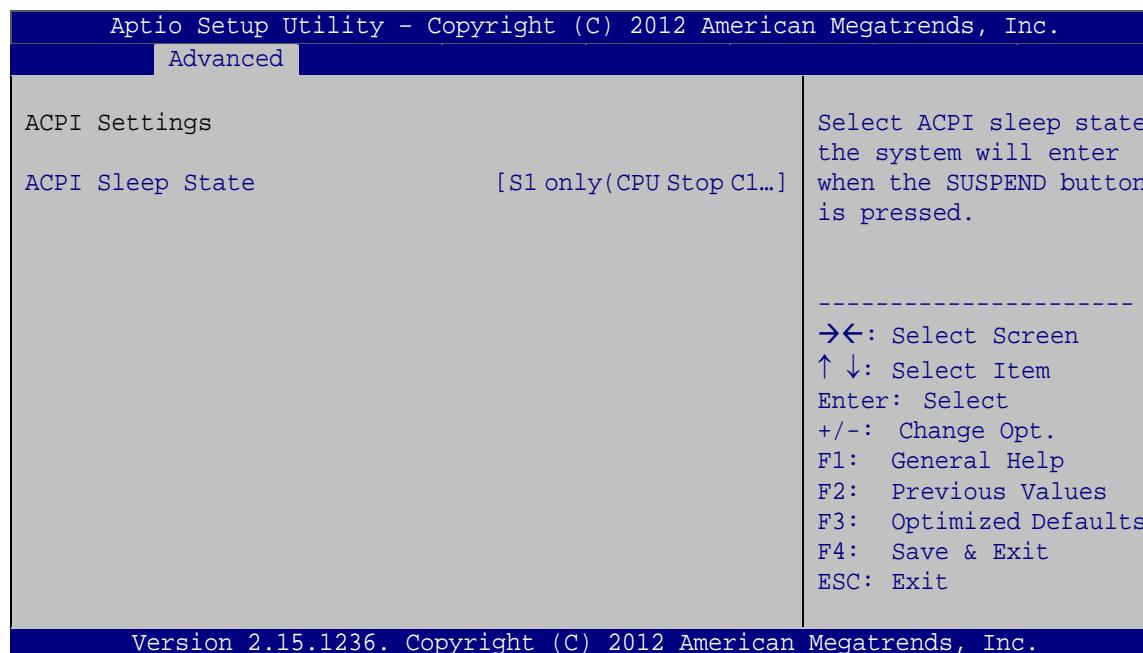

BIOS Menu 3: ACPI Configuration

WSB-H810 PICMG 1.0 CPU Card


→ ACPI Sleep State [S1 only (CPU Stop Clock)]

Use the **ACPI Sleep State** option to specify the sleep state the system enters when it is not being used.

- **S1 only (CPU Stop Clock) DEFAULT** The system enters S1 (POS) sleep state. The system appears off. The CPU is stopped; RAM is refreshed; the system is running in a low power mode.
- **S3 only (Suspend to RAM)** The caches are flushed and the CPU is powered off. Power to the RAM is maintained. The computer returns slower to a working state, but more power is saved.

5.3.2 RTC Wake Settings

The **RTC Wake Settings** menu (**BIOS Menu 4**) enables the system to wake at the specified time.

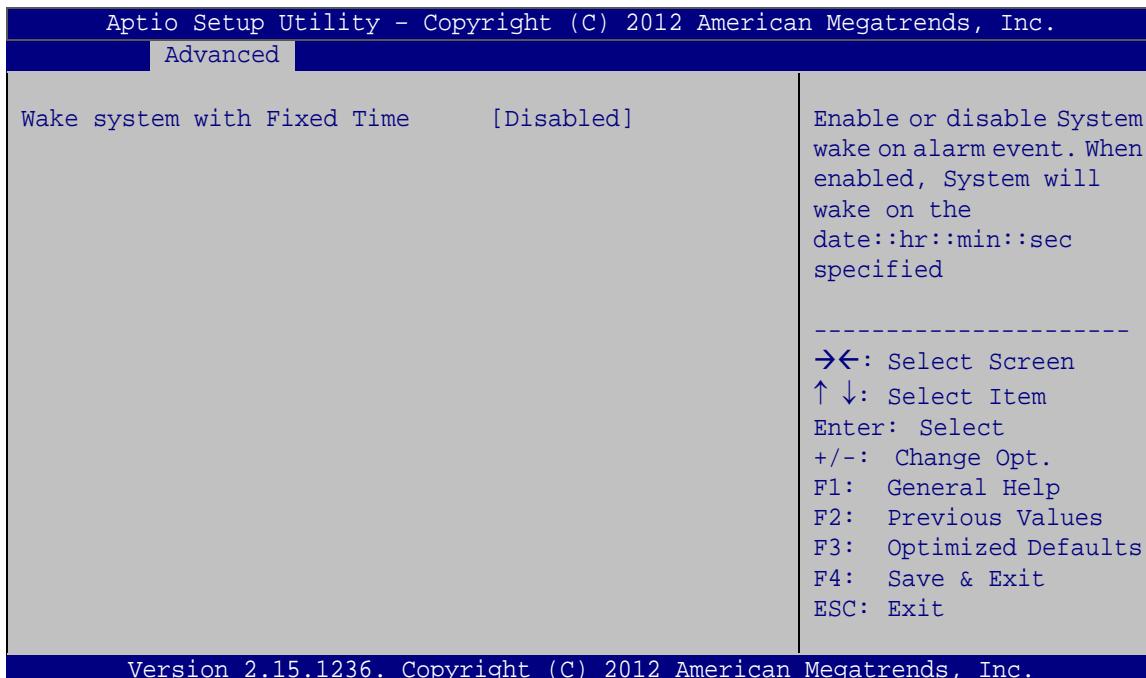

BIOS Menu 4: RTC Wake Settings

→ **Wake system with Fixed Time [Disabled]**

Use the **Wake system with Fixed Time** option to enable or disable the system wake on alarm event.

→ **Disabled** **DEFAULT** The real time clock (RTC) cannot generate a wake event

→ **Enabled** If selected, the **Wake up every day** option appears allowing you to enable to disable the system to wake every day at the specified time. Besides, the following options appear with values that can be selected:

 Wake up date

 Wake up hour

 Wake up minute


 Wake up second

After setting the alarm, the computer turns itself on from a suspend state when the alarm goes off.

WSB-H810 PICMG 1.0 CPU Card

5.3.3 Trusted Computing

Use the **Trusted Computing** menu (**BIOS Menu 5**) to configure settings related to the Trusted Computing Group (TCG) Trusted Platform Module (TPM).

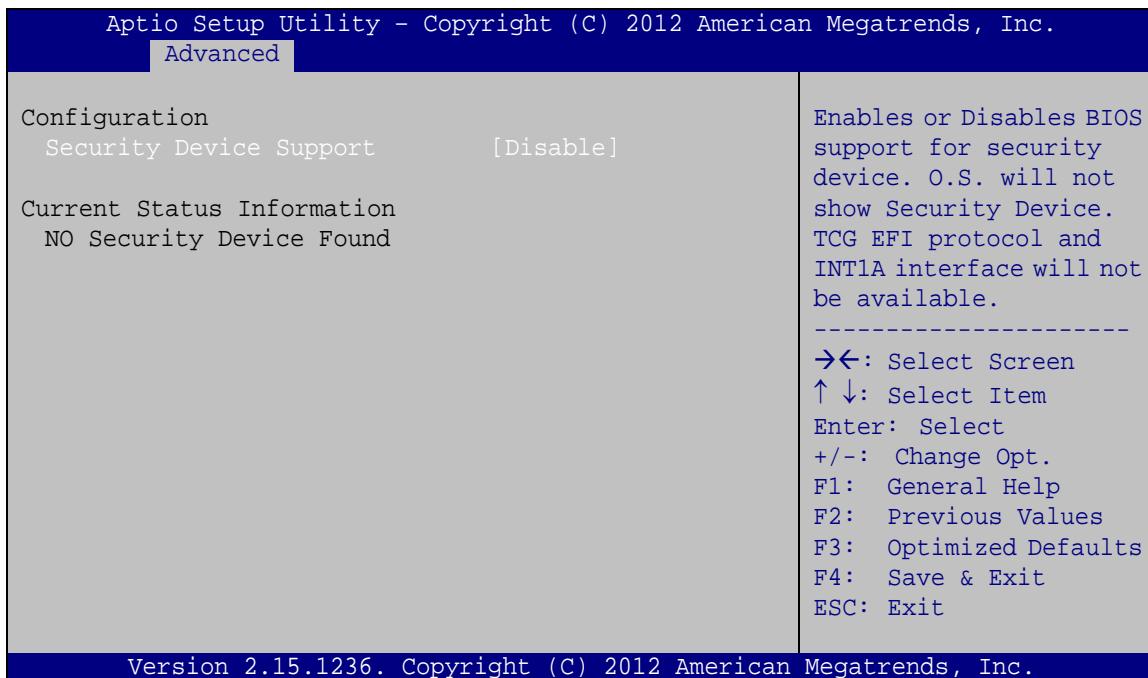

BIOS Menu 5: TPM Configuration

➔ **Security Device Support [Disable]**

Use the **Security Device Support** option to configure support for the TPM.

- ➔ **Disable** DEFAULT TPM support is disabled.
- ➔ **Enable** TPM support is enabled.

5.3.4 CPU Configuration

Use the **CPU Configuration** menu (**BIOS Menu 6**) to view detailed CPU specifications or enable the Intel Virtualization Technology.

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.	
Advanced	
CPU Configuration	
Intel(R) Core(TM) i7-4790S CPU @ 3.20GHz	
CPU Signature	306c2
Microcode Patch	17
Max CPU Speed	3200 MHz
Min CPU Speed	800 MHz
CPU Speed	3600 MHz
Processor Cores	4
Intel HT Technology	Supported
Intel VT-x Technology	Supported
Intel SMX Technology	Supported
64-bit	Supported
EIST Technology	Supported
 L1 Data Cache	32 kB x 4
L1 Code Cache	32 kB x 4
L2 Cache	256 kB x 4
L3 Cache	8192 kB
 Hyper-threading	[Enabled]
Active Processor Cores	[All]
Intel Virtualization Technology	[Disabled]
EIST	[Enabled]
Intel TXT(LT) Support	[Disabled]
 ----- →←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit	
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.	

BIOS Menu 6: CPU Configuration

→ Hyper-threading [Enabled]

Use the **Hyper-threading** BIOS option to enable or disable the Intel Hyper-Threading Technology.

- **Disabled** Disables the Intel Hyper-Threading Technology.
- **Enabled** **DEFAULT** Enables the Intel Hyper-Threading Technology.

WSB-H810 PICMG 1.0 CPU Card

→ Active Processor Cores [All]

Use the **Active Processor Cores** BIOS option to enable numbers of cores in the processor package.

- **All** **DEFAULT** Enable all cores in the processor package.
- **1** Enable one core in the processor package.
- **2** Enable two cores in the processor package.
- **3** Enable three cores in the processor package.

→ Intel Virtualization Technology [Disabled]

Use the **Intel Virtualization Technology** option to enable or disable virtualization on the system. When combined with third party software, Intel® Virtualization technology allows several OSs to run on the same system at the same time.

- **Disabled** **DEFAULT** Disables Intel Virtualization Technology.
- **Enabled** Enables Intel Virtualization Technology.


→ EIST [Enabled]

Use the **EIST** option to enable or disable the Enhanced Intel® SpeedStep Technology (EIST).

- **Disabled** Disables Enhanced Intel® SpeedStep Technology
- **Enabled** **DEFAULT** Enables Enhanced Intel® SpeedStep Technology

5.3.5 SATA Configuration

Use the **SATA Configuration** menu (**BIOS Menu 7**) to change and/or set the configuration of the SATA devices installed in the system.

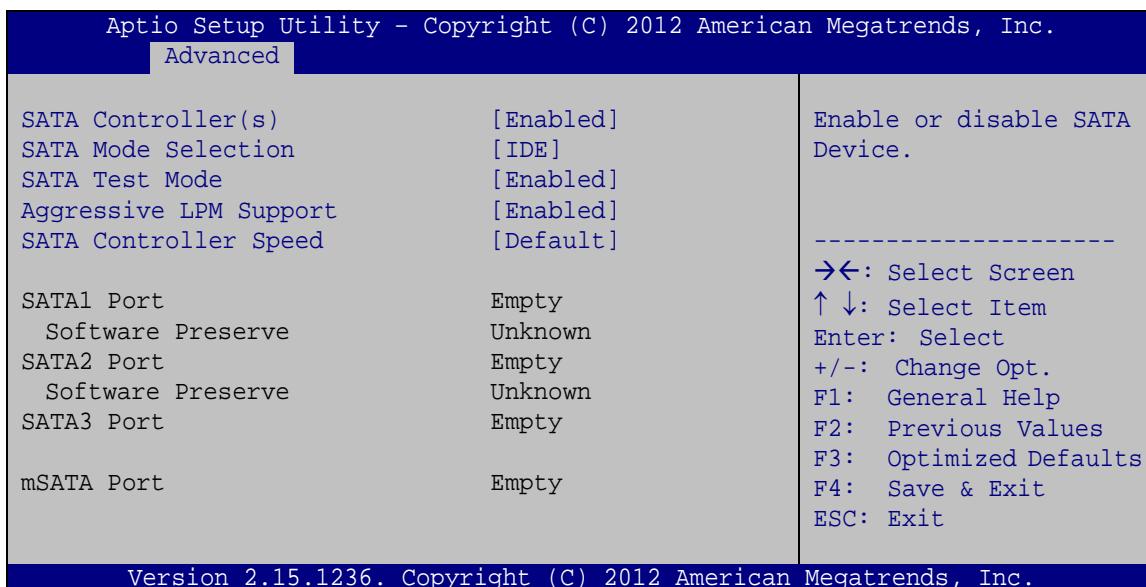

BIOS Menu 7: SATA Configuration

→ **SATA Controller(s) [Enabled]**

Use the **SATA Controller(s)** option to configure the SATA controller(s).

→ **Enabled** **DEFAULT** Enables the on-board SATA controller(s).

→ **Disabled** Disables the on-board SATA controller(s).

→ **SATA Mode Selection [IDE]**

Use the **SATA Mode Selection** option to determine how SATA devices operate.

→ **IDE** **DEFAULT** Configures SATA devices as normal IDE device.

→ **AHCI** Configures SATA devices as AHCI device.

→ **SATA Test Mode [Enabled]**

Use the **SATA Test Mode** option to enable or disable the SATA test mode.

WSB-H810 PICMG 1.0 CPU Card

→ **Enabled** **DEFAULT** Enables the SATA test mode.

→ **Disabled** Disables the SATA test mode.

→ **Aggressive LPM Support [Enabled]**

Use the **Aggressive LPM Support** option to enable or disable the PCH to aggressively enter link power state.

→ **Enabled** **DEFAULT** Enables the PCH to aggressively enter link power state.

→ **Disabled** Disables the PCH to aggressively enter link power state.


→ **SATA Controller Speed [Default]**

Use the **SATA Controller Speed** option to specify the maximum speed the SATA controller can support.

- Default **Default**
- Gen1
- Gen2
- Gen3

5.3.6 USB Configuration

Use the **USB Configuration** menu (**BIOS Menu 8**) to read USB configuration information and configure the USB settings.

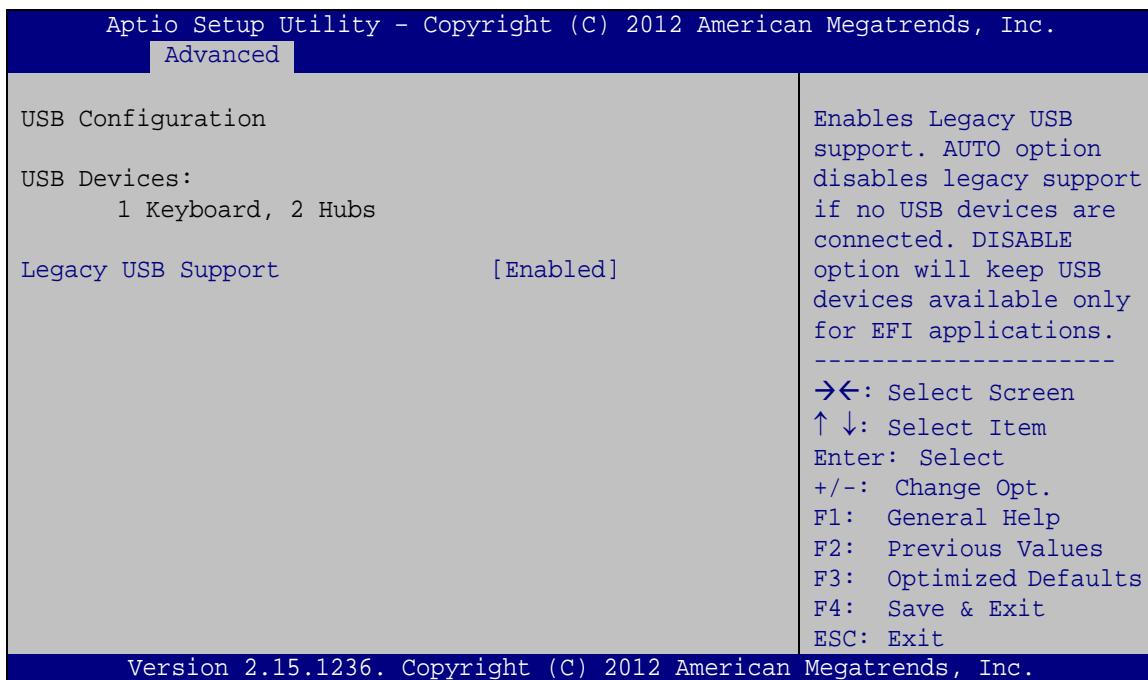

BIOS Menu 8: USB Configuration

→ USB Devices

The **USB Devices** field lists the USB devices that are enabled on the system

→ Legacy USB Support [Enabled]


Use the **Legacy USB Support** BIOS option to enable USB mouse and USB keyboard support. Normally if this option is not enabled, any attached USB mouse or USB keyboard does not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB driver loaded onto the system.

- **Enabled** **DEFAULT** Legacy USB support enabled
- **Disabled** Legacy USB support disabled
- **Auto** Legacy USB support disabled if no USB devices are connected

WSB-H810 PICMG 1.0 CPU Card

5.3.7 F81866 Super IO Configuration


Use the **F81866 Super IO Configuration** menu (**BIOS Menu 9**) to set or change the configurations for the serial ports and parallel port.

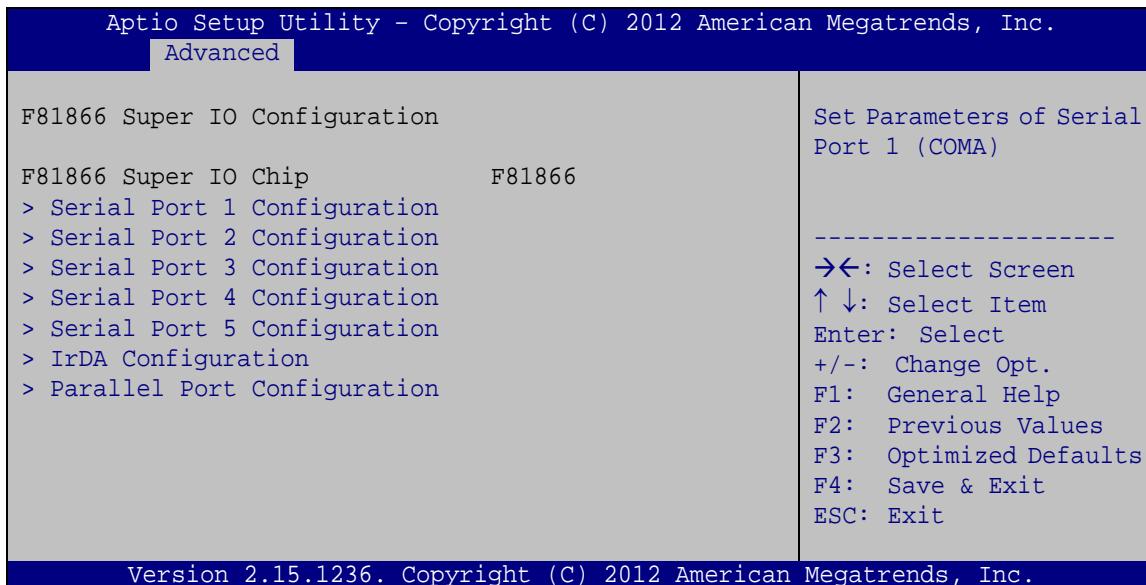

BIOS Menu 9: F81866 Super IO Configuration

5.3.7.1 Serial Port n Configuration

Use the **Serial Port n Configuration** menu (**BIOS Menu 10**) to configure the serial port n.

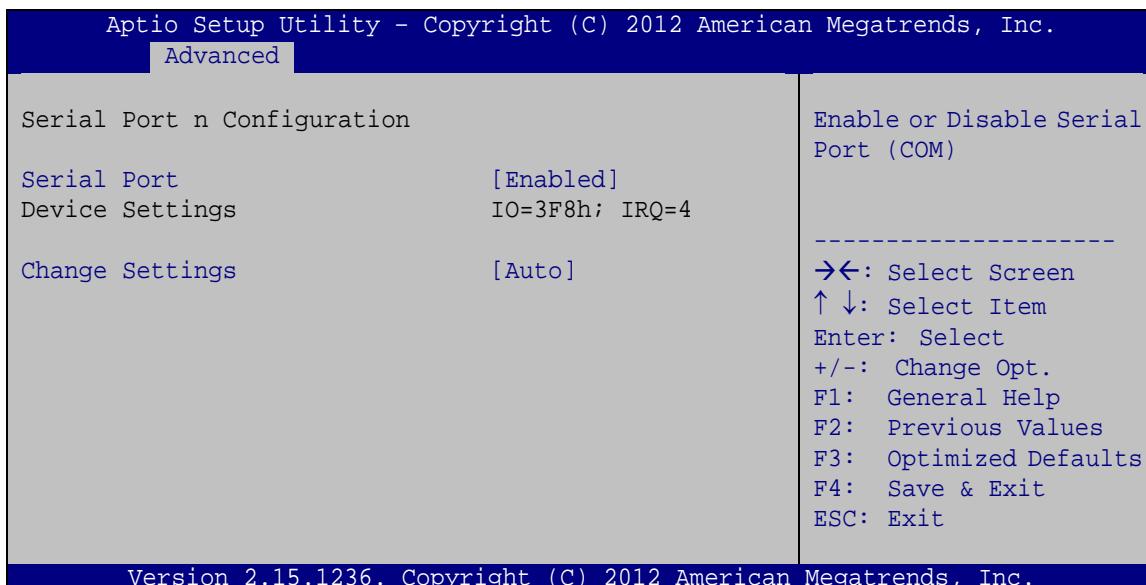

BIOS Menu 10: Serial Port n Configuration Menu

5.3.7.1.1 Serial Port 1 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

→ **Disabled** Disable the serial port

→ **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

→ **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.

→ **IO=3F8h;** Serial Port I/O port address is 3F8h and the interrupt address is IRQ4.

→ **IO=3F8h;** Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4.

→ **IO=2C0h;** Serial Port I/O port address is 2C0h and the interrupt address is IRQ3, 4.

→ **IO=2C8h;** Serial Port I/O port address is 2C8h and the interrupt address is IRQ3, 4.

5.3.7.1.2 Serial Port 2 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

→ **Disabled** Disable the serial port

→ **Enabled** **DEFAULT** Enable the serial port

WSB-H810 PICMG 1.0 CPU Card

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=2F8h;
IRQ=3** Serial Port I/O port address is 2F8h and the interrupt address is IRQ3.
- **IO=3F8h;
IRQ=3, 4** Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4.
- **IO=2F8h;
IRQ=3, 4** Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4.
- **IO=2C0h;
IRQ=3, 4** Serial Port I/O port address is 2C0h and the interrupt address is IRQ3, 4.
- **IO=2C8h;
IRQ=3, 4** Serial Port I/O port address is 2C8h and the interrupt address is IRQ3, 4.

→ Device Mode [RS422/485]

Use the **Device Mode** option to select the serial port mode.

- **RS422/485** **DEFAULT** Enables serial port RS-422/485 support.

5.3.7.1.3 Serial Port 3 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=2D0h;
IRQ=10** Serial Port I/O port address is 2D0h and the interrupt address is IRQ10
- **IO=2D0h;
IRQ=10, 11** Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11
- **IO=2E8h;
IRQ=10, 11** Serial Port I/O port address is 2E8h and the interrupt address is IRQ10, 11
- **IO=2D8h;
IRQ=10, 11** Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11

5.3.7.1.4 Serial Port 4 Configuration

→ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=2E8h;
IRQ=10** Serial Port I/O port address is 2E8h and the interrupt address is IRQ10

WSB-H810 PICMG 1.0 CPU Card

- ➔ IO=2E8h;
IRQ=10, 11 Serial Port I/O port address is 2E8h and the interrupt address is IRQ10, 11
- ➔ IO=2D0h;
IRQ=10, 11 Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11
- ➔ IO=2D8h;
IRQ=10, 11 Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11

5.3.7.1.5 Serial Port 5 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled** **DEFAULT** Enable the serial port

➔ Change Settings [Auto]


Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- ➔ IO=2D0h;
IRQ=10 Serial Port I/O port address is 2D0h and the interrupt address is IRQ10
- ➔ IO=2C0h;
IRQ=10, 11 Serial Port I/O port address is 2C0h and the interrupt address is IRQ10, 11
- ➔ IO=2C8h;
IRQ=10, 11 Serial Port I/O port address is 2C8h and the interrupt address is IRQ10, 11
- ➔ IO=2D0h;
IRQ=10, 11 Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11
- ➔ IO=2D8h;
IRQ=10, 11 Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11

- IO=2E0h; Serial Port I/O port address is 2E0h and the interrupt address is IRQ10, 11
IRQ=10, 11

5.3.7.2 IrDA Configuration

Use the **IrDA Configuration** menu (**BIOS Menu 11**) to configure the infrared port.

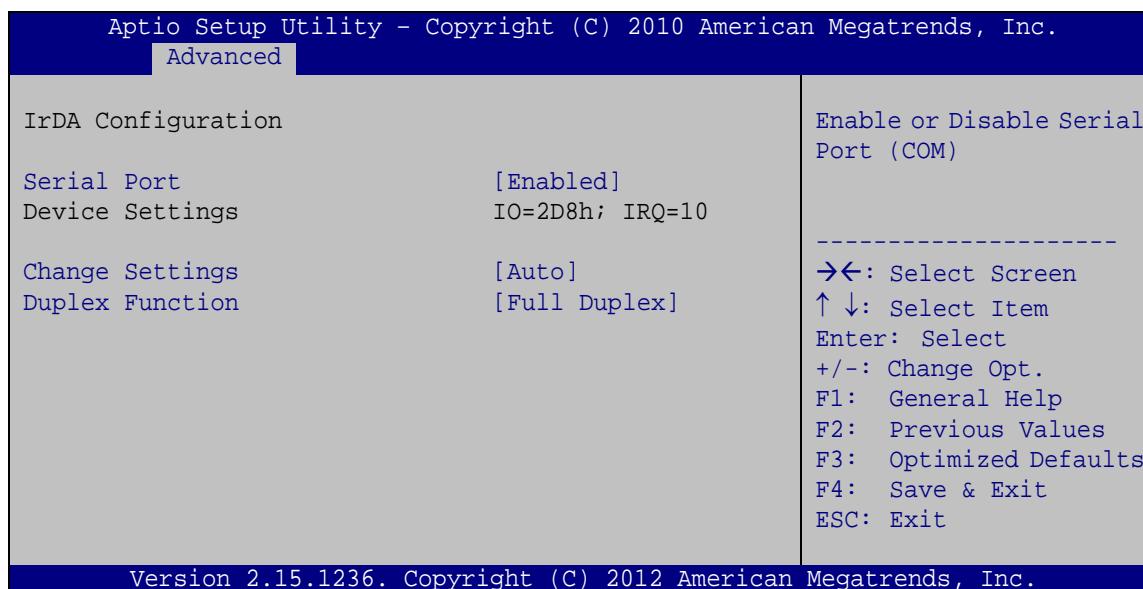

BIOS Menu 11: IrDA Configuration Menu

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the infrared port.

- **Disabled** Disable the infrared port
→ **Enabled** **DEFAULT** Enable the infrared port

→ Change Settings [Auto]

Use the **Change Settings** option to change the infrared port IO port address and interrupt address.

- **Auto** **DEFAULT** The infrared port IO port address and interrupt address are automatically detected.

WSB-H810 PICMG 1.0 CPU Card

- ➔ **IO=2D8h;
IRQ=10** Infrared port I/O port address is 2D8h and the interrupt address is IRQ10
- ➔ **IO=2C0h;
IRQ=10, 11** Infrared port I/O port address is 2C0h and the interrupt address is IRQ10, 11
- ➔ **IO=2C8h;
IRQ=10, 11** Infrared port I/O port address is 2C8h and the interrupt address is IRQ10, 11
- ➔ **IO=2D0h;
IRQ=10, 11** Infrared port I/O port address is 2D0h and the interrupt address is IRQ10, 11
- ➔ **IO=2D8h;
IRQ=10, 11** Infrared port I/O port address is 2D8h and the interrupt address is IRQ10, 11
- ➔ **IO=2E0h;
IRQ=10, 11** Infrared port I/O port address is 2E0h and the interrupt address is IRQ10, 11


➔ Duplex Function [Full Duplex]

Use the **Duplex Function** option to select the IR data transmission mode.

- ➔ **Full Duplex DEFAULT** The communication channels is used to send and receive the data in both directions at the same time.
- ➔ **Half Duplex** Transmission signals are sent in both directions but one direction at a time so half duplex lines can alternatively send and receive data.

5.3.7.3 Parallel Port Configuration

Use the **Parallel Port Configuration** menu (**BIOS Menu 12**) to configure the serial port n.

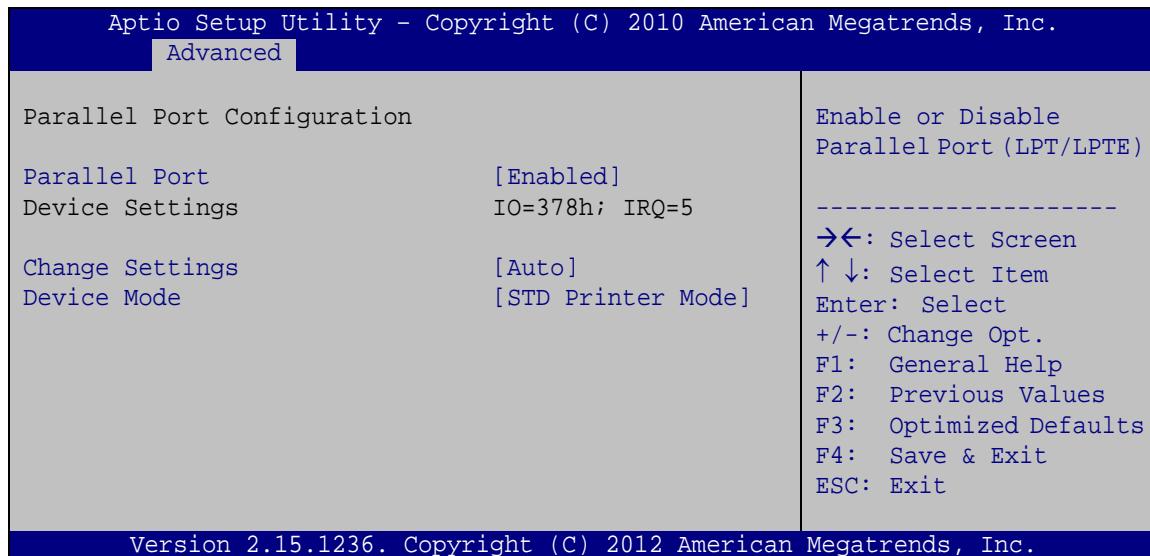

BIOS Menu 12: Parallel Port Configuration Menu

→ Parallel Port [Enabled]

Use the **Parallel Port** option to enable or disable the parallel port.

- **Disabled** Disable the parallel port
- **Enabled** **DEFAULT** Enable the parallel port

→ Change Settings [Auto]

Use the **Change Settings** option to change the parallel port IO port address and interrupt address.

- **Auto** **DEFAULT** The parallel port IO port address and interrupt address are automatically detected.
- **IO=378h;**
IRQ=5 Parallel Port I/O port address is 378h and the interrupt address is IRQ5
- **IO=378h;**
IRQ=5, 7 Parallel Port I/O port address is 378h and the interrupt address is IRQ5, 7

WSB-H810 PICMG 1.0 CPU Card

- IO=278h; Parallel Port I/O port address is 278h and the interrupt address is IRQ5, 7
- IO=3BCh; Parallel Port I/O port address is 3BCh and the interrupt address is IRQ5, 7


→ Device Mode [STD Printer Mode]

Use the **Device Mode** option to select the mode the parallel port operates in. Configuration options are listed below.

- | | |
|--|----------------|
| <ul style="list-style-type: none"> ▪ STD Printer Mode ▪ SPP Mode ▪ EPP-1.9 and SPP Mode ▪ EPP-1.7 and SPP Mode ▪ ECP Mode ▪ ECP and EPP 1.9 Mode ▪ ECP and EPP 1.7 Mode | Default |
|--|----------------|

5.3.8 iWDD H/W Monitor

The **iWDD H/W Monitor** menu (**BIOS Menu 13**) contains the fan configuration submenu and displays operating temperature, fan speeds and system voltages.

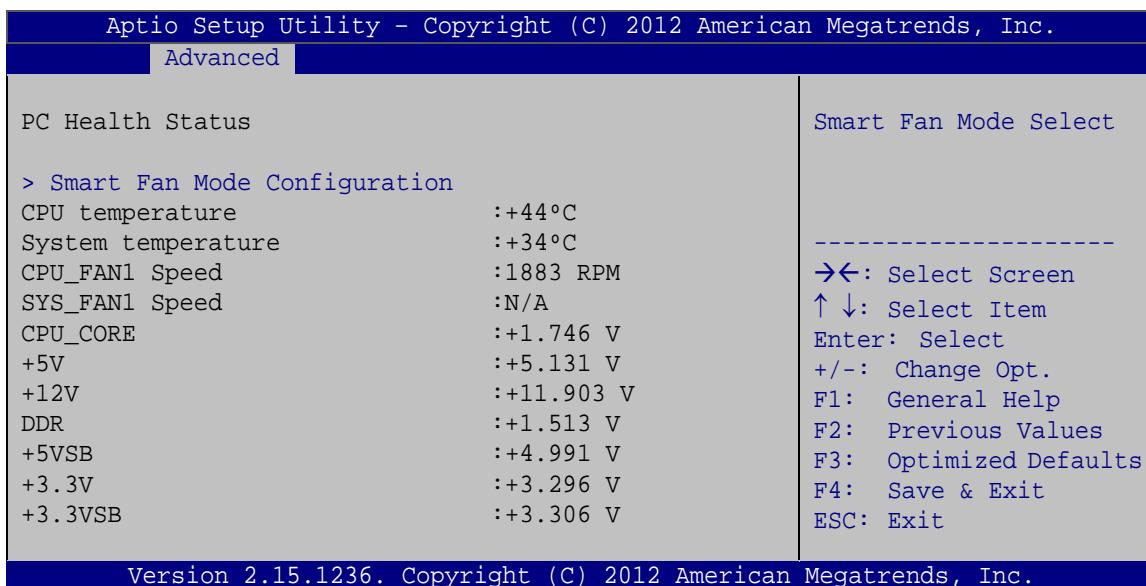

BIOS Menu 13: iWDD H/W Monitor

→ PC Health Status

The following system parameters and values are shown. The system parameters that are monitored are:

- System Temperatures:
 - CPU Temperature
 - System Temperature
- Fan Speeds:
 - CPU Fan Speed
 - System Fan Speed
- Voltages:
 - CPU_CORE
 - +5V
 - +12V
 - DDR
 - +5VSB
 - +3.3V
 - +3.3VSB

5.3.8.1 Smart Fan Mode Configuration

Use the **Smart Fan Mode Configuration** submenu (**BIOS Menu 14**) to configure fan speed settings.

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.

Advanced

Smart Fan Mode Configuration

CPU_FAN1 Smart Fan Control	[Auto Mode]	----- →←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Fan start temperature	50	
Fan off temperature	40	
Fan start PWM	30	
Fan slope PWM	1	
SYS_FAN1 Smart Fan Control	[Auto Mode]	
Fan start temperature	50	
Fan off temperature	40	
Fan start PWM	30	
Fan slope PWM	1	

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.

BIOS Menu 14: Smart Fan Mode Configuration

WSB-H810 PICMG 1.0 CPU Card

→ CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control [Auto Mode]

Use the **CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control** option to configure the CPU/System Smart Fan.

→ **Auto Mode** **DEFAULT** The fan adjusts its speed using Auto Mode settings.

→ **Manual Mode** The fan spins at the speed set in Manual Mode settings.

→ Fan start/off temperature

Use the + or – key to change the **Fan start/off temperature** value. Enter a decimal number between 1 and 100.

→ Fan start PWM

Use the + or – key to change the **Fan start PWM** value. Enter a decimal number between 1 and 100.

→ Fan slope PWM

Use the + or – key to change the **Fan slope PWM** value. Enter a decimal number between 1 and 8.

5.3.9 Serial Port Console Redirection

The **Serial Port Console Redirection** menu (**BIOS Menu 15**) allows the console redirection options to be configured. Console redirection allows users to maintain a system remotely by re-directing keyboard input and text output through the serial port.

Aptio Setup Utility - Copyright (c) 2012 American Megatrends, Inc.				
Advanced				
COM1	Console Redirection	[Disabled]		
> Console Redirection Settings	Console Redirection Enable or Disable			
COM2	Console Redirection	[Disabled]		
> Console Redirection Settings				
COM3	Console Redirection	[Disabled]		
> Console Redirection Settings				
COM4	Console Redirection	[Disabled]		
> Console Redirection Settings				
COM5	Console Redirection	[Disabled]		
> Console Redirection Settings				

→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit				
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.				

BIOS Menu 15: Serial Port Console Redirection

→ Console Redirection [Disabled]

Use **Console Redirection** option to enable or disable the console redirection function.

- **Disabled** **DEFAULT** Disabled the console redirection function
- **Enabled** Enabled the console redirection function

→ Terminal Type [ANSI]

Use the **Terminal Type** option to specify the remote terminal type.

- **VT100** The target terminal type is VT100
- **VT100+** The target terminal type is VT100+
- **VT-UTF8** The target terminal type is VT-UTF8
- **ANSI** **DEFAULT** The target terminal type is ANSI

WSB-H810 PICMG 1.0 CPU Card

→ Bits per second [115200]

Use the **Bits per second** option to specify the serial port transmission speed. The speed must match the other side. Long or noisy lines may require lower speeds.

- **9600** Sets the serial port transmission speed at 9600.
- **19200** Sets the serial port transmission speed at 19200.
- **57600** Sets the serial port transmission speed at 57600.
- **115200** **DEFAULT** Sets the serial port transmission speed at 115200.

→ Data Bits [8]

Use the **Data Bits** option to specify the number of data bits.

- **7** Sets the data bits at 7.
- **8** **DEFAULT** Sets the data bits at 8.

→ Parity [None]

Use the **Parity** option to specify the parity bit that can be sent with the data bits for detecting the transmission errors.

- **None** **DEFAULT** No parity bit is sent with the data bits.
- **Even** The parity bit is 0 if the number of ones in the data bits is even.
- **Odd** The parity bit is 0 if the number of ones in the data bits is odd.
- **Mark** The parity bit is always 1. This option does not provide error detection.
- **Space** The parity bit is always 0. This option does not provide error detection.


→ Stop Bits [1]

Use the **Stop Bits** option to specify the number of stop bits used to indicate the end of a serial data packet. Communication with slow devices may require more than 1 stop bit.

- 1 **DEFAULT** Sets the number of stop bits at 1.
- 2 Sets the number of stop bits at 2.

5.3.10 iEI Feature

Use the **iEI Feature** menu (**BIOS Menu 16**) to configure One Key Recovery function.

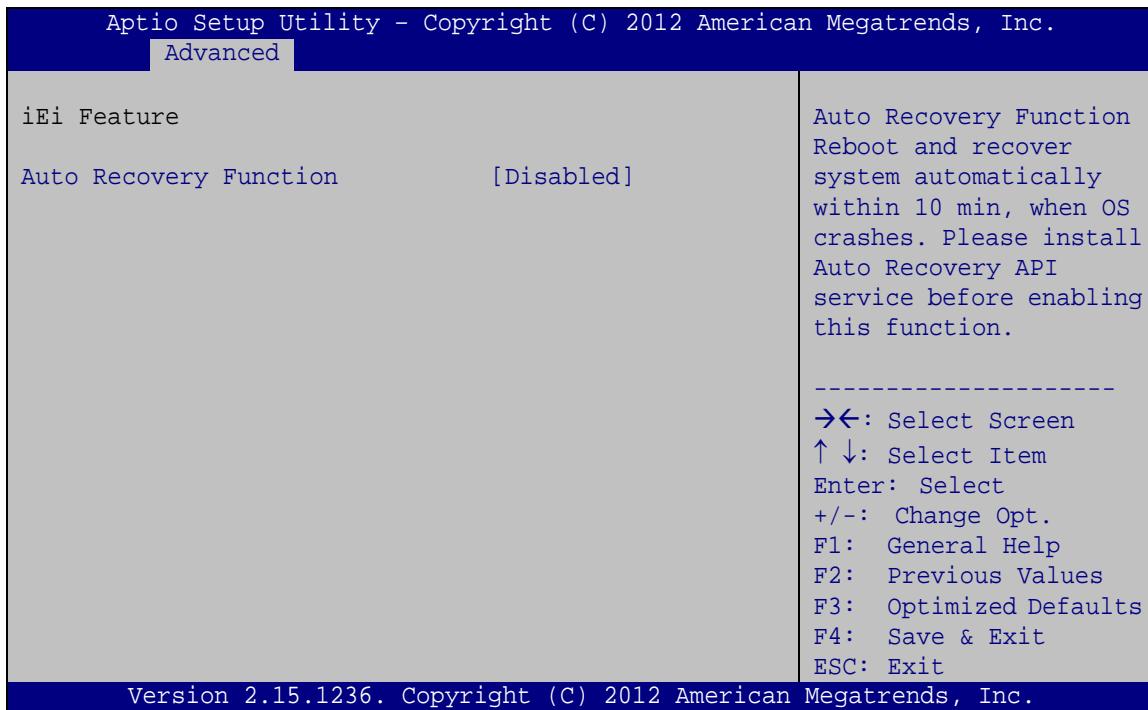

BIOS Menu 16: IEI Feature

→ Auto Recovery Function [Disabled]

Use the **Auto Recovery Function** BIOS option to enable or disable the auto recovery function of the IEI One Key Recovery.

- **Disabled** **DEFAULT** Auto recovery function disabled
- **Enabled** Auto recovery function enabled


5.4 Chipset

Use the **Chipset** menu (**BIOS Menu 17**) to access the PCH IO and System Agent (SA) configuration menus.



WARNING!


Setting the wrong values for the Chipset BIOS selections in the Chipset BIOS menu may cause the system to malfunction.

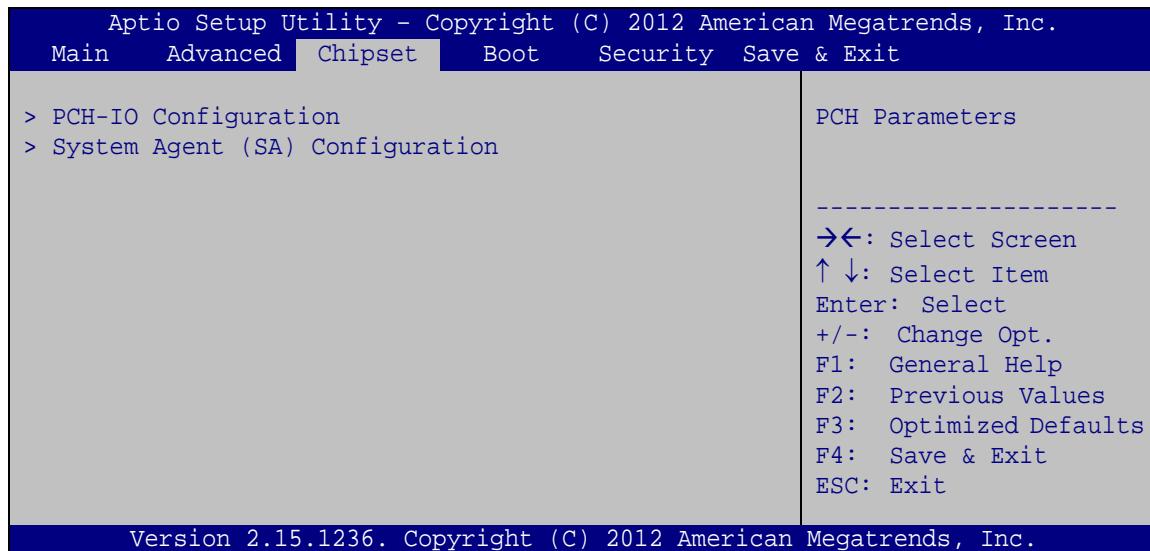

BIOS Menu 17: Chipset

5.4.1 PCH-IO Configuration

Use the **PCH-IO Configuration** menu (**BIOS Menu 18**) to configure the PCH parameters.

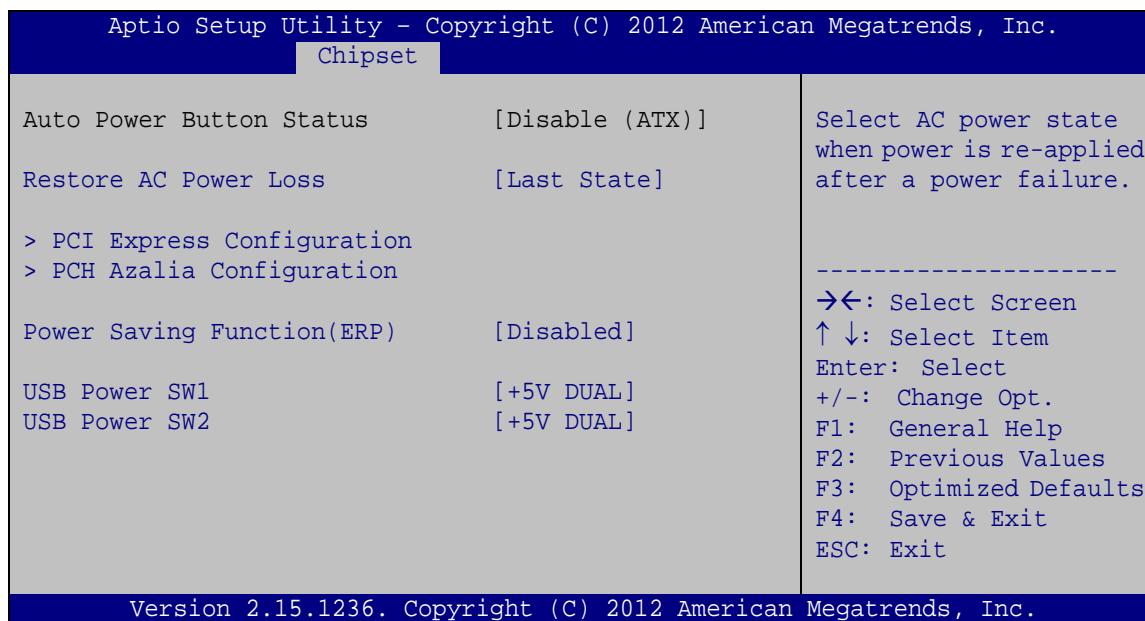

BIOS Menu 18: PCH-IO Configuration

→ Restore AC Power Loss [Last State]

Use the **Restore AC Power Loss** BIOS option to specify what state the system returns to if there is a sudden loss of power to the system.

- **Power Off** The system remains turned off
- **Power On** The system turns on
- **Last State** **DEFAULT** The system returns to its previous state. If it was on, it turns itself on. If it was off, it remains off.

→ Power Saving Function(ERP) [Disabled]

Use the **Power Saving Function(ERP)** BIOS option to enable or disable the power saving function.

- **Disabled** **DEFAULT** Power saving function is disabled.
- **Enabled** Power saving function is enabled. It will reduce power consumption when the system is off.

WSB-H810 PICMG 1.0 CPU Card

→ USB Power SW1 [+5V DUAL]

Use the **USB Power SW1** BIOS option to configure the USB power source for the corresponding USB connectors (**Table 5-2**).

- **+5V** Sets the USB power source to +5V
- **+5V DUAL** **DEFAULT** Sets the USB power source to +5V dual

→ USB Power SW2 [+5V DUAL]

Use the **USB Power SW2** BIOS option to configure the USB power source for the corresponding USB connectors (**Table 5-2**).


- **+5V** Sets the USB power source to +5V
- **+5V DUAL** **DEFAULT** Sets the USB power source to +5V dual

BIOS Options	Configured USB Ports
USB Power SW1	USB2-1 (external USB 2.0 port) USB2-2 (external USB 2.0 port)
USB Power SW2	USB2-4 (internal USB 2.0 ports) USB2-5 (internal USB 2.0 ports) USB2-3 (internal USB 2.0 port, Type A) USB3-1 (internal USB 3.2 Gen 1 ports)

Table 5-2: BIOS Options and Configured USB Ports

5.4.1.1 PCI Express Configuration


Use the **PCI Express Configuration** menu (**BIOS Menu 19**) to configure the PCIe Mini slot.

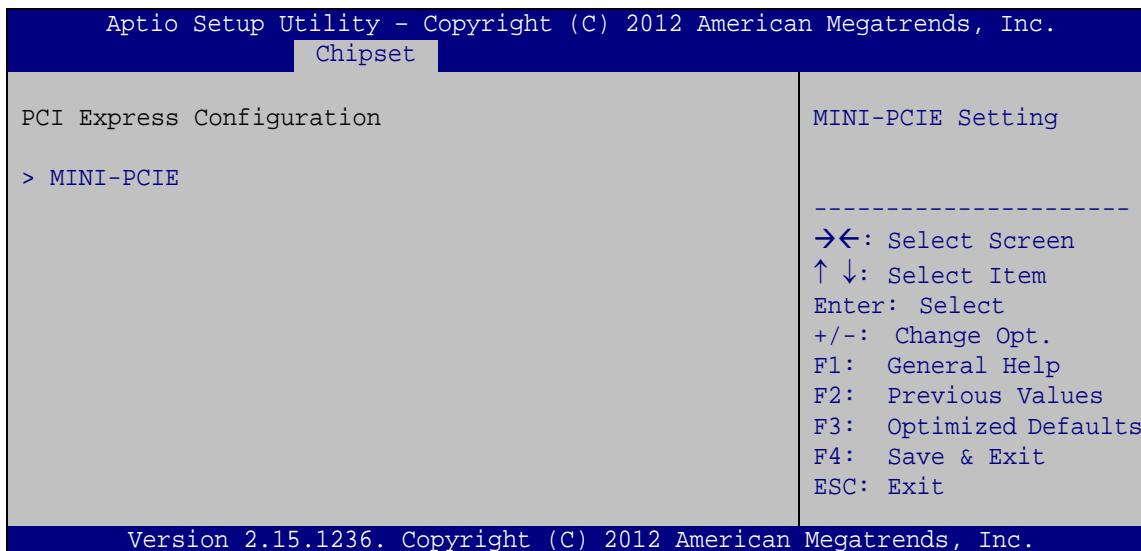

BIOS Menu 19: PCI Express Configuration

5.4.1.1.1 MINI-PCIE

Use the **MINI-PCIE** menu (**BIOS Menu 20**) to configure the PCIe Mini slot settings.

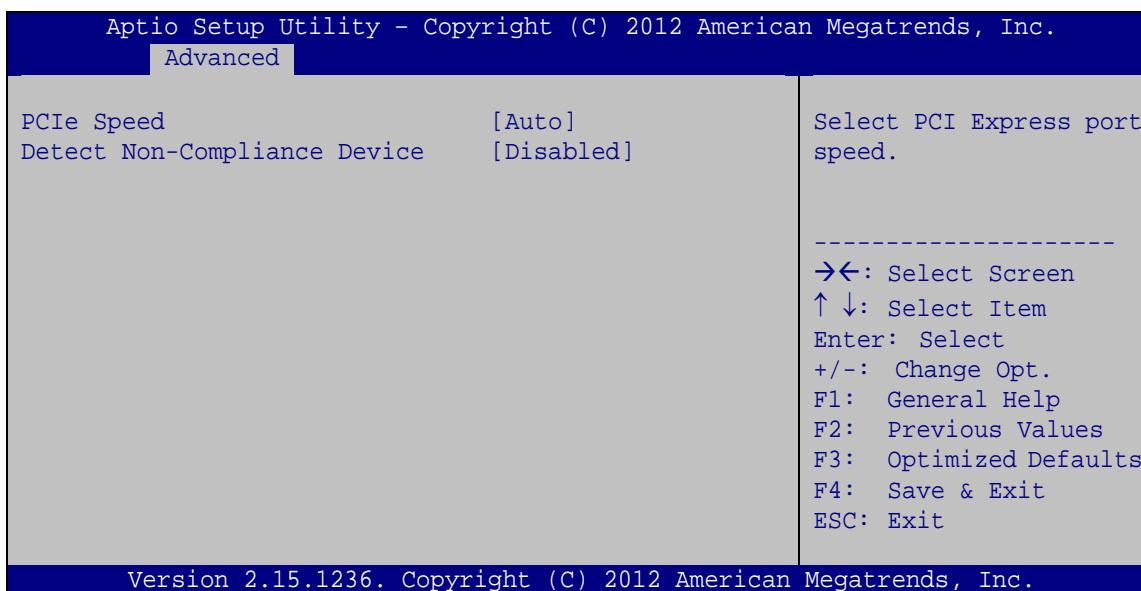

BIOS Menu 20: MINI-PCIE

WSB-H810 PICMG 1.0 CPU Card

→ PCIe Speed [Auto]

Use this option to select the support type of the PCIe Mini slot. The following options are available:

- Auto **Default**
- Gen1
- Gen2


→ Detect Non-Compliance Device [Disabled]

Use the **Detect Non-Compliance Device** option to enable or disable detecting if a non-compliance PCI Express device is connected to the PCI Express slot.

- | | | |
|-------------------|----------------|---|
| → Disabled | DEFAULT | Disables to detect if a non-compliance PCI Express device is connected to the PCI Express slot. |
| → Enabled | | Enables to detect if a non-compliance PCI Express device is connected to the PCI Express slot. |

5.4.1.2 PCH Azalia Configuration

Use the **PCH Azalia Configuration** menu (**BIOS Menu 21**) to configure the PCH Azalia settings.

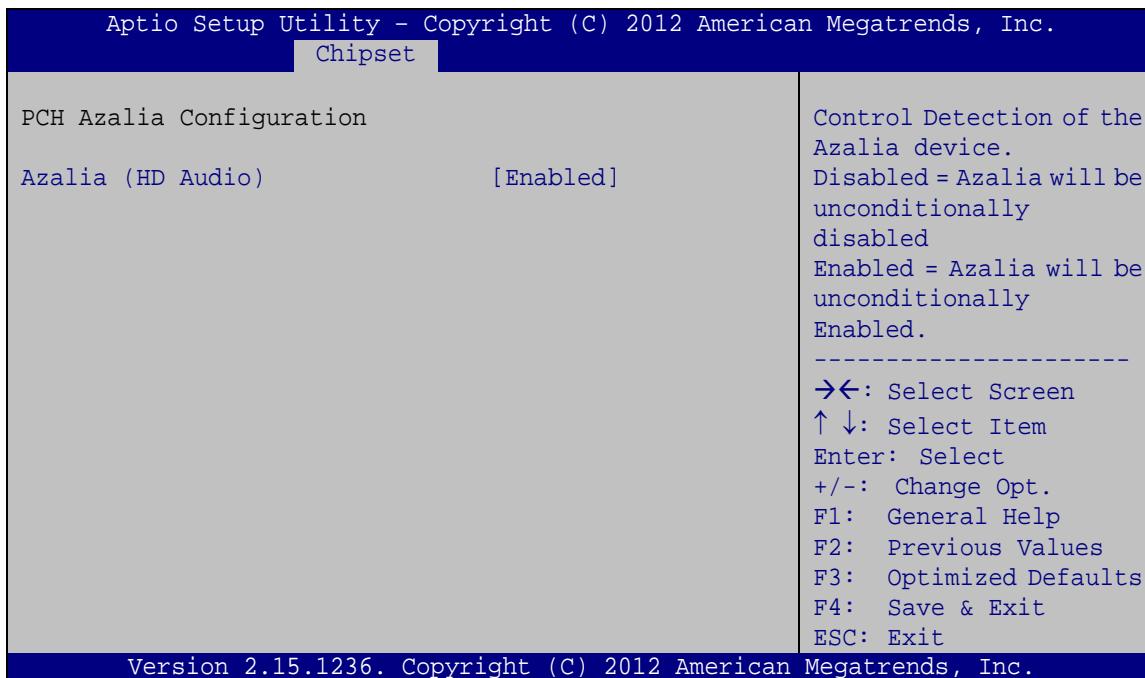

BIOS Menu 21: PCH Azalia Configuration

→ Azalia [Enabled]


Use the **Azalia** option to enable or disable the High Definition Audio controller.

- **Disabled** The onboard High Definition Audio controller is disabled
- **Enabled DEFAULT** The onboard High Definition Audio controller automatically detected and enabled

WSB-H810 PICMG 1.0 CPU Card

5.4.2 System Agent (SA) Configuration

Use the **System Agent (SA) Configuration** menu (**BIOS Menu 22**) to configure the System Agent (SA) parameters.

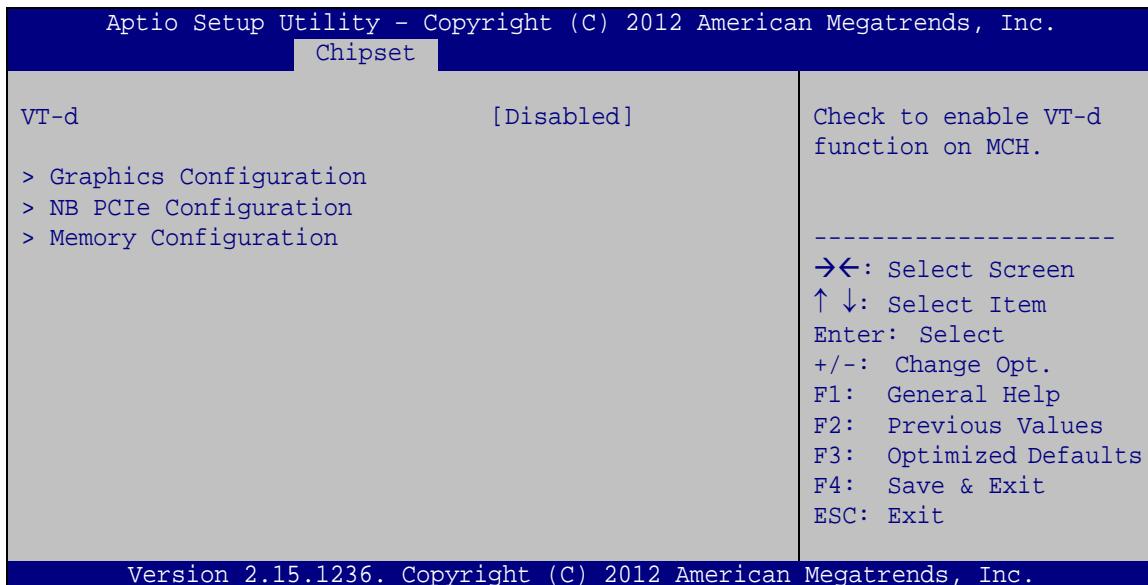

BIOS Menu 22: System Agent (SA) Configuration

→ VT-d [Disabled]


Use the **VT-d** option to enable or disable VT-d support.

→ **Disabled** **DEFAULT** Disables VT-d support.

→ **Enabled** Enables VT-d support.

5.4.2.1 Graphics Configuration

Use the **Graphics Configuration** (**BIOS Menu 23**) menu to configure the video device connected to the system.

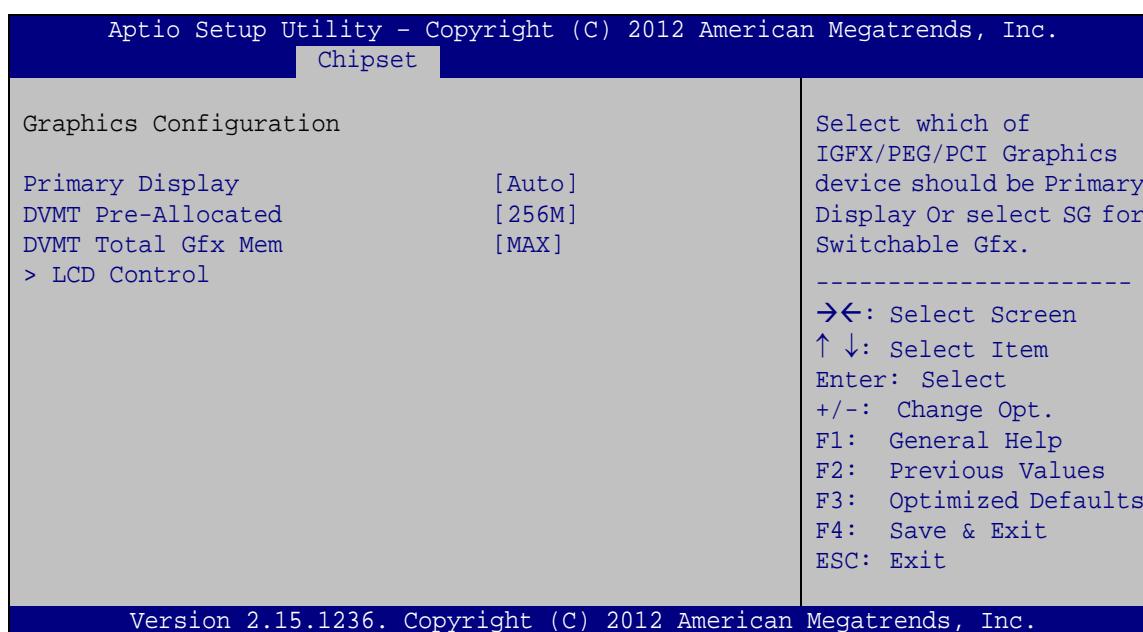

BIOS Menu 23: Graphics Configuration

→ Primary Display [Auto]

Use the **Primary Display** option to select the primary graphics controller the system uses.

The following options are available:

- Auto **Default**
- IGFX
- PEG
- PCIE/PCI

→ DVMT Pre-Allocated [256M]

Use the **DVMT Pre-Allocated** option to set the amount of system memory allocated to the integrated graphics processor when the system boots. The system memory allocated can then only be used as graphics memory, and is no longer available to applications or the operating system. Configuration options are listed below:

- 32M
- 64M
- 128M
- 256M **Default**
- 512M


WSB-H810 PICMG 1.0 CPU Card

→ DVMT Total Gfx Mem [MAX]

Use the **DVMT Total Gfx Mem** option to select DVMT5.0 total graphic memory size used by the internal graphic device. The following options are available:

- 128M
- 256M
- MAX **Default**

5.4.2.1.1 LCD Control

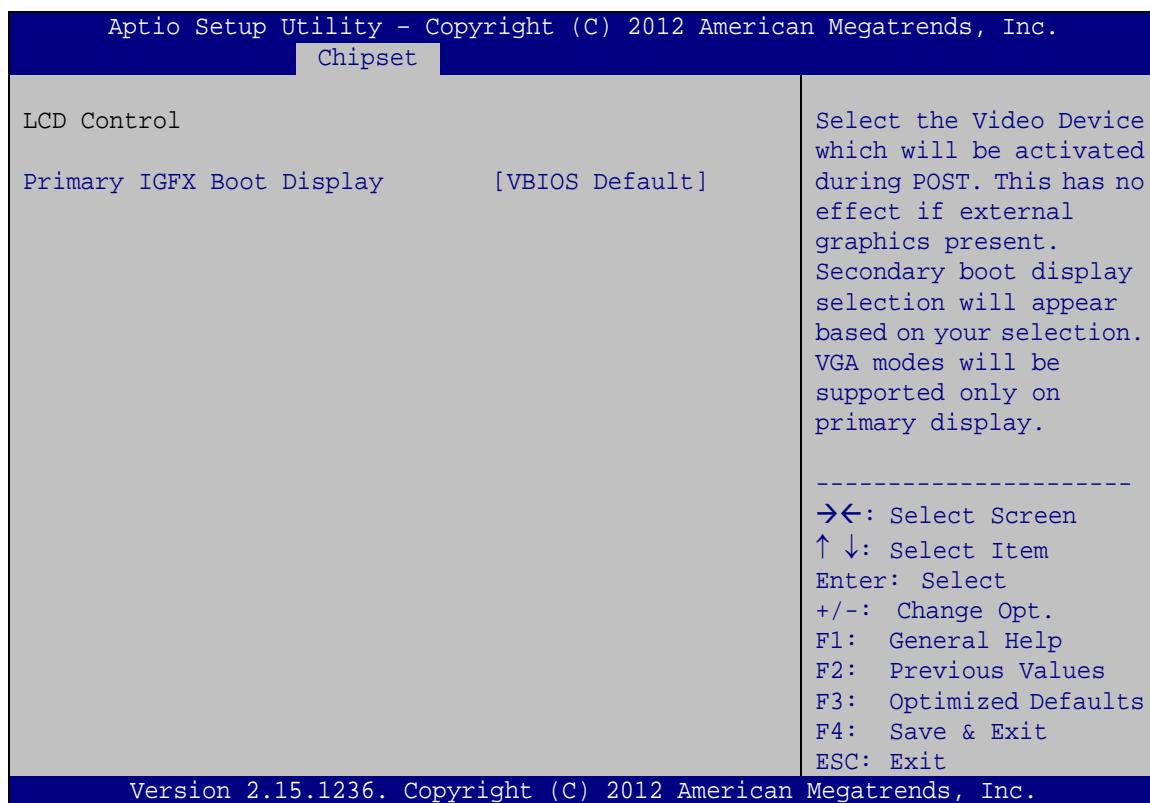

BIOS Menu 24: LCD Control

→ Primary IGFX Boot Display [VBIOS Default]

Use the **Primary IGFX Boot Display** option to select the display device used by the system when it boots. Configuration options are listed below.

- VBIOS Default **DEFAULT**
- CRT
- DP

5.4.2.2 NB PCIe Configuration



BIOS Menu 25: NB PCIe Configuration

→ PEG0 – Gen X [Auto]

Use the **PEG0 – Gen X** option to select the support type of the PCI Express slot. The following options are available:

- Auto **Default**
- Gen1
- Gen2

→ Enable PEG [Auto]

Use the **Enable PEG** option to enable or disable the PCI Express (PEG) controller.

- | | |
|-------------------|--|
| → Disabled | Disables the PCI Express (PEG) controller. |
| → Enabled | Enables the PCI Express (PEG) controller. |
| → Auto | DEFAULT The PCI Express (PEG) controller is disabled if no PCI Express devices are connected. |

→ Detect Non-Compliance Device [Disabled]


Use the **Detect Non-Compliance Device** option to enable or disable detecting if a non-compliance PCI Express device is connected to the PCI Express port.

WSB-H810 PICMG 1.0 CPU Card

- **Disabled** **DEFAULT** Disables to detect if a non-compliance PCI Express device is connected to the PCI Express port.
- **Enabled** Enables to detect if a non-compliance PCI Express device is connected to the PCI Express port.

5.4.2.3 Memory Configuration


Use the **Memory Configuration** submenu (**BIOS Menu 26**) to view memory information.

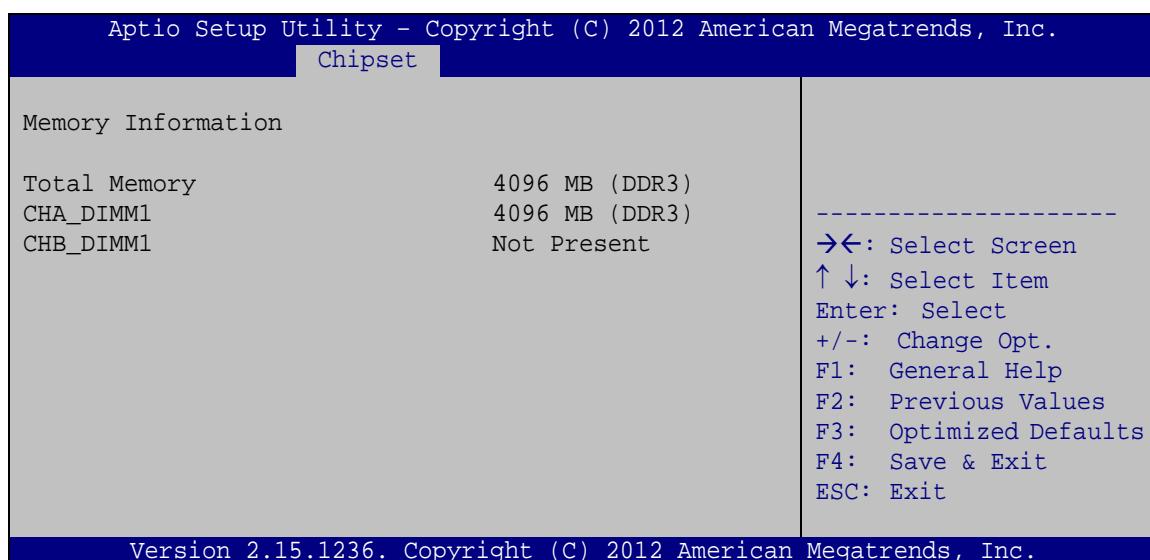

BIOS Menu 26: Memory Configuration

5.5 Boot

Use the **Boot** menu (**BIOS Menu 27**) to configure system boot options.

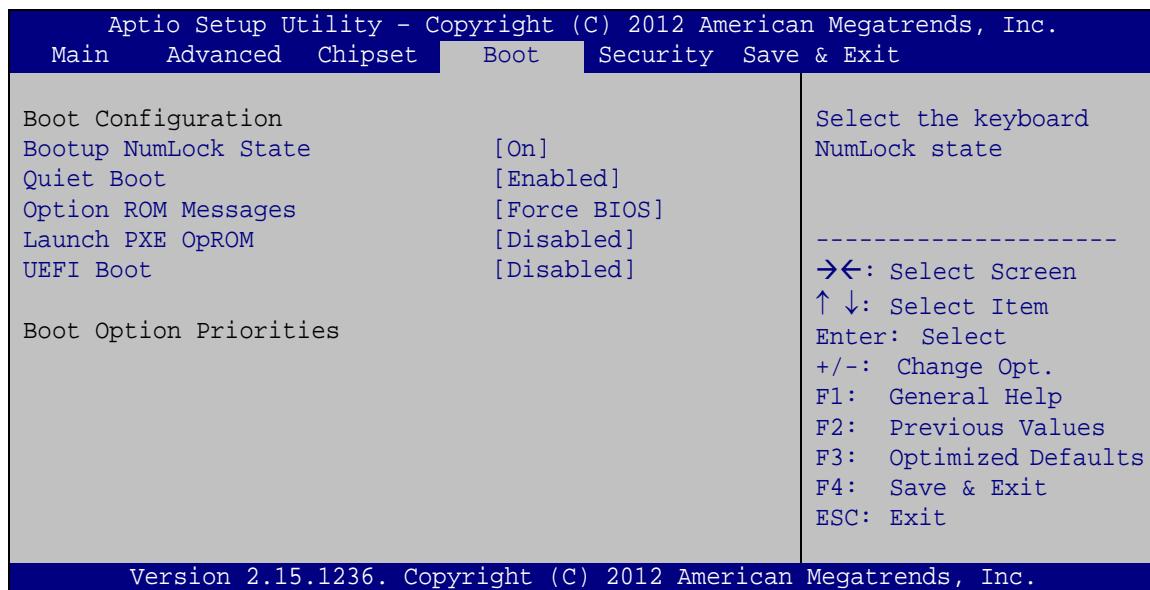

BIOS Menu 27: Boot

→ Bootup NumLock State [On]

Use the **Bootup NumLock State** BIOS option to specify if the number lock setting must be modified during boot up.

→ **On** **DEFAULT** Allows the Number Lock on the keyboard to be enabled automatically when the computer system boots up. This allows the immediate use of the 10-key numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard is lit.

→ **Off** Does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard lights up when the Number Lock is engaged.

WSB-H810 PICMG 1.0 CPU Card

→ Quiet Boot [Enabled]

Use the **Quiet Boot** BIOS option to select the screen display when the system boots.

- **Disabled** Normal POST messages displayed
- **Enabled** **DEFAULT** OEM Logo displayed instead of POST messages

→ Option ROM Messages [Force BIOS]

Use the **Option ROM Messages** option to set the Option ROM display mode.

- **Force BIOS** **DEFAULT** Sets display mode to force BIOS.
- **Keep Current** Sets display mode to current.

→ Launch PXE OpROM [Disabled]

Use the **Launch PXE OpROM** option to enable or disable boot option for legacy network devices.

- **Disabled** **DEFAULT** Ignore all PXE Option ROMs
- **Enabled** Load PXE Option ROMs.


→ UEFI Boot [Disabled]

Use the **UEFI Boot** option to enable or disable to boot from the UEFI devices.

- **Enabled** Boot from UEFI devices is enabled.
- **Disabled** **DEFAULT** Boot from UEFI devices is disabled.

5.6 Security

Use the **Security** menu (**BIOS Menu 28**) to set system and user passwords.

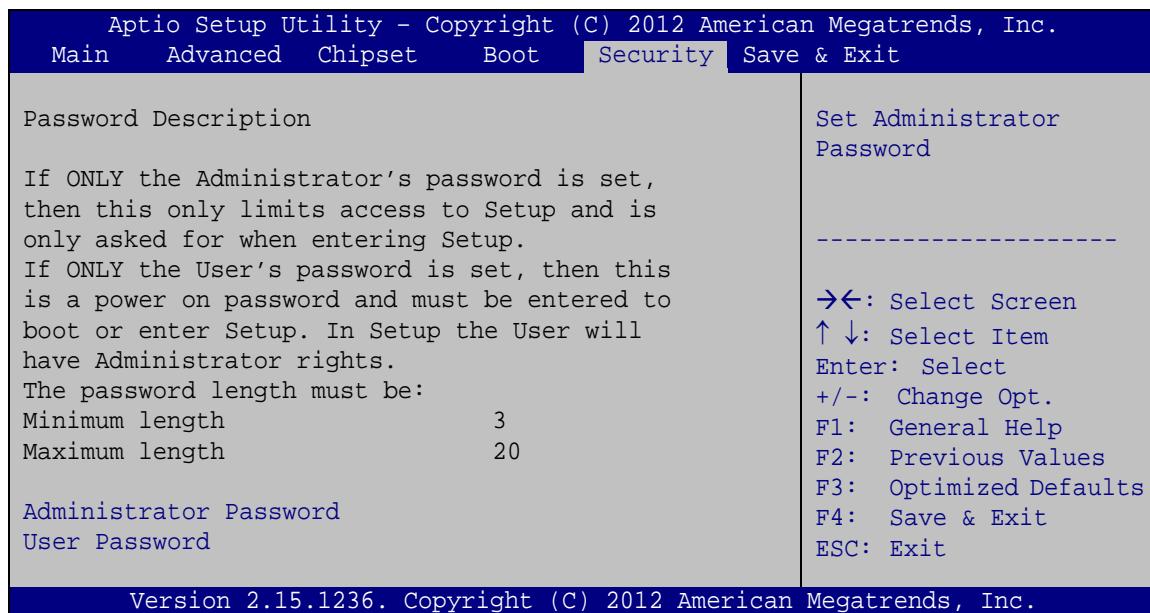

BIOS Menu 28: Security

→ Administrator Password

Use the **Administrator Password** to set or change a administrator password.

→ User Password

Use the **User Password** to set or change a user password.

5.7 Save & Exit

Use the **Save & Exit** menu (**BIOS Menu 29**) to load default BIOS values, optimal failsafe values and to save configuration changes.

WSB-H810 PICMG 1.0 CPU Card



BIOS Menu 29: Save & Exit

→ Save Changes and Reset

Use the **Save Changes and Reset** option to save the changes made to the BIOS options and reset the system.

→ Discard Changes and Reset

Use the **Discard Changes and Reset** option to exit the system without saving the changes made to the BIOS configuration setup program.

→ Restore Defaults

Use the **Restore Defaults** option to load the optimal default values for each of the parameters on the Setup menus. **F3 key can be used for this operation.**

→ Save as User Defaults

Use the **Save as User Defaults** option to save the changes done so far as user defaults.

→ Restore User Defaults

Use the **Restore User Defaults** option to restore the user defaults to all the setup options.

Chapter

6

Software Drivers

6.1 Available Drivers

All the drivers for the WSB-H810 are available on IEI Resource Download Center (<https://download.ieeworld.com>). Type WSB-H810 and press Enter to find all the relevant software, utilities, and documentation.


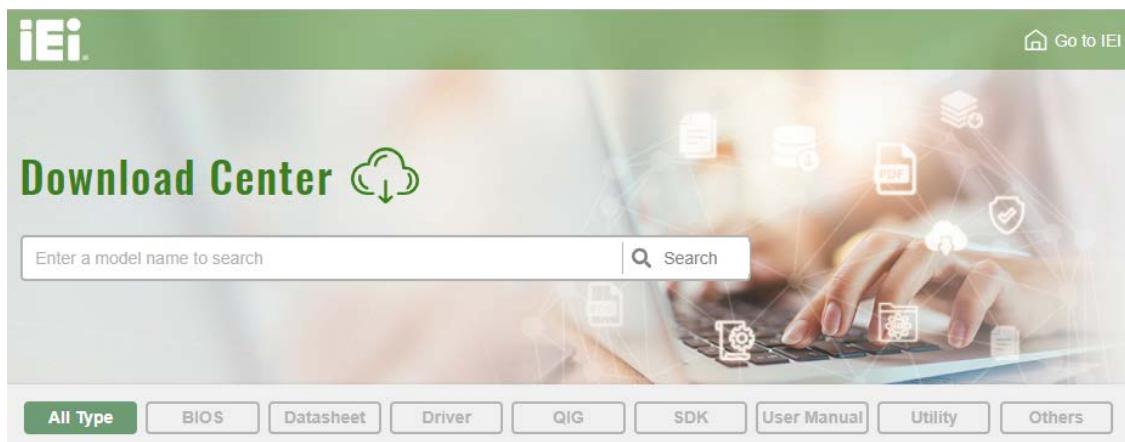


Figure 6-1: IEI Resource Download Center

6.2 Driver Download

To download drivers from IEI Resource Download Center, follow the steps below.


Step 5: Go to <https://download.ieeworld.com>. Type WSB-H810 and press Enter.

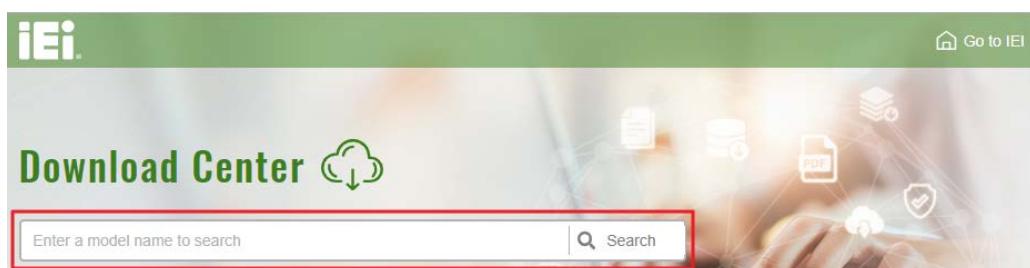

Step 6: All product-related software, utilities, and documentation will be listed. You can choose **Driver** to filter the result.

The screenshot shows a search results page for "WSB-H810". At the top, there are tabs for "All Type", "BIOS", "Datasheet", "Driver" (which is highlighted in green), "QIG", "SDK", "User Manual", "Utility", and "Others". A red arrow points from the text "Click the driver file name on the page and you will be prompted with the following window." to the "Driver" tab. Below the tabs, a message says "Keyword: \"WSB-H810\", Searching Result : 15 Records." The main content area has a title "WSB-H810" and a "Product Info" button. Underneath, it says "Embedded Computer > Single Board Computer > Full Size Single Board Computer". A note states "Full-size PICMG 1.0 CPU Card supports LGA 1150 Intel® Core™ i7/i5/i3, Pentium® and Celeron® CPU with Intel® H81,". A table titled "Driver" lists one item: "7B000-000951-RS_V2.1.iso (1.6 GB)" with a download link, published on 2018/03/27, version 2.10, and file checksum 457D5745C04F54824F4E2BB3331A1BD7.

Step 7: Click the driver file name on the page and you will be prompted with the following window. You can download the entire ISO file (❶), or double click an individual item to find its driver file and click the file name to download (❷).

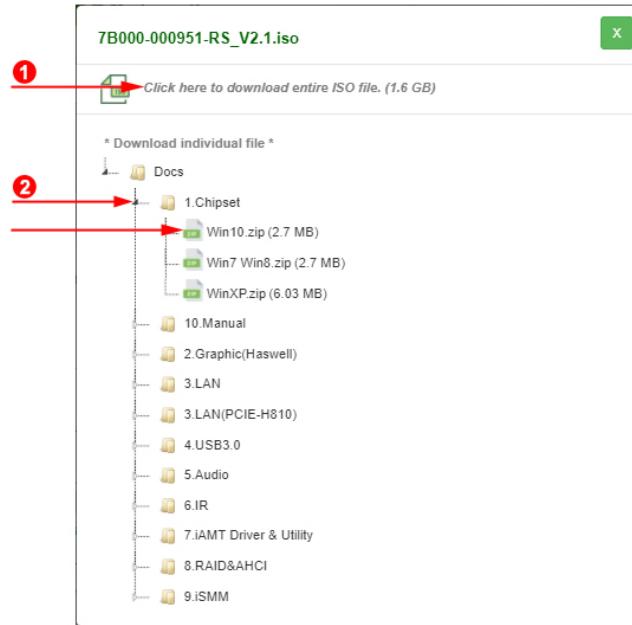

NOTE:

To install software from the downloaded ISO image file in Windows 8, 8.1 or 10, double-click the ISO file to mount it as a virtual drive to view its content. On Windows 7 system, an additional tool (such as Virtual CD-ROM Control Panel from Microsoft) is needed to mount the file.

Appendix

A

Regulatory Compliance

DECLARATION OF CONFORMITY

This equipment has been tested and found to comply with specifications for CE marking. If the user modifies and/or installs other devices in the equipment, the CE conformity declaration may no longer apply.

FCC WARNING

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Appendix

B


Product Disposal

**CAUTION:**

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

- Outside the European Union – If you wish to dispose of used electrical and electronic products outside the European Union, please contact your local authority so as to comply with the correct disposal method.
- Within the European Union – The device that produces less waste and is easier to recycle is classified as electronic device in terms of the European Directive 2012/19/EU (WEEE), and must not be disposed of as domestic garbage.



EU-wide legislation, as implemented in each Member State, requires that waste electrical and electronic products carrying the mark (left) must be disposed of separately from normal household waste. This includes monitors and electrical accessories, such as signal cables or power cords. When you need to dispose of your device, please follow the guidance of your local authority, or ask the shop where you purchased the product. The mark on electrical and electronic products only applies to the current European Union Member States.

Please follow the national guidelines for electrical and electronic product disposal.

Appendix

C

BIOS Options

Below is a list of BIOS configuration options in the BIOS chapter.

<input type="checkbox"/> System Overview	79
<input type="checkbox"/> System Date [xx/xx/xx]	79
<input type="checkbox"/> System Time [xx:xx:xx]	79
<input type="checkbox"/> ACPI Sleep State [S1 only (CPU Stop Clock)]	81
<input type="checkbox"/> Wake system with Fixed Time [Disabled]	82
<input type="checkbox"/> Security Device Support [Disable]	83
<input type="checkbox"/> Hyper-threading [Enabled]	84
<input type="checkbox"/> Active Processor Cores [All]	85
<input type="checkbox"/> Intel Virtualization Technology [Disabled]	85
<input type="checkbox"/> EIST [Enabled]	85
<input type="checkbox"/> SATA Controller(s) [Enabled]	86
<input type="checkbox"/> SATA Mode Selection [IDE]	86
<input type="checkbox"/> SATA Test Mode [Enabled]	86
<input type="checkbox"/> Aggressive LPM Support [Enabled]	87
<input type="checkbox"/> SATA Controller Speed [Default]	87
<input type="checkbox"/> USB Devices	88
<input type="checkbox"/> Legacy USB Support [Enabled]	88
<input type="checkbox"/> Serial Port [Enabled]	90
<input type="checkbox"/> Change Settings [Auto]	90
<input type="checkbox"/> Serial Port [Enabled]	90
<input type="checkbox"/> Change Settings [Auto]	91
<input type="checkbox"/> Device Mode [RS422/485]	91
<input type="checkbox"/> Serial Port [Enabled]	91
<input type="checkbox"/> Change Settings [Auto]	92
<input type="checkbox"/> Serial Port [Enabled]	92
<input type="checkbox"/> Change Settings [Auto]	92
<input type="checkbox"/> Serial Port [Enabled]	93
<input type="checkbox"/> Change Settings [Auto]	93
<input type="checkbox"/> Serial Port [Enabled]	94
<input type="checkbox"/> Change Settings [Auto]	94
<input type="checkbox"/> Duplex Function [Full Duplex]	95
<input type="checkbox"/> Parallel Port [Enabled]	96
<input type="checkbox"/> Change Settings [Auto]	96

WSB-H810 PICMG 1.0 CPU Card

□ Device Mode [STD Printer Mode]	97
□ PC Health Status	98
□ CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control [Auto Mode]	99
□ Fan start/off temperature	99
□ Fan start PWM	99
□ Fan slope PWM	99
□ Console Redirection [Disabled]	100
□ Terminal Type [ANSI].....	100
□ Bits per second [115200].....	101
□ Data Bits [8]	101
□ Parity [None].....	101
□ Stop Bits [1].....	102
□ Auto Recovery Function [Disabled].....	102
□ Restore AC Power Loss [Last State]	104
□ Power Saving Function(ERP) [Disabled].....	104
□ USB Power SW1 [+5V DUAL].....	105
□ USB Power SW2 [+5V DUAL].....	105
□ PCIe Speed [Auto].....	107
□ Detect Non-Compliance Device [Disabled]	107
□ Azalia [Enabled]	108
□ VT-d [Disabled].....	109
□ Primary Display [Auto]	110
□ DVMT Pre-Allocated [256M]	110
□ DVMT Total Gfx Mem [MAX].....	111
□ Primary IGFX Boot Display [VBIOS Default]	111
□ PEG0 – Gen X [Auto]	112
□ Enable PEG [Auto]	112
□ Detect Non-Compliance Device [Disabled]	112
□ Bootup NumLock State [On].....	114
□ Quiet Boot [Enabled]	115
□ Option ROM Messages [Force BIOS].....	115
□ Launch PXE OpROM [Disabled]	115
□ UEFI Boot [Disabled]	115
□ Administrator Password	116
□ User Password	116

<input type="checkbox"/> Save Changes and Reset	117
<input type="checkbox"/> Discard Changes and Reset	117
<input type="checkbox"/> Restore Defaults	117
<input type="checkbox"/> Save as User Defaults	117
<input type="checkbox"/> Restore User Defaults	117

Appendix

D

Digital I/O Interface

D.1 Introduction

The DIO connector on the WSB-H810 is interfaced to GPIO ports on the Super I/O chipset. The digital inputs and digital outputs are generally control signals that control the on/off circuit of external devices or TTL devices. Data can be read or written to the selected address to enable the DIO functions.



NOTE:

For further information, please refer to the datasheet for the Super I/O chipset.

The BIOS interrupt call **INT 15H** controls the digital I/O.

INT 15H:

AH – 6FH
<u>Sub-function:</u>
AL – 8 : Set the digital port as INPUT
AL : Digital I/O input value

D.2 Assembly Language Sample 1

```
MOV      AX, 6F08H      ;setting the digital port as input  
INT      15H          ;
```

AL low byte = value

AH – 6FH

Sub-function:

AL – 9	:Set the digital port as OUTPUT
BL	:Digital I/O input value

D.3 Assembly Language Sample 2

```
MOV      AX, 6F09H      ;setting the digital port as output  
MOV      BL, 09H        ;digital value is 09H  
INT      15H          ;
```

Digital Output is 1001b

Appendix

E

Watchdog Timer

WSB-H810 PICMG 1.0 CPU Card



NOTE:

The following discussion applies to DOS environment. Contact IEI support or visit the IEI website for specific drivers for other operating systems.

The Watchdog Timer is provided to ensure that standalone systems can always recover from catastrophic conditions that cause the CPU to crash. This condition may have occurred by external EMIs or a software bug. When the CPU stops working correctly, Watchdog Timer either performs a hardware reset (cold boot) or a Non-Maskable Interrupt (NMI) to bring the system back to a known state.

A BIOS function call (INT 15H) is used to control the Watchdog Timer.

INT 15H:

AH – 6FH Sub-function:	
AL – 2:	Sets the Watchdog Timer's period.
BL:	Time-out value (Its unit-second is dependent on the item "Watchdog Timer unit select" in CMOS setup).

Table E-1: AH-6FH Sub-function

Call sub-function 2 to set the time-out period of Watchdog Timer first. If the time-out value is not zero, the Watchdog Timer starts counting down. When the timer value reaches zero, the system resets. To ensure that this reset condition does not occur, calling sub-function 2 must periodically refresh the Watchdog Timer. However, the watchdog timer is disabled if the time-out value is set to zero.

A tolerance of at least 10% must be maintained to avoid unknown routines within the operating system (DOS), such as disk I/O that can be very time-consuming.

**NOTE:**

When exiting a program it is necessary to disable the Watchdog Timer,
otherwise the system resets.

EXAMPLE PROGRAM:

```
; INITIAL TIMER PERIOD COUNTER  
  
;  
W_LOOP:  
;  
    MOV      AX, 6F02H      ;setting the time-out value  
    MOV      BL, 30          ;time-out value is 48 seconds  
    INT      15H  
  
;  
; ADD THE APPLICATION PROGRAM HERE  
;  
    CMP      EXIT_AP, 1      ;is the application over?  
    JNE      W_LOOP          ;No, restart the application  
  
    MOV      AX, 6F02H      ;disable Watchdog Timer  
    MOV      BL, 0            ;  
    INT      15H  
  
;  
; EXIT ;
```

Appendix

F

Error Beep Code

F.1 PEI Beep Codes

Number of Beeps	Description
1	Memory not Installed
1	Memory was installed twice (InstallPeiMemory routine in PEI Core called twice)
2	Recovery started
3	DXE IPL was not found
3	DXE Core Firmware Volume was not found
4	Recovery failed
4	S3 Resume failed
7	Reset PPI is not available

F.2 DXE Beep Codes

Number of Beeps	Description
1	Invalid password
4	Some of the Architectural Protocols are not available
5	No Console Output Devices are found
5	No Console Input Devices are found
6	Flash update is failed
7	Reset protocol is not available
8	Platform PCI resource requirements cannot be met



NOTE:

If you have any question, please contact IEI for further assistance.

Appendix

G

Hazardous Materials Disclosure

G.1 RoHS II Directive (2015/863/EU)

The details provided in this appendix are to ensure that the product is compliant with the RoHS II Directive (2015/863/EU). The table below acknowledges the presences of small quantities of certain substances in the product, and is applicable to RoHS II Directive (2015/863/EU).

Please refer to the following table.

Part Name	Toxic or Hazardous Substances and Elements									
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)	Bis(2-ethylhexyl) phthalate (DEHP)	Butyl benzyl phthalate (BBP)	Dibutyl phthalate (DBP)	Diisobutyl phthalate (DIBP)
Housing	O	O	O	O	O	O	O	O	O	O
Display	O	O	O	O	O	O	O	O	O	O
Printed Circuit Board	O	O	O	O	O	O	O	O	O	O
Metal Fasteners	O	O	O	O	O	O	O	O	O	O
Cable Assembly	O	O	O	O	O	O	O	O	O	O
Fan Assembly	O	O	O	O	O	O	O	O	O	O
Power Supply Assemblies	O	O	O	O	O	O	O	O	O	O
Battery	O	O	O	O	O	O	O	O	O	O
O: This toxic or hazardous substance is contained in all of the homogeneous materials for the part is below the limit requirement in Directive (EU) 2015/863. X: This toxic or hazardous substance is contained in at least one of the homogeneous materials for this part is above the limit requirement in Directive (EU) 2015/863.										

G.2 China RoHS

此附件旨在确保本产品符合中国 RoHS 标准。以下表格标示此产品中某有毒物质的含量符合中国 RoHS 标准规定的限量要求。

本产品上会附有“环境友好使用期限”的标签，此期限是估算这些物质“不会有泄漏或突变”的年限。本产品可能包含有较短的环境友好使用期限的可替换元件，像是电池或灯管，这些元件将会单独标示出来。

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
壳体	○	○	○	○	○	○
显示	○	○	○	○	○	○
印刷电路板	○	○	○	○	○	○
金属螺帽	○	○	○	○	○	○
电缆组装	○	○	○	○	○	○
风扇组装	○	○	○	○	○	○
电力供应组装	○	○	○	○	○	○
电池	○	○	○	○	○	○

O: 表示该有毒有害物质在该部件所有物质材料中的含量均在 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求。