

**PCIe Card Supports
Four RS-232/422/485 Ports, RoHS**

IPCIE-UART-2D2P Quick Installation Guide

Version 1.0

August 7, 2023

Package Contents

IPCIE-UART-2D2P package includes the following items:

- 1 x IPCIE-UART-2D2P PCIe card
- 1 x Full height bracket
- 2 x DB-9 male cable
- 1 x QIG (Quick Installation Guide)



©2023 Copyright by iEi Integration Corp.
All rights reserved.

Features:

- PCIe card supports four RS-232/422/485 ports
- 128-byte transmit/receive FIFO
- High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- Baud rate supports 115.2K, up to 1.5M

Specifications:

- **Form Factor:**
PCIe x1 (Gen3)
- **Chip:**
Fintek F81504 (PCI Express bridge to quad serial port)
- **Buffer/Transceiver:**
Fintek F81439
- **I/O:**
2 x RS-232/422/485 DB-9
2 x RS-232/422/485 pin header (2x5 pin)
- **Operating Temperature:**
0°C ~ 60°C
- **Storage Temperature:**
-20°C ~ 70°C
- **Operating Humidity:**
5% ~ 95%, non-condensing
- **Dimensions:** full height
- **Net Weight:** 40 g
- **Safety:** CE/FCC compliant


Ordering Information

- **IPCIE-UART-2D2P-R10:** PCIe card supports four RS-232/422/485 ports, RoHS

Connector Pinouts


SW1: RS-232/422/485 Mode Select Switch	
1-2-3-4-5-6	DESCRIPTION
100100	4 RS422 (default)
110100	COM1,2=RS485 ; COM3,4=RS422
001100	COM1,2=RS232 ; COM3,4=RS422
111100	COM1,2=shutdown ; COM3,4=RS422
100110	COM1,2=RS422 ; COM3,4=RS485
110110	4 RS485
001110	COM1,2=RS232 ; COM3,4=RS485
111110	COM1,2=Shutdown ; COM3,4=RS485
100001	COM1,2=RS422 ; COM3,4=RS232
110001	COM1,2=RS485 ; COM3,4=RS232
001001	4 RS232
111001	COM1,2=shutdown ; COM3,4=RS232
100111	COM1,2=RS422 ; COM3,4=Shutdown
110111	COM1,2=RS485 ; COM3,4=Shutdown
001111	COM1,2=RS232 ; COM3,4=Shutdown
111111	All shutdown

COM3, COM4 : RS-232/422/485 Connectors (10-pin header)			
PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DCDN	2	DSRN
3	SINN	4	RTSN
5	SOUTN	6	CTSN
7	DTRN	8	RIN
9	GND	10	GND

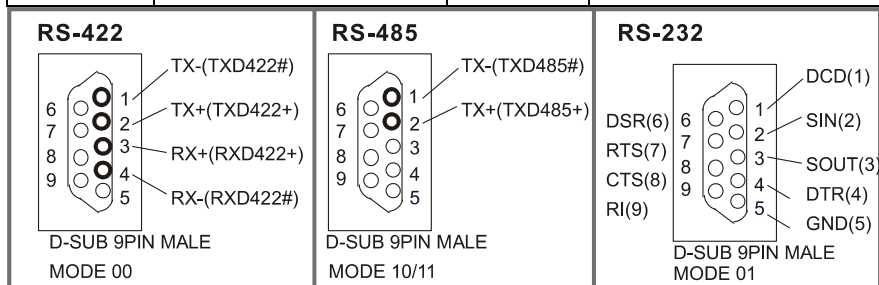

COM1, COM2: RS-232/422/485 Connectors (DB-9)			
PIN NO.	RS-232	RS-422	RS-485
1	DCD	TXD422-	TXD485-
2	RXD	TXD422+	TXD485+
3	TXD	RXD422+	--
4	DTR	RXD422-	--
5	GND	--	--
6	DSR	--	--
7	RTS	--	--
8	CTS	--	--
9	RI	--	--

Board Layout and Connector Locations

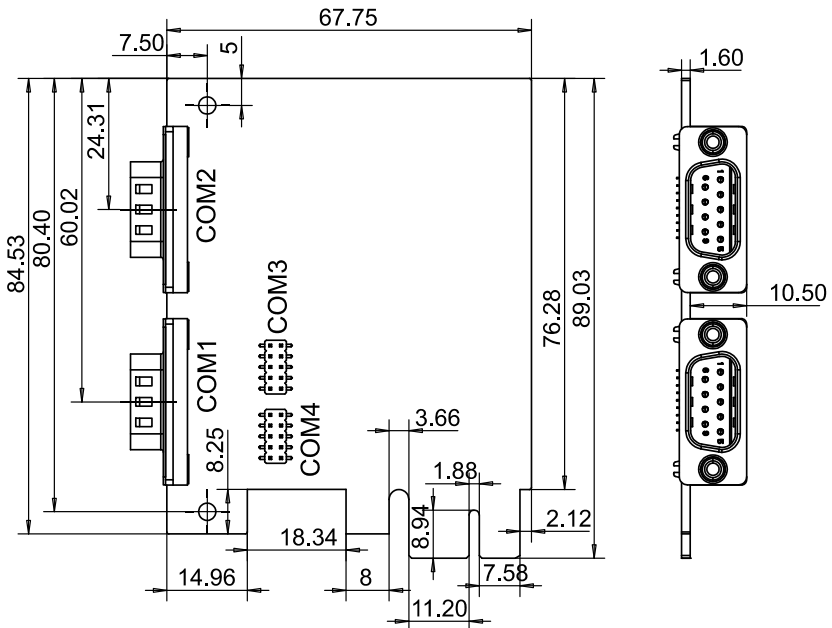

(Unit: mm)