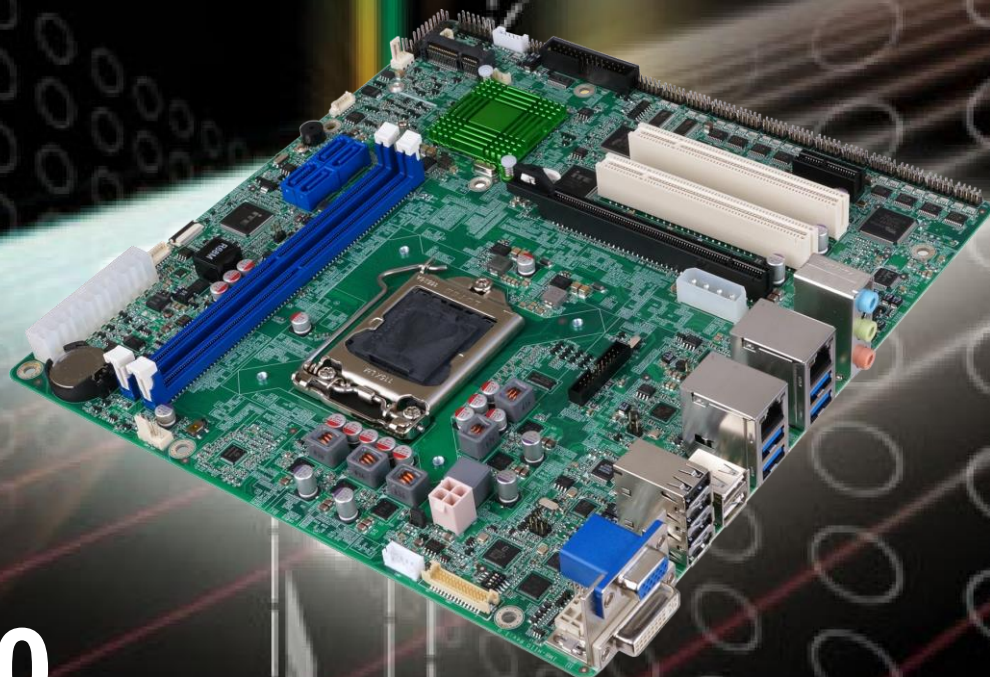




MODEL:
IMB-H110

**microATX Motherboard Supports 6th Generation LGA1151
Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU, Intel® H110
Chipset, DDR4, VGA, DVI-I, LVDS, iDP, Dual GbE LAN, USB,
SATA 6Gb/s, 12 COM Ports, 12 USB Ports, HD Audio and RoHS**

User Manual



Revision

Date	Version	Changes
May 15, 2025	1.01	Updated Section 2.3: Packing List Updated Section 4.11: Available Drivers Changed audio IC to ALC888S
August 23, 2016	1.00	Initial release



Copyright

COPYRIGHT NOTICE

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

TRADEMARKS

All registered trademarks and product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

Manual Conventions

**WARNING**

Warnings appear where overlooked details may cause damage to the equipment or result in personal injury. Warnings should be taken seriously.

**CAUTION**

Cautionary messages should be heeded to help reduce the chance of losing data or damaging the product.

**NOTE**

These messages inform the reader of essential but non-critical information. These messages should be read carefully as any directions or instructions contained therein can help avoid making mistakes.

Table of Contents

1 INTRODUCTION.....	1
1.1 INTRODUCTION.....	2
1.2 FEATURES.....	3
1.3 CONNECTORS	4
1.4 DIMENSIONS.....	5
1.5 DATA FLOW	6
1.6 TECHNICAL SPECIFICATIONS	7
2 PACKING LIST	10
2.1 ANTI-STATIC PRECAUTIONS	11
2.2 UNPACKING PRECAUTIONS.....	11
2.3 PACKING LIST.....	12
2.4 OPTIONAL ITEMS	13
3 CONNECTORS	15
3.1 PERIPHERAL INTERFACE CONNECTORS.....	16
3.1.1 IMB-H110 Layout	16
3.1.2 Peripheral Interface Connectors	17
3.1.3 External Interface Panel Connectors.....	18
3.2 INTERNAL PERIPHERAL CONNECTORS	19
3.2.1 +12V ATX Power Connector	19
3.2.2 Additional Power Connector	20
3.2.3 ATX Power Connector	21
3.2.4 Audio Connector	22
3.2.5 Backlight Inverter Connector	23
3.2.6 Battery Connector	24
3.2.7 Chassis Intrusion Connector.....	25
3.2.8 DDR4 DIMM Sockets	26
3.2.9 Digital I/O Connector	27
3.2.10 EC Debug Connector	28

3.2.11 Fan Connector (CPU).....	29
3.2.12 Fan Connector (System)	30
3.2.13 Front Panel Connector	31
3.2.14 I ² C Connector	32
3.2.15 Internal DisplayPort Connector	32
3.2.16 Keyboard and Mouse Connector	34
3.2.17 LAN LED Connectors	35
3.2.18 LVDS Connector	36
3.2.19 Parallel Port Connector	37
3.2.20 PCI Slots	38
3.2.21 PCIe x1 Slot	39
3.2.22 PCIe x16 Slot	40
3.2.23 PCIe Mini Slot.....	40
3.2.24 Power Button	42
3.2.25 RS-232 Serial Port Connectors.....	43
3.2.26 RS-232/422/485 Serial Port Connectors	44
3.2.27 SATA 6Gb/s Drive Connector	46
3.2.28 SMBus Connector	47
3.2.29 SPI Flash Connector.....	48
3.2.30 SPI Flash Connector, EC	49
3.2.31 TPM Connector.....	50
3.2.32 USB 2.0 Connector	51
3.3 EXTERNAL PERIPHERAL INTERFACE CONNECTOR PANEL	52
3.3.1 Audio Connector	52
3.3.2 Ethernet and USB 3.2 Gen 1 Connectors	53
3.3.3 USB 2.0 Connectors.....	54
3.3.4 VGA and DVI-I Connectors	55
4 INSTALLATION	57
4.1 ANTI-STATIC PRECAUTIONS	58
4.2 INSTALLATION CONSIDERATIONS.....	58
4.3 SOCKET LGA1151 CPU INSTALLATION	60
4.4 SOCKET LGA1151 COOLING KIT INSTALLATION	63
4.5 DIMM INSTALLATION	65
4.6 FULL-SIZE PCIe MINI CARD INSTALLATION	66

IMB-H110 microATX Motherboard

4.7 HALF-SIZE PCIe MINI CARD INSTALLATION.....	67
4.8 SYSTEM CONFIGURATION.....	70
4.8.1 AT/ATX Power Mode Setting	70
4.8.2 Clear CMOS Button.....	70
4.8.3 DVI/CRT Selection Switch	71
4.8.4 Flash Descriptor Security Override Jumper.....	72
4.8.5 LVDS Panel Resolution Selection Switch	73
4.8.6 LVDS Voltage Selection Jumper.....	74
4.8.7 LVDS/iDP Selection Switch	75
4.8.8 USB Power Selection	76
4.9 INTERNAL PERIPHERAL DEVICE CONNECTIONS.....	76
4.9.1 SATA Drive Connection	76
4.10 ADDING USB 3.2 GEN 1 DRIVERS TO A WINDOWS 7 INSTALLATION IMAGE	78
4.11 AVAILABLE DRIVERS	80
4.11.1 Driver Download.....	81
5 BIOS.....	83
5.1 INTRODUCTION.....	84
5.1.1 Starting Setup.....	84
5.1.2 Using Setup	84
5.1.3 Getting Help.....	85
5.1.4 Unable to Reboot after Configuration Changes	85
5.1.5 BIOS Menu Bar.....	85
5.2 MAIN.....	86
5.3 ADVANCED	87
5.3.1 Trusted Computing.....	88
5.3.2 ACPI Settings	89
5.3.3 Super IO Configuration	90
5.3.3.1 Serial Port 1 ~ 6 Configuration	91
5.3.3.2 Serial Port 1 Configuration	91
5.3.3.3 Serial Port 2 Configuration	92
5.3.3.4 Serial Port 3 Configuration	93
5.3.3.5 Parallel Port Configuration	97
5.3.4 F81866SEC Super IO Configuration	99
5.3.4.1 Serial Port 7~12 Configuration	99



5.3.5 iWDD H/W Monitor 100

 5.3.5.1 Smart Fan Mode Configuration 101

5.3.6 RTC Wake Settings 102

5.3.7 Serial Port Console Redirection 104

 5.3.7.1 Legacy Console Redirection Settings 107

5.3.8 CPU Configuration 107

5.3.9 SATA Configuration..... 109

5.3.10 NVMe Configuration.....110

5.3.11 USB Configuration.....111

5.3.12 iEi Feature112

5.4 CHIPSET113

 5.4.1 System Agent (SA) Configuration114

 5.4.1.1 Graphics Configuration.....115

 5.4.1.2 PEG Port Configuration.....117

 5.4.1.3 Memory Configuration118

 5.4.2 PCH-IO Configuration119

 5.4.2.1 PCI Express Configuration 121

 5.4.2.2 HD Audio Configuration..... 123

5.5 SECURITY 124

5.6 BOOT..... 125

5.7 SAVE & EXIT 127

A REGULATORY COMPLIANCE 128

B PRODUCT DISPOSAL 130

C BIOS OPTIONS 132

D DIGITAL I/O INTERFACE..... 136

 D.1 INTRODUCTION..... 137

 D.2 ASSEMBLY LANGUAGE SAMPLE 1..... 138

 D.3 ASSEMBLY LANGUAGE SAMPLE 2..... 138

E WATCHDOG TIMER..... 139

F ERROR BEEP CODE 142

 F.1 PEI BEEP CODES 143

 F.2 DXE BEEP CODES 143



IMB-H110 microATX Motherboard

G HAZARDOUS MATERIALS DISCLOSURE	144
G.1 RoHS II DIRECTIVE (2015/863/EU).....	145
G.2 CHINA RoHS	146



List of Figures

Figure 1-1: IMB-H110	2
Figure 1-2: Connectors	4
Figure 1-3: IMB-H110 Dimensions (mm)	5
Figure 1-4: Data Flow Diagram	6
Figure 3-1: Peripheral Interface Connectors	16
Figure 3-2: +12V ATX Power Connector Pinout Location	19
Figure 3-3: Additional Power Connector Location.....	20
Figure 3-4: ATX Power Connector Location	21
Figure 3-5: Audio Connector Location	22
Figure 3-6: Backlight Inverter Connector Location.....	23
Figure 3-7: Battery Connector Location.....	24
Figure 3-8: Chassis Intrusion Connector Location	25
Figure 3-9: DDR4 DIMM Socket Locations	26
Figure 3-10: Digital I/O Connector Location	27
Figure 3-11: EC Debug Connector Location	28
Figure 3-12: CPU Fan Connector Location	29
Figure 3-13: System Fan Connector Location	30
Figure 3-14: Front Panel Connector Location	31
Figure 3-15: I ² C Connector Location	32
Figure 3-16: Internal DisplayPort Connector Location	33
Figure 3-17: Keyboard and Mouse Connector.....	34
Figure 3-18: LAN LED Connector Locations	35
Figure 3-19: LVDS Connector Location.....	36
Figure 3-20: Parallel Port Connector Location	37
Figure 3-21: PCI Slot Locations	38
Figure 3-22: PCIe x1 Slot Location	39
Figure 3-23: PCIe x16 Slot Location	40
Figure 3-24: PCIe Mini Slot Location	41
Figure 3-25: Power Button Location.....	42
Figure 3-26: RS-232 Serial Port Connector Locations.....	43

IMB-H110 microATX Motherboard

Figure 3-27: RS-232/422/485 Serial Port Connector Locations	44
Figure 3-28: SATA 6Gb/s Drive Connector Locations	46
Figure 3-29: SMBus Connector Location	47
Figure 3-30: SPI Flash Connector Location	48
Figure 3-31: SPI EC Flash Connector Location	49
Figure 3-32: TPM Connector Location	50
Figure 3-33: USB 2.0 Connector Locations	51
Figure 3-34: External Peripheral Interface Connector	52
Figure 3-35: Audio Connector	53
Figure 3-36: LAN Connector	54
Figure 3-37: DVI-I Connector	56
Figure 3-38: VGA Connector	56
Figure 4-1: Disengage the CPU Socket Load Lever	60
Figure 4-2: Remove Protective Cover	61
Figure 4-3: Insert the Socket LGA1151 CPU	62
Figure 4-4: Close the Socket LGA1151	62
Figure 4-5: Cooling Kit Support Bracket	64
Figure 4-6: DIMM Installation	65
Figure 4-7: Removing the Retention Screw	66
Figure 4-8: Inserting the Full-size PCIe Mini Card into the Slot at an Angle	66
Figure 4-9: Securing the Full-size PCIe Mini Card	67
Figure 4-10: Removing the Standoff	68
Figure 4-11: Installing the Standoff	68
Figure 4-12: Inserting the Half-size PCIe Mini Card into the Slot at an Angle	69
Figure 4-13: Securing the Half-size PCIe Mini Card	69
Figure 4-14: AT/ATX Power Mode Switch Location	70
Figure 4-15: Clear CMOS Button Location	71
Figure 4-16: DVI/CRT Selection Switch Location	71
Figure 4-17: Flash Descriptor Security Override Jumper Location	72
Figure 4-18: LVDS Panel Resolution Selection Switch Location	73
Figure 4-19: LVDS Voltage Selection Jumper Location	74
Figure 4-20: LVDS/iDP Selection Switch Location	75
Figure 4-21: SATA Drive Cable Connection	77
Figure 4-22: SATA Power Drive Connection	78
Figure 4-23: Windows 7 USB 3.0 Creator Utility	79



Figure 4-24: Update Process is Complete80
Figure 4-25: IEI Resource Download Center.....80



List of Tables

Table 1-1: IMB-H110 Specifications	9
Table 2-1: Packing List.....	12
Table 2-2: Optional Items	14
Table 3-1: Peripheral Interface Connectors	18
Table 3-2: External Peripheral Connectors	18
Table 3-3: +12V ATX Power Connector Pinouts	19
Table 3-4: Additional Power Connector Pinouts	20
Table 3-5: ATX Power Connector Pinouts.....	21
Table 3-6: Audio Connector Pinouts	22
Table 3-7: Backlight Inverter Connector Pinouts	23
Table 3-8: Chassis Intrusion Connector Pinouts	25
Table 3-9: Digital I/O Connector Pinouts.....	27
Table 3-10: EC Debug Connector Pinouts	28
Table 3-11: CPU Fan Connector Pinouts.....	29
Table 3-12: System Fan Connector Pinouts	30
Table 3-13: Front Panel Connector Pinouts.....	31
Table 3-14: I ² C Connector Pinouts.....	32
Table 3-15: Internal DisplayPort Connector Pinouts	33
Table 3-16: Keyboard and Mouse Connector Pinouts	34
Table 3-17: LAN LED Connector Pinouts	35
Table 3-18: LVDS Connector Pinouts	37
Table 3-19: Parallel Port Connector Pinouts	38
Table 3-20: PCIe Mini Slot Pinouts.....	42
Table 3-21: RS-232 Serial Port Connector Pinouts	43
Table 3-22: RS-232/422/485 Serial Port Connector Pinouts	45
Table 3-23: DB-9 RS-232/422/485 Pinouts	45
Table 3-24: SATA 6Gb/s Drive Connector Pinouts.....	46
Table 3-25: SMBus Connector Pinouts	47
Table 3-26: SPI Flash Connector Pinouts	48
Table 3-27: SPI EC Flash Connector Pinouts	49



Table 3-28: TPM Connector Pinouts50

Table 3-29: USB 2.0 Connector Pinouts51

Table 3-30: USB 3.2 Gen 1 Port Pinouts53

Table 3-31: LAN Pinouts54

Table 3-32: USB 2.0 Port Pinouts54

Table 3-33: DVI-I Connector Pinouts55

Table 3-34: VGA Connector Pinouts56

Table 4-1: AT/ATX Power Mode Switch Settings.....70

Table 4-2: DVI/CRT Selection Switch Settings71

Table 4-3: Flash Descriptor Security Override Jumper Settings72

Table 4-4: LVDS Panel Resolution Selection73

Table 4-5: LVDS Voltage Selection Jumper Settings74

Table 4-6: LVDS/iDP Selection Switch Settings75

Table 4-7: BIOS Options and Configured USB Ports76

Table 4-8: USB Power Source Setup76

Table 5-1: BIOS Navigation Keys85

Table 5-2: BIOS Options and Configured USB Ports120



BIOS Menus

BIOS Menu 1: Main	86
BIOS Menu 2: Advanced	87
BIOS Menu 3: Trusted Computing	88
BIOS Menu 4: ACPI Configuration	89
BIOS Menu 5: Super IO Configuration.....	90
BIOS Menu 6: Serial Port 1 ~ 6 Configuration Menu	91
BIOS Menu 7: Parallel Port Configuration Menu	97
BIOS Menu 8: F81866SEC Super IO Configuration	99
BIOS Menu 9: Serial Port 7~12 Configuration Menu	99
BIOS Menu 10: iWDD H/W Monitor	100
BIOS Menu 11: Smart Fan Mode Configuration	101
BIOS Menu 12: RTC Wake Settings	102
BIOS Menu 13: Serial Port Console Redirection	104
BIOS Menu 14: Legacy Console Redirection Settings	107
BIOS Menu 15: CPU Configuration	108
BIOS Menu 16: SATA Configuration	109
BIOS Menu 17: NVMe Configuration.....	110
BIOS Menu 18: USB Configuration	111
BIOS Menu 19: iEi Feature	112
BIOS Menu 20: Chipset	113
BIOS Menu 21: System Agent (SA) Configuration	114
BIOS Menu 22: Graphics Configuration	115
BIOS Menu 23: PEG Port Configuration.....	117
BIOS Menu 24: Memory Configuration.....	118
BIOS Menu 25: PCH-IO Configuration	119
BIOS Menu 26: PCI Express Configuration	121
BIOS Menu 27: MPCIE1 Slot	121
BIOS Menu 28: HD Audio Configuration	123
BIOS Menu 29: Security	124
BIOS Menu 30: Boot	125



BIOS Menu 31: Save & Exit.....127



Chapter

1

Introduction



1.1 Introduction

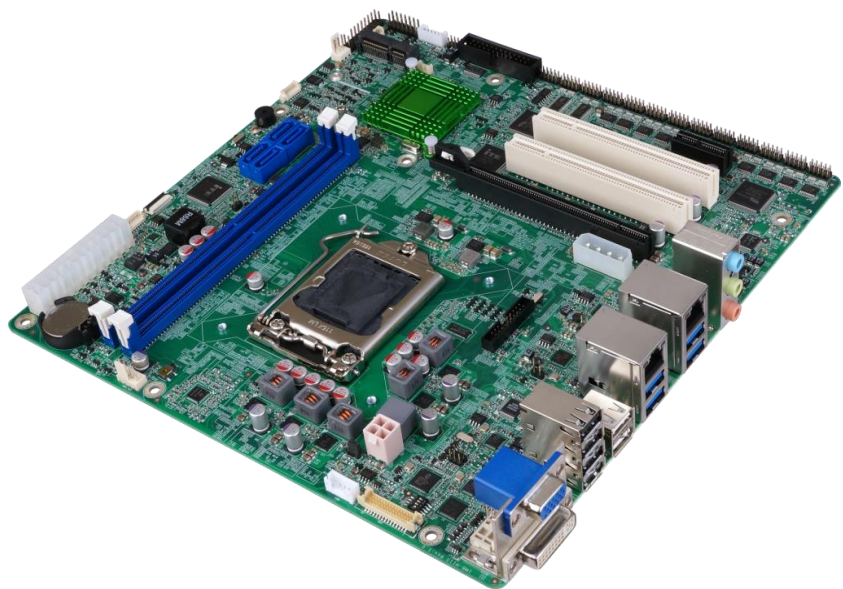


Figure 1-1: IMB-H110

The IMB-H110 is a microATX motherboard. It accepts a Socket LGA1151 Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor and supports two 288-pin 2133 MHz dual-channel DDR4 DIMM modules up to 64 GB.

The IMB-H110 provides two GbE interfaces through the Realtek RTL8111GN controllers. The integrated Intel® H110 chipset supports four SATA 6Gb/s drives. In addition, the IMB-H110 includes VGA, DVI-I and LVDS/iDP interfaces for dual independent display.

Expansion and I/O include one PCIe x16 slot, one PCIe x1 slot, two PCI slots, one PCIe Mini slot, four USB 3.2 Gen 1 (5Gb/s) on the rear panel, six USB 2.0 on the rear panel, two USB 2.0 by pin headers, ten RS-232 and two RS-232/422/485. High Definition Audio (HDA) support ensures HDA devices can be easily implemented on the IMB-H110.



IMB-H110 microATX Motherboard

1.2 Features

Some of the IMB-H110 motherboard features are listed below:

- microATX form factor
- 6th generation LGA1151 Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- Intel® H110 chipset
- Two 288-pin 2133 MHz dual-channel unbuffered DDR4 DIMMs supported (system max. 32 GB)
- Two GbE connectors via Realtek RTL8111GN controllers
- Dual independent display by VGA, DVI-I and LVDS/iDP interfaces
- Four SATA 6Gb/s connectors
- One PCIe x16 slot
- One PCIe x1 slot
- Two PCI slots
- One full-size/half-size PCIe Mini slot
- Four USB 3.2 Gen 1 (5Gb/s) ports on the rear I/O
- Six USB 2.0 ports on the rear I/O
- Two USB 2.0 ports via internal pin headers
- Ten RS-232 serial ports
- Two RS-232/422/485 serial ports
- TPM V1.2 hardware security function supported by TPM module
- High Definition Audio
- RoHS compliant

1.3 Connectors

The connectors on the IMB-H110 are shown in the figure below.

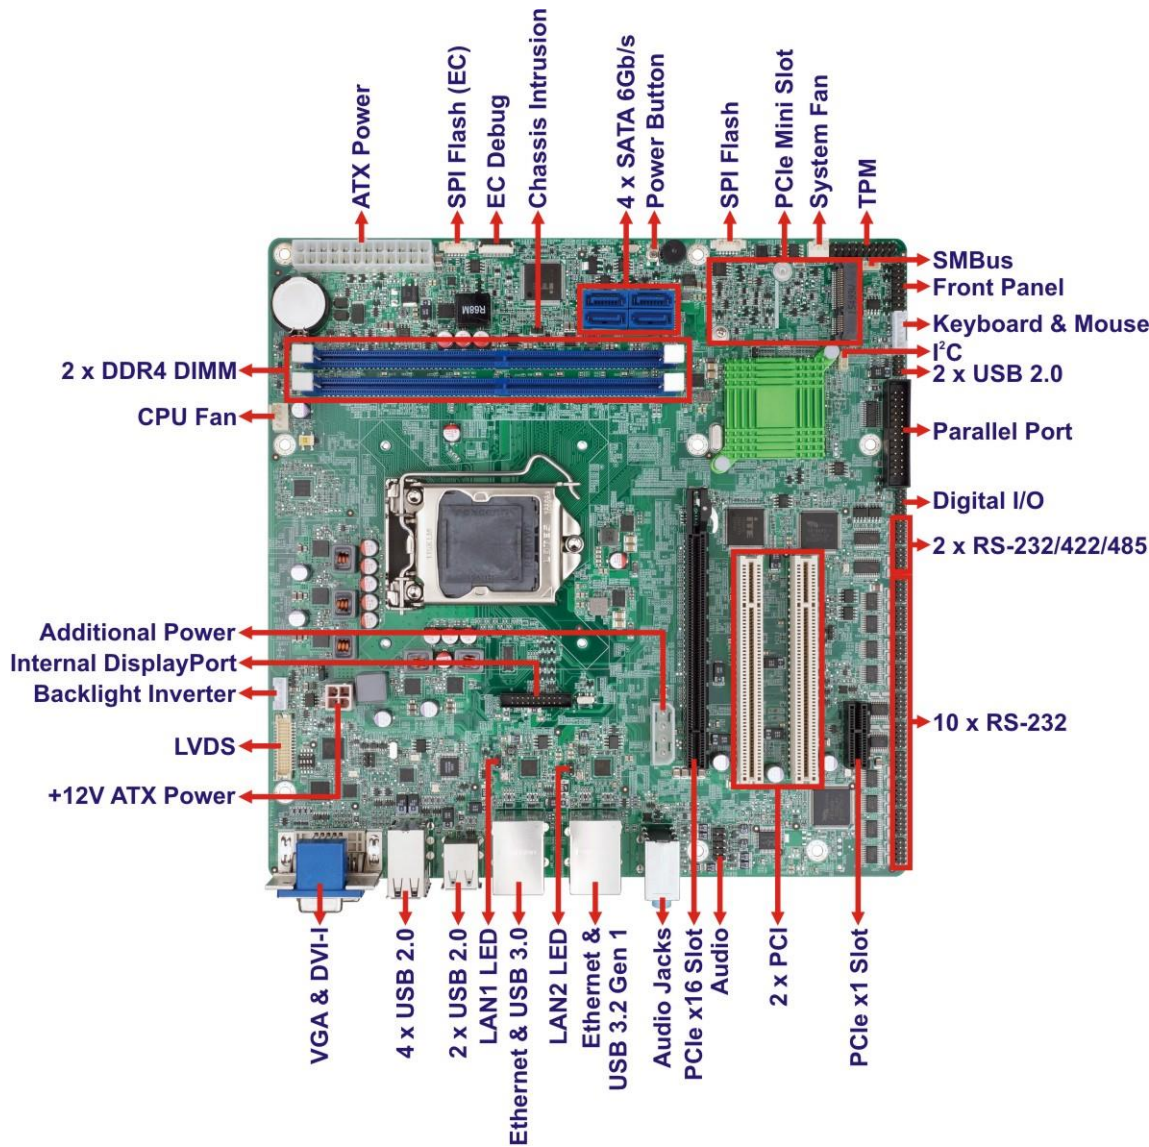


Figure 1-2: Connectors

IMB-H110 microATX Motherboard

1.4 Dimensions

The main dimensions of the IMB-H110 are shown in the diagram below.

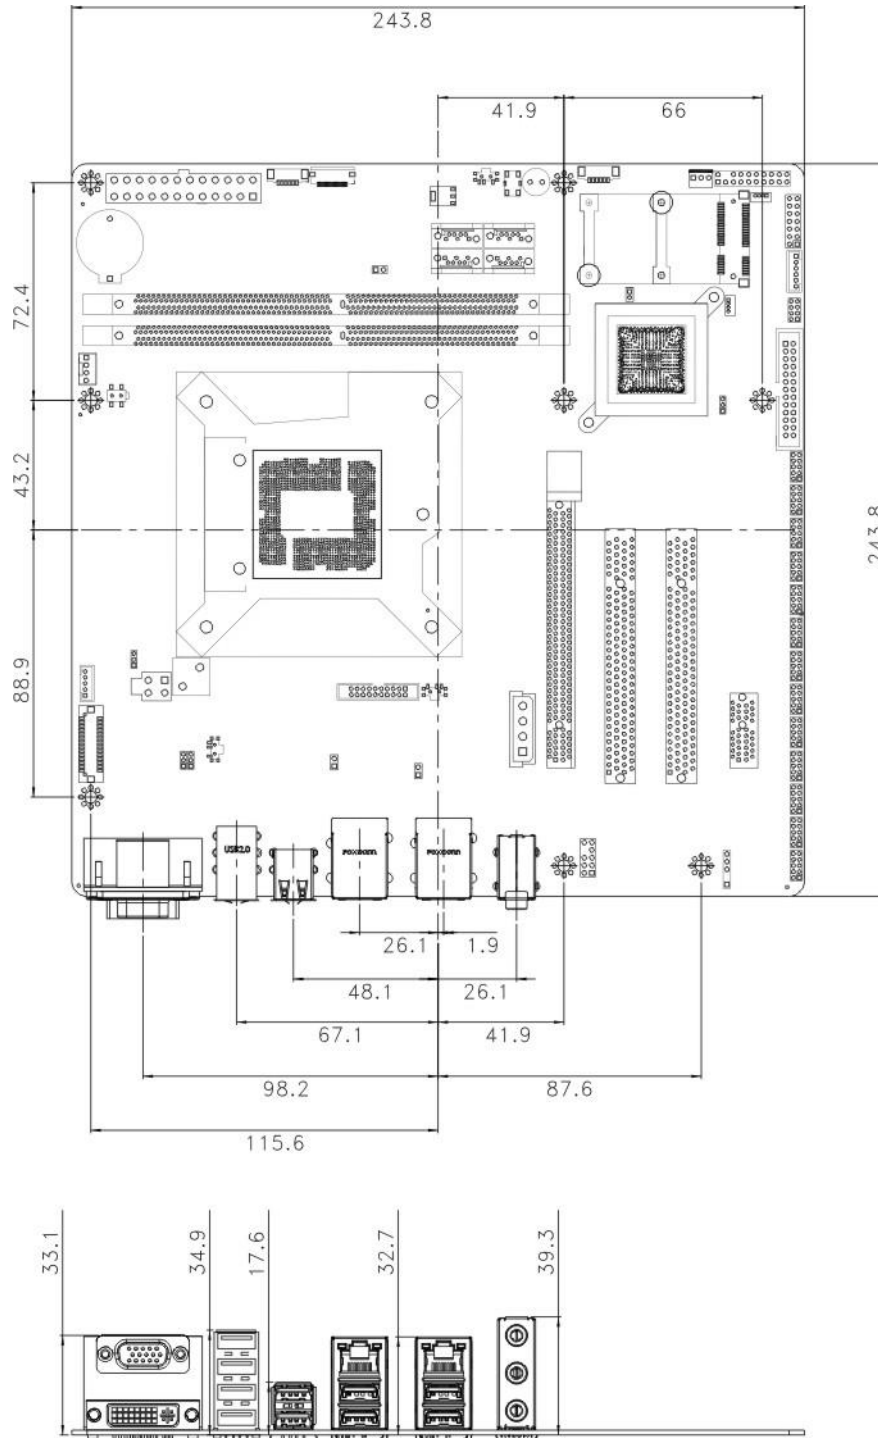


Figure 1-3: IMB-H110 Dimensions (mm)

1.5 Data Flow

Figure 1-4 shows the data flow between the system chipset, the CPU and other components installed on the motherboard.

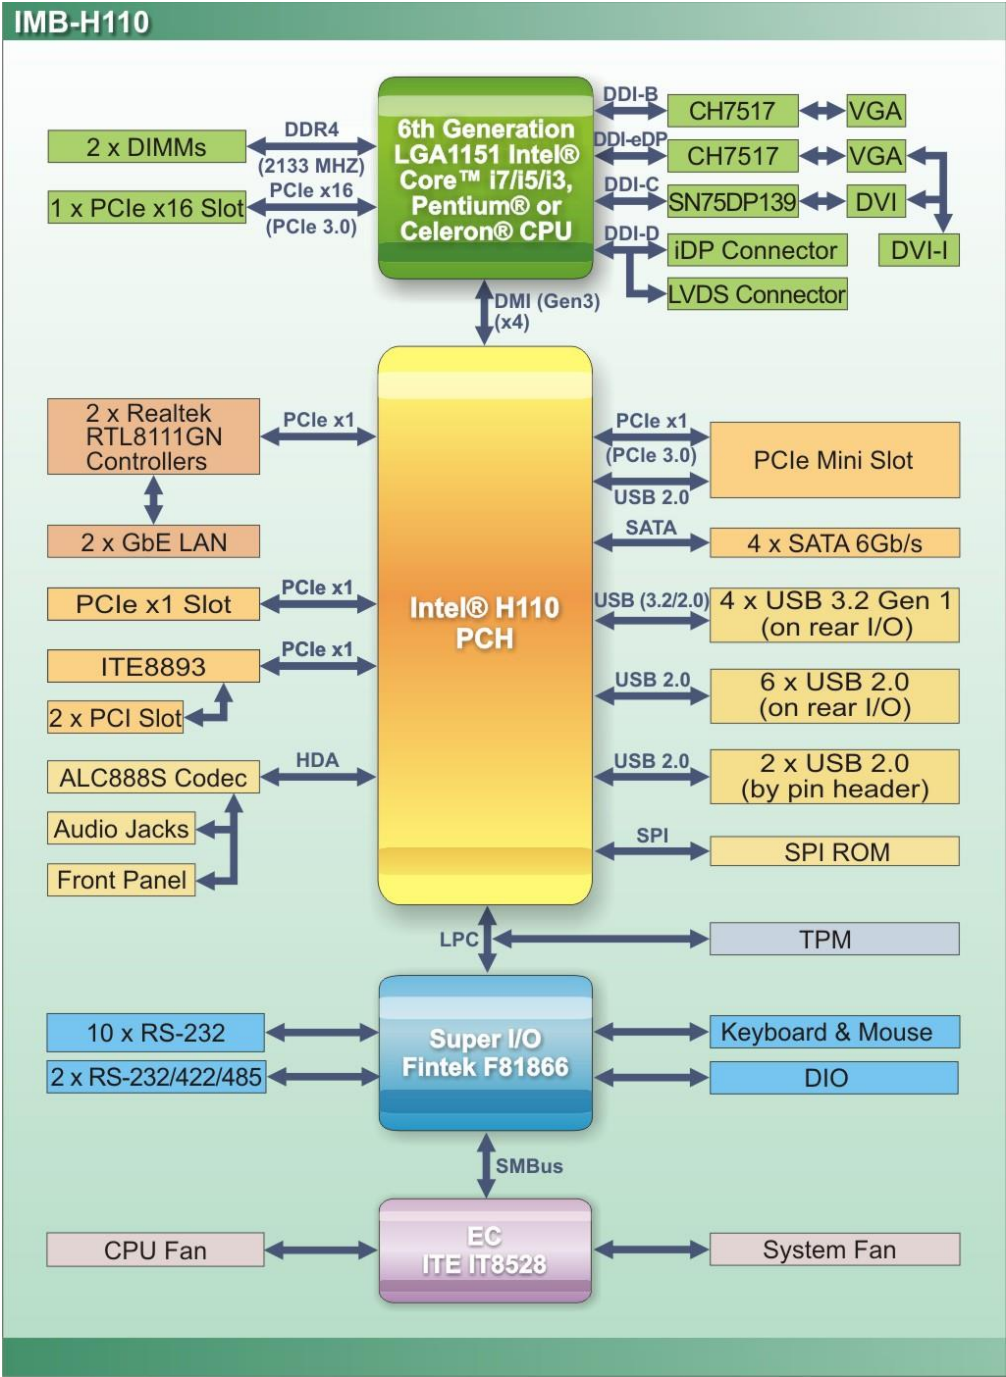


Figure 1-4: Data Flow Diagram

IMB-H110 microATX Motherboard

1.6 Technical Specifications

The IMB-H110 technical specifications are listed below.

Specification/Model	IMB-H110
Form Factor	microATX
CPU Supported	6th generation LGA1151 Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU
PCH	Intel® H110
Memory	Two 288-pin 2133 MHz dual-channel unbuffered DDR4 SDRAM DIMMs supported (system max. 64 GB)
Graphics Engine	Intel® HD Graphics Gen9 engine with 16 low-power execution units, supporting DX2015, OpenGL 5.x, OpenCL 2.x and ES 2.0
Display Output	Supports dual independent display One VGA (Chrontel CH7517) One DVI-I (TI SN75DP139, Chrontel CH7517) One LVDS (Chrontel CH7511) One iDP interface for HDMI, LVDS, VGA, DVI and DisplayPort
Ethernet Controllers	Dual Realtek RTL 8111GN GbE controller
Audio	Realtek ALC888S HD Audio codec supports 5.1 channels
BIOS	AMI UEFI BIOS
Super I/O Controller	Fintek F81866
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Expansions	One PCIe x16 slot (Gen3) One PCIe x1 slot (Gen2) Two PCI slots One full-size/half-size PCIe Mini card slot



IMB-H110 microATX Motherboard

I/O Interface Connectors	
Audio Connectors	Line-in, line-out and mic-in audio jacks on rear panel One internal front panel audio connector (10-pin header)
Chassis Intrusion	One 2-pin header
Digital I/O	8-bit digital I/O
Ethernet	Two RJ-45 GbE ports
Fan	One 4-pin CPU smart fan connector One 3-pin system smart fan connector
Front Panel	One 14-pin header (power LED, HDD LED, speaker, power button, reset button)
I ² C	One 4-pin wafer connector
Internal DisplayPort	One 20-pin box header
Keyboard and Mouse	One internal keyboard and mouse connector (6-pin wafer)
LAN LED	Two 2-pin headers for LAN1 LED and LAN2 LED
Parallel Port	One parallel port via internal 26-pin box header
Serial ATA	Four SATA 6Gb/s connectors
Serial Ports	Ten RS-232 via internal 10-pin headers Two RS-232/422/485 via internal 10-pin headers
SMBus	One 4-pin wafer connector
TPM	One via 20-pin header
USB 2.0	Six USB 2.0 ports on rear panel Two USB 2.0 ports via internal pin headers
USB 3.2 Gen 1	Four USB 3.2 Gen 1 (5Gb/s) ports on rear panel * The Windows® 7 installation media does not include native driver support for USB 3.2 Gen 1. In order to use the USB keyboard or mouse connected to a USB 3.2 Gen 1 port during OS installation, the user has to update the Windows® 7 installation image so that it contains USB 3.2 Gen 1 drivers. Please refer to Section 4.10 for detailed installation procedures.



IMB-H110 microATX Motherboard

Environmental and Power Specifications	
Power Supply	AT/ATX power support
Power Consumption	3.3V@0.93A, 5V@2.99A, 12V@6.88A, 5VSB@0.02A (4.0 GHz Intel® Core™ i7-6700K CPU with two 8 GB 2133 MHz DDR4 memory)
Operating Temperature	-20°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Operating Humidity	5% ~ 95% (non-condensing)
Physical Specifications	
Dimensions	244 mm x 244 mm
Weight (GW/NW)	1200 g / 700 g

Table 1-1: IMB-H110 Specifications



Chapter

2

Packing List



IMB-H110 microATX Motherboard

2.1 Anti-static Precautions



WARNING!

Static electricity can destroy certain electronics. Make sure to follow the ESD precautions to prevent damage to the product, and injury to the user.

Make sure to adhere to the following guidelines:

- ***Wear an anti-static wristband:*** Wearing an anti-static wristband can prevent electrostatic discharge.
- ***Self-grounding:*** Touch a grounded conductor every few minutes to discharge any excess static buildup.
- ***Use an anti-static pad:*** When configuring any circuit board, place it on an anti-static mat.
- ***Only handle the edges of the PCB:*** Don't touch the surface of the motherboard. Hold the motherboard by the edges when handling.

2.2 Unpacking Precautions

When the IMB-H110 is unpacked, please do the following:

- Follow the anti-static guidelines above.
- Make sure the packing box is facing upwards when opening.
- Make sure all the packing list items are present.

2.3 Packing List



NOTE:

If any of the components listed in the checklist below are missing, do not proceed with the installation. Contact the IEI reseller or vendor the IMB-H110 was purchased from or contact an IEI sales representative directly by sending an email to sales@ieiworld.com.

The IMB-H110 is shipped with the following components:


Quantity	Item and Part Number	Image
1	IMB-H110 single board computer	
2	SATA cable	
1	I/O shielding	
1	Quick installation guide	

Table 2-1: Packing List

IMB-H110 microATX Motherboard

2.4 Optional Items

The following are optional components which may be separately purchased:

Item and Part Number	Image
LPT cable (P/N: 19800-000049-RS)	
PS/2 KB/MS Y-cable with bracket (P/N: 19800-000075-RS)	
RS-232/422/485 cable, 300 mm, p=2.00 mm (P/N: 19800-000200-100-RS)	
SATA power cable (P/N: 32102-000100-200-RS)	
High-performance LGA1155/LGA1156 cooler kit (1U chassis compatible, 73W) (P/N: CF-115XA-R10)	
High-performance LGA1155/LGA1156 cooler kit (95W) (P/N: CF-115XE-R10)	
DisplayPort to HDMI converter board (for IEI iDP connector) (P/N: DP-HDMI-R10)	
DisplayPort to LVDS converter board (for IEI iDP connector) (P/N: DP-LVDS-R10)	



IMB-H110 microATX Motherboard

Item and Part Number	Image
DisplayPort to VGA converter board (for IEI iDP connector) (P/N: DP-VGA-R10)	
DisplayPort to DVI-D converter board (for IEI iDP connector) (P/N: DP-DVI-R10)	
DisplayPort to DisplayPort converter board (for IEI iDP connector) (P/N: DP-DP-R10)	
20-pin Infineon TPM module, software management tool, firmware v5.5 (P/N: TPM-IN02-R20)	

Table 2-2: Optional Items



Chapter

3

Connectors

3.1 Peripheral Interface Connectors

This chapter details all the peripheral interface connectors.

3.1.1 IMB-H110 Layout

The figure below shows all the peripheral interface connectors.

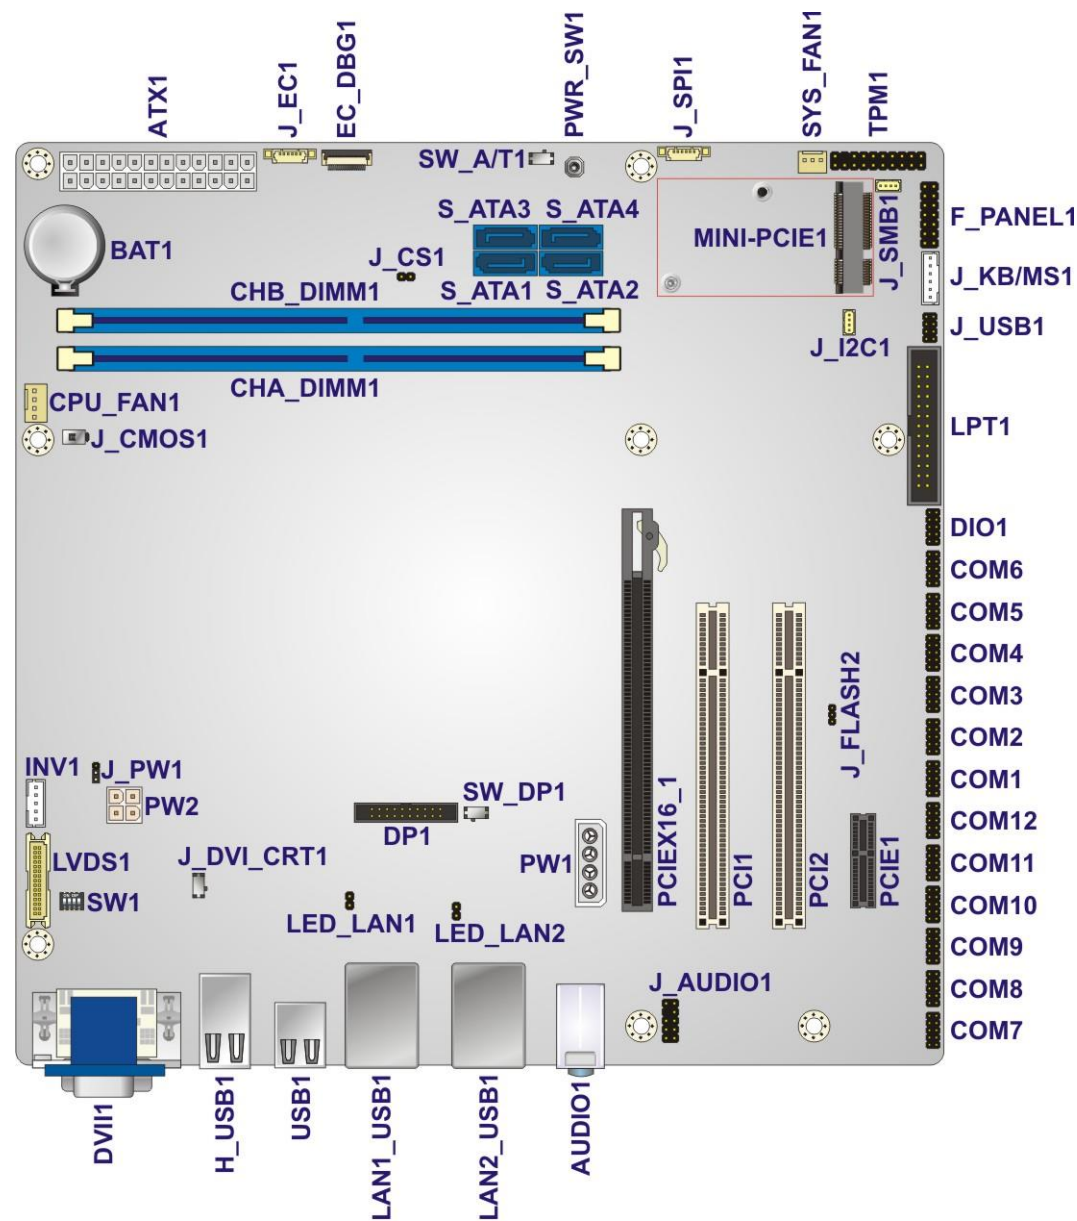


Figure 3-1: Peripheral Interface Connectors

IMB-H110 microATX Motherboard

3.1.2 Peripheral Interface Connectors

The table below lists all the connectors on the board.

Connector	Type	Label
+12V ATX power connector	4-pin Molex power connector	PW2
Additional power connector	4-pin connector	PW1
ATX power connector	24-pin connector	ATX1
Audio connector	10-pin header	J_AUDIO1
Backlight inveter connector	5-pin wafer	INV1
Battery connector	Battery holder	BAT1
Chassis intrusion connector	2-pin header	J_CS1
DDR4 DIMM sockets	288-pin DDR4 DIMM socket	CHA_DIMM1, CHB_DIMM1
Digital I/O connector	10-pin header	DIO1
EC debug connector	20-pin wafer	EC_DBG1
Fan connector (CPU)	4-pin wafer	CPU_FAN1
Fan connector (system)	3-pin wafer	SYS_FAN1
Front panel connector	14-pin header	F_PANEL1
I ² C connector	4-pin wafer	J_I2C1
Internal DisplayPort connector	20-pin box header	DP1
Keyboard and mouse connector	6-pin wafer	J_KB/MS1
LAN LED connectors	2-pin header	LED_LAN1, LED_LAN2
LVDS connector	30-pin crimp	LVDS1
Parallel port connector	26-pin box header	LPT1
PCI slots	PCI slot	PCI1, PCI2
PCIe x1 slot	PCIe x1 slot	PCIE1
PCIe x16 slot	PCIe x16 slot	PCIEX16_1

Connector	Type	Label
PCIe Mini slot	PCIe Mini slot	MINI-PCIE1
Power button	Push button	PWR_SW1
RS-232 serial ports	10-pin header	COM1 ~ COM4, COM7 ~ COM12
RS-232/422/485 serial ports	10-pin header	COM5, COM6
SATA 6Gb/s drive connector	7-pin SATA connector	S_ATA1, S_ATA2, S_ATA3, S_ATA4
SMBus connector	4-pin wafer	J_SMB1
SPI flash connector	6-pin wafer	J_SPI1
SPI flash connector, EC	6-pin wafer	J_EC1
TPM connector	20-pin header	TPM1
USB 2.0 connector	8-pin header	J_USB1

Table 3-1: Peripheral Interface Connectors

3.1.3 External Interface Panel Connectors

The table below lists the connectors on the external I/O panel.

Connector	Type	Label
Audio connector	Audio jacks	AUDIO1
Ethernet and USB 3.2 Gen 1 ports	RJ-45, USB Type-A	LAN1_USB1, LAN2_USB1
Ethernet ports	RJ-45	LAN1, LAN2
USB 2.0 ports	USB 2.0	USB1, H_USB1
VGA and DVI-I connectors	15-pin female, 24-pin female	VIDEO1

Table 3-2: External Peripheral Connectors

IMB-H110 microATX Motherboard

3.2 Internal Peripheral Connectors

The section describes all of the connectors on the IMB-H110.

3.2.1 +12V ATX Power Connector

- CN Label:** CPU12V1
- CN Type:** 4-pin Molex power connector, p=4.2 mm
- CN Location:** See Figure 3-2
- CN Pinouts:** See Table 3-3

This connector provides power to the CPU.

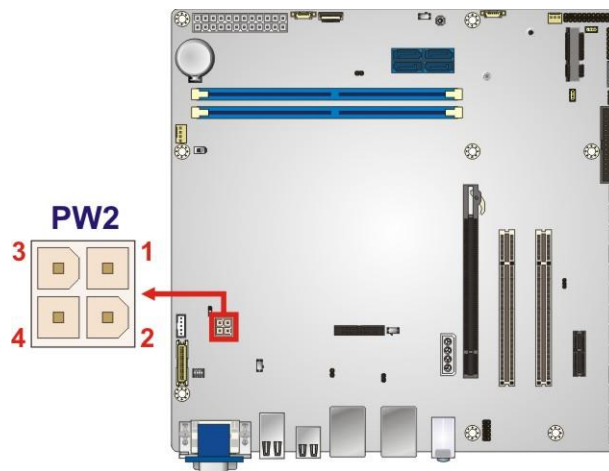


Figure 3-2: +12V ATX Power Connector Pinout Location

Pin	Description	Pin	Description
1	GND	2	GND
3	VCC12V	4	VCC12V

Table 3-3: +12V ATX Power Connector Pinouts

3.2.2 Additional Power Connector

- CN Label: PW1
- CN Type: 4-pin connector, p=5.08 mm
- CN Location: See Figure 3-3
- CN Pinouts: See Table 3-4

The additional power connector provides extra +12V and +5V power to the system.

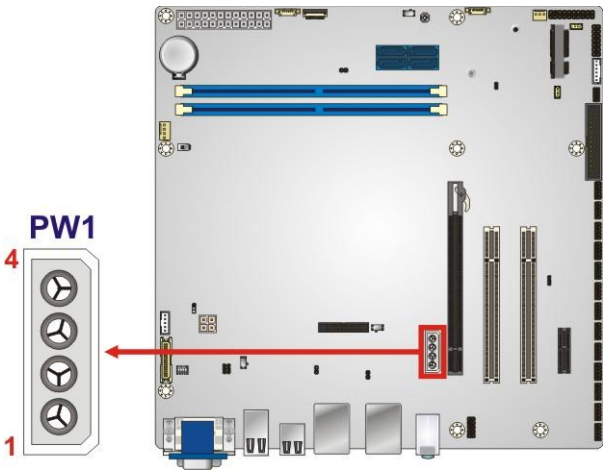


Figure 3-3: Additional Power Connector Location

Pin	Description
1	VCC12V
2	GND
3	GND
4	VCC5V

Table 3-4: Additional Power Connector Pinouts

IMB-H110 microATX Motherboard

3.2.3 ATX Power Connector

- CN Label:** ATX1
- CN Type:** 24-pin connector, p=4.2 mm
- CN Location:** See **Figure 3-4**
- CN Pinouts:** See **Table 3-5**

The ATX power connector connects to an ATX power supply.

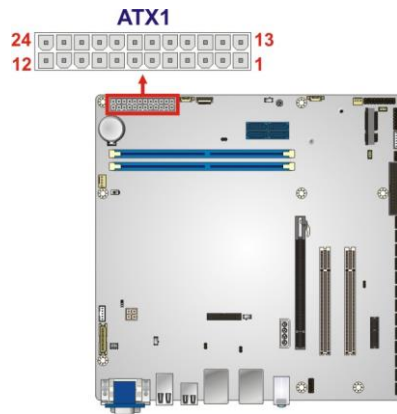


Figure 3-4: ATX Power Connector Location

Pin	Description	Pin	Description
1	VCC3V	13	VCC3V
2	VCC3V	14	-VCC12V
3	GND	15	GND
4	VCC5V	16	PS_ON
5	GND	17	GND
6	VCC5V	18	GND
7	GND	19	GND
8	PWR-OK	20	NC
9	SB5V	21	VCC5V
10	VCC12V	22	VCC5V
11	VCC12V	23	VCC5V
12	VCC3V	24	GND

Table 3-5: ATX Power Connector Pinouts

3.2.4 Audio Connector

- CN Label:

J_AUDIO1
- CN Type:

10-pin header, p=2.54 mm
- CN Location:

See Figure 3-5
- CN Pinouts:

See Table 3-6

This connector connects to speakers, a microphone and an audio input.

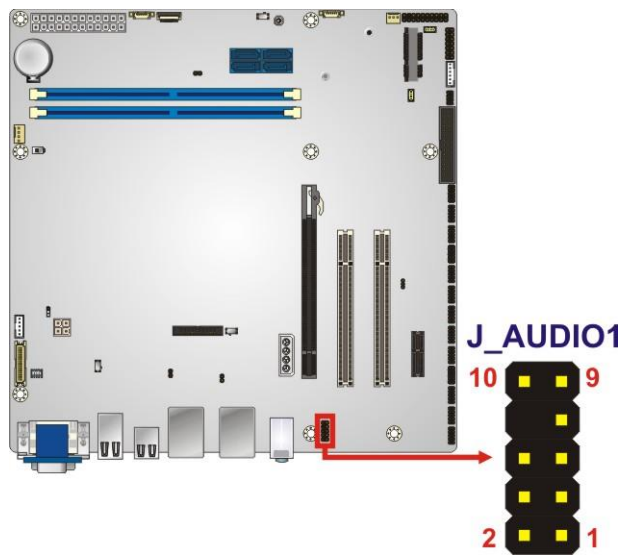


Figure 3-5: Audio Connector Location

Pin	Description	Pin	Description
1	MIC2-L	2	GND
3	MIC2-R	4	PRESENCE
5	LINE2-R	6	MIC2-JD
7	SENSE	8	NC
9	LINE2-L	10	LINE2-JD

Table 3-6: Audio Connector Pinouts

IMB-H110 microATX Motherboard

3.2.5 Backlight Inverter Connector

- CN Label:** INV1
- CN Type:** 5-pin wafer, p=2.00 mm
- CN Location:** See **Figure 3-6**
- CN Pinouts:** See **Table 3-7**

The backlight inverter connector provides power to an LCD panel.

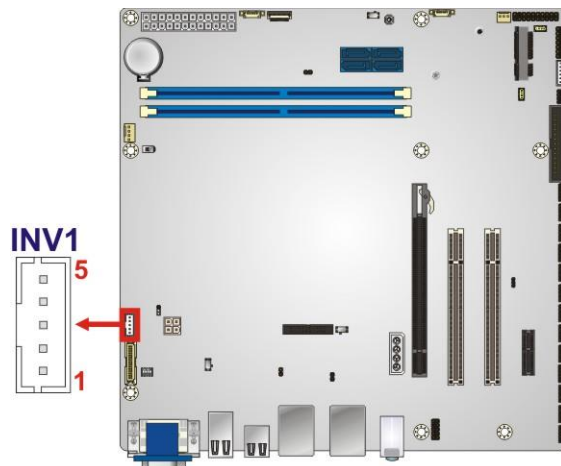


Figure 3-6: Backlight Inverter Connector Location

Pin	Description
1	LCD_ADJ
2	GND
3	VCC12V
4	GND
5	BL_ON/OFF

Table 3-7: Backlight Inverter Connector Pinouts

3.2.6 Battery Connector

**CAUTION:**

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

CN Label: **BAT1**

CN Type: Battery holder

CN Location: See **Figure 3-7**

A system battery is placed in the battery holder. The battery provides power to the system clock to retain the time when power is turned off.

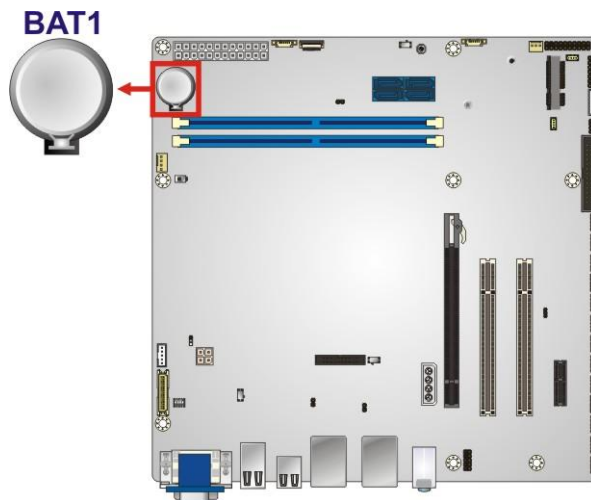


Figure 3-7: Battery Connector Location

IMB-H110 microATX Motherboard

3.2.7 Chassis Intrusion Connector

- CN Label:** J_CS1
- CN Type:** 2-pin header, p=2.54 mm
- CN Location:** See Figure 3-8
- CN Pinouts:** See Table 3-8

The chassis intrusion connector is for a chassis intrusion detection sensor or switch that detects if a chassis component is removed or replaced.

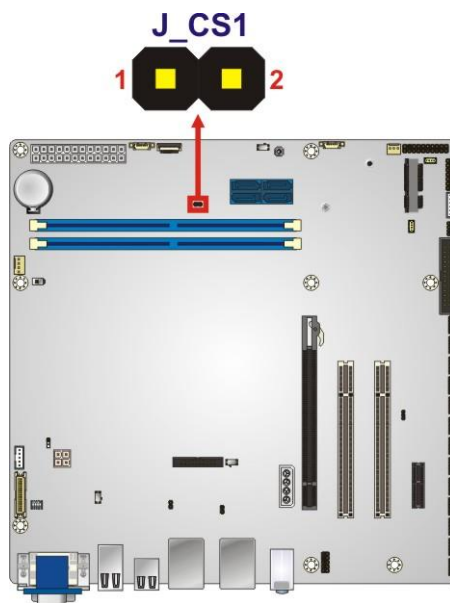


Figure 3-8: Chassis Intrusion Connector Location

Pin	Description
1	VCC3V
2	CHASSIS

Table 3-8: Chassis Intrusion Connector Pinouts

3.2.8 DDR4 DIMM Sockets

CN Label: CHA_DIMM1, CHB_DIMM1

CN Type: 288-pin DDR4 DIMM socket

CN Location: See Figure 3-9

The DIMM slots are for installing the DDR4 DIMMs.

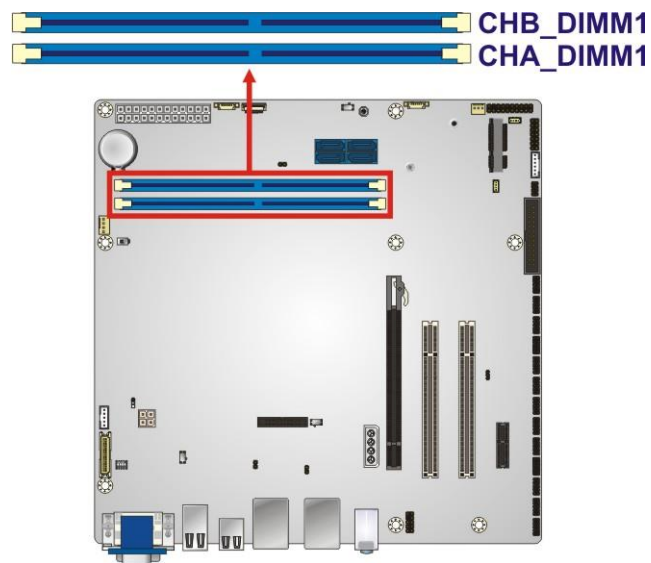


Figure 3-9: DDR4 DIMM Socket Locations



CAUTION:

For dual channel configuration, always install two identical memory modules that feature the same capacity, timings, voltage, number of ranks and the same brand.

IMB-H110 microATX Motherboard

3.2.9 Digital I/O Connector

CN Label:	DIO1
CN Type:	10-pin header, p=2.00 mm
CN Location:	See Figure 3-10
CN Pinouts:	See Table 3-9

The digital I/O connector provides programmable input and output for external devices.

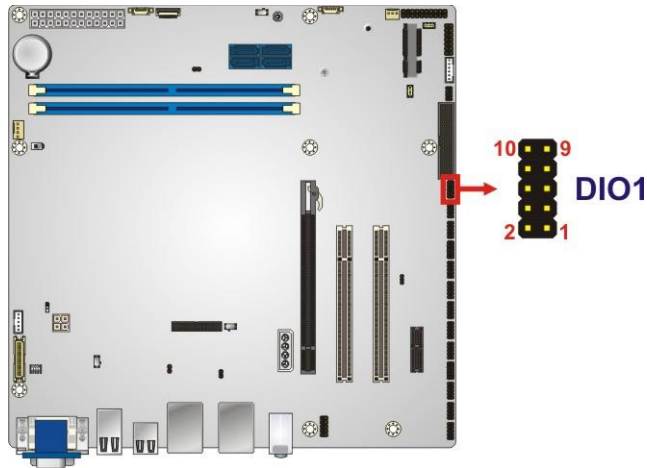


Figure 3-10: Digital I/O Connector Location

Pin	Description	Pin	Description
1	GND	2	VCC5V
3	Output 3	4	Output 2
5	Output 1	6	Output 0
7	Input 3	8	Input 2
9	Input 1	10	Input 0

Table 3-9: Digital I/O Connector Pinouts

3.2.10 EC Debug Connector

- CN Label:EC_DBG1
- CN Type:20-pin wafer, p=0.5 mm
- CN Location:See Figure 3-11
- CN Pinouts:See Table 3-10

The EC debug connector is used for EC debug.

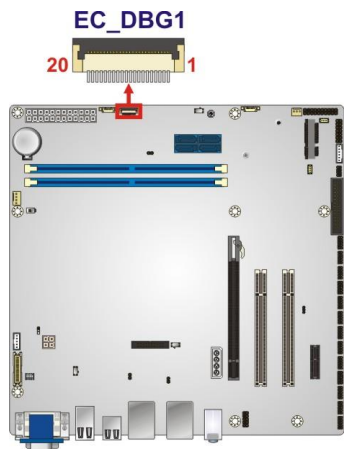


Figure 3-11: EC Debug Connector Location

Pin	Description	Pin	Description
1	KSI0	11	KSO9
2	KSO0	12	KSO10
3	KSO1	13	KSO12
4	KSO2	14	KSI1
5	KSO3	15	KSO11
6	KSO4	16	KSI2
7	KSO5	17	KSI3
8	KSO6	18	GND
9	KSO7	19	GND
10	KSO8	20	GND

Table 3-10: EC Debug Connector Pinouts

IMB-H110 microATX Motherboard

3.2.11 Fan Connector (CPU)

CN Label:	CPU_FAN1
CN Type:	4-pin wafer, p=2.54 mm
CN Location:	See Figure 3-12
CN Pinouts:	See Table 3-11

The fan connector attaches to a CPU cooling fan.

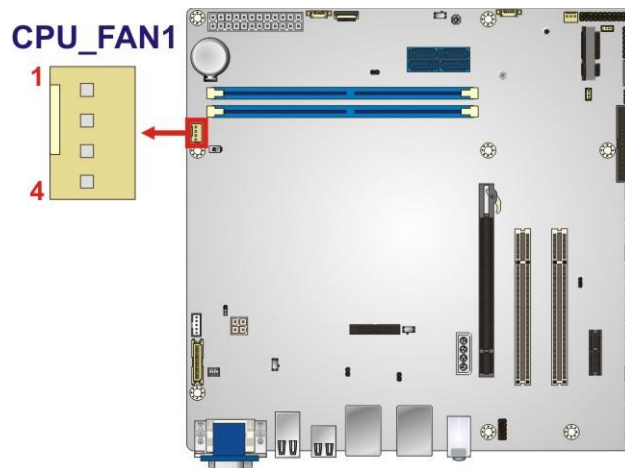


Figure 3-12: CPU Fan Connector Location

Pin	Description
1	GND
2	VCC12V
3	FANIO
4	PWM

Table 3-11: CPU Fan Connector Pinouts

3.2.12 Fan Connector (System)

- CN Label:SYS_FAN1
- CN Type:3-pin wafer, p=2.54 mm
- CN Location:See Figure 3-12
- CN Pinouts:See Table 3-11

The fan connector attaches to a system cooling fan.

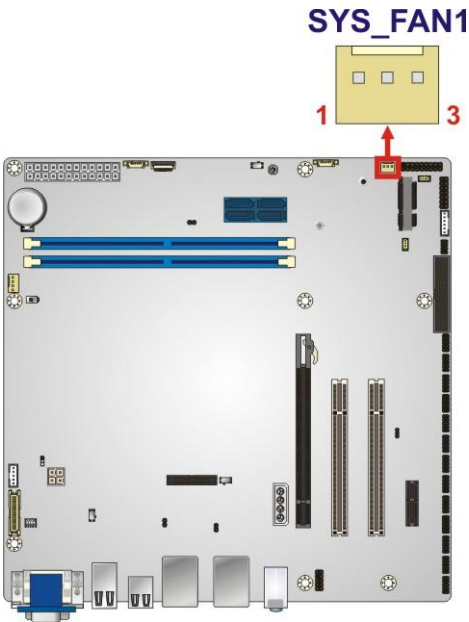


Figure 3-13: System Fan Connector Location

Pin	Description
1	FANIO
2	PWM/VCC12V
3	GND

Table 3-12: System Fan Connector Pinouts

IMB-H110 microATX Motherboard

3.2.13 Front Panel Connector

- CN Label:** F_PANEL1
- CN Type:** 14-pin header, p=2.54 mm
- CN Location:** See **Figure 3-14**
- CN Pinouts:** See **Table 3-13**

The front panel connector connects to the indicator LEDs and buttons on the computer's front panel.

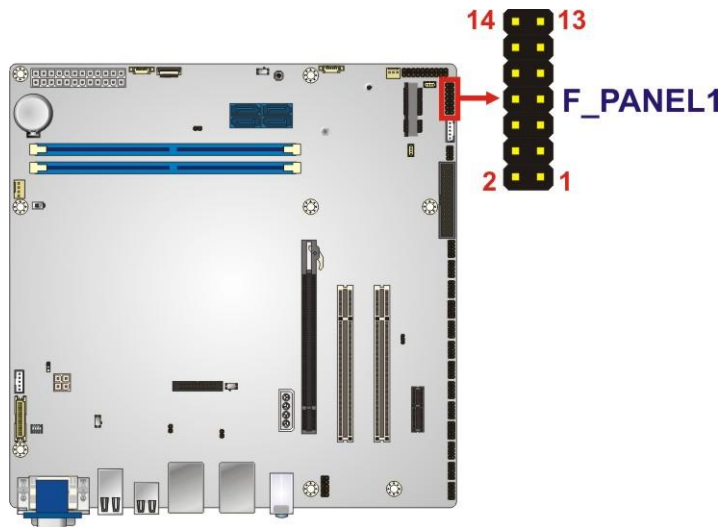


Figure 3-14: Front Panel Connector Location

Function	Pin	Description	Function	Pin	Description
Power LED	1	PWR_LED+	Speaker	2	SPKR+
	3	NC		4	NC
	5	PWR_LED-		6	NC
Power Button	7	PWR_BTN+		8	SPKR-
	9	PWR_BTN-		10	NC
HDD LED	11	HDD_LED+	Reset	12	RESET+
	13	HDD_LED-		14	RESET-

Table 3-13: Front Panel Connector Pinouts

3.2.14 I²C Connector

- CN Label:J_I2C1
- CN Type:4-pin wafer, p=1.25 mm
- CN Location:See Figure 3-15
- CN Pinouts:See Table 3-14

The I²C connector is used to connect I²C-bus devices to the motherboard.

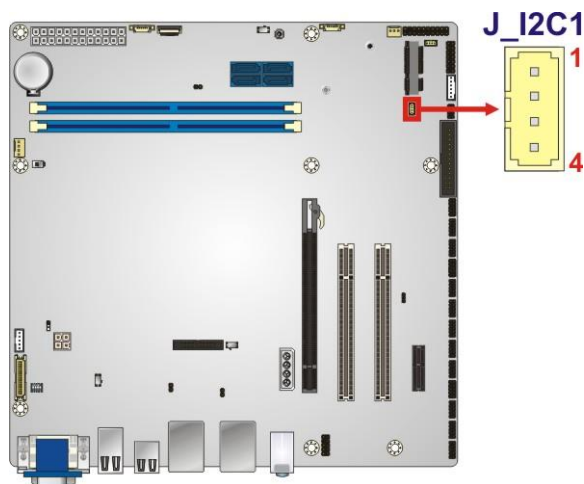


Figure 3-15: I²C Connector Location

Pin	Description
1	GND
2	I2C_DATA
3	I2C_CLK
4	VCC5V

Table 3-14: I²C Connector Pinouts

3.2.15 Internal DisplayPort Connector



NOTE:

The user can select either to use the LVDS connector or the internal DisplayPort connector. Use the LVDS/iDP selection switch to configure the settings. Please refer to **Section 4.8.5** for detailed information.

IMB-H110 microATX Motherboard

- CN Label:** DP1
- CN Type:** 20-pin box header, p=2.00 mm
- CN Location:** See **Figure 3-16**
- CN Pinouts:** See **Table 3-15**

The internal DisplayPort connector supports HDMI, LVDS, VGA, DVI and DisplayPort graphics interfaces.

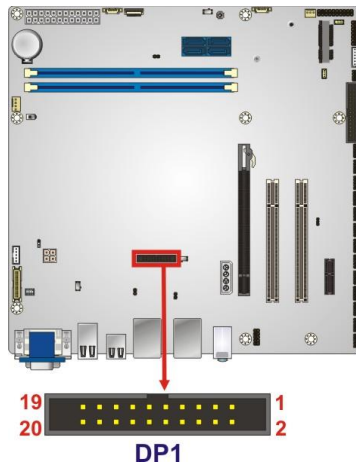


Figure 3-16: Internal DisplayPort Connector Location

Pin	Description	Pin	Description
1	HPD	2	AUX_P
3	GND	4	AUX_N
5	AUX_DET	6	GND
7	GND	8	LANE2P
9	LANE3P	10	LANE2N
11	LANE3N	12	GND
13	GND	14	LANE0P
15	LANE1P	16	LANE0N
17	LANE1N	18	VCC3V
19	VCC5V	20	NC

Table 3-15: Internal DisplayPort Connector Pinouts

3.2.16 Keyboard and Mouse Connector

- CN Label:J_KB/MS1
- CN Type:6-pin wafer, p=2.00 mm
- CN Location:See Figure 3-17
- CN Pinouts:See Table 3-16

The keyboard and mouse connector connects to a PS/2 Y-cable that can be connected to a PS/2 keyboard and mouse.

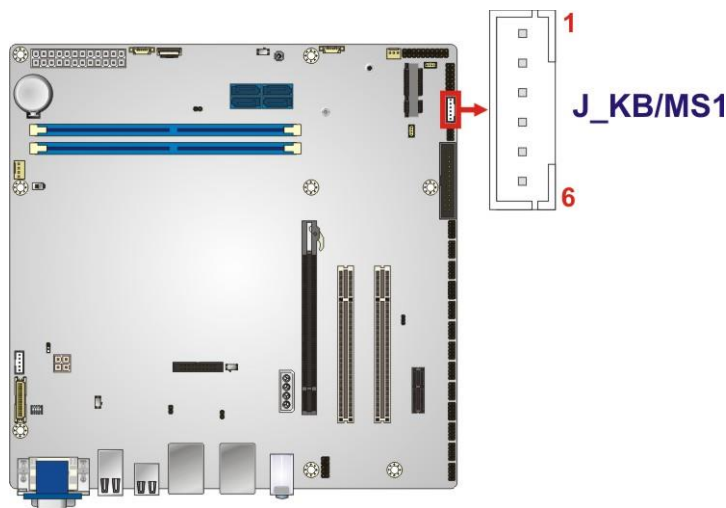


Figure 3-17: Keyboard and Mouse Connector Location

Pin	Description
1	VCC5V
2	Mouse Data
3	Mouse Clock
4	Keyboard Data
5	Keyboard Clock
6	GND

Table 3-16: Keyboard and Mouse Connector Pinouts

IMB-H110 microATX Motherboard

3.2.17 LAN LED Connectors

CN Label: LED_LAN1, LED_LAN2

CN Type: 2-pin header, p=2.54 mm

CN Location: See Figure 3-18

CN Pinouts: See Table 3-17

The LAN LED connectors are used to connect to the LAN LED indicators on the chassis to indicate users the link activities of the two LAN ports.

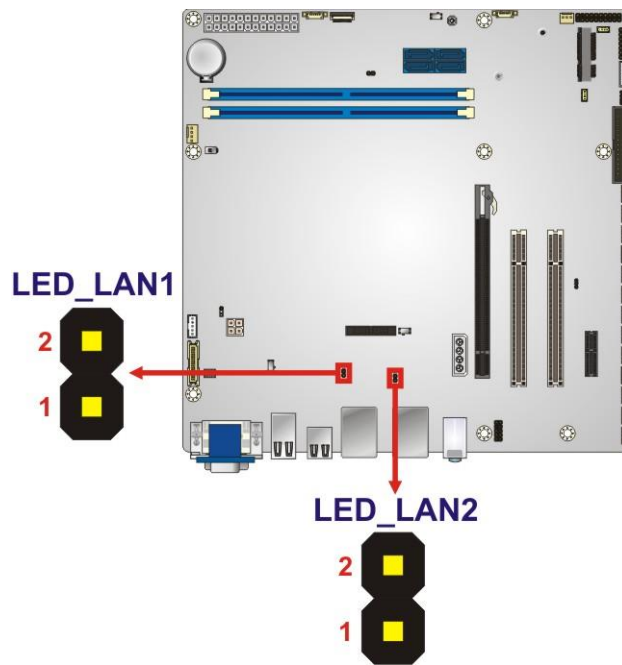


Figure 3-18: LAN LED Connector Locations

Pin	Description
1	VCC3V
2	ACT

Table 3-17: LAN LED Connector Pinouts

3.2.18 LVDS Connector



NOTE:

The user can select either to use the LVDS connector or the internal DisplayPort connector. Use the LVDS/iDP selection switch to configure the settings. Please refer to **Section 4.8.5** for detailed information.

- CN Label: LVDS1
- CN Type: 30-pin crimp, p=1.25 mm
- CN Location: See **Figure 3-19**
- CN Pinouts: See **Table 3-18**

The LVDS connector is for an LCD panel to connect to the board.

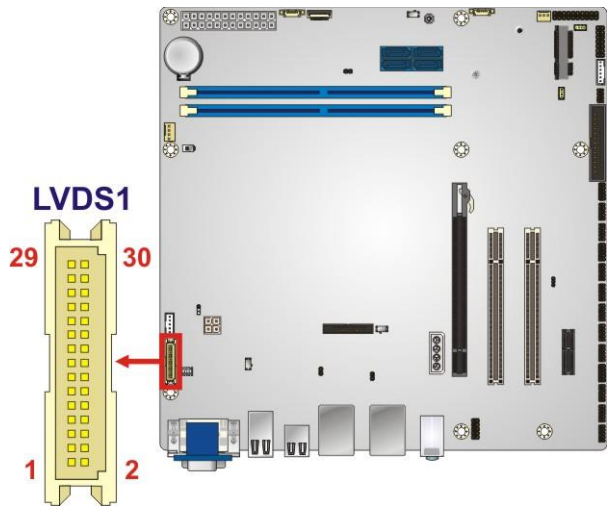


Figure 3-19: LVDS Connector Location

Pin	Description	Pin	Description
1	GROUND	2	GROUND
3	LVDS_A_TX0-P	4	LVDS_A_TX0-N
5	LVDS_A_TX1-P	6	LVDS_A_TX1-N
7	LVDS_A_TX2-P	8	LVDS_A_TX2-N
9	LVDS_A_TXCLK-P	10	LVDS_A_TXCLK-N

IMB-H110 microATX Motherboard

Pin	Description	Pin	Description
11	LVDS_A_TX3-P	12	LVDS_A_TX3-N
13	GROUND	14	GROUND
15	LVDS_B_TX0-P	16	LVDS_B_TX0-N
17	LVDS_B_TX1-P	18	LVDS_B_TX1-N
19	LVDS_B_TX2-P	20	LVDS_B_TX2-N
21	LVDS_B_TXCLK-P	22	LVDS_B_TXCLK-N
23	LVDS_B_TX3-P	24	LVDS_B_TX3-N
25	GROUND	26	GROUND
27	+LCD VCC	28	+LCD VCC
29	+LCD VCC	30	+LCD VCC

Table 3-18: LVDS Connector Pinouts

3.2.19 Parallel Port Connector

- CN Label:** LPT1
- CN Type:** 26-pin box header, p=2.54 mm
- CN Location:** See **Figure 3-20**
- CN Pinouts:** See **Table 3-19**

The parallel port connector connects to a parallel port connector interface or some other parallel port device such as a printer.

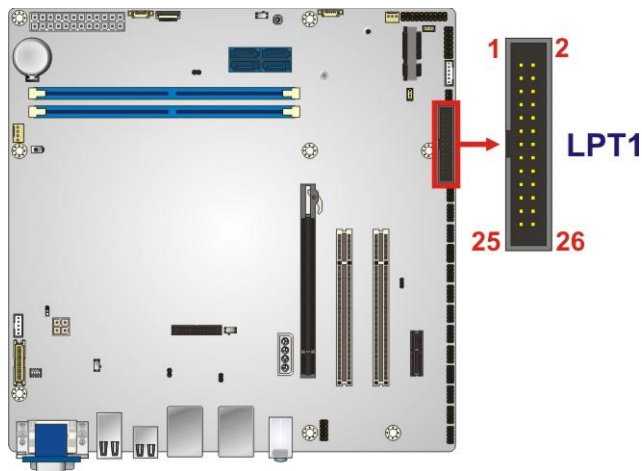


Figure 3-20: Parallel Port Connector Location

Pin	Description	Pin	Description
1	STB	2	AFD
3	PPD0	4	ERROR
5	PPD1	6	INIT
7	PPD2	8	SLIN
9	PPD3	10	GND
11	PPD4	12	GND
13	PPD5	14	GND
15	PPD6	16	GND
17	PPD7	18	GND
19	ACK	20	GND
21	BUSY	22	GND,
23	PE	24	GND
25	SLCT	26	NC

Table 3-19: Parallel Port Connector Pinouts

3.2.20 PCI Slots

- CN Label: **PCI1, PCI2**
- CN Type: **PCI Slot**
- CN Location: See **Figure 3-21**

The PCI slot enables a PCI expansion module to be connected to the board.

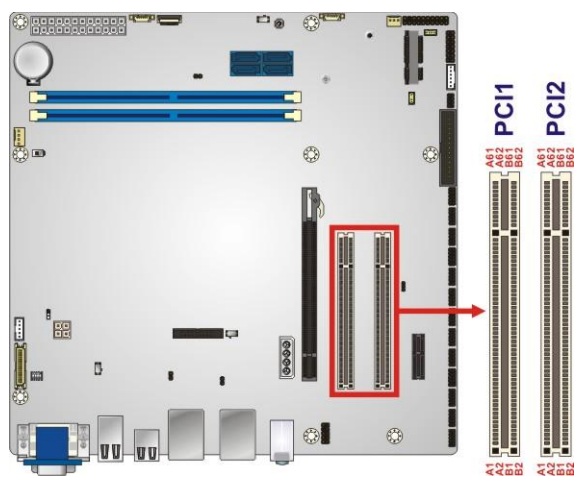


Figure 3-21: PCI Slot Locations

IMB-H110 microATX Motherboard

3.2.21 PCIe x1 Slot

CN Label:	PCIE1
CN Type:	PCIe x1 slot
CN Location:	See Figure 3-22

The PCIe x1 expansion card slot is for PCIe x1 expansion card.

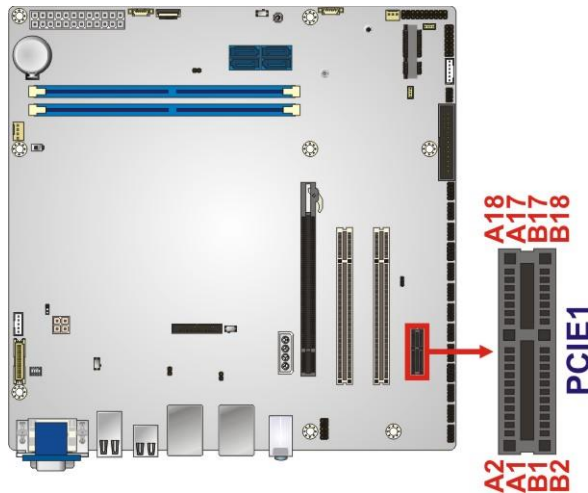


Figure 3-22: PCIe x1 Slot Location

3.2.22 PCIe x16 Slot

- CN Label:

PCIEX16_1
- CN Type:

PCIe x8 slot
- CN Location:

See Figure 3-23

The PCIe x16 expansion card slot is for PCIe x16 expansion card.

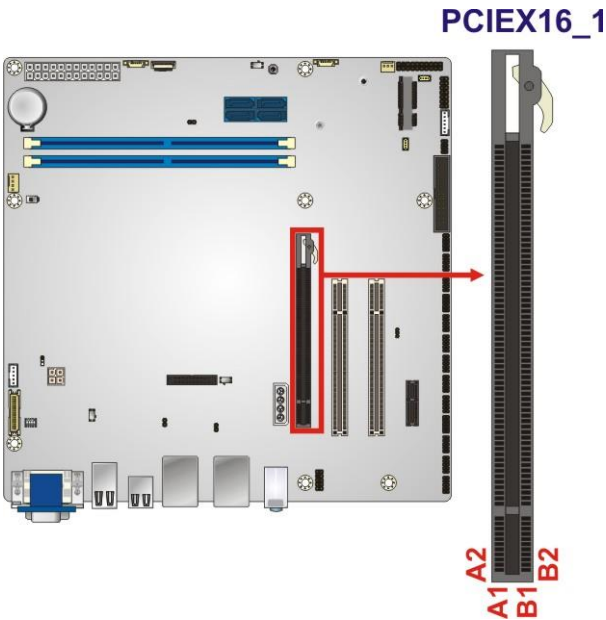


Figure 3-23: PCIe x16 Slot Location

3.2.23 PCIe Mini Slot

- CN Label:

MINI-PCIE1
- CN Type:

PCIe Mini slot
- CN Location:

See Figure 3-24
- CN Pinouts:

See Table 3-20

The PCIe Mini slot is for installing a full-size/half-size PCIe Mini expansion card, such as a wireless LAN card.

IMB-H110 microATX Motherboard

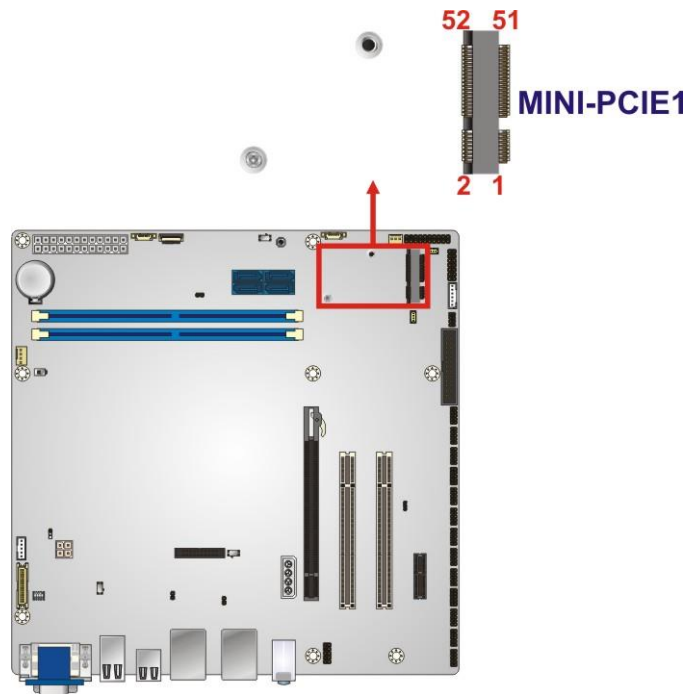


Figure 3-24: PCIe Mini Slot Location

Pin	Description	Pin	Description
1	NC	2	VCC3V
3	NC	4	GND
5	NC	6	VCC1.5V
7	CLKREQ	8	NC
9	GND	10	NC
11	CLKN	12	NC
13	CLKP	14	NC
15	GND	16	NC
17	NC	18	GND
19	NC	20	VCC3V
21	GND	22	RESET
23	PCIE_RXN	24	SB3V
25	PCIE_RXP	26	GND
27	GND	28	VCC1.5V
29	GND	30	SMB_CLK
31	PCIE_TXN	32	SMB_DATA
33	PCIE_TXP	34	GND

Pin	Description	Pin	Description
35	GND	36	USB_N
37	NC	38	USB_P
39	NC	40	GND
41	NC	42	NC
43	NC	44	NC
45	NC	46	NC
47	NC	48	VCC1.5V
49	NC	50	GND
51	NC	52	VCC3V

Table 3-20: PCIe Mini Slot Pinouts

3.2.24 Power Button

- CN Label: PWR_SW1
- CN Type: Push button
- CN Location: See Figure 3-25

The on-board power button controls system power.

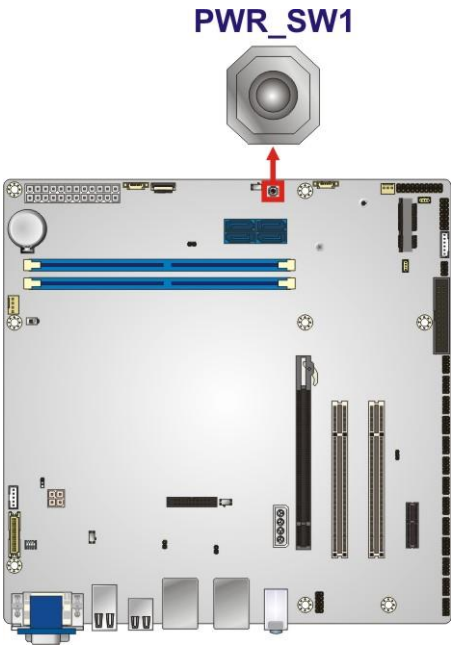


Figure 3-25: Power Button Location

IMB-H110 microATX Motherboard

3.2.25 RS-232 Serial Port Connectors

CN Label: COM1, COM2, COM3, COM4, COM7, COM8, COM9, COM10, COM11, COM12

CN Type: 10-pin header, p=2.00 mm

CN Location: See Figure 3-27

CN Pinouts: See Table 3-22

Each of these connectors provides RS-232 connections.

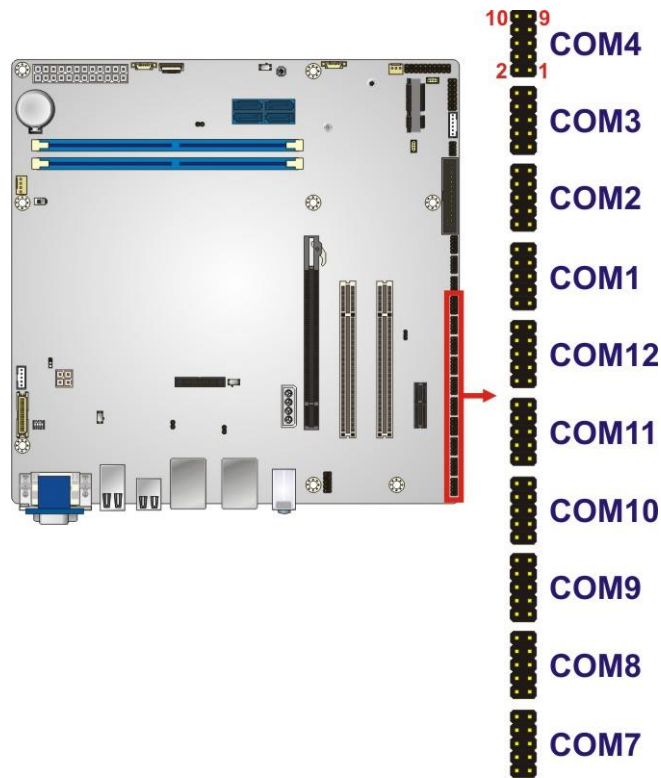


Figure 3-26: RS-232 Serial Port Connector Locations

Pin	Description	Pin	Description
1	DCD	2	DSR
3	RX	4	RTS
5	TX	6	CTS
7	DTR	8	RI
9	GND	10	GND

Table 3-21: RS-232 Serial Port Connector Pinouts

3.2.26 RS-232/422/485 Serial Port Connectors

- CN Label:

COM5, COM6
- CN Type:

10-pin header, p=2.00 mm
- CN Location:

See Figure 3-27
- CN Pinouts:

See Table 3-22

Each of these connectors provides RS-232/422/485 connections.



NOTE:

The communication protocol of the serial ports is set through the BIOS menu in “Advanced → Super IO Configuration → Serial Port 5/6 Configuration”. Use the **Transfer Mode** BIOS option to configure the correspondent serial ports (refer to **Sections 5.3.3.4.2** and **5.3.3.4.3** for detailed information).

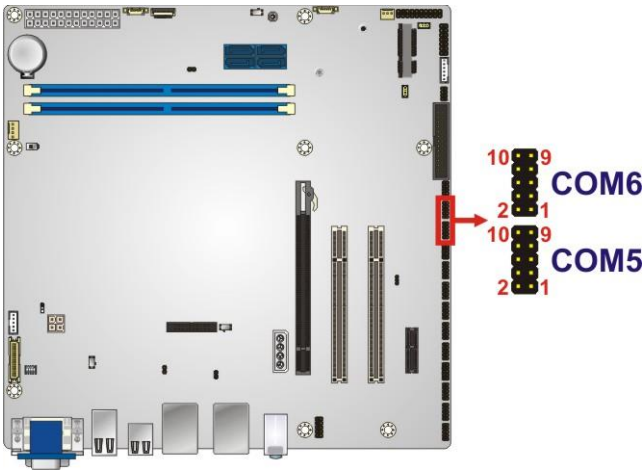


Figure 3-27: RS-232/422/485 Serial Port Connector Locations

Pin	Description	Pin	Description
1	DCD/TX-/D-	2	DSR
3	RX/TX+/D+	4	RTS
5	TX/RT+	6	CTS

IMB-H110 microATX Motherboard

Pin	Description	Pin	Description
7	DTR/RX-	8	RI
9	GND	10	GND

Table 3-22: RS-232/422/485 Serial Port Connector Pinouts

Use the optional RS-232/422/485 cable to connect to a serial device. The pinouts of the DB-9 connector are listed below.




RS-232 Pinouts	RS-422 Pinouts	RS-485 Pinouts
 DSR(6) RTS(7) CTS(8) RI(9) 1 DCD(1) 2 SIN(2) 3 SOUT(3) 4 DTR(4) 5 GND(5)	 1 TX- (TXD485#) 2 TX+ (TXD485+) 3 RX+ (RXD485+) 4 RX- (RXD485#) 5	 1 TX- (TXD485#) 2 TX+ (TXD485+) 3 4 5

Table 3-23: DB-9 RS-232/422/485 Pinouts

3.2.27 SATA 6Gb/s Drive Connector

- CN Label:** S_ATA1, S_ATA2, S_ATA3, S_ATA4
- CN Type:** 7-pin SATA drive connector
- CN Location:** See Figure 3-28
- CN Pinouts:** See Table 3-24

The SATA drive connectors can be connected to SATA drives and supports up to 6Gb/s data transfer rate.

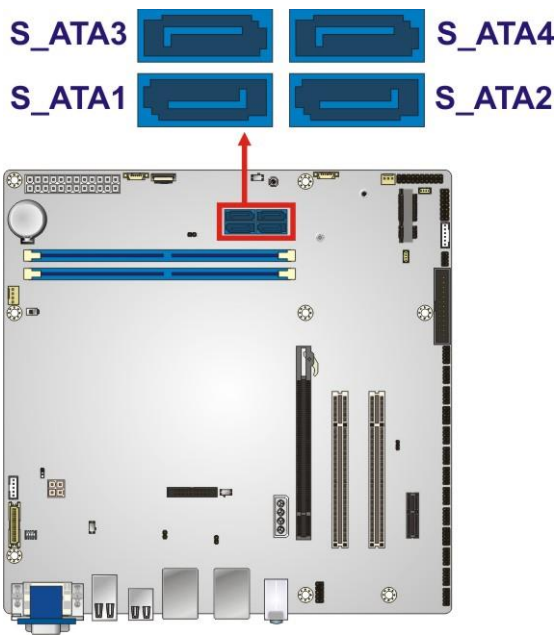


Figure 3-28: SATA 6Gb/s Drive Connector Locations

Pin	Description	Pin	Description
1	GND	2	SATA_TXP
3	SATA_TXN	4	GND
5	SATA_RXN	6	SATA_RXP
7	GND		

Table 3-24: SATA 6Gb/s Drive Connector Pinouts

IMB-H110 microATX Motherboard

3.2.28 SMBus Connector

- CN Label:** J_SMB1
- CN Type:** 4-pin wafer, p=1.25 mm
- CN Location:** See **Figure 3-29**
- CN Pinouts:** See **Table 3-25**

The SMBus (System Management Bus) connector provides low-speed system management communications.

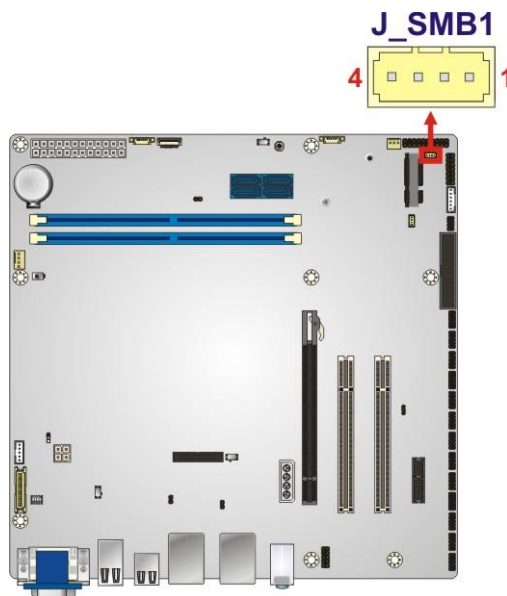


Figure 3-29: SMBus Connector Location

Pin	Description
1	GND
2	SMB_DATA
3	SMB_CLK
4	VCC5V

Table 3-25: SMBus Connector Pinouts

3.2.29 SPI Flash Connector

- CN Label:J_SPI1
- CN Type:6-pin wafer, p=1.25 mm
- CN Location:See Figure 3-30
- CN Pinouts:See Table 3-26

The SPI flash connector is used to flash the SPI ROM.

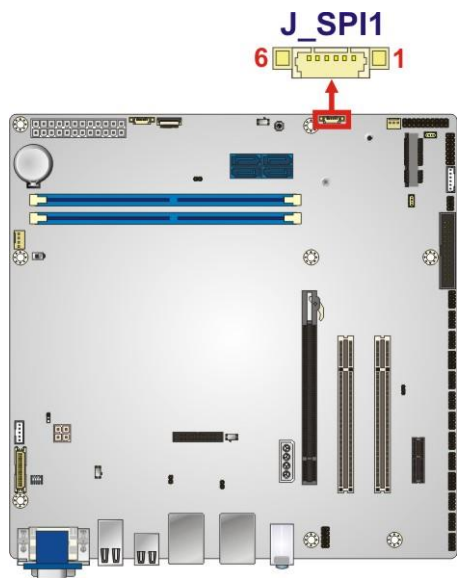


Figure 3-30: SPI Flash Connector Location

Pin	Description
1	VCC3V
2	CS
3	MISO
4	CLK
5	MOSI
6	GND

Table 3-26: SPI Flash Connector Pinouts

IMB-H110 microATX Motherboard

3.2.30 SPI Flash Connector, EC

- CN Label:** J_EC1
- CN Type:** 6-pin wafer, p=1.25 mm
- CN Location:** See **Figure 3-31**
- CN Pinouts:** See **Table 3-27**

The SPI flash connector is used to flash the EC ROM.

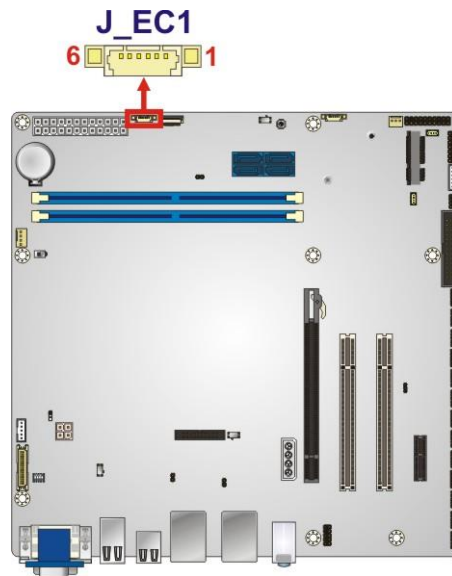


Figure 3-31: SPI EC Flash Connector Location

Pin	Description
1	VCC3V
2	CS
3	MISO
4	CLK
5	MOSI
6	GND

Table 3-27: SPI EC Flash Connector Pinouts

3.2.31 TPM Connector

- CN Label:

TPM1
- CN Type:

20-pin header, p=2.54 mm
- CN Location:

See Figure 3-32
- CN Pinouts:

See Table 3-28

The TPM connector connects to a TPM module.

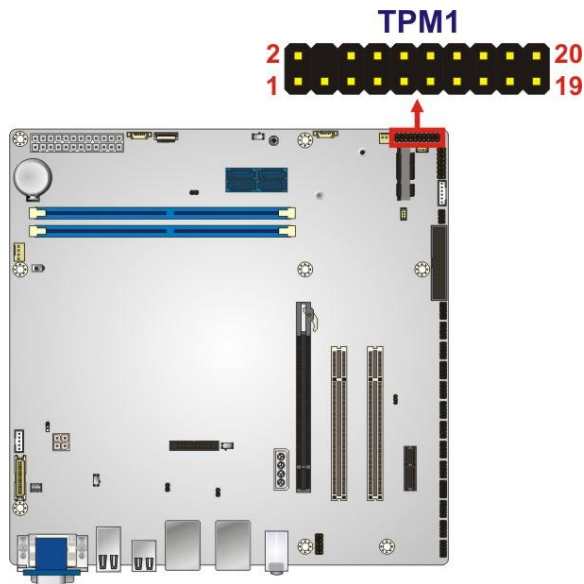


Figure 3-32: TPM Connector Location

Pin	Description	Pin	Description
1	CLOCK	2	GND
3	FRAME	4	NC
5	RESET	6	VCC5V
7	LAD3	8	LAD2
9	VCC3V	10	LAD1
11	LAD0	12	GND
13	SMB_CLK	14	SMB_DATA
15	SB3V	16	SERIRQ
17	GND	18	CLKRUN
19	LPCPD	20	DRQ

Table 3-28: TPM Connector Pinouts

IMB-H110 microATX Motherboard

3.2.32 USB 2.0 Connector

- CN Label:** J_USB1
- CN Type:** 8-pin header, p=2.00 mm
- CN Location:** See **Figure 3-33**
- CN Pinouts:** See **Table 3-29**

The USB 2.0 connectors connect to USB 2.0/1.1 devices. Each pin header provides two USB 2.0 ports.

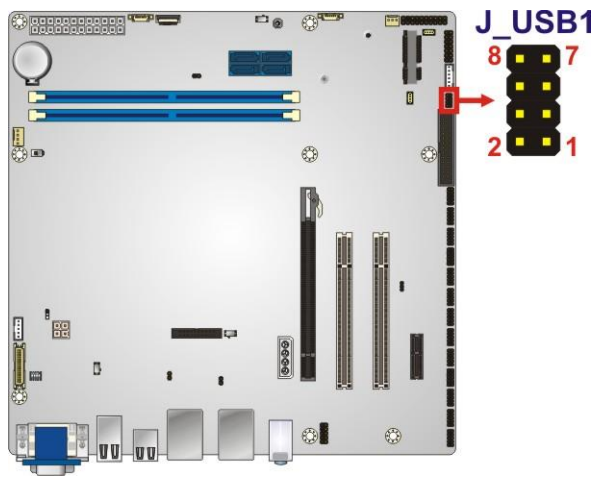


Figure 3-33: USB 2.0 Connector Locations

Pin	Description	Pin	Description
1	SB5V	2	GND
3	DATA-	4	DATA+
5	DATA+	6	DATA-
7	GND	8	SB5V

Table 3-29: USB 2.0 Connector Pinouts

3.3 External Peripheral Interface Connector Panel

The figure below shows the external peripheral interface connector (EPIC) panel. The EPIC panel consists of the following:

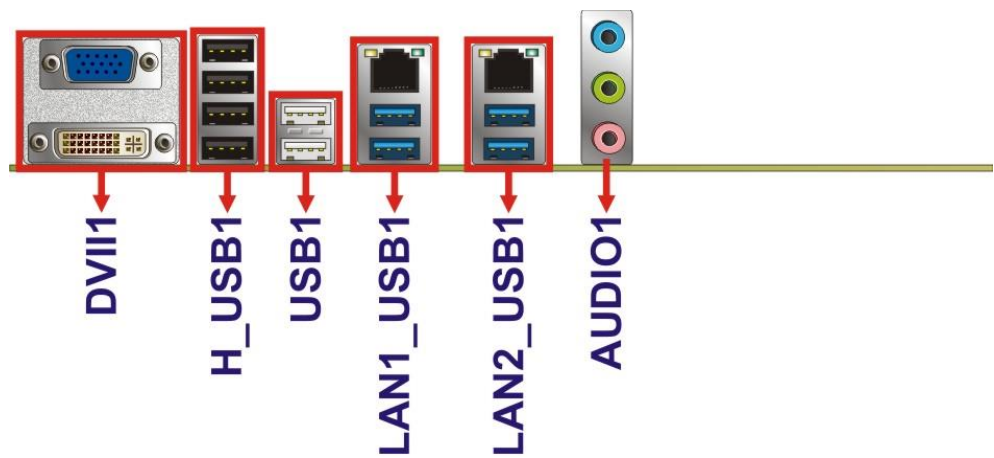


Figure 3-34: External Peripheral Interface Connector

3.3.1 Audio Connector

CN Label:	AUDIO1
CN Type:	Audio jack
CN Location:	See Figure 3-34

The audio jacks connect to external audio devices.

- **Line In port (Light Blue):** Connects a CD-ROM, DVD player, or other audio devices.
- **Line Out port (Lime):** Connects to a headphone or a speaker. With multi-channel configurations, this port can also connect to front speakers.
- **Microphone (Pink):** Connects a microphone.

IMB-H110 microATX Motherboard

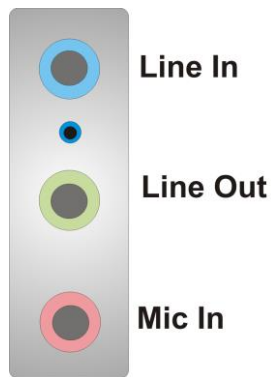


Figure 3-35: Audio Connector

3.3.2 Ethernet and USB 3.2 Gen 1 Connectors

CN Label: LAN1_USB1, LAN2_USB1

CN Type: RJ-45, USB Type-A

CN Location: See Figure 3-34

CN Pinouts: See Table 3-30 and Table 3-31

There are four external USB 3.2 Gen 1 (5Gb/s) connectors on the IMB-H110.

Pin	Description	Pin	Description
1	VCC	10	VCC
2	USB_DATA-	11	USB_DATA-
3	USB_DATA+	12	USB_DATA+
4	GND	13	GND
5	USB3_RX-	14	USB3_RX-
6	USB3_RX+	15	USB3_RX+
7	GND	16	GND
8	USB3_TX-	17	USB3_TX-
9	USB3_TX+	18	USB3_TX+

Table 3-30: USB 3.2 Gen 1 Port Pinouts

Each LAN connector connects to a local network.

Pin	Description	Pin	Description
1	LAN_MDI0P	5	LAN_MDI2P
2	LAN_MDI0N	6	LAN_MDI2N
3	LAN_MDI1P	7	LAN_MDI3P
4	LAN_MDI1N	8	LAN_MDI3N

Table 3-31: LAN Pinouts

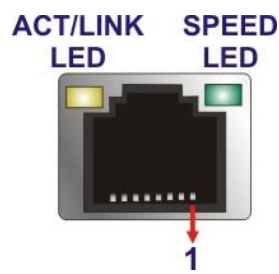


Figure 3-36: LAN Connector

3.3.3 USB 2.0 Connectors

- CN Label:USB1, H_USB1
- CN Type:USB 2.0
- CN Location:See Figure 3-34
- CN Pinouts:See Table 3-32

The USB 2.0 connector can be connected to a USB 2.0/1.1 device.

Pin	Description
1	SB5V
2	DATA-
3	DATA+
4	GND

Table 3-32: USB 2.0 Port Pinouts

IMB-H110 microATX Motherboard

3.3.4 VGA and DVI-I Connectors

- CN Label:** DVII1
- CN Type:** 15-pin VGA, 24-pin DVI-I
- CN Location:** See **Figure 3-34**
- CN Pinouts:** See **Table 3-33** and **Table 3-34**

The 24-pin Digital Visual Interface (DVI) connector connects to a high-speed, high-resolution digital display. The DVI-I connector supports both digital and analog signals.

**NOTE:**

To connect a CRT monitor to the DVI-I connector, the user has to set the DVI/CRT selection switch to CRT position. Please refer to **Section 4.8.3** for detailed information.

Pin	Description	Pin	Description
1	DATA2-	2	DATA2+
3	GND	4	NC
5	NC	6	DDC CLK
7	DDC DATA	8	VSYSN
9	DATA1-	10	DATA1+
11	GND	12	NC
13	NC	14	VCC5V
15	GND	16	HPDET
17	DATA0-	18	DATA0+
19	GND	20	NC
21	NC	22	GND
23	CLK+	24	CLK-
C1	RED	C2	GREEN
C3	BLUE	C4	HSYSN
C5	GND		

Table 3-33: DVI-I Connector Pinouts

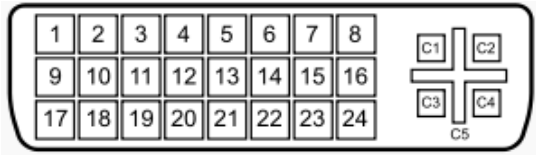


Figure 3-37: DVI-I Connector

The 15-pin VGA connector connects to a monitor that accepts a standard VGA input.



NOTE:

The user has to connect the VGA connector to the monitor before system booting as the VGA output function is supported via the eDP to VGA converter.

Pin	Description	Pin	Description
1	RED	2	GREEN
3	BLUE	4	NC
5	GND	6	GND
7	GND	8	GND
9	VCC5V	10	GND
11	NC	12	DDCDATA
13	HSYNC	14	VSYNC
15	DDCCLK		

Table 3-34: VGA Connector Pinouts




Figure 3-38: VGA Connector

Chapter

4

Installation

4.1 Anti-static Precautions



WARNING:

Failure to take ESD precautions during the installation of the IMB-H110 may result in permanent damage to the IMB-H110 and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the IMB-H110. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the IMB-H110 or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** - Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- ***Self-grounding:*** - Before handling the board touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** When configuring the IMB-H110, place it on an anti-static pad. This reduces the possibility of ESD damaging the IMB-H110.
- ***Only handle the edges of the PCB:-:*** When handling the PCB, hold the PCB by the edges.

4.2 Installation Considerations



NOTE:

The following installation notices and installation considerations should be read and understood before installation. All installation notices must be strictly adhered to. Failing to adhere to these precautions may lead to severe damage and injury to the person performing the installation.

IMB-H110 microATX Motherboard



WARNING:

The installation instructions described in this manual should be carefully followed in order to prevent damage to the components and injury to the user.

Before and during the installation please **DO** the following:

- Read the user manual:
 - The user manual provides a complete description of the IMB-H110 installation instructions and configuration options.
- Wear an electrostatic discharge cuff (ESD):
 - Electronic components are easily damaged by ESD. Wearing an ESD cuff removes ESD from the body and helps prevent ESD damage.
- Place the IMB-H110 on an anti-static pad:
 - When installing or configuring the motherboard, place it on an anti-static pad. This helps to prevent potential ESD damage.
- Turn all power to the IMB-H110 off:
 - When working with the IMB-H110, make sure that it is disconnected from all power supplies and that no electricity is being fed into the system.

Before and during the installation of the IMB-H110, **DO NOT:**

- Remove any of the stickers on the PCB board. These stickers are required for warranty validation.
- Use the product before verifying all the cables and power connectors are properly connected.
- Allow screws to come in contact with the PCB circuit, connector pins, or its components.

4.3 Socket LGA1151 CPU Installation

**WARNING:**

CPUs are expensive and sensitive components. When installing the CPU please be careful not to damage it in anyway. Make sure the CPU is installed properly and ensure the correct cooling kit is properly installed.

DO NOT touch the pins at the bottom of the CPU. When handling the CPU, only hold it on the sides.

To install the CPU, follow the steps below.

Step 1: Disengage the load lever by pressing the lever down and slightly outward to clear the retention tab. Fully open the lever. See **Figure 4-1**.

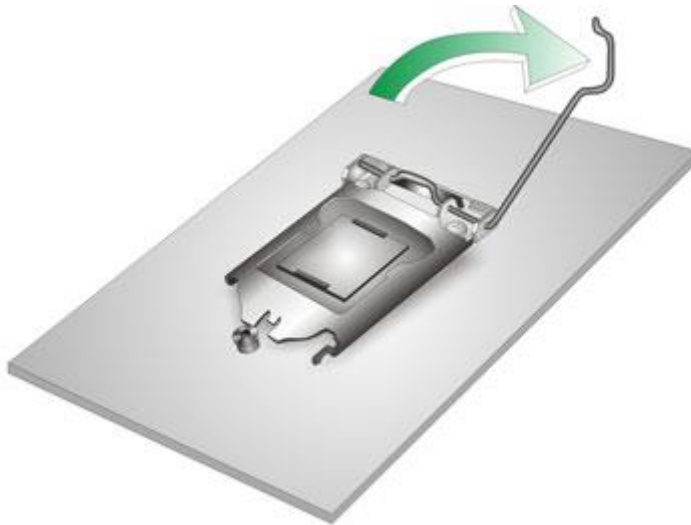


Figure 4-1: Disengage the CPU Socket Load Lever

Step 2: Open the socket and remove the protective cover. The black protective cover can be removed by pulling up on the tab labeled "Remove". See **Figure 4-2**.

IMB-H110 microATX Motherboard

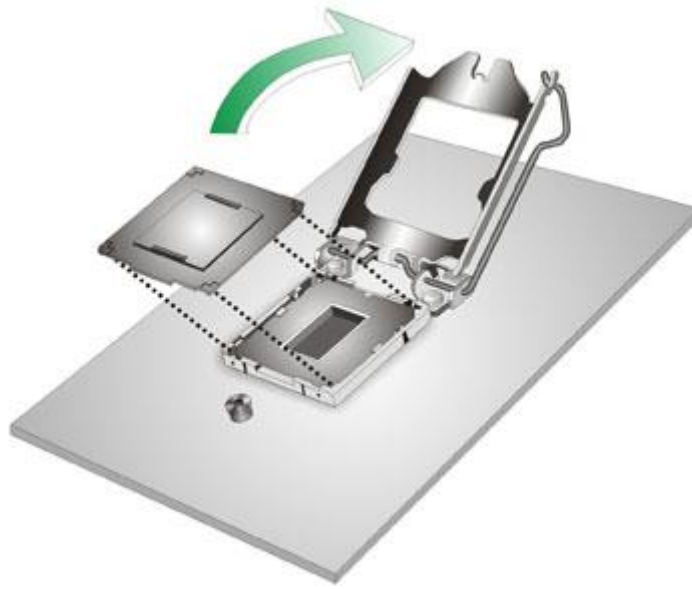


Figure 4-2: Remove Protective Cover

- Step 3: Inspect the CPU socket.** Make sure there are no bent pins and make sure the socket contacts are free of foreign material. If any debris is found, remove it with compressed air.
- Step 4: Orientate the CPU properly.** The contact array should be facing the CPU socket.



WARNING:

DO NOT touch the pins at the bottom of the CPU. When handling the CPU, only hold it on the sides.

- Step 5: Correctly position the CPU.** Match the Pin 1 mark with the cut edge on the CPU socket.
- Step 6: Align the CPU pins.** Locate pin 1 and the two orientation notches on the CPU. Carefully match the two orientation notches on the CPU with the socket alignment keys.

Step 7: **Insert the CPU.** Gently insert the CPU into the socket. If the CPU pins are properly aligned, the CPU should slide into the CPU socket smoothly. See **Figure 4-3**.

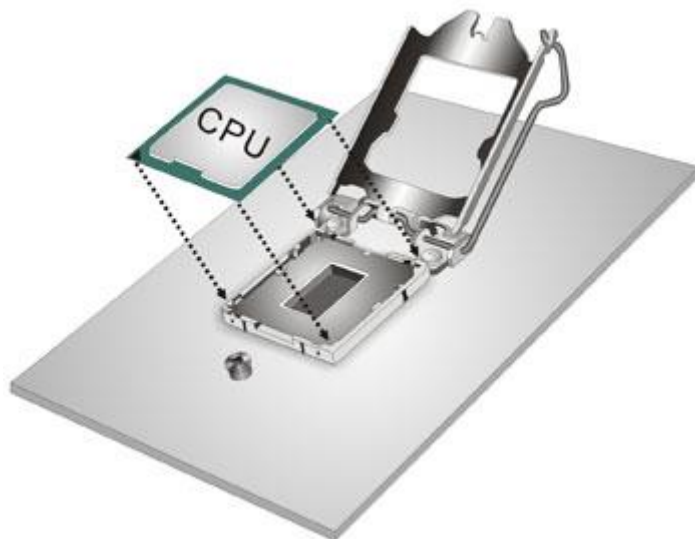


Figure 4-3: Insert the Socket LGA1151 CPU

Step 8: **Close the CPU socket.** Close the load plate and pull the load lever back a little to have the load plate be able to secure to the knob. Engage the load lever by pushing it back to its original position (**Figure 4-4**). There will be some resistance, but will not require extreme pressure.

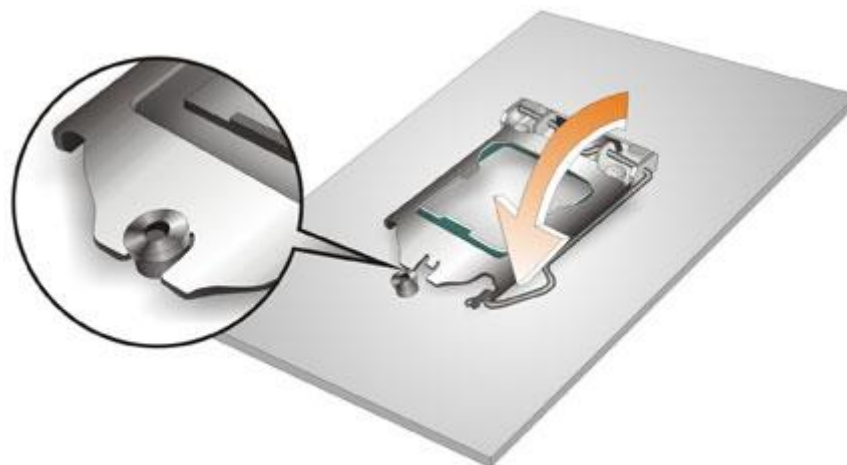


Figure 4-4: Close the Socket LGA1151

IMB-H110 microATX Motherboard

Step 9: Connect the 12 V power to the board. Connect the 12 V power from the power supply to the board.

4.4 Socket LGA1151 Cooling Kit Installation



WARNING:

DO NOT attempt to install a push-pin cooling fan.

The pre-installed support bracket prevents the board from bending and is **ONLY** compatible with captive screw type cooling fans.

The cooling kit can be bought from IEI. The cooling kit has a heat sink and fan.



WARNING:

Do not wipe off (accidentally or otherwise) the pre-sprayed layer of thermal paste on the bottom of the heat sink. The thermal paste between the CPU and the heat sink is important for optimum heat dissipation.

To install the cooling kit, follow the instructions below.

Step 1: A cooling kit bracket is pre-installed on the rear of the motherboard. See **Figure 4-5**.

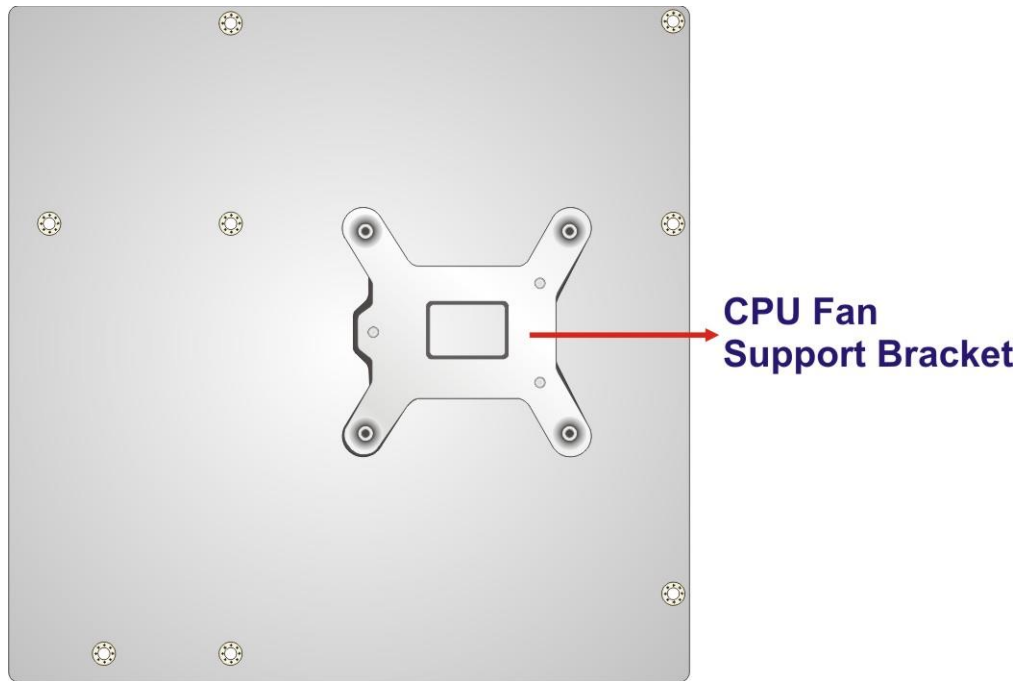


Figure 4-5: Cooling Kit Support Bracket

- Step 2:** Place the cooling kit onto the socket LGA1151 CPU. Make sure the CPU cable can be properly routed when the cooling kit is installed.
- Step 3:** Mount the cooling kit. Gently place the cooling kit on top of the CPU. Make sure the four threaded screws on the corners of the cooling kit properly pass through the holes of the cooling kit bracket.
- Step 4:** Tighten the screws. Use a screwdriver to tighten the four screws. In a diagonal pattern, tighten each screw a few turns then move to the next one, until they are all secured. Do not overtighten the screws.
- Step 5:** Connect the fan cable. Connect the cooling kit fan cable to the CPU fan connector on the IMB-H110. Carefully route the cable and avoid heat generating chips and fan blades.

IMB-H110 microATX Motherboard

4.5 DIMM Installation

To install a DIMM, please follow the steps below and refer to **Figure 4-6**.



CAUTION:

For dual channel configuration, always install two identical memory modules that feature the same capacity, timings, voltage, number of ranks and the same brand.

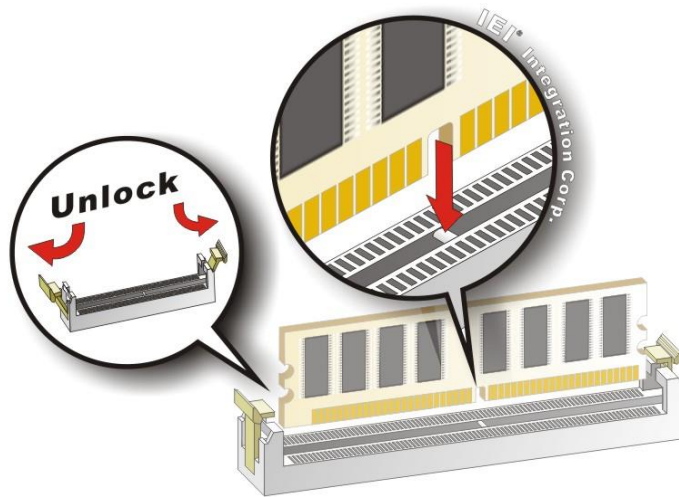


Figure 4-6: DIMM Installation

- Step 1: Open the DIMM socket handles.** Open the two handles outwards as far as they can. See **Figure 4-6**.
- Step 2: Align the DIMM with the socket.** Align the DIMM so the notch on the memory lines up with the notch on the memory socket. See **Figure 4-6**.
- Step 3: Insert the DIMM.** Once aligned, press down until the DIMM is properly seated. Clip the two handles into place. See **Figure 4-6**.
- Step 4:** To remove a DIMM, push both handles outward. The memory module is ejected by a mechanism in the socket.



4.6 Full-size PCIe Mini Card Installation

The PCIe Mini card slot allows installation of either a full-size or half-size PCIe Mini card. To install a full-size PCIe Mini card, please follow the steps below.

- Step 1:** Locate the PCIe Mini card slot. See Chapter 3.
- Step 2:** Remove the retention screw. Remove the retention screw as shown in **Figure 4-7**.

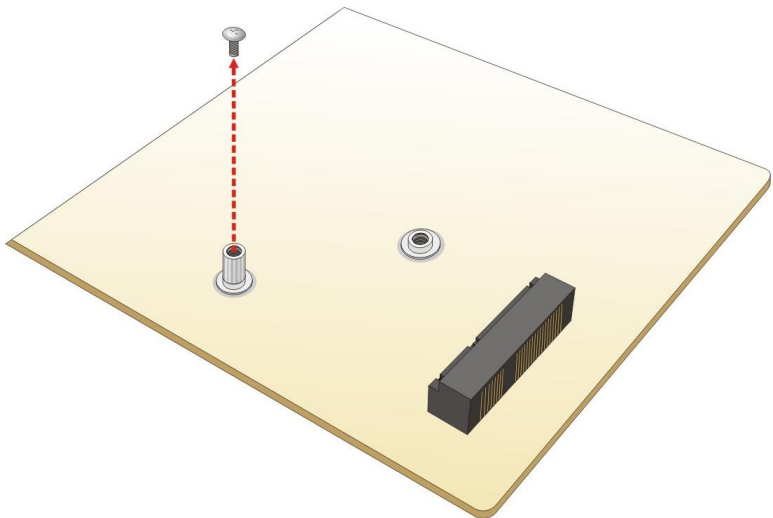


Figure 4-7: Removing the Retention Screw

- Step 3:** Insert into the socket at an angle. Line up the notch on the card with the notch on the slot. Slide the PCIe Mini card into the socket at an angle of about 20° (**Figure 4-8**).

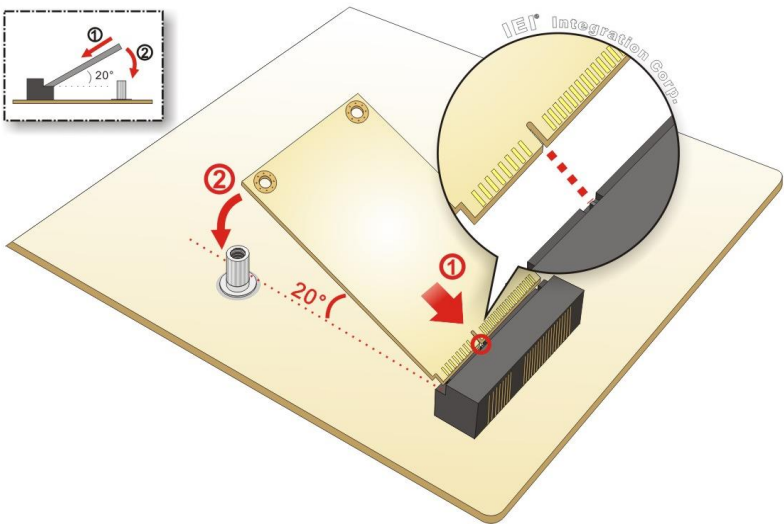


Figure 4-8: Inserting the Full-size PCIe Mini Card into the Slot at an Angle



IMB-H110 microATX Motherboard

Step 4: Secure the full-size PCIe Mini card. Secure the full-size PCIe Mini card with the retention screw previously removed (**Figure 4-9**).

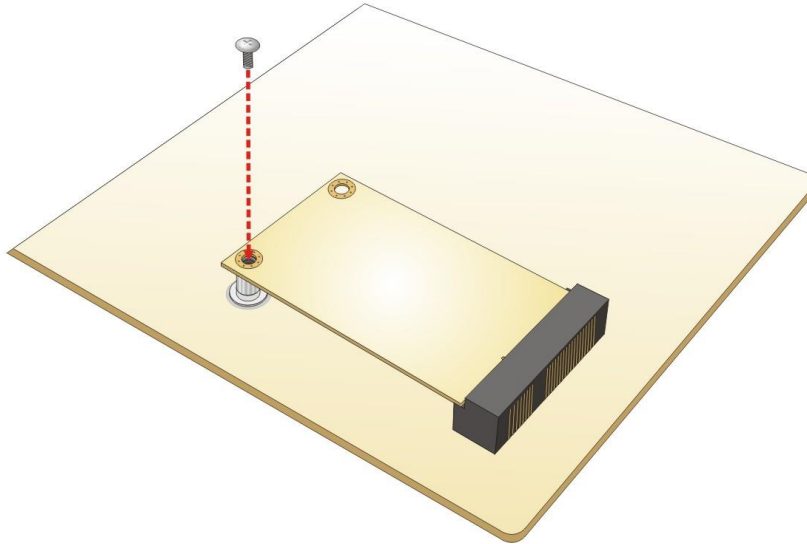


Figure 4-9: Securing the Full-size PCIe Mini Card

4.7 Half-size PCIe Mini Card Installation

The PCIe Mini card slot allows installation of either a full-size or half-size PCIe Mini card. To install a half-size PCIe Mini card, please follow the steps below.

Step 1: Locate the PCIe Mini card slot. See **Chapter 3**.

Step 2: Remove the retention screw. Remove the retention screw as shown in **Figure 4-7**.

Step 3: Remove the standoff. Unscrew and remove the standoff secured on the motherboard as shown in **Figure 4-10**.

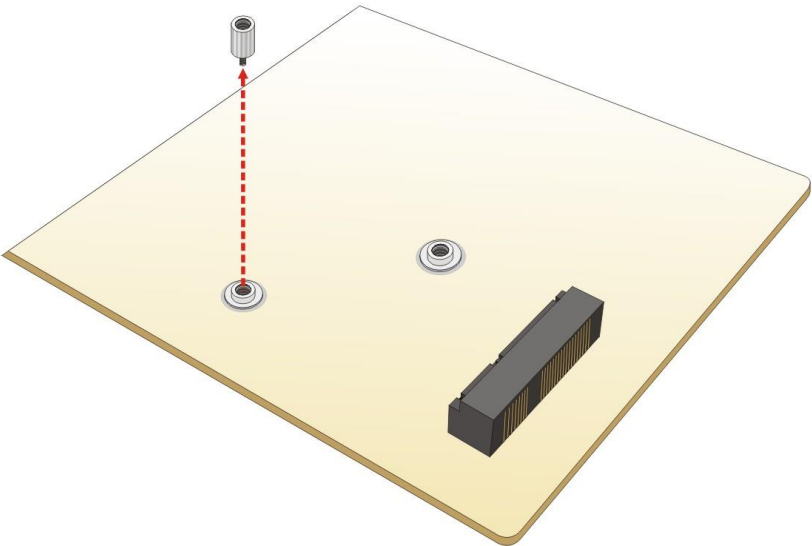


Figure 4-10: Removing the Standoff

Step 4: Install the standoff to the screw hole for the half-size PCIe Mini card. Install the previously removed standoff to the screw hole for the half-size PCIe Mini card (Figure 4-11).

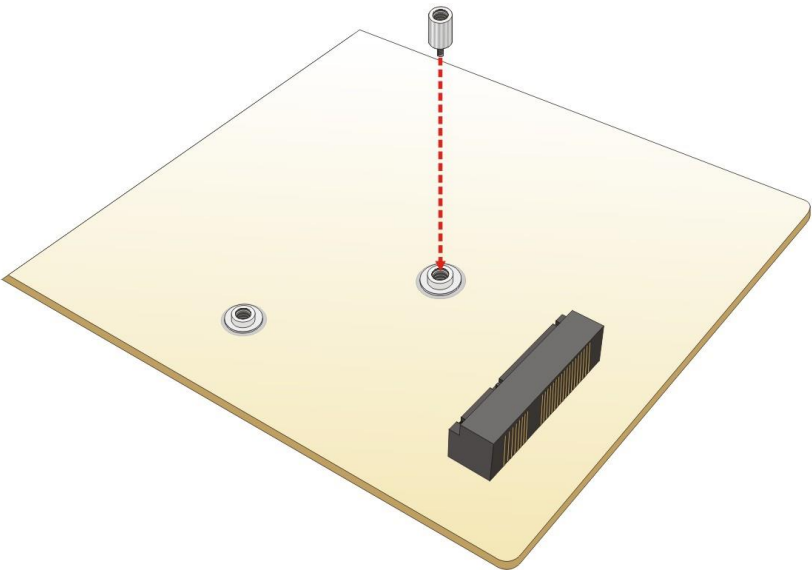


Figure 4-11: Installing the Standoff

Step 5: Insert into the socket at an angle. Line up the notch on the card with the notch on the slot. Slide the PCIe Mini card into the slot at an angle of about 20° (Figure 4-12).



IMB-H110 microATX Motherboard

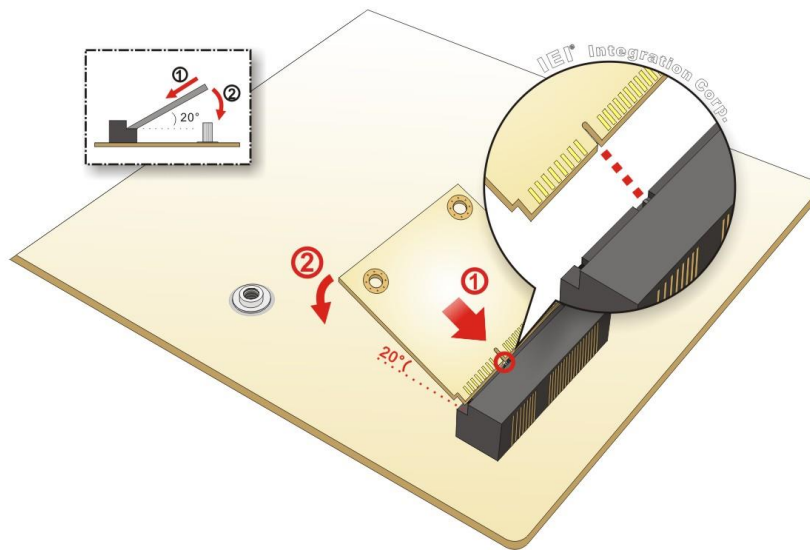


Figure 4-12: Inserting the Half-size PCIe Mini Card into the Slot at an Angle

Step 6: Secure the half-size PCIe Mini card. Secure the half-size PCIe Mini card with the retention screw previously removed (Figure 4-13).

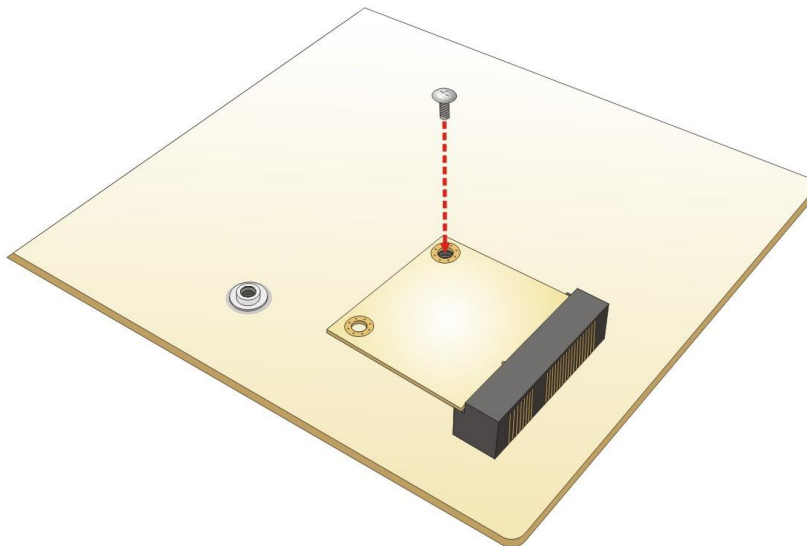


Figure 4-13: Securing the Half-size PCIe Mini Card

4.8 System Configuration

The system configuration should be performed before installation.

4.8.1 AT/ATX Power Mode Setting

The AT and ATX power mode selection is made through the AT/ATX power mode switch which is shown in **Figure 4-14**.

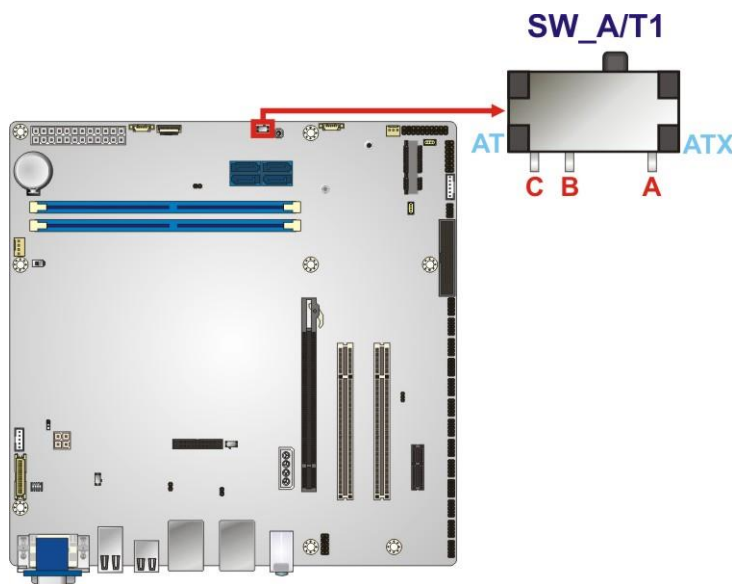


Figure 4-14: AT/ATX Power Mode Switch Location

Setting	Description
Short A-B	ATX power mode (default)
Short B-C	AT power mode

Table 4-1: AT/ATX Power Mode Switch Settings

4.8.2 Clear CMOS Button

To reset the BIOS, remove the on-board battery and press the clear CMOS button for three seconds or more. The clear CMOS button location is shown in **Figure 4-15**.

IMB-H110 microATX Motherboard

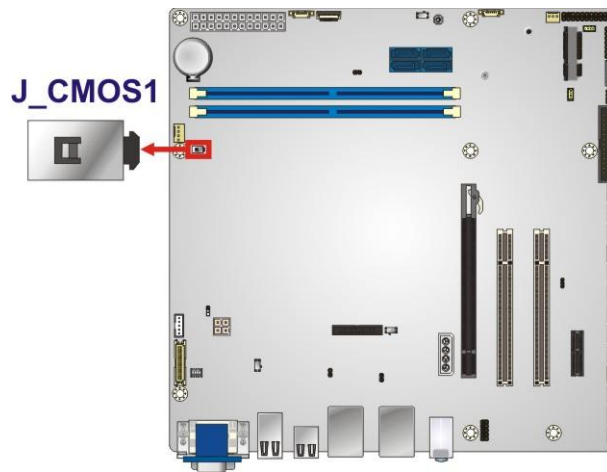


Figure 4-15: Clear CMOS Button Location

4.8.3 DVI/CRT Selection Switch

The DVI-I connector on the rear panel supports both digital and analog signals. To connect a CRT monitor to the DVI-I connector, the user has to set the DVI/CRT selection switch to CRT position. Refer to **Figure 4-16** and **Table 4-2** for the switch location and settings.

Setting	Description
Short A-B	DVI monitor (Default)
Short B-C	CRT monitor

Table 4-2: DVI/CRT Selection Switch Settings

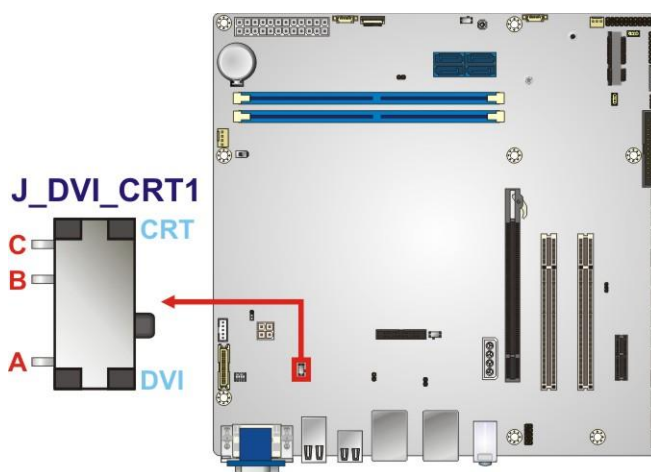


Figure 4-16: DVI/CRT Selection Switch Location

4.8.4 Flash Descriptor Security Override Jumper

The flash descriptor security override jumper (J_FLASH2) allows to enable or disable the ME firmware update. Refer to **Table 4-3** and **Figure 4-17** for the jumper location and settings.

Setting	Description
Short 1-2	Disabled (default)
Short 2-3	Enabled

Table 4-3: Flash Descriptor Security Override Jumper Settings

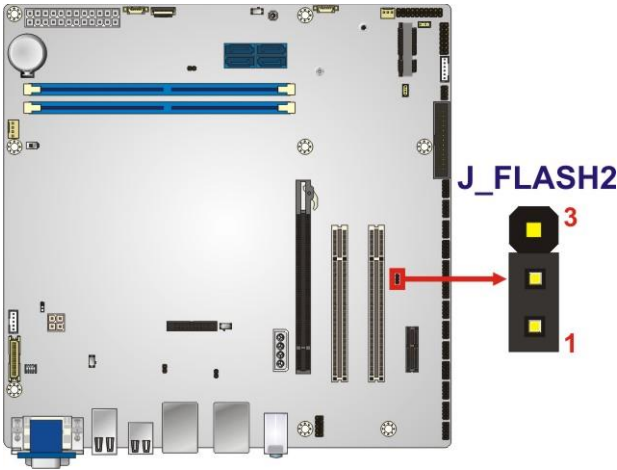


Figure 4-17: Flash Descriptor Security Override Jumper Location

To update the ME firmware, please follow the steps below.

- Step 1:** Before turning on the system power, short pin 2-3 of the flash descriptor security override jumper.
- Step 2:** Update the BIOS and ME firmware, and then turn off the system power.
- Step 3:** Remove the metal clip on the flash descriptor security override jumper or return to its default setting (short pin 1-2).
- Step 4:** Restart the system. The system will reboot 2 ~ 3 times to complete the ME firmware update.

IMB-H110 microATX Motherboard

4.8.5 LVDS Panel Resolution Selection Switch

Use the LVDS panel resolution selection switch to select the resolution of the LCD panel connected to the LVDS connector.

* ON=0, OFF=1; Single=S, Dual=D

SW1 (4-3-2-1)	Description
0000	800x600 18-bit S (default)
0001	1024x768 18-bit S
0010	1024x768 24-bit S
0011	1280x768 18-bit S
0100	1280x800 18-bit S
0101	1280x960 18-bit S
0110	1280x1024 24-bit D
0111	1366x768 18-bit S
1000	1366x768 24-bit S
1001	1440x960 24-bit D
1010	1400x1050 24-bit D
1011	1600x900 24-bit D
1100	1680x1050 24-bit D
1101	1600x1200 24-bit D
1110	1920x1080 24-bit D
1111	1920x1200 24-bit D

Table 4-4: LVDS Panel Resolution Selection

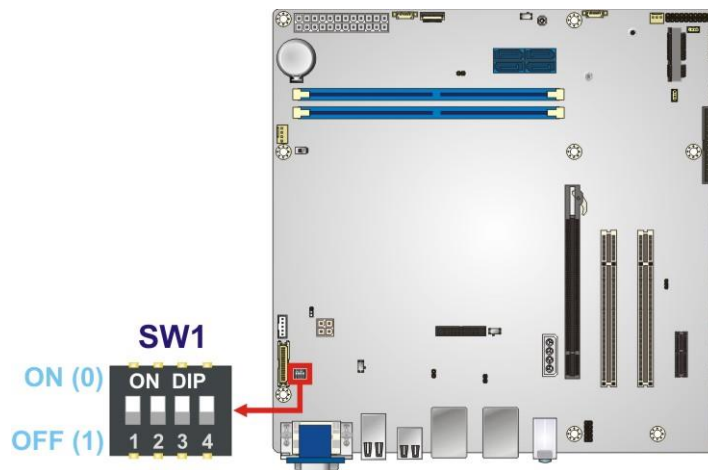


Figure 4-18: LVDS Panel Resolution Selection Switch Location

4.8.6 LVDS Voltage Selection Jumper



WARNING:

Permanent damage to the screen and IMB-H110 may occur if the wrong voltage is selected with this jumper. Please refer to the user guide that came with the monitor to select the correct voltage.

The LVDS voltage selection switch allows setting the voltage provided to the monitor connected to the LVDS connector. The LVDS voltage selection switch settings are shown in **Table 4-5**.

Setting	Description
Short 1-2	Keep VCC3V panel setup (Default)
Short 2-3	Keep VCC5V panel setup

Table 4-5: LVDS Voltage Selection Jumper Settings

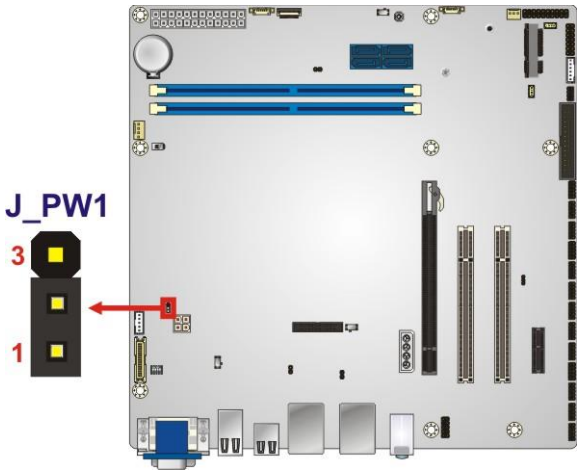


Figure 4-19: LVDS Voltage Selection Jumper Location

IMB-H110 microATX Motherboard

4.8.7 LVDS/iDP Selection Switch

The user can select either to use the LVDS connector or the internal DisplayPort connector. Use the LVDS/iDP selection switch (**Figure 4-20**) to configure the settings (**Table 4-6**).

Setting	Description
Short A-B	LVDS panel (Default)
Short B-C	iDP monitor

Table 4-6: LVDS/iDP Selection Switch Settings

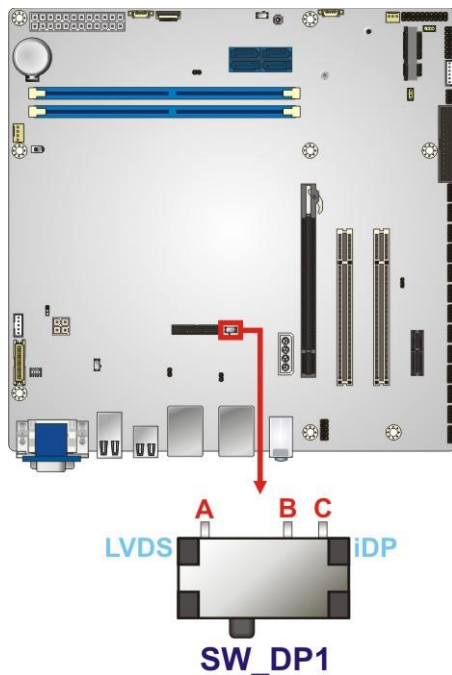


Figure 4-20: LVDS/iDP Selection Switch Location



4.8.8 USB Power Selection

The USB power selection is made through the BIOS menu in “Chipset → PCH-IO Configuration”. Use the **USB Power SW1** and the **USB Power SW2** BIOS options to configure the correspondent USB ports (see **Table 4-7**) and refer to **Table 4-8** to select the USB power source.

BIOS Options	Configured USB Ports
USB Power SW1	LAN1_USB1 (external USB 3.2 Gen 1 ports)
	LAN2_USB1 (external USB 3.2 Gen 1 ports)
USB Power SW2	USB1 (External USB 2.0 ports)
	H_USB1 (External USB 2.0 ports)
	J_USB1 (internal USB 2.0 ports)

Table 4-7: BIOS Options and Configured USB Ports

Options	Description
+5V DUAL	+5V dual (default)
+5V	+5V

Table 4-8: USB Power Source Setup

Please refer to **Section 5.4.2** for BIOS setup.

4.9 Internal Peripheral Device Connections

This section outlines the installation of peripheral devices to the onboard connectors.

4.9.1 SATA Drive Connection

The IMB-H110 is shipped with two SATA drive cables. To connect the SATA drives to the connectors, please follow the steps below.

- Step 1:** **Locate the connectors.** The locations of the SATA drive connectors are shown in **Chapter 3**.
- Step 2:** **Insert the cable connector.** Insert the cable connector into the on-board SATA drive connector until it clips into place. See **Figure 4-21**.



IMB-H110 microATX Motherboard

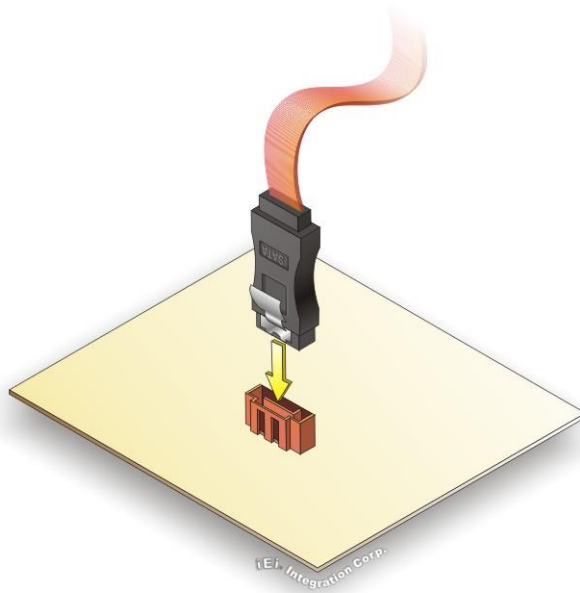


Figure 4-21: SATA Drive Cable Connection

- Step 3:** **Connect the cable to the SATA disk.** Connect the connector on the other end of the cable to the connector at the back of the SATA drive. See **Figure 4-22**.
- Step 4:** **Connect the SATA power cable.** Connect the SATA power connector to the back of the SATA drive. See **Figure 4-22**.

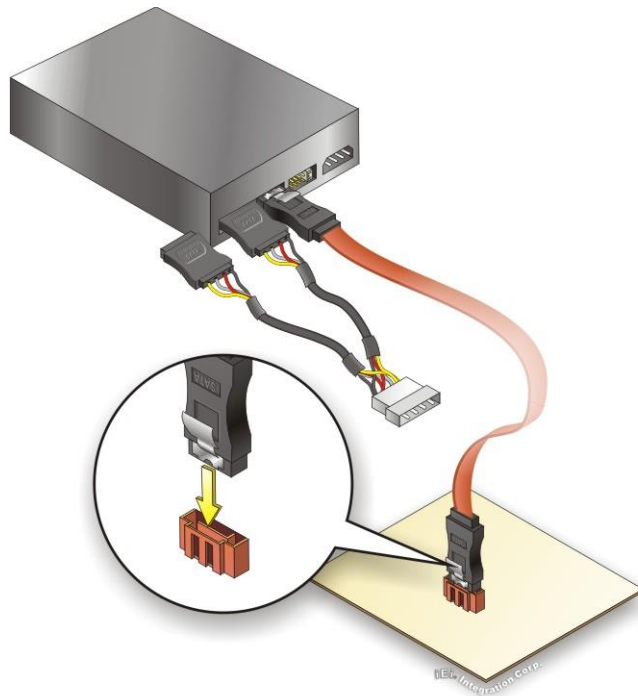


Figure 4-22: SATA Power Drive Connection

The SATA power cable can be bought from IEI. See Optional Items in Section 2.4.

4.10 Adding USB 3.2 Gen 1 Drivers to a Windows 7 Installation Image

The Windows 7 installation media does not include native driver support for USB 3.2 Gen 1. In order to use the USB keyboard or mouse connected to a USB 3.2 Gen 1 port during OS installation, the user has to update the Windows 7 installation image so that it contains USB 3.2 Gen 1 drivers. Please follow the instructions below to complete the task.

Step 1: Prepare a USB flash drive installer.

On a working computer, use your Windows 7 DVD or ISO image to create a bootable USB flash drive.

Step 2: Download the Windows 7 USB 3.0 Creator Utility from:

<https://downloadcenter.intel.com/download/25476/Windows-7-USB-3-0-Creator-Utility>.

IMB-H110 microATX Motherboard

Step 3: Extract the downloaded file to a temporary folder on a computer where the user has logged in as the administrator.



NOTE:

The OS version of the computer can be Windows 7, Windows 8.1 or Windows 10.

Step 4: Connect the USB drive containing the Windows 7 installation image to the computer.

Step 5: Right click on **Installer_Creator.exe** from the extracted files and select **Run as administrator**.

Step 6: The Windows 7 USB 3.0 Creator Utility screen appears (**Figure 4-23**). Click  to browse to the root of the USB drive containing the Windows 7 image.

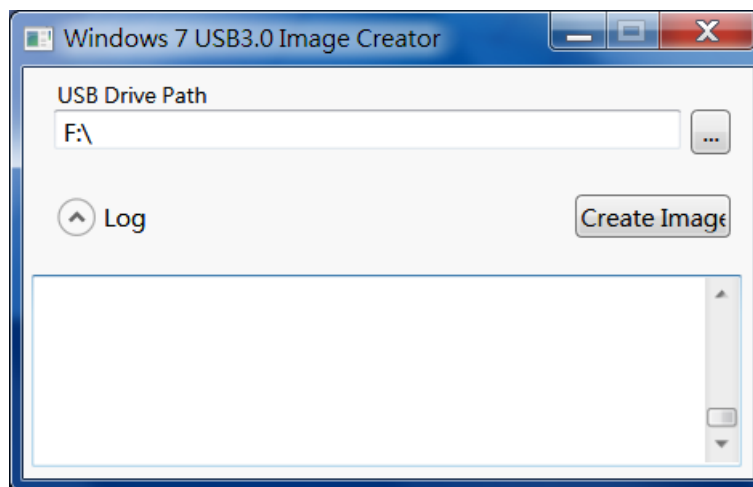


Figure 4-23: Windows 7 USB 3.0 Creator Utility

Step 7: Click **Create Image** to start the update process.

Step 8: Wait for the process to finish. It may take up to 15 minutes.

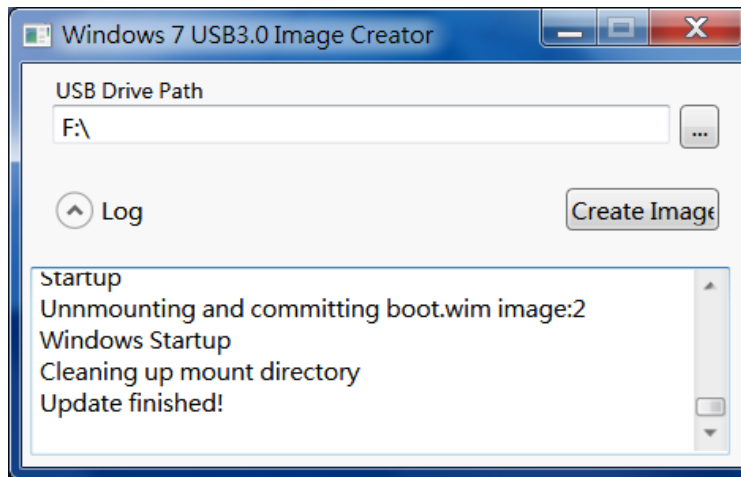


Figure 4-24: Update Process is Complete

Step 9: Now the user can proceed with the Windows 7 installation using the updated installer.

4.11 Available Drivers

All the drivers for the IMB-H110 are available on IEI Resource Download Center (<https://download.ieiworld.com>). Type IMB-H110 and press Enter to find all the relevant software, utilities, and documentation.

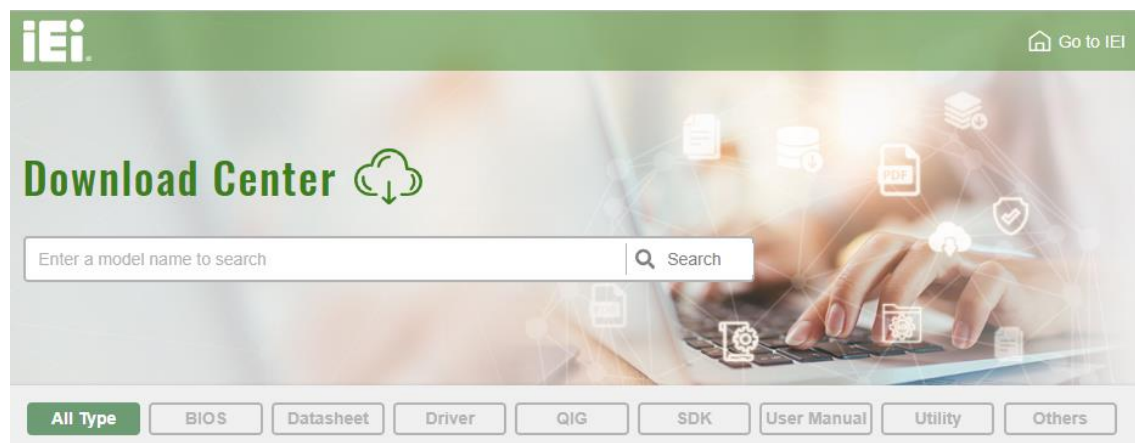



Figure 4-25: IEI Resource Download Center

IMB-H110 microATX Motherboard


4.11.1 Driver Download

To download drivers from IEI Resource Download Center, follow the steps below.

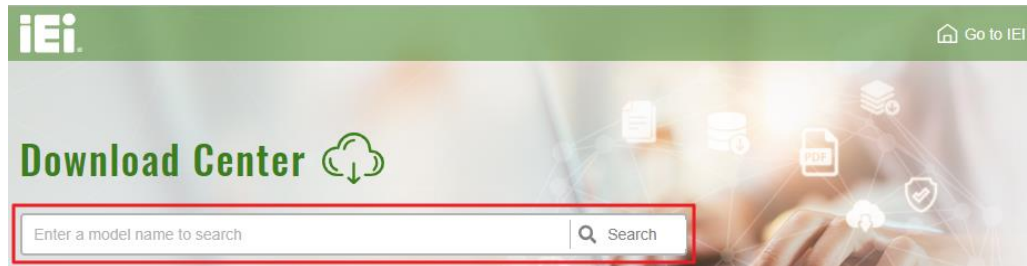
Step 1: Go to <https://download.ieiworld.com>. Type IMB-H110 and press Enter.



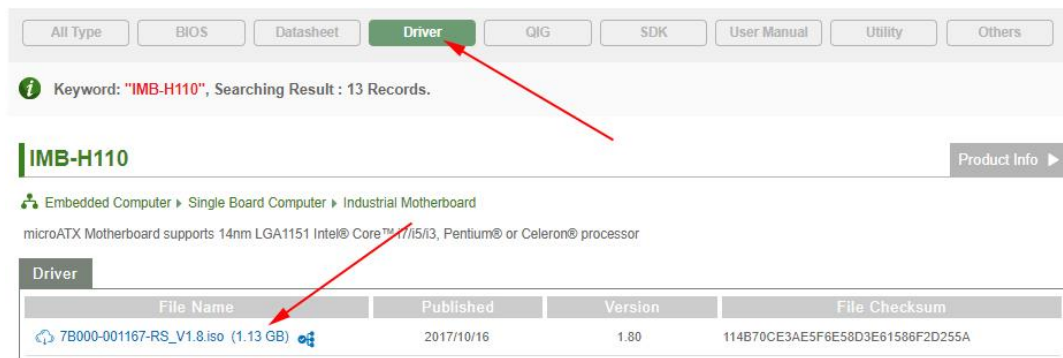Step 2: All product-related software, utilities, and documentation will be listed. You can choose **Driver** to filter the result.



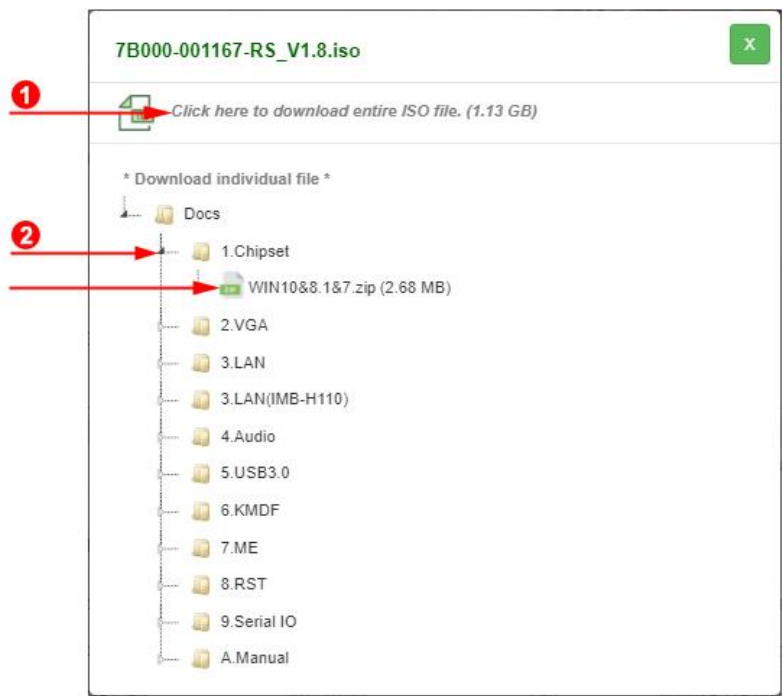Step 3: Click the driver file name on the page and you will be prompted with the following window. You can download the entire ISO file (❶), or double click an individual item to find its driver file and click the file name to download (❷).



NOTE:

To install software from the downloaded ISO image file in Windows 8, 8.1 or 10, double-click the ISO file to mount it as a virtual drive to view its content. On Windows 7 system, an additional tool (such as Virtual CD-ROM Control Panel from Microsoft) is needed to mount the file.



Chapter

5

BIOS



5.1 Introduction

The BIOS is programmed onto the BIOS chip. The BIOS setup program allows changes to certain system settings. This chapter outlines the options that can be changed.



NOTE:

Some of the BIOS options may vary throughout the life cycle of the product and are subject to change without prior notice.

5.1.1 Starting Setup

The UEFI BIOS is activated when the computer is turned on. The setup program can be activated in one of two ways.

1. Press the **DEL** or **F2** key as soon as the system is turned on or
2. Press the **DEL** or **F2** key when the “**Press DEL or F2 to enter SETUP**” message appears on the screen.

If the message disappears before the **DEL** or **F2** key is pressed, restart the computer and try again.

5.1.2 Using Setup

Use the arrow keys to highlight items, press **ENTER** to select, use the PageUp and PageDown keys to change entries, press **F1** for help and press **Esc** to quit. Navigation keys are shown in the following table.

Key	Function
Up arrow	Move to previous item
Down arrow	Move to next item
Left arrow	Move to the item on the left hand side
Right arrow	Move to the item on the right hand side
+	Increase the numeric value or make changes
-	Decrease the numeric value or make changes
Page Up	Move to the previous page
Page Dn	Move to the next page



IMB-H110 microATX Motherboard

Key	Function
Esc	Main Menu – Quit and not save changes into CMOS Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
F1	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2	Load previous values
F3	Load optimized defaults
F4	Save changes and Exit BIOS

Table 5-1: BIOS Navigation Keys

5.1.3 Getting Help

When **F1** is pressed, a small help window describing the appropriate keys to use and the possible selections for the highlighted item appears. To exit the Help Window, press **Esc**.

5.1.4 Unable to Reboot after Configuration Changes

If the computer cannot boot after changes to the system configuration is made, CMOS defaults. Use the clear CMOS button described in **Chapter 4**.

5.1.5 BIOS Menu Bar

The **menu bar** on top of the BIOS screen has the following main items:

- Main – Changes the basic system configuration.
- Advanced – Changes the advanced system settings.
- Chipset – Changes the chipset settings.
- Security – Sets User and Supervisor Passwords.
- Boot – Changes the system boot configuration.
- Save & Exit – Selects exit options and loads default settings

The following sections completely describe the configuration options found in the menu items at the top of the BIOS screen and listed above.

5.2 Main

The **Main** BIOS menu (**BIOS Menu 1**) appears when the **BIOS Setup** program is entered.

The **Main** menu gives an overview of the basic system information.

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.					
Main	Advanced	Chipset	Security	Boot	Save & Exit
BIOS Information					Set the Date. Use Tab to switch between Date elements.
BIOS Vendor		American Megatrends			
Core Version		5.11			
Compliance		UEFI 2.4; PI 1.3			
Project Version		B388AT09.ROM			
Build Date and Time		06/14/2016 14:20:17			
iWDD Vendor		iEi			
iWDD Version		B388ER02.bin			
Processor Information					
Name		SkyLake DT			
Brand String		Intel(R) Core(TM)			
		i3-6100 CPU @ 3.70GHz			
Frequency		3700 MHz			
Processor ID		506E3			
Stepping		R0/S0/N0			
Number of Processors		2Core(s) / 4Thread(s)			
Microcode Revision		7C			
GT Info		GT2			
IGFX VBIOS Version		1036			
Memory RC Version		1.8.0.1			
Total Memory		8192 MB			
Memory Frequency		2133 MHz			
PCH Information					----- →←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Name		SKL PCH-H			
PCH SKU		PCH-H Desktop H110 SKU			
Stepping		31/D1			
LAN PHY Revision		N/A			
ME FW Version		11.0.0.1205			
ME Firmware SKU		Consumer SKU			
SPI Clock Frequency					
DOFR Support		Unsupported			
Read Status Clock Frequency		17 MHz			
Write Status Clock Frequency		48 MHz			
Fast Read Status Clock Frequency		48 MHz			
Access Level		Administrator			
System Date		[Thu 07/21/2016]			
System Time		[15:10:27]			
Version 2.17.1255. Copyright (C) 2016 American Megatrends, Inc.					

BIOS Menu 1: Main

IMB-H110 microATX Motherboard

The **Main** menu has two user configurable fields:

➔ **System Date [xx/xx/xx]**

Use the **System Date** option to set the system date. Manually enter the day, month and year.

➔ **System Time [xx:xx:xx]**

Use the **System Time** option to set the system time. Manually enter the hours, minutes and seconds.

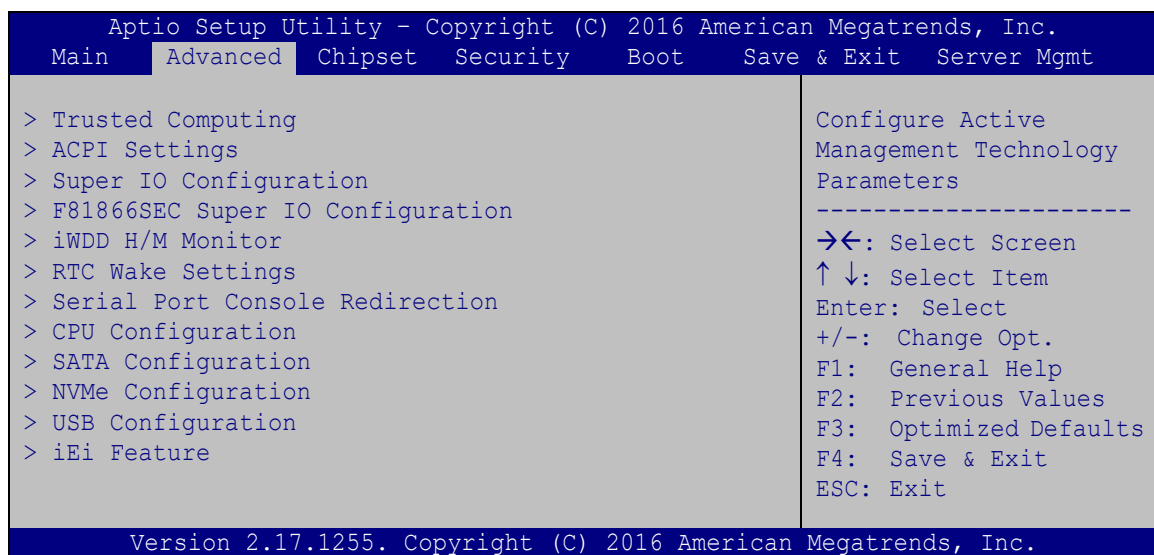
5.3 Advanced

Use the **Advanced** menu (**BIOS Menu 2**) to configure the CPU and peripheral devices through the following sub-menus:



WARNING!

Setting the wrong values in the sections below may cause the system to malfunction. Make sure that the settings made are compatible with the hardware.




BIOS Menu 2: Advanced



5.3.1 Trusted Computing

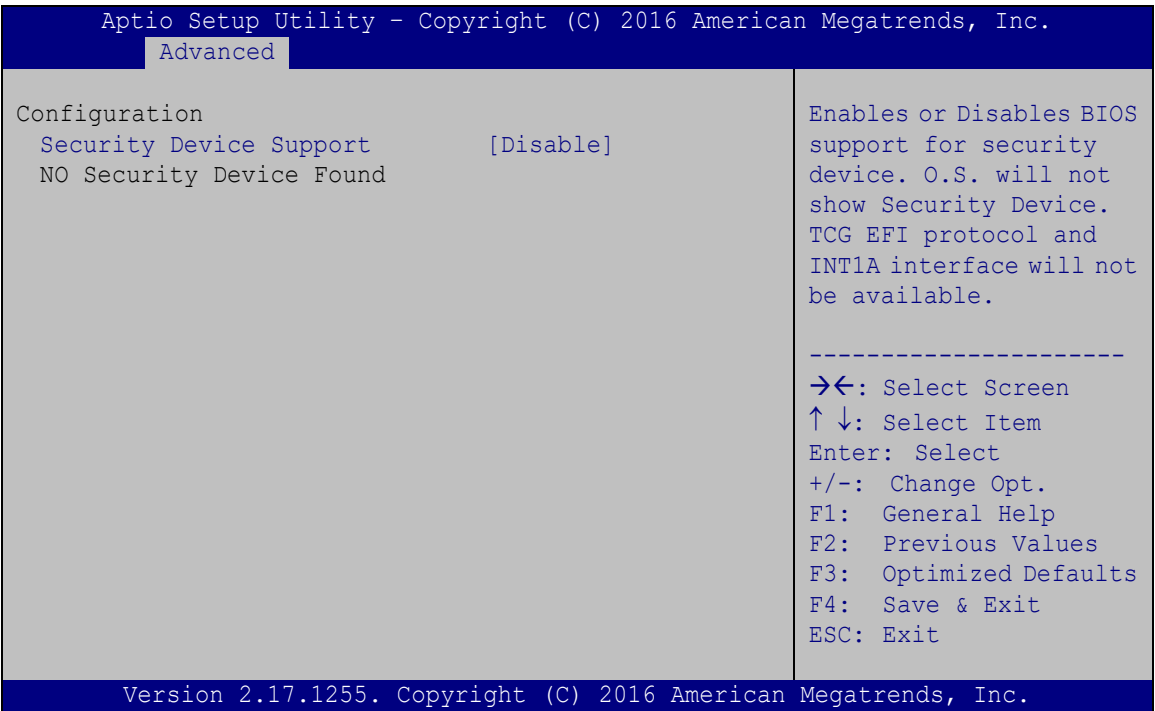Use the **Trusted Computing** menu (**BIOS Menu 3**) to configure settings related to the Trusted Computing Group (TCG) Trusted Platform Module (TPM).



BIOS Menu 3: Trusted Computing

➔ Security Device Support [Disable]

Use the **Security Device Support** option to configure support for the TPM.

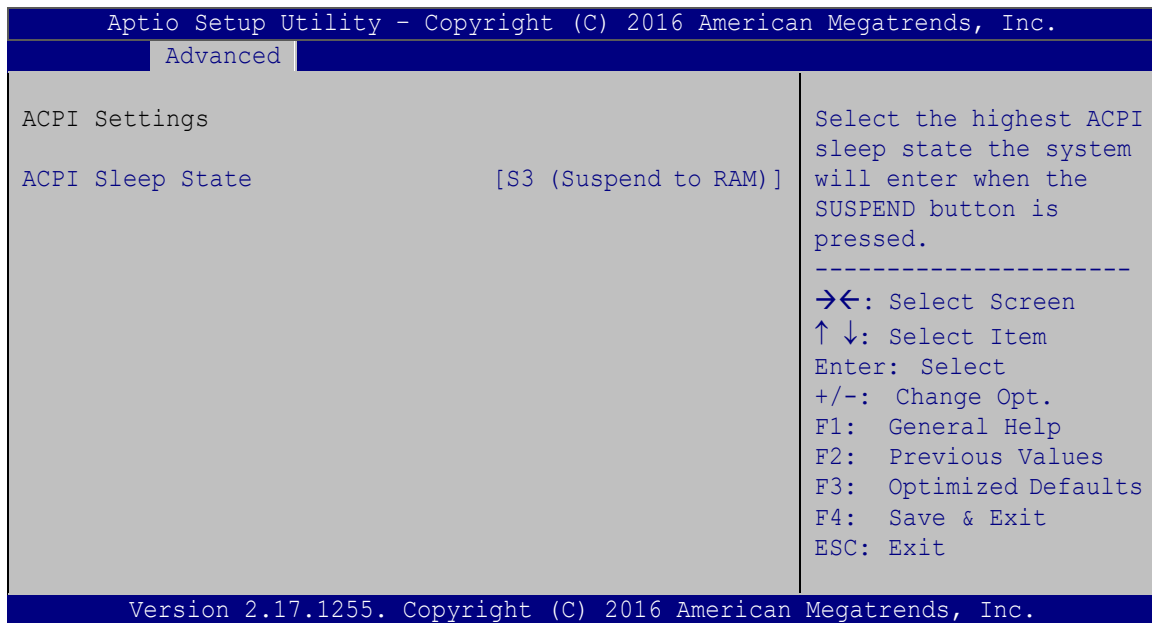
- ➔ **Disable** **DEFAULT** TPM support is disabled.
- ➔ **Enable** TPM support is enabled.



IMB-H110 microATX Motherboard

5.3.2 ACPI Settings

The **ACPI Settings** menu (**BIOS Menu 4**) configures the Advanced Configuration and Power Interface (ACPI) options.



BIOS Menu 4: ACPI Configuration

→ ACPI Sleep State [S3 (Suspend to RAM)]


Use the **ACPI Sleep State** option to specify the sleep state the system enters when it is not being used.

- | | | | |
|---|----------------------------|----------------|---|
| → | S3 (Suspend to RAM) | DEFAULT | The caches are flushed and the CPU is powered off. Power to the RAM is maintained. The computer returns slower to a working state, but more power is saved. |
|---|----------------------------|----------------|---|



5.3.3 Super IO Configuration

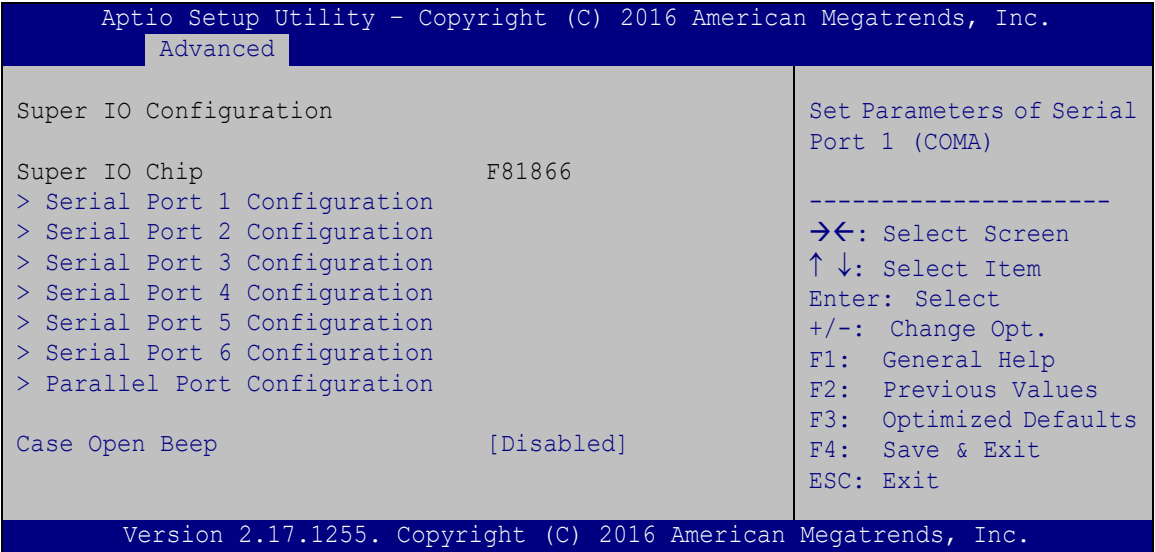Use the **Super IO Configuration** menu (**BIOS Menu 5**) to set or change the configurations for the parallel ports and serial ports.



BIOS Menu 5: Super IO Configuration

➔ **Case Open Beep [Disabled]**

Use the **Case Open Beep** option to enable or disable the case open beep function.

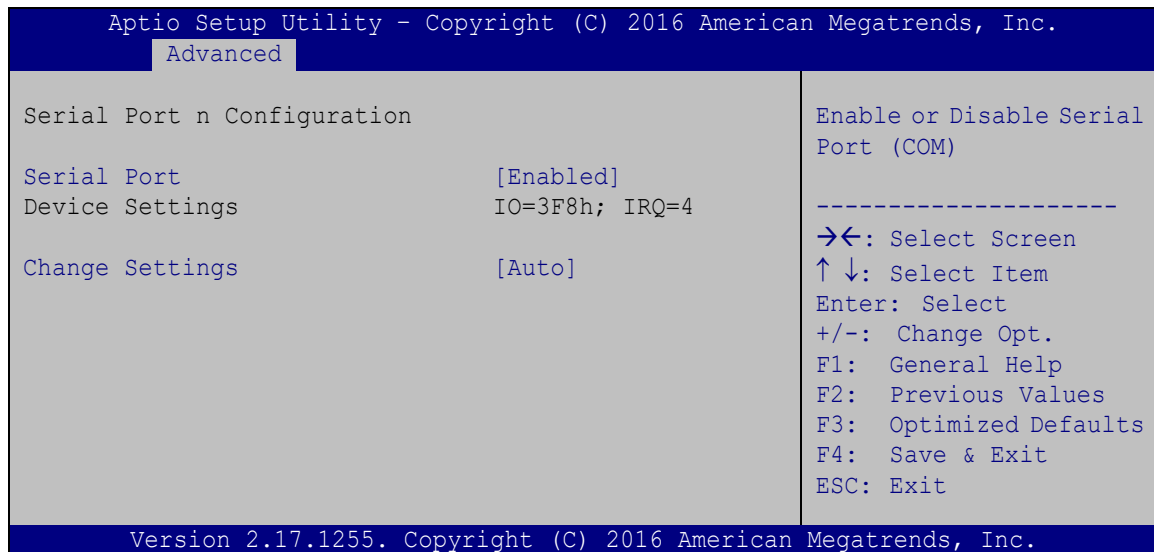
- ➔ **Disabled** **DEFAULT** Disable the case open beep function
- ➔ **Enabled** Enable the case open beep function



IMB-H110 microATX Motherboard

5.3.3.1 Serial Port 1 ~ 6 Configuration

Use the **Serial Port 1 ~ 6 Configuration** menu (**BIOS Menu 6**) to configure the serial ports.



BIOS Menu 6: Serial Port 1 ~ 6 Configuration Menu

5.3.3.2 Serial Port 1 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled** **DEFAULT** Enable the serial port

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=3F8h;**
IRQ=4 Serial Port I/O port address is 3F8h and the interrupt address is IRQ4



- | | | |
|---|--------------------------|---|
| ➔ | IO=3F8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2F8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=3E8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2E8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2D0h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2D0h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2E0h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 11 |

5.3.3.3 Serial Port 2 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- | | | | |
|---|----------|---------|-------------------------|
| ➔ | Disabled | | Disable the serial port |
| ➔ | Enabled | DEFAULT | Enable the serial port |

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- | | | | |
|---|-------------------|---------|---|
| ➔ | Auto | DEFAULT | The serial port IO port address and interrupt address are automatically detected. |
| ➔ | IO=2F8h;
IRQ=3 | | Serial Port I/O port address is 2F8h and the interrupt address is IRQ3 |



IMB-H110 microATX Motherboard

- | | | |
|---|--------------------------|---|
| ➔ | IO=3F8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2F8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=3E8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2E8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2D0h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2D0h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2E0h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 11 |

5.3.3.4 Serial Port 3 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- | | | |
|---|------------------------|-------------------------|
| ➔ | Disabled | Disable the serial port |
| ➔ | Enabled DEFAULT | Enable the serial port |

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- | | | |
|---|--------------------------|---|
| ➔ | Auto DEFAULT | The serial port IO port address and interrupt address are automatically detected. |
| ➔ | IO=3E8h;
IRQ=11 | Serial Port I/O port address is 3E8h and the interrupt address is IRQ11 |
| ➔ | IO=3F8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 11 |



- | | | |
|---|--------------------------|---|
| ➔ | IO=2F8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=3E8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2E8h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2D0h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2D0h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2E0h;
IRQ=3, 4, 11 | Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 11 |

5.3.3.4.1 Serial Port 4 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- | | | | |
|---|----------|---------|-------------------------|
| ➔ | Disabled | | Disable the serial port |
| ➔ | Enabled | DEFAULT | Enable the serial port |

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- | | | | |
|---|--------------------------|---------|---|
| ➔ | Auto | DEFAULT | The serial port IO port address and interrupt address are automatically detected. |
| ➔ | IO=2E8h;
IRQ=11 | | Serial Port I/O port address is 2E8h and the interrupt address is IRQ11 |
| ➔ | IO=3F8h;
IRQ=3, 4, 11 | | Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 11 |
| ➔ | IO=2F8h;
IRQ=3, 4, 11 | | Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 11 |



IMB-H110 microATX Motherboard

- ➔ **IO=3E8h;**
IRQ=3, 4, 11 Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2E8h;**
IRQ=3, 4, 11 Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2D0h;**
IRQ=3, 4, 11 Serial Port I/O port address is 2D0h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2E0h;**
IRQ=3, 4, 11 Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 11

5.3.3.4.2 Serial Port 5 Configuration

➔ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled** **DEFAULT** Enable the serial port

➔ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=2D0h;**
IRQ=11 Serial Port I/O port address is 2D0h and the interrupt address is IRQ11
- ➔ **IO=3F8h;**
IRQ=3, 4, 11 Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2F8h;**
IRQ=3, 4, 11 Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=3E8h;**
IRQ=3, 4, 11 Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 11



- ➔ IO=2E8h; Serial Port I/O port address is 2E8h and the interrupt
 IRQ=3, 4, 11 address is IRQ3, 4, 11
- ➔ IO=2D0h; Serial Port I/O port address is 2D0h and the interrupt
 IRQ=3, 4, 11 address is IRQ3, 4, 11
- ➔ IO=2E0h; Serial Port I/O port address is 2E0h and the interrupt
 IRQ=3, 4, 11 address is IRQ3, 4, 11

➔ **Transfer Mode [RS232]**

The serial port 5 allows setting the data transfer mode to RS-232, RS-422 or RS-485.

5.3.3.4.3 Serial Port 6 Configuration

➔ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

- ➔ Disabled Disable the serial port
- ➔ Enabled **DEFAULT** Enable the serial port

➔ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ Auto **DEFAULT** The serial port IO port address and interrupt address
 are automatically detected.
- ➔ IO=2E0h; Serial Port I/O port address is 2E0h and the interrupt
 IRQ=11 address is IRQ11
- ➔ IO=3F8h; Serial Port I/O port address is 3F8h and the interrupt
 IRQ=3, 4, 11 address is IRQ3, 4, 11
- ➔ IO=2F8h; Serial Port I/O port address is 2F8h and the interrupt
 IRQ=3, 4, 11 address is IRQ3, 4, 11
- ➔ IO=3E8h; Serial Port I/O port address is 3E8h and the interrupt
 IRQ=3, 4, 11 address is IRQ3, 4, 11



IMB-H110 microATX Motherboard

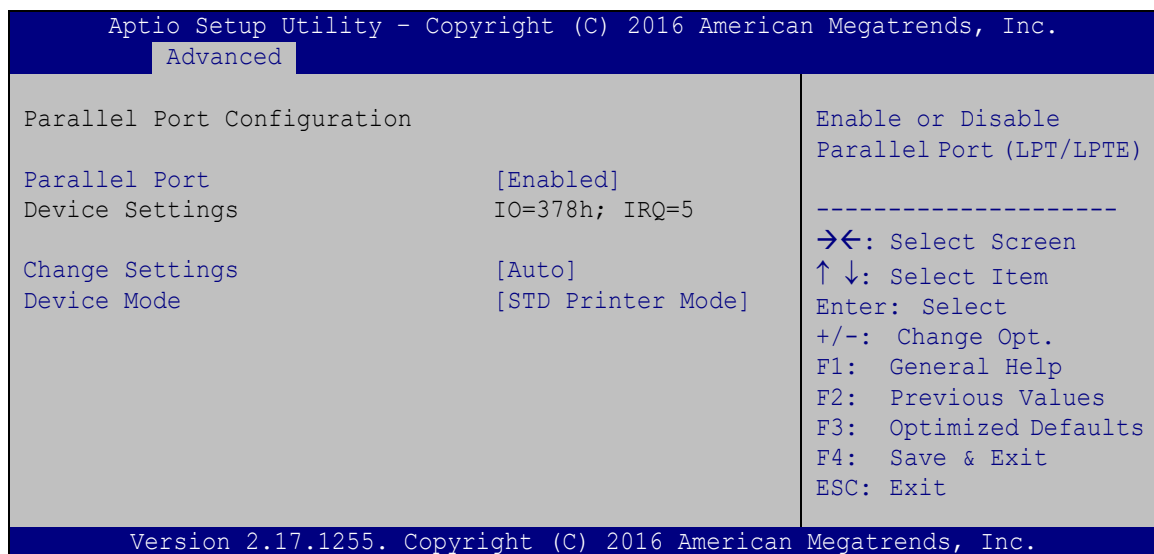
- ➔ **IO=2E8h;**
IRQ=3, 4, 11 Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2D0h;**
IRQ=3, 4, 11 Serial Port I/O port address is 2D0h and the interrupt address is IRQ3, 4, 11
- ➔ **IO=2E0h;**
IRQ=3, 4, 11 Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 11

➔ Transfer Mode [RS232]

The serial port 6 allows setting the data transfer mode to RS-232, RS-422 or RS-485.

5.3.3.5 Parallel Port Configuration

Use the **Parallel Port Configuration** menu (**BIOS Menu 7**) to configure the parallel port.



BIOS Menu 7: Parallel Port Configuration Menu

➔ Parallel Port [Enabled]

Use the **Parallel Port** option to enable or disable the parallel port.

- ➔ **Disabled** Disable the parallel port
- ➔ **Enabled** **DEFAULT** Enable the parallel port



➔ **Change Settings [Auto]**

Use the **Change Settings** option to change the parallel port IO port address and interrupt address.

➔	Auto	DEFAULT	The parallel port IO port address and interrupt address are automatically detected.
➔	IO=378h; IRQ=5		Parallel Port I/O port address is 378h and the interrupt address is IRQ5
➔	IO=378h; IRQ=5, 6, 7, 9, 10, 11, 12		Parallel Port I/O port address is 378h and the interrupt address is IRQ5, 6, 7, 9, 10, 11, 12
➔	IO=278h; IRQ=5, 6, 7, 9, 10, 11, 12		Parallel Port I/O port address is 278h and the interrupt address is IRQ5, 6, 7, 9, 10, 11, 12
➔	IO=3BCh; IRQ=5, 6, 7, 9, 10, 11, 12		Parallel Port I/O port address is 3BCh and the interrupt address is IRQ5, 6, 7, 9, 10, 11, 12

➔ **Device Mode [STD Printer Mode]**

Use the **Device Mode** option to select the mode the parallel port operates in. Configuration options are listed below.


- | | |
|------------------------|----------------|
| ▪ STD Printer Mode | Default |
| ▪ SPP Mode | |
| ▪ EPP-1.9 and SPP Mode | |
| ▪ EPP-1.7 and SPP Mode | |
| ▪ ECP Mode | |
| ▪ ECP and EPP 1.9 Mode | |
| ▪ ECP and EPP 1.7 Mode | |



IMB-H110 microATX Motherboard

5.3.4 F81866SEC Super IO Configuration

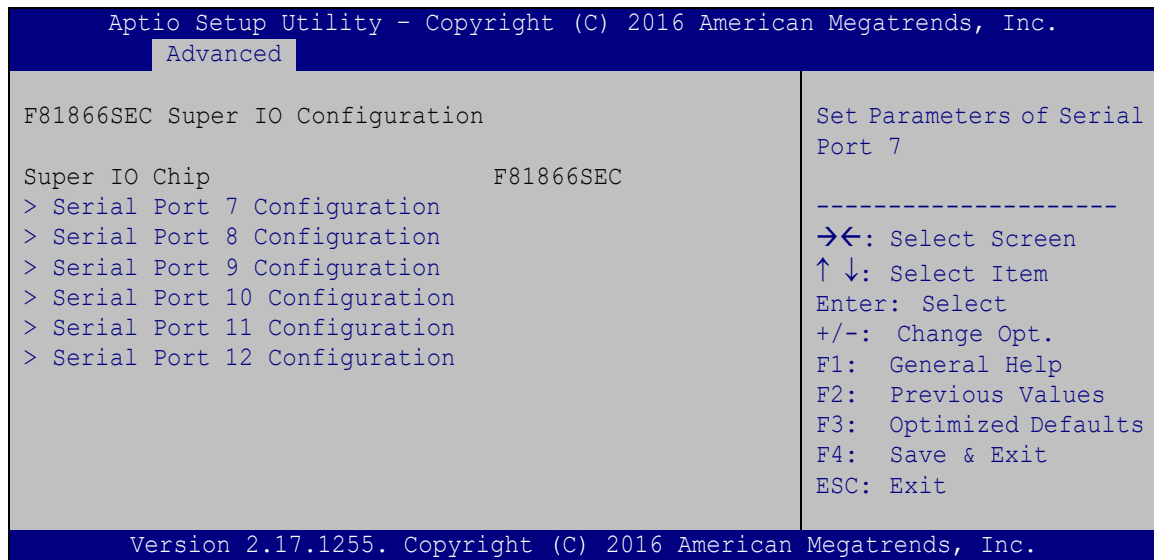
Use the **F81866SEC Super IO Configuration** menu (**BIOS Menu 8**) to set or change the configurations for the serial ports.



BIOS Menu 8: F81866SEC Super IO Configuration

5.3.4.1 Serial Port 7~12 Configuration

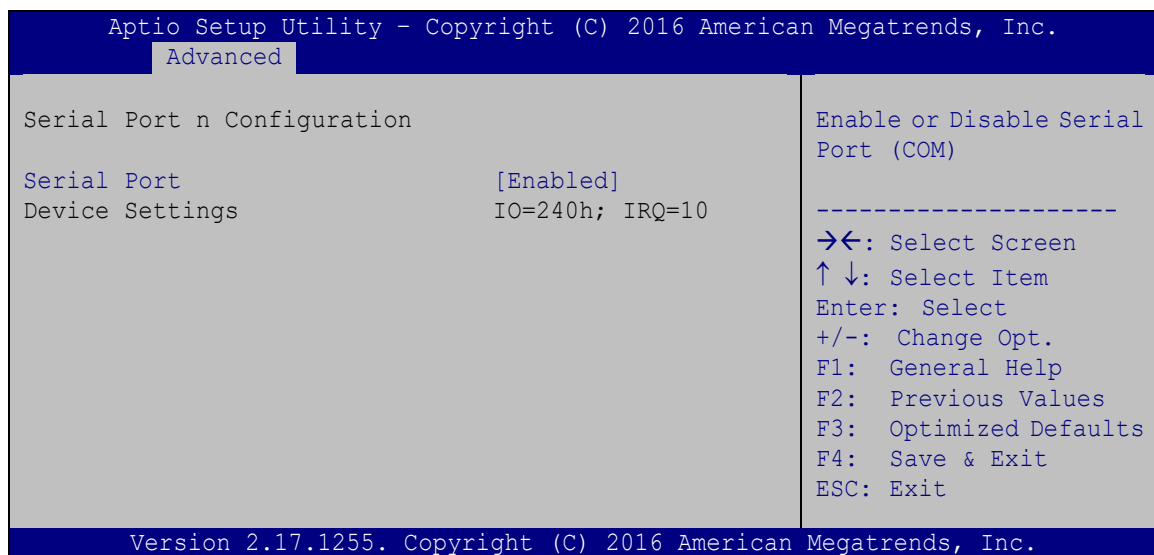Use the **Serial Port 7~12 Configuration** menu (**BIOS Menu 9**) to configure the serial ports.



BIOS Menu 9: Serial Port 7~12 Configuration Menu



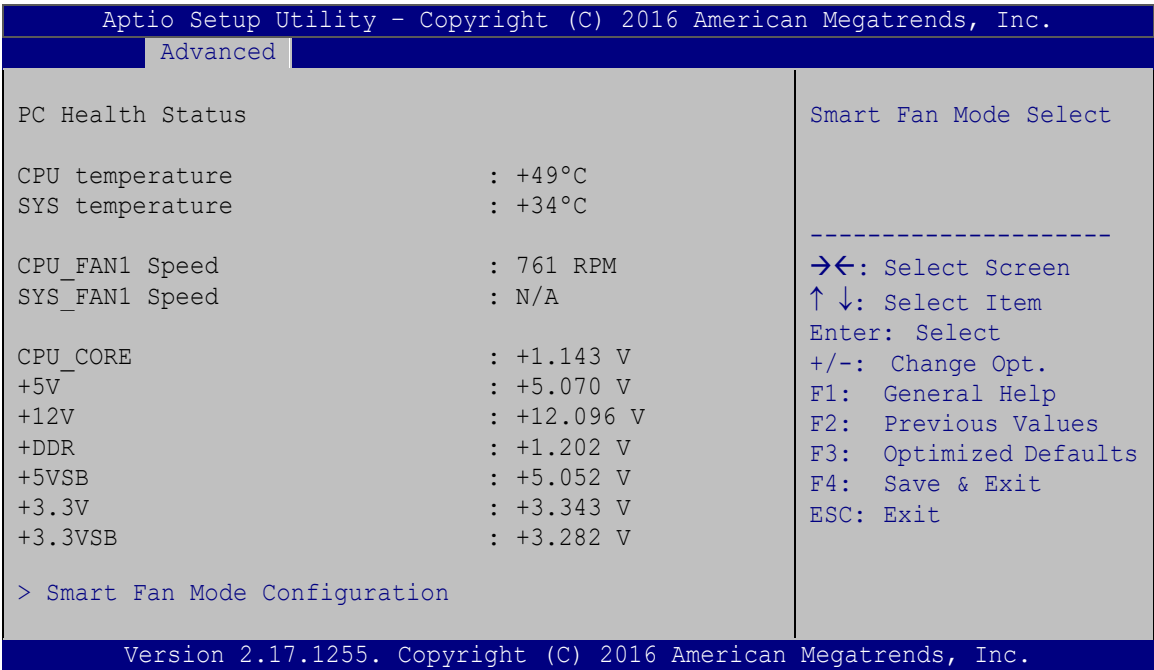
➔ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled DEFAULT** Enable the serial port

5.3.5 iWDD H/W Monitor

The **iWDD H/W Monitor** menu (**BIOS Menu 10**) contains the fan configuration submenu, and displays operating temperature, fan speeds and system voltages.



BIOS Menu 10: iWDD H/W Monitor

➔ **PC Health Status**

The following system parameters and values are shown. The system parameters that are monitored are:

- System Temperatures:
 - CPU Temperature
 - System Temperature
- Fan Speed:
 - CPU Fan Speed
 - System Fan Speed

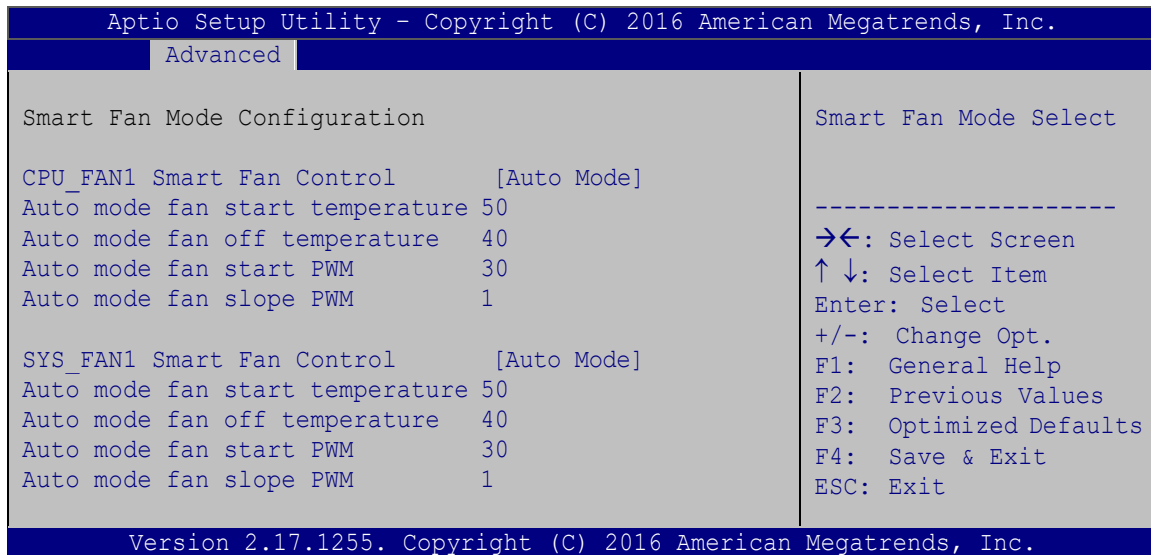


IMB-H110 microATX Motherboard

- Voltages:
 - CPU_CORE
 - +5V
 - +12V
 - +DDR
 - +5VSB
 - +3.3V
 - +3.3VSB

5.3.5.1 Smart Fan Mode Configuration

Use the **Smart Fan Mode Configuration** submenu (**BIOS Menu 11**) to configure the CPU/system fan temperature and speed settings.



BIOS Menu 11: Smart Fan Mode Configuration

→ CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control [Auto Mode]

Use the **CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control** option to configure the CPU/System Smart Fan.

- **Auto Mode** **DEFAULT** The fan adjusts its speed using Auto Mode settings.
- **Manual Mode** The fan spins at the speed set in Manual Mode settings.



➔ **Auto mode fan start/off temperature**

Use the + or – key to change the **Auto mode fan start/off temperature** value. Enter a decimal number between 1 and 100.

➔ **Auto mode fan start PWM**

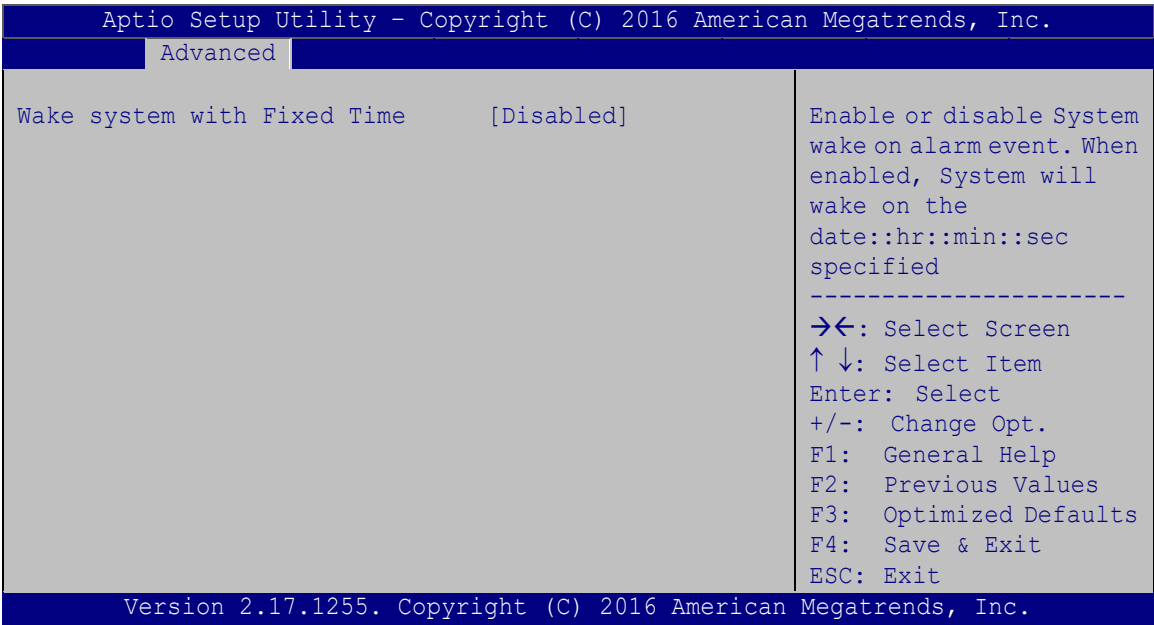
Use the + or – key to change the **Auto mode fan start PWM** value. Enter a decimal number between 1 and 100.

➔ **Auto mode fan slope PWM**

Use the + or – key to change the **Auto mode fan slope PWM** value. Enter a decimal number between 1 and 64.

5.3.6 RTC Wake Settings

The **RTC Wake Settings** menu (**BIOS Menu 12**) enables the system to wake at the specified time.



BIOS Menu 12: RTC Wake Settings



IMB-H110 microATX Motherboard

→ Wake system with Fixed Time [Disabled]

Use the **Wake system with Fixed Time** option to enable or disable the system wake on alarm event.

→ **Disabled** **DEFAULT** The real time clock (RTC) cannot generate a wake event.

→ **Enabled** If selected, the **Wake up every day** option appears allowing you to enable to disable the system to wake every day at the specified time. Besides, the following options appear with values that can be selected:

Wake up date

Wake up hour

Wake up minute

Wake up second

After setting the alarm, the computer turns itself on from a suspend state when the alarm goes off.



5.3.7 Serial Port Console Redirection

The **Serial Port Console Redirection** menu (**BIOS Menu 13**) allows the console redirection options to be configured. Console redirection allows users to maintain a system remotely by re-directing keyboard input and text output through the serial port.

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.

Advanced

COM1

Console Redirection

[Disabled]

> Console Redirection Settings

COM2

Console Redirection

[Disabled]

> Console Redirection Settings

COM3

Console Redirection

[Disabled]

> Console Redirection Settings

COM4

Console Redirection

[Disabled]

> Console Redirection Settings

COM5

Console Redirection

[Disabled]

> Console Redirection Settings

COM6

Console Redirection

[Disabled]

> Console Redirection Settings

COM7

Console Redirection

[Disabled]

> Console Redirection Settings

COM8

Console Redirection

[Disabled]

> Console Redirection Settings

COM9

Console Redirection

[Disabled]

> Console Redirection Settings

COM10

Console Redirection

[Disabled]

> Console Redirection Settings

Legacy Console Redirection

> Legacy Console Redirection Settings

Console Redirection

Enable or Disable

→←: Select Screen

↑↓: Select Item

Enter: Select

+/-: Change Opt.

F1: General Help

F2: Previous Values

F3: Optimized Defaults

F4: Save & Exit

ESC: Exit

Version 2.17.1255. Copyright (C) 2016 American Megatrends, Inc.

BIOS Menu 13: Serial Port Console Redirection



IMB-H110 microATX Motherboard

→ Console Redirection [Disabled]

Use **Console Redirection** option to enable or disable the console redirection function.

- **Disabled** **DEFAULT** Disabled the console redirection function
- **Enabled** Enabled the console redirection function

The following options are available in the **Console Redirection Settings** submenu when the **Console Redirection** option is enabled.

→ Terminal Type [ANSI]

Use the **Terminal Type** option to specify the remote terminal type.

- **VT100** The target terminal type is VT100
- **VT100+** The target terminal type is VT100+
- **VT-UTF8** The target terminal type is VT-UTF8
- **ANSI** **DEFAULT** The target terminal type is ANSI

→ Bits per second [115200]

Use the **Bits per second** option to specify the serial port transmission speed. The speed must match the other side. Long or noisy lines may require lower speeds.

- **9600** Sets the serial port transmission speed at 9600.
- **19200** Sets the serial port transmission speed at 19200.
- **57600** Sets the serial port transmission speed at 57600.
- **115200** **DEFAULT** Sets the serial port transmission speed at 115200.

→ Data Bits [8]

Use the **Data Bits** option to specify the number of data bits.

- **7** Sets the data bits at 7.
- **8** **DEFAULT** Sets the data bits at 8.

→ Parity [None]

Use the **Parity** option to specify the parity bit that can be sent with the data bits for detecting the transmission errors.

- | | | | |
|---|--------------|----------------|---|
| → | None | DEFAULT | No parity bit is sent with the data bits. |
| → | Even | | The parity bit is 0 if the number of ones in the data bits is even. |
| → | Odd | | The parity bit is 0 if the number of ones in the data bits is odd. |
| → | Mark | | The parity bit is always 1. This option does not provide error detection. |
| → | Space | | The parity bit is always 0. This option does not provide error detection. |


→ Stop Bits [1]

Use the **Stop Bits** option to specify the number of stop bits used to indicate the end of a serial data packet. Communication with slow devices may require more than 1 stop bit.

- | | | | |
|---|----------|----------------|------------------------------------|
| → | 1 | DEFAULT | Sets the number of stop bits at 1. |
| → | 2 | | Sets the number of stop bits at 2. |

IMB-H110 microATX Motherboard

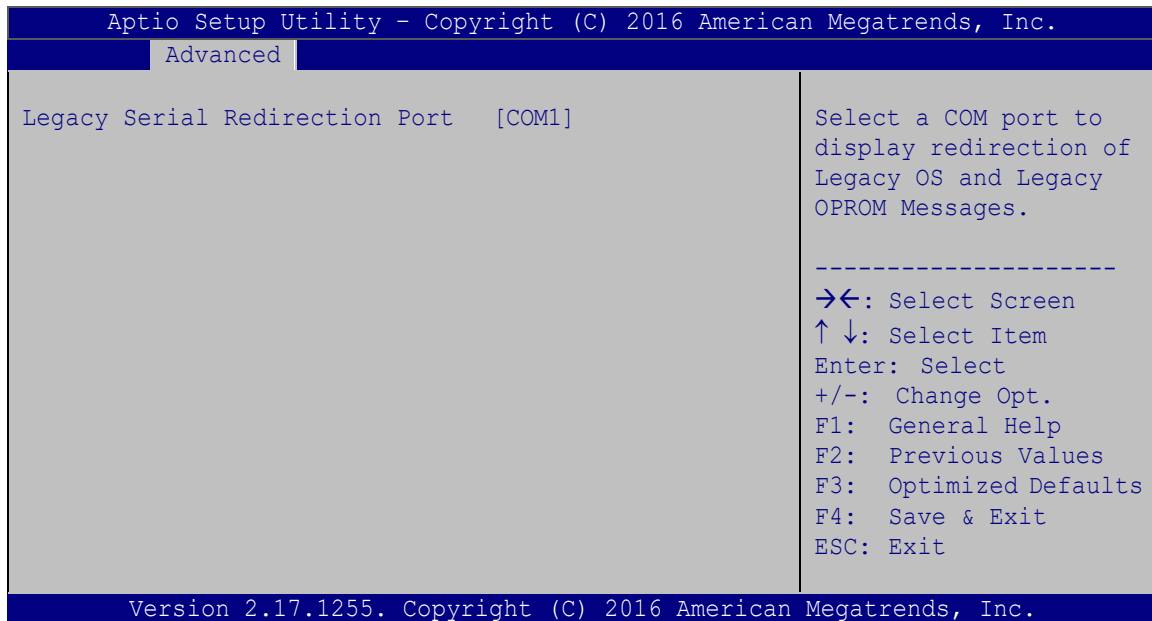5.3.7.1 Legacy Console Redirection Settings



BIOS Menu 14: Legacy Console Redirection Settings

→ Legacy Serial Redirection Port [COM1]

Use the Legacy Serial Redirection Port option to select a COM port to display redirection of legacy OS and legacy OPRON messages.

5.3.8 CPU Configuration

Use the **CPU Configuration** menu (**BIOS Menu 15**) to view detailed CPU specifications or enable the Intel Virtualization Technology.



Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.		
Advanced		
CPU Configuration		Number of cores to enable in each processor package.
Intel(R) Core(TM) i3-6100 CPU @ 3.70GHz		
CPU Signature	506E3	
Microcode Patch	7C	
Max CPU Speed	3700 MHz	
Min CPU Speed	800 MHz	
CPU Speed	3700 MHz	
Processor Cores	2	-----
Hyper Threading Technology	Supported	→←: Select Screen
Intel VT-x Technology	Supported	↑ ↓: Select Item
Intel SMX Technology	Not Supported	Enter: Select
64-bit	Supported	+/-: Change Opt.
EIST Technology	Supported	F1: General Help
		F2: Previous Values
		F3: Optimized Defaults
		F4: Save & Exit
		ESC: Exit
L1 Data Cache	32 kB x 2	
L1 Code Cache	32 kB x 2	
L2 Cache	256 kB x 2	
L3 Cache	3 MB	
Hyper-threading	[Enabled]	
Active Processor Cores	[All]	
Intel Virtualization Technology	[Disabled]	
Intel(R) SpeedStep(tm)	[Enabled]	
Version 2.17.1255. Copyright (C) 2016 American Megatrends, Inc.		

BIOS Menu 15: CPU Configuration

→ Hyper-threading [Enabled]

Use the **Hyper-threading** BIOS option to enable or disable the Intel Hyper-Threading Technology.

- Disabled Disables the Intel Hyper-Threading Technology.
- Enabled DEFAULT Enables the Intel Hyper-Threading Technology.

→ Active Processor Cores [All]

Use the **Active Processor Cores** BIOS option to enable numbers of cores in the processor package.

- All DEFAULT Enable all cores in the processor package.
- 1 Enable one core in the processor package.



IMB-H110 microATX Motherboard

→ Intel Virtualization Technology [Disabled]

Use the **Intel Virtualization Technology** option to enable or disable virtualization on the system. When combined with third party software, Intel® Virtualization technology allows several OSs to run on the same system at the same time.

- **Disabled** **DEFAULT** Disables Intel Virtualization Technology.
- **Enabled** Enables Intel Virtualization Technology.

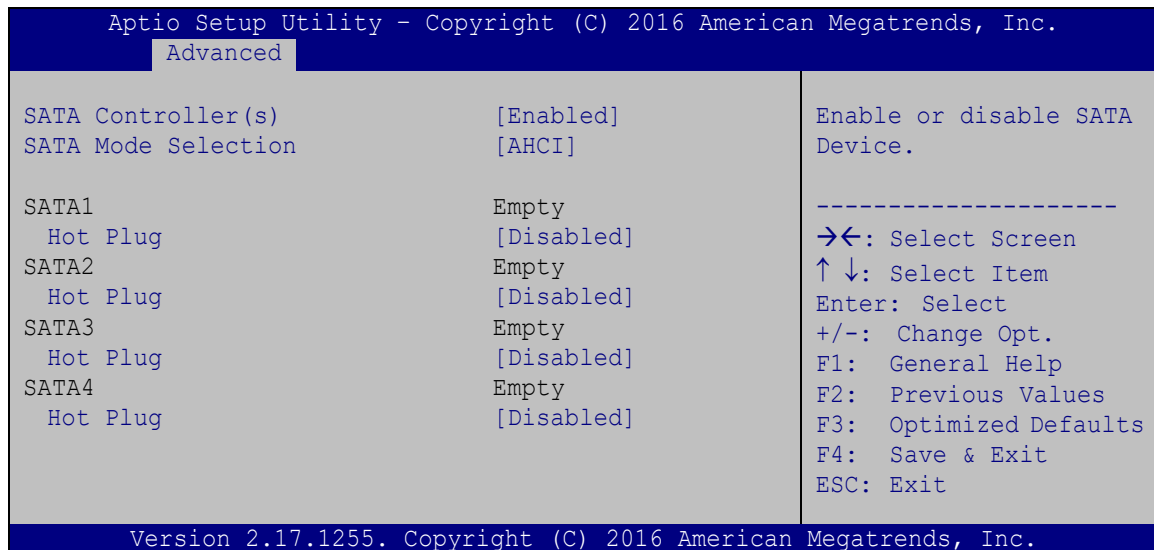
→ Intel(R) SpeedStep(tm) [Enabled]

Use the **Intel(R) SpeedStep(tm)** option to enable or disable the Intel® SpeedStep Technology which allows more than two frequency ranges to be supported.

- **Disabled** Disables Intel® SpeedStep Technology
- **Enabled** **DEFAULT** Enables Intel® SpeedStep Technology

5.3.9 SATA Configuration

Use the **SATA Configuration** menu (**BIOS Menu 16**) to change and/or set the configuration of the SATA devices installed in the system.



BIOS Menu 16: SATA Configuration



➔ **SATA Controller(s) [Enabled]**

Use the **SATA Controller(s)** option to configure the SATA controller(s).

- ➔ **Enabled** **DEFAULT** Enables the on-board SATA controller(s).
- ➔ **Disabled** Disables the on-board SATA controller(s).

➔ **SATA Mode Selection [AHCI]**

Use the **SATA Mode Selection** option to determine how the SATA devices operate.

- ➔ **AHCI** **DEFAULT** Configures SATA devices as AHCI device.

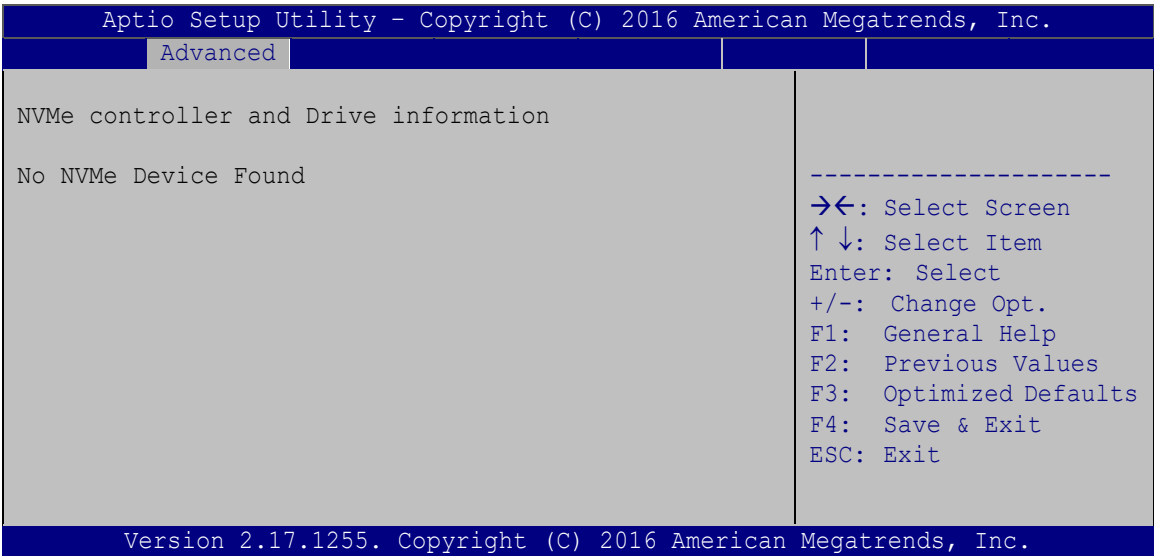
➔ **Hot Plug [Disabled]**

Use the **Hot Plug** option to designate the correspondent SATA port as hot-pluggable.

- ➔ **Disabled** **DEFAULT** Disables the hot-pluggable function of the SATA port.
- ➔ **Enabled** Designates the SATA port as hot-pluggable.

5.3.10 NVMe Configuration

Use the **NVMe Configuration (BIOS Menu 17)** menu to display the NVMe controller and device information.




BIOS Menu 17: NVMe Configuration



IMB-H110 microATX Motherboard

5.3.11 USB Configuration

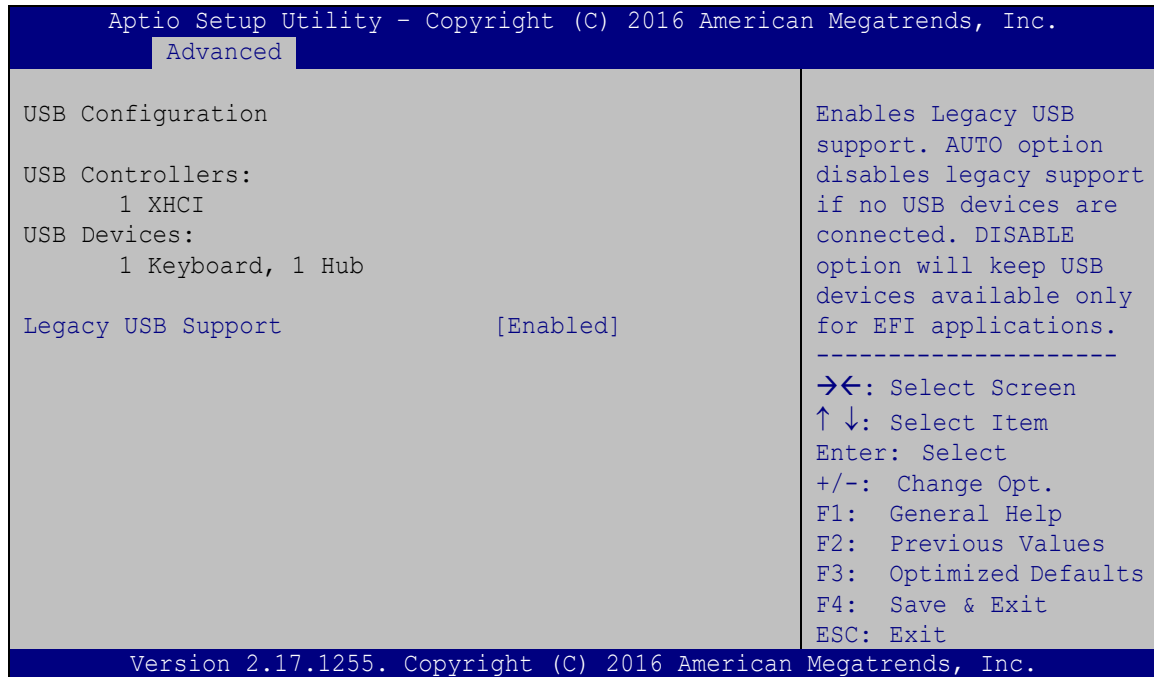Use the **USB Configuration** menu (**BIOS Menu 18**) to read USB configuration information and configure the USB settings.

**BIOS Menu 18: USB Configuration**➔ **Legacy USB Support [Enabled]**

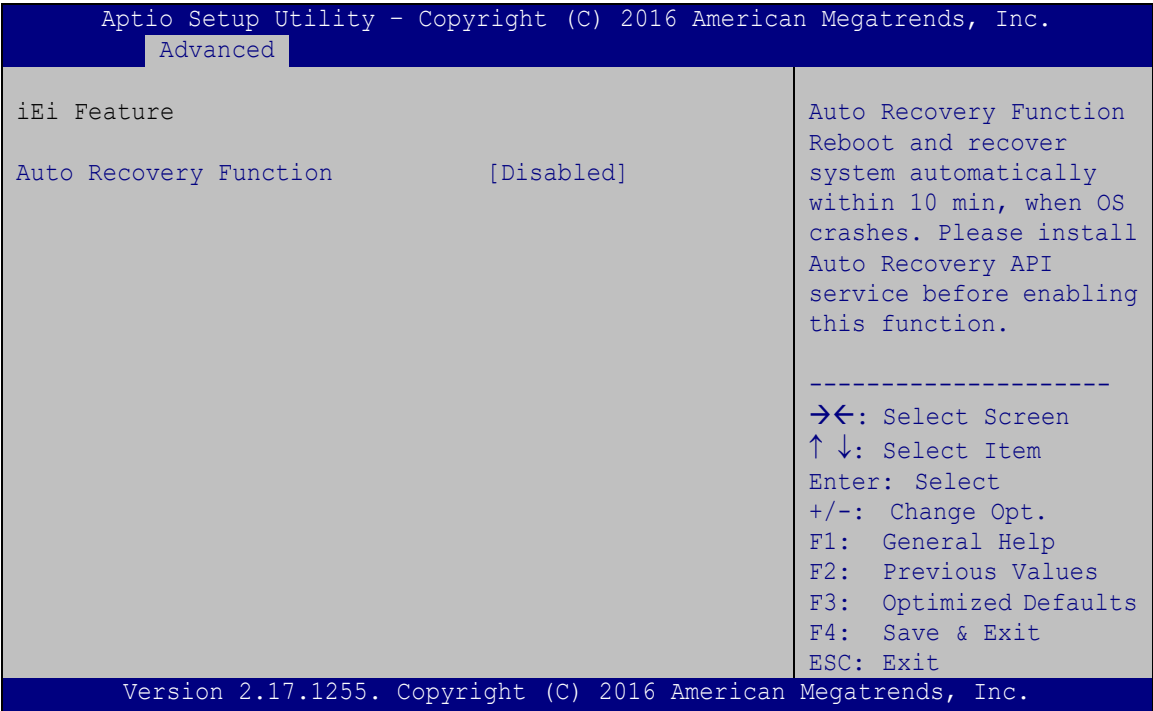
Use the **Legacy USB Support** BIOS option to enable USB mouse and USB keyboard support. Normally if this option is not enabled, any attached USB mouse or USB keyboard does not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB driver loaded onto the system.

- ➔ **Enabled** **DEFAULT** Legacy USB support enabled
- ➔ **Disabled** Legacy USB support disabled
- ➔ **Auto** Legacy USB support disabled if no USB devices are connected



5.3.12 iEi Feature

Use the **iEi Feature** menu (**BIOS Menu 19**) to configure One Key Recovery function.



BIOS Menu 19: iEi Feature

➔ Auto Recovery Function [Disabled]

Use the **Auto Recovery Function** BIOS option to enable or disable the auto recovery function of the IEI One Key Recovery.

- ➔ Disabled DEFAULT Auto recovery function disabled
- ➔ Enabled Auto recovery function enabled



IMB-H110 microATX Motherboard

5.4 Chipset

Use the **Chipset** menu (**BIOS Menu 20**) to access the PCH IO and System Agent (SA) configuration menus.



WARNING!

Setting the wrong values for the Chipset BIOS selections in the Chipset BIOS menu may cause the system to malfunction.

```
Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
Main      Advanced  Chipset  Security  Boot      Save & Exit
-----
> System Agent (SA) Configuration
> PCH-IO Configuration

System Agent (SA)
Parameters

-----
-><: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit


Version 2.17.1255. Copyright (C) 2016 American Megatrends, Inc.
```

BIOS Menu 20: Chipset



5.4.1 System Agent (SA) Configuration

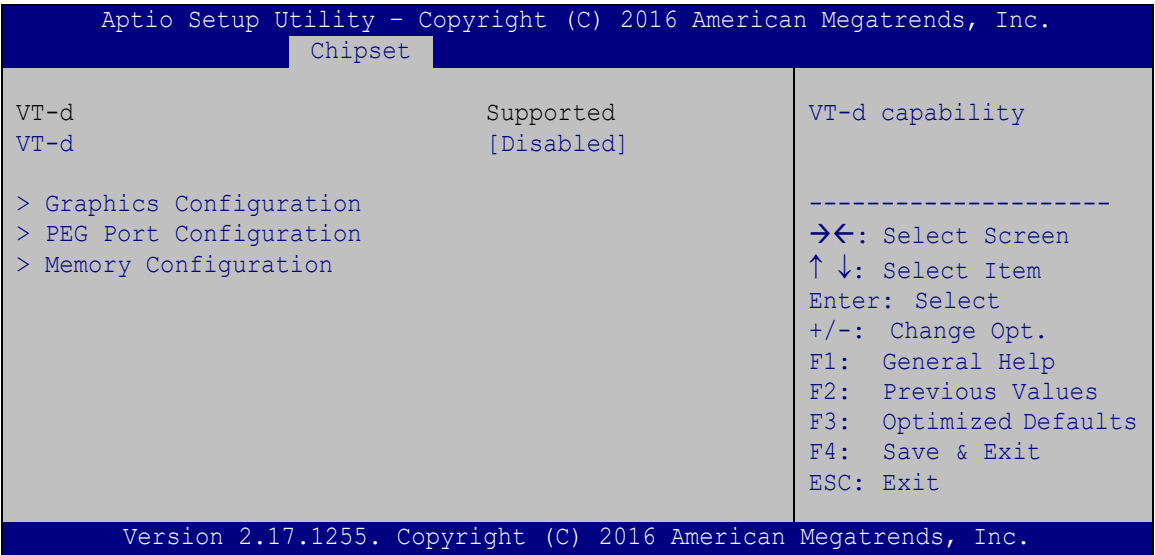Use the **System Agent (SA) Configuration** menu (**BIOS Menu 21**) to configure the System Agent (SA) parameters.



BIOS Menu 21: System Agent (SA) Configuration

➔ VT-d [Disabled]

Use the **VT-d** option to enable or disable VT-d capability.

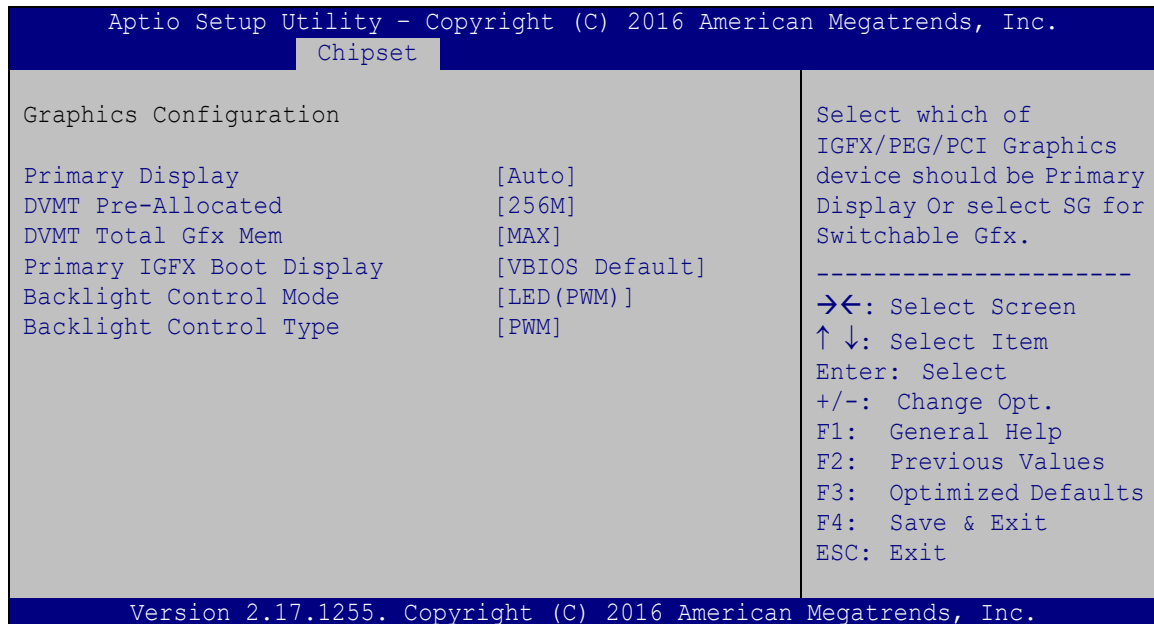
- ➔ **Disabled** **DEFAULT** Disables VT-d capability.
- ➔ **Enabled** Enables VT-d capability.



IMB-H110 microATX Motherboard

5.4.1.1 Graphics Configuration

Use the **Graphics Configuration (BIOS Menu 22)** menu to configure the video device connected to the system.



BIOS Menu 22: Graphics Configuration

→ Primary Display [Auto]

Use the **Primary Display** option to select the primary graphics controller the system uses.

The following options are available:

- Auto **Default**
- IGFX
- PEG
- PCIE
- SG

→ DVMT Pre-Allocated [256M]

Use the **DVMT Pre-Allocated** option to set the amount of system memory allocated to the integrated graphics processor when the system boots. The system memory allocated can then only be used as graphics memory, and is no longer available to applications or the operating system. Configuration options are listed below:

- 32M
- 64M

- 128M
- 256M **Default**
- 512M

➔ **DVMT Total Gfx Mem [MAX]**

Use the **DVMT Total Gfx Mem** option to select DVMT5.0 total graphic memory size used by the internal graphic device. The following options are available:

- 128M
- 256M
- MAX **Default**

➔ **Primary IGFX Boot Display [VBIOS Default]**

Use the **Primary IGFX Boot Display** option to select the display device used by the system when it boots. Configuration options are listed below.

- VBIOS Default **Default**
- CRT
- DVI-VGA
- LVDS
- DVI

➔ **Backlight Control Mode [LED(PWM)]**

Use the **Backlight Control Mode** BIOS option to select the LCD backlight control mode. Configuration options are listed below.

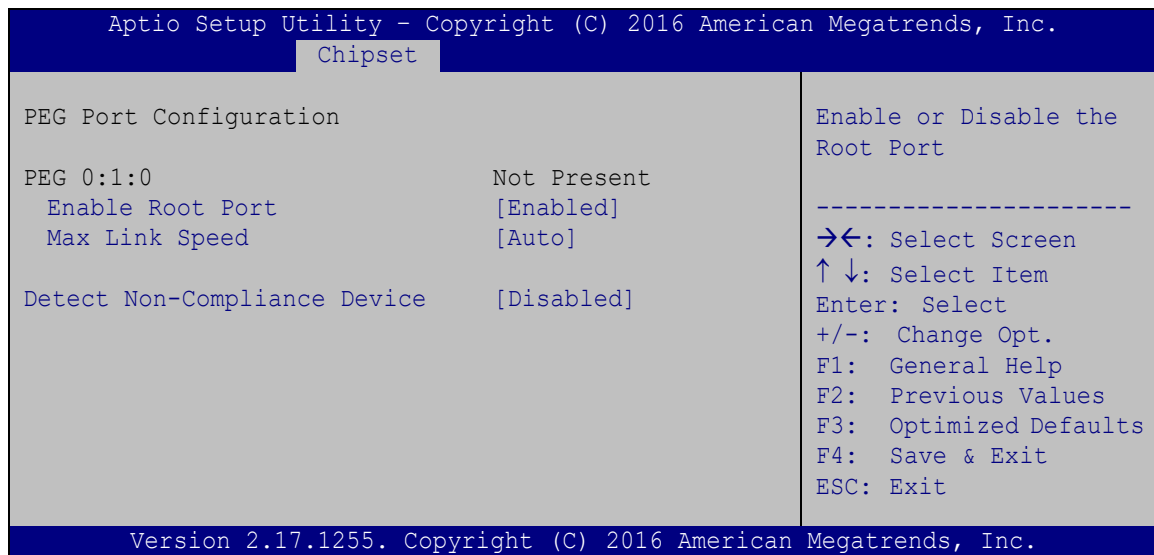
- LED(PWM) **DEFAULT**
- CCFL(Linear)

➔ **Backlight Control Type [PWM]**

Use this BIOS option to select the LCD backlight control type from **PWM** or **DC**.

IMB-H110 microATX Motherboard

5.4.1.2 PEG Port Configuration



BIOS Menu 23: PEG Port Configuration

→ **Enable Root Port [Enabled]**

Use the **Enable Root Port** option to enable or disable the PCI Express (PEG) controller.

- **Disabled** Disables the PCI Express (PEG) controller.
- **Enabled** **DEFAULT** Enables the PCI Express (PEG) controller.

→ **Max Link Speed [Auto]**

Use the **Max Link Speed** option to select the maximum link speed of the PCI Express slot.

The following options are available:

- **Auto** **Default**
- Gen1
- Gen2
- Gen3


→ **Detect Non-Compliance Device [Disabled]**

Use the **Detect Non-Compliance Device** option to enable or disable detecting if a non-compliance PCI Express device is connected to the PCI Express slot.

➔ Disabled	DEFAULT	Disables to detect if a non-compliance PCI Express device is connected to the PCI Express slot.
➔ Enabled		Enables to detect if a non-compliance PCI Express device is connected to the PCI Express slot.

5.4.1.3 Memory Configuration

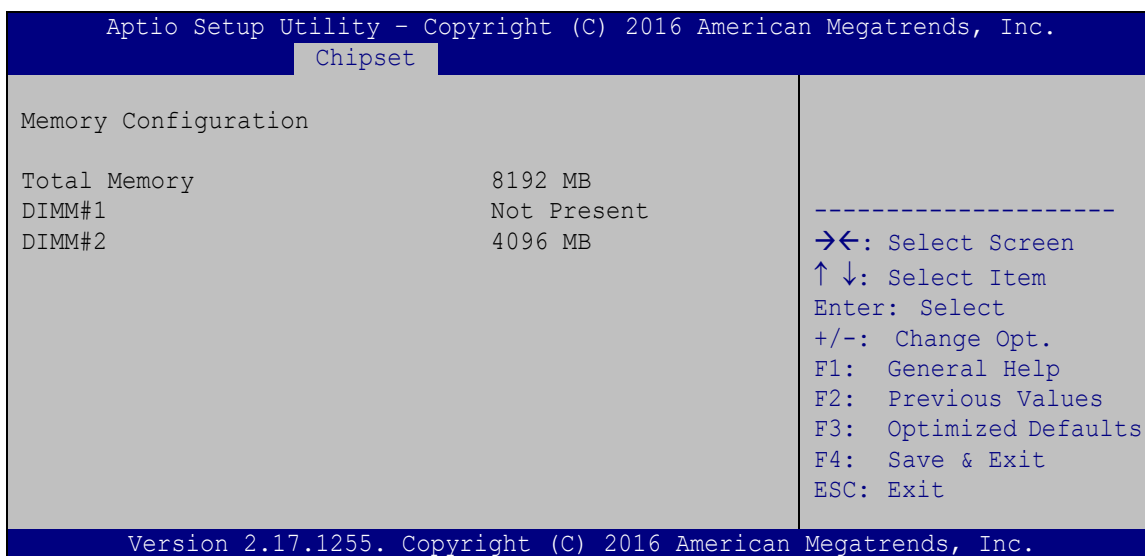Use the **Memory Configuration** submenu (**BIOS Menu 24**) to view memory information.




BIOS Menu 24: Memory Configuration

IMB-H110 microATX Motherboard

5.4.2 PCH-IO Configuration

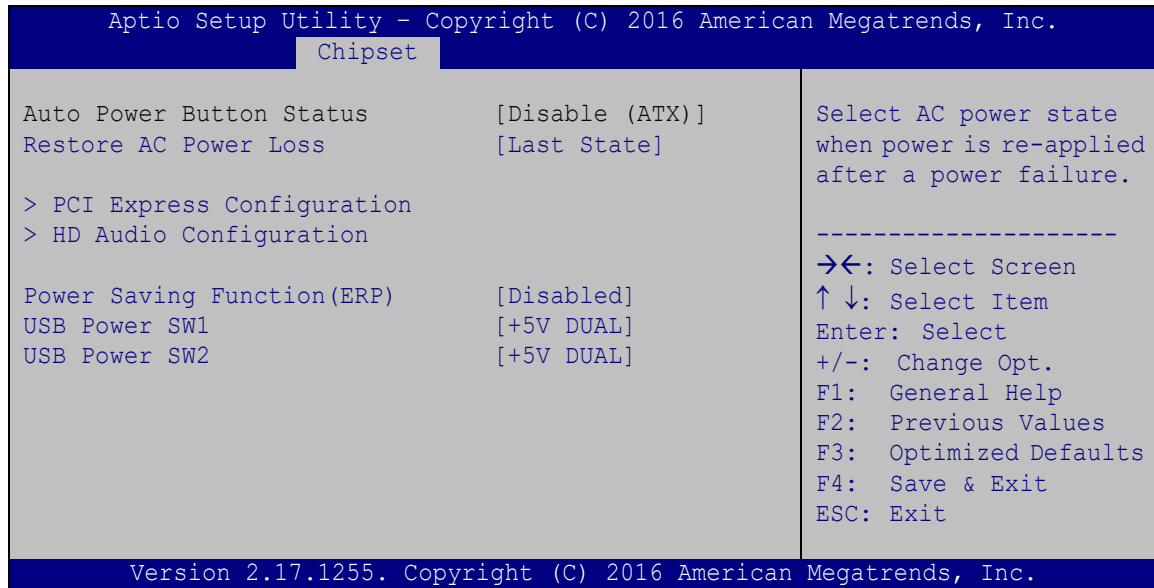Use the **PCH-IO Configuration** menu (**BIOS Menu 25**) to configure the PCH parameters.



BIOS Menu 25: PCH-IO Configuration

→ Restore AC Power Loss [Last State]

Use the **Restore AC Power Loss** BIOS option to specify what state the system returns to if there is a sudden loss of power to the system.

- **Power Off** The system remains turned off.
- **Power On** The system turns on.
- **Last State** **DEFAULT** The system returns to its previous state. If it was on, it turns itself on. If it was off, it remains off.

→ Power Saving Function(ERP) [Disabled]

Use the **Power Saving Function(ERP)** BIOS option to enable or disable the power saving function.

- **Disabled** **DEFAULT** Power saving function is disabled.
- **Enabled** Power saving function is enabled. It will reduce power consumption when the system is off.



➔ **USB Power SW1 [+5V DUAL]**

Use the **USB Power SW1** BIOS option to configure the USB power source for the corresponding USB connectors (**Table 5-2**).

- ➔ **+5V** Sets the USB power source to +5V
- ➔ **+5V DUAL DEFAULT** Sets the USB power source to +5V dual

➔ **USB Power SW2 [+5V DUAL]**

Use the **USB Power SW2** BIOS option to configure the USB power source for the corresponding USB connectors (**Table 5-2**).

- ➔ **+5V** Sets the USB power source to +5V
- ➔ **+5V DUAL DEFAULT** Sets the USB power source to +5V dual

BIOS Options	Configured USB Ports
USB Power SW1	LAN1_USB1 (external USB 3.2 Gen 1 ports) LAN2_USB1 (external USB 3.2 Gen 1 ports)
USB Power SW2	USB1 (External USB 2.0 ports) H_USB1 (External USB 2.0 ports) J_USB1 (internal USB 2.0 ports)


Table 5-2: BIOS Options and Configured USB Ports



IMB-H110 microATX Motherboard


5.4.2.1 PCI Express Configuration

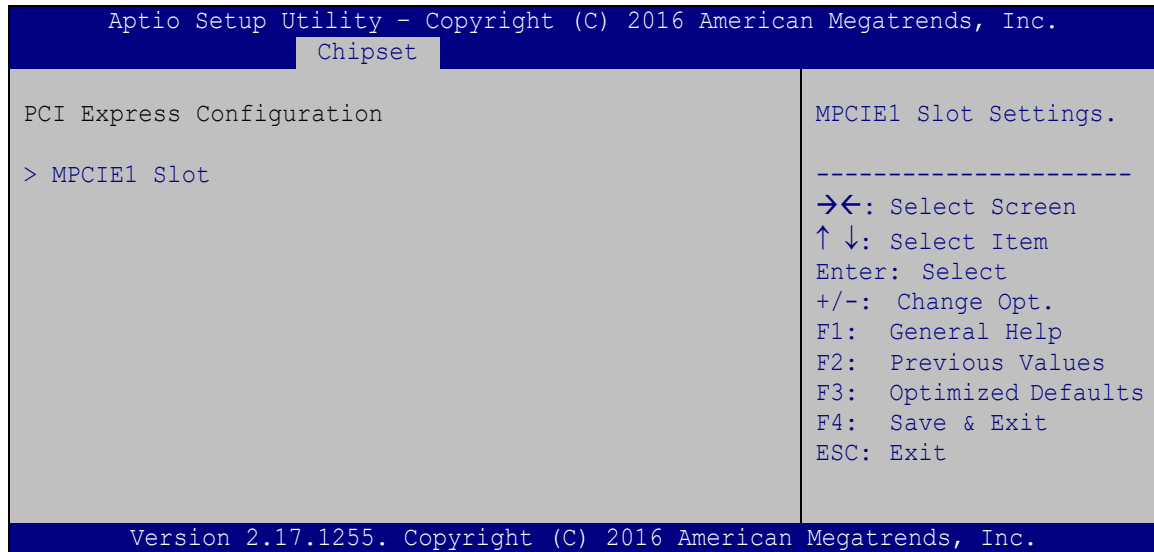Use the **PCI Express Configuration** submenu (**BIOS Menu 26**) to configure the PCIe Mini slot.



BIOS Menu 26: PCI Express Configuration

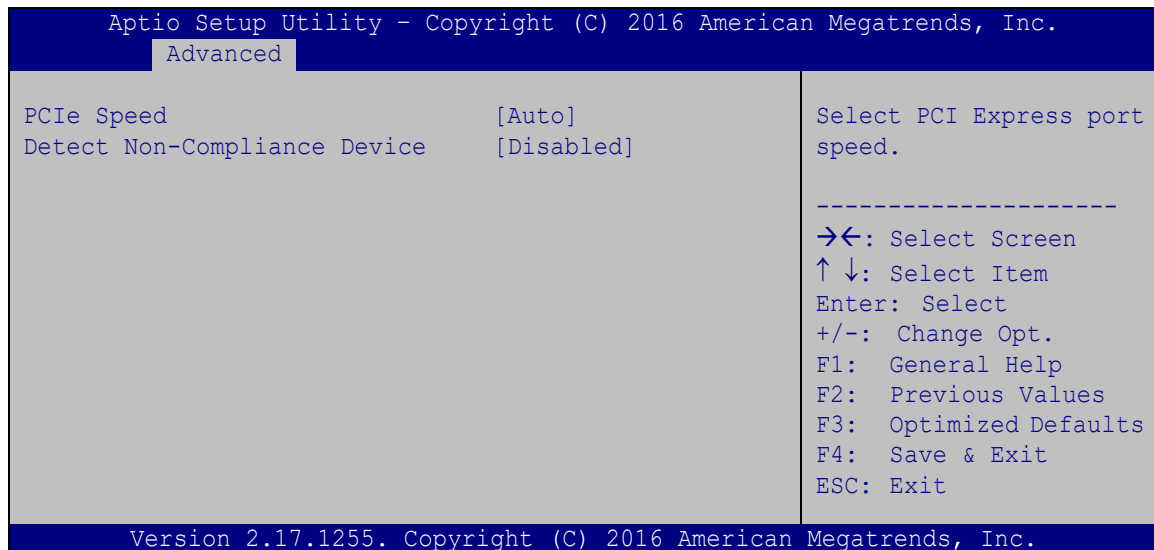5.4.2.1.1 MPCIE1 Slot



BIOS Menu 27: MPCIE1 Slot



➔ **PCIe Speed [Auto]**

Use this option to select the support type of the PCI Express slots. The following options are available:

- | | |
|--------|----------------|
| ▪ Auto | Default |
| ▪ Gen1 | |
| ▪ Gen2 | |
| ▪ Gen3 | |

➔ **Detect Non-Compliance Device [Disabled]**

Use the **Detect Non-Compliance Device** option to enable or disable detecting if a non-compliance PCI Express device is connected to the PCI Express slot.


- | | | | |
|---|-----------------|----------------|---|
| ➔ | Disabled | DEFAULT | Disables to detect if a non-compliance PCI Express device is connected to the PCI Express slot. |
| ➔ | Enabled | | Enables to detect if a non-compliance PCI Express device is connected to the PCI Express slot. |



IMB-H110 microATX Motherboard

5.4.2.2 HD Audio Configuration

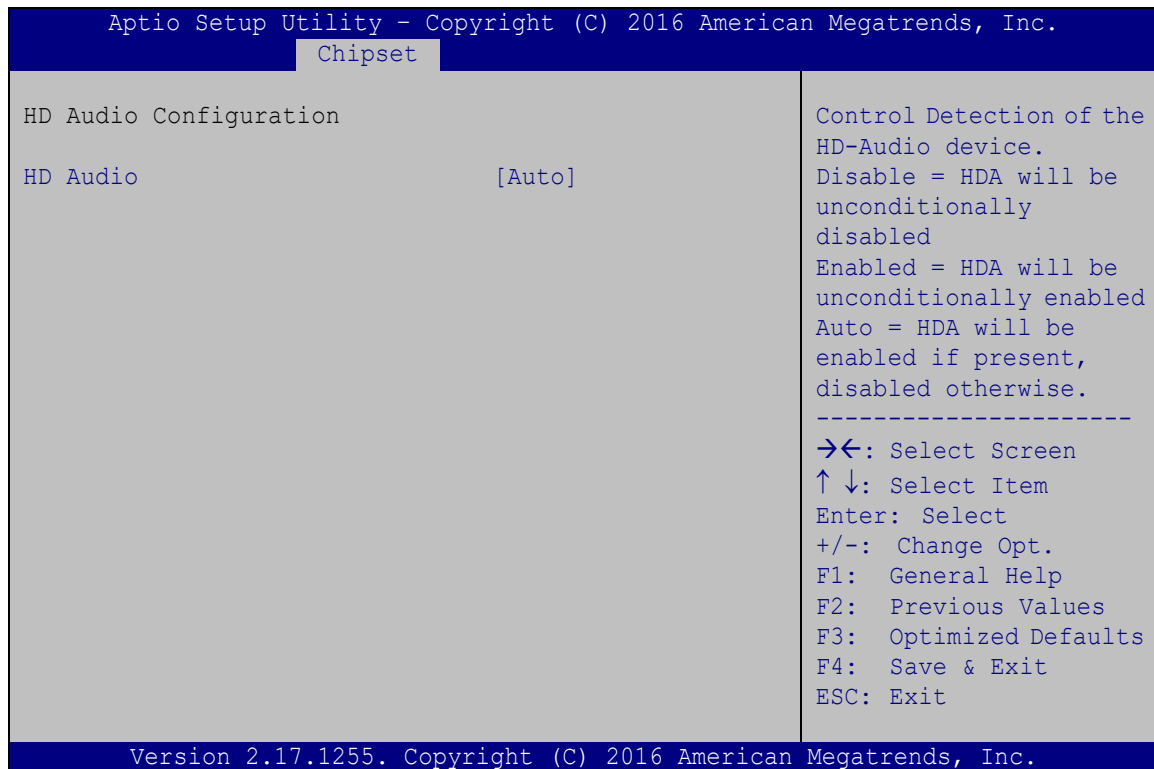Use the **HD Audio Configuration** menu (**BIOS Menu 28**) to configure the PCH Azalia settings.

**BIOS Menu 28: HD Audio Configuration****→ HD Audio [Auto]**

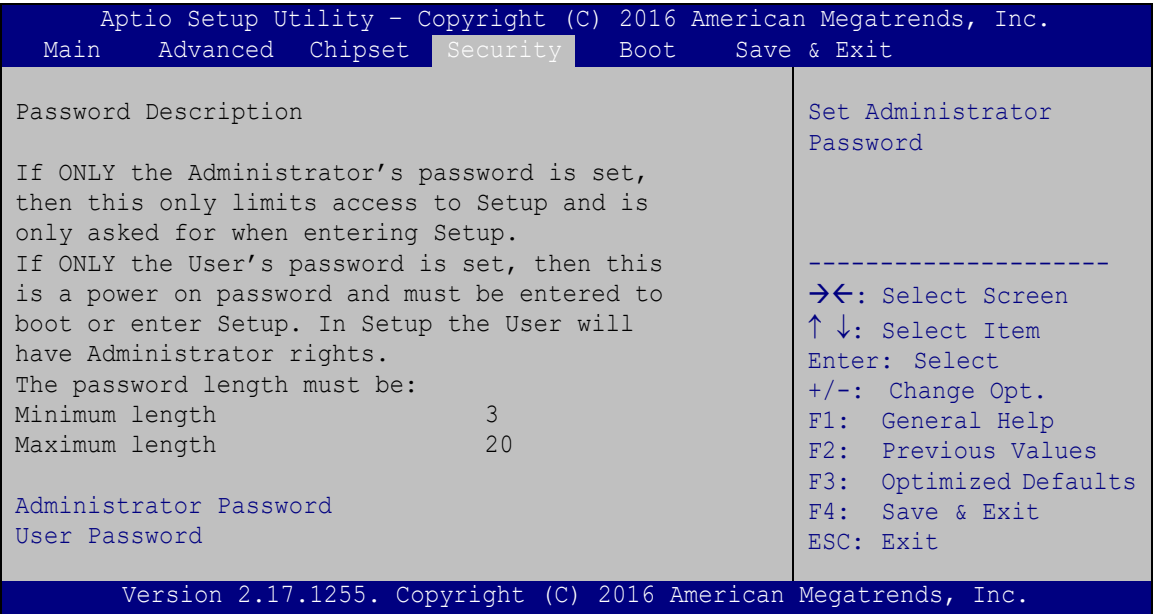
Use the **HD Audio** option to enable or disable the High Definition Audio controller.

- **Disabled** The onboard High Definition Audio controller is disabled.
- **Enabled** The onboard High Definition Audio controller is enabled.
- **Auto** **DEFAULT** The onboard High Definition Audio controller automatically detected and enabled



5.5 Security

Use the **Security** menu (**BIOS Menu 29**) to set system and user passwords.



BIOS Menu 29: Security

➔ **Administrator Password**

Use the **Administrator Password** to set or change a administrator password.

➔ **User Password**

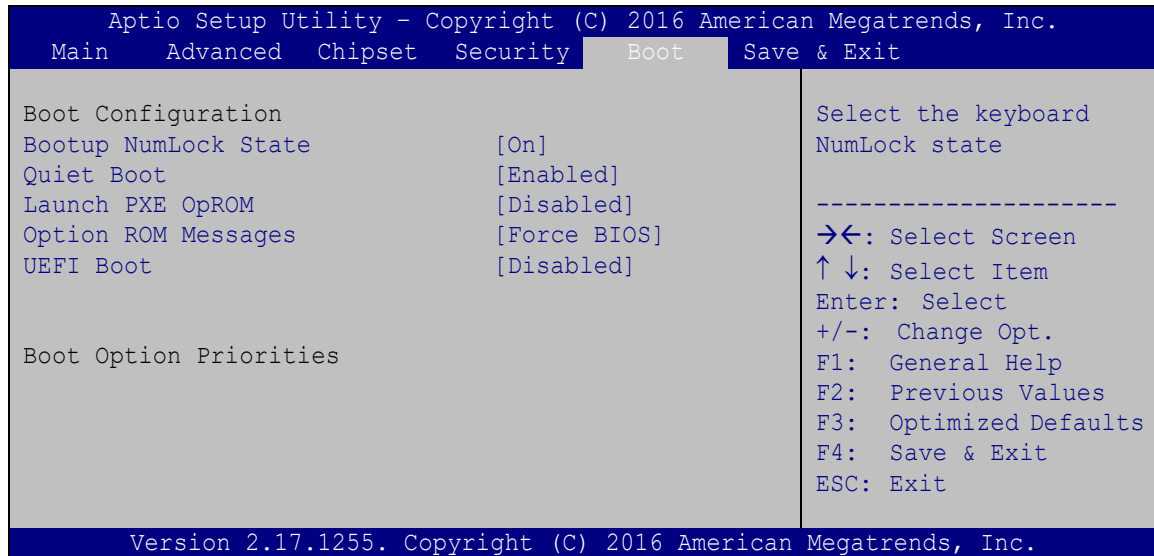
Use the **User Password** to set or change a user password.



IMB-H110 microATX Motherboard

5.6 Boot

Use the **Boot** menu (**BIOS Menu 30**) to configure system boot options.

**BIOS Menu 30: Boot****→ Bootup NumLock State [On]**

Use the **Bootup NumLock State** BIOS option to specify if the number lock setting must be modified during boot up.

→ On **DEFAULT** Allows the Number Lock on the keyboard to be enabled automatically when the computer system boots up. This allows the immediate use of the 10-key numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard is lit.

→ Off Does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard lights up when the Number Lock is engaged.

→ Quiet Boot [Enabled]

Use the **Quiet Boot** BIOS option to select the screen display when the system boots.

- | | | | |
|---|----------|---------|---|
| → | Disabled | | Normal POST messages displayed |
| → | Enabled | DEFAULT | OEM Logo displayed instead of POST messages |

→ Launch PXE OpROM [Disabled]

Use the **Launch PXE OpROM** option to enable or disable boot option for legacy network devices.

- | | | | |
|---|----------|---------|----------------------------|
| → | Disabled | DEFAULT | Ignore all PXE Option ROMs |
| → | Enabled | | Load PXE Option ROMs. |

→ Option ROM Messages [Force BIOS]

Use the **Option ROM Messages** option to set the Option ROM display mode.

- | | | | |
|---|-----------------|---------|----------------------------------|
| → | Force
BIOS | DEFAULT | Sets display mode to force BIOS. |
| → | Keep
Current | | Sets display mode to current. |

→ UEFI Boot [Disabled]


Use the **UEFI Boot** option to enable or disable to boot from the UEFI devices.

- | | | | |
|---|----------|---------|-------------------------------------|
| → | Enabled | | Boot from UEFI devices is enabled. |
| → | Disabled | DEFAULT | Boot from UEFI devices is disabled. |

IMB-H110 microATX Motherboard

5.7 Save & Exit

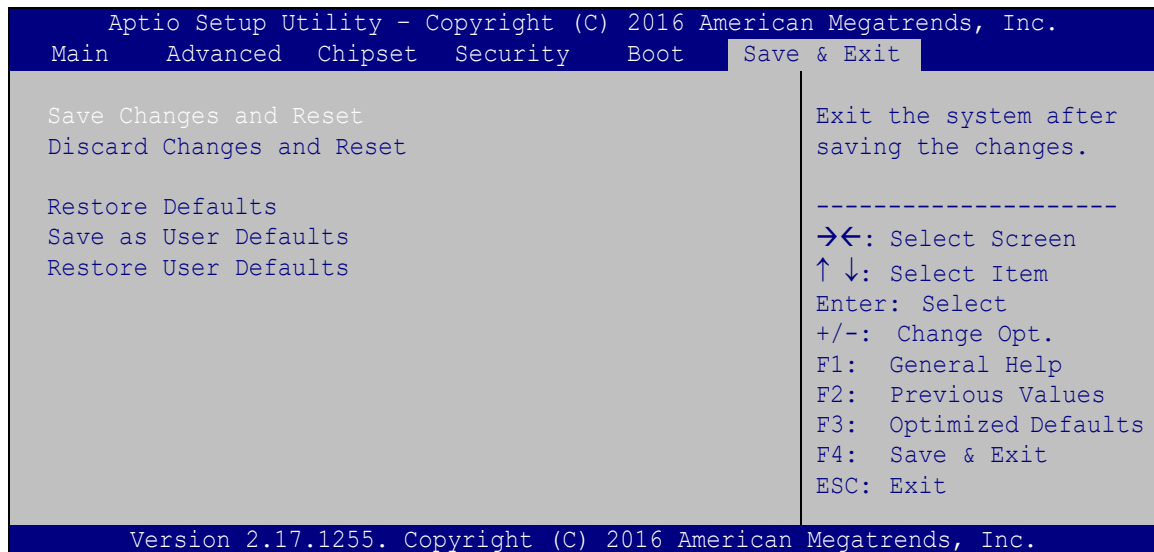Use the **Safe & Exit** menu (**BIOS Menu 31**) to load default BIOS values, optimal failsafe values and to save configuration changes.



BIOS Menu 31: Save & Exit

➔ **Save Changes and Reset**

Use the **Save Changes and Reset** option to save the changes made to the BIOS options and reset the system.

➔ **Discard Changes and Reset**

Use the **Discard Changes and Reset** option to exit the system without saving the changes made to the BIOS configuration setup program.

➔ **Restore Defaults**

Use the **Restore Defaults** option to load the optimal default values for each of the parameters on the Setup menus. **F3 key can be used for this operation.**

➔ **Save as User Defaults**

Use the **Save as User Defaults** option to save the changes done so far as user defaults.

➔ **Restore User Defaults**

Use the **Restore User Defaults** option to restore the user defaults to all the setup options.

Appendix

A

Regulatory Compliance

IMB-H110 microATX Motherboard

DECLARATION OF CONFORMITY



This equipment has been tested and found to comply with specifications for CE marking. If the user modifies and/or installs other devices in the equipment, the CE conformity declaration may no longer apply.

FCC WARNING



This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Appendix

B

Product Disposal

IMB-H110 microATX Motherboard




CAUTION:

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.


Dispose of used batteries according to instructions and local regulations.

- Outside the European Union – If you wish to dispose of used electrical and electronic products outside the European Union, please contact your local authority so as to comply with the correct disposal method.
- Within the European Union – The device that produces less waste and is easier to recycle is classified as electronic device in terms of the European Directive 2012/19/EU (WEEE), and must not be disposed of as domestic garbage.



EU-wide legislation, as implemented in each Member State, requires that waste electrical and electronic products carrying the mark (left) must be disposed of separately from normal household waste. This includes monitors and electrical accessories, such as signal cables or power cords. When you need to dispose of your device, please follow the guidance of your local authority, or ask the shop where you purchased the product. The mark on electrical and electronic products only applies to the current European Union Member States.

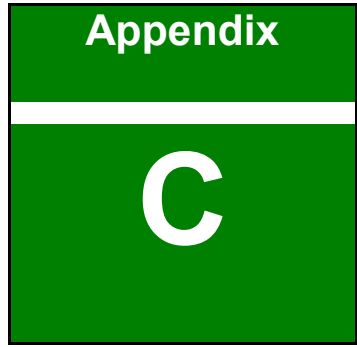Please follow the national guidelines for electrical and electronic product disposal.



BIOS Options



IMB-H110 microATX Motherboard

Below is a list of BIOS configuration options in the BIOS chapter.

System Date [xx/xx/xx]	87
System Time [xx:xx:xx]	87
Security Device Support [Disable]	88
ACPI Sleep State [S3 (Suspend to RAM)]	89
Case Open Beep [Disabled]	90
Serial Port [Enabled]	91
Change Settings [Auto]	91
Serial Port [Enabled]	92
Change Settings [Auto]	92
Serial Port [Enabled]	93
Change Settings [Auto]	93
Serial Port [Enabled]	94
Change Settings [Auto]	94
Serial Port [Enabled]	95
Change Settings [Auto]	95
Transfer Mode [RS232]	96
Serial Port [Enabled]	96
Change Settings [Auto]	96
Transfer Mode [RS232]	97
Parallel Port [Enabled]	97
Change Settings [Auto]	98
Device Mode [STD Printer Mode]	98
Serial Port [Enabled]	100
PC Health Status	100
CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control [Auto Mode]	101
Auto mode fan start/off temperature	102
Auto mode fan start PWM	102
Auto mode fan slope PWM	102
Wake system with Fixed Time [Disabled]	103
Console Redirection [Disabled]	105
Terminal Type [ANSI]	105
Bits per second [115200]	105
Data Bits [8]	105



Parity [None].....106

Stop Bits [1]106

Legacy Serial Redirection Port [COM1].....107

Hyper-threading [Enabled].....108

Active Processor Cores [All]108

Intel Virtualization Technology [Disabled]109

Intel(R) SpeedStep(tm) [Enabled].....109

SATA Controller(s) [Enabled]110

SATA Mode Selection [AHCI].....110

Hot Plug [Disabled].....110

Legacy USB Support [Enabled].....111

Auto Recovery Function [Disabled]112

VT-d [Disabled].....114

Primary Display [Auto]115

DVMT Pre-Allocated [256M]115

DVMT Total Gfx Mem [MAX].....116

Primary IGFX Boot Display [VBIOS Default]116

Backlight Control Mode [LED(PWM)].....116

Backlight Control Type [PWM]116

Enable Root Port [Enabled]117

Max Link Speed [Auto]117

Detect Non-Compliance Device [Disabled]117

Restore AC Power Loss [Last State]119

Power Saving Function(ERP) [Disabled].....119

USB Power SW1 [+5V DUAL].....120

USB Power SW2 [+5V DUAL].....120

PCIe Speed [Auto].....122

Detect Non-Compliance Device [Disabled]122

HD Audio [Auto]123

Administrator Password124

User Password124

Bootup NumLock State [On].....125

Quiet Boot [Enabled]126

Launch PXE OpROM [Disabled]126

Option ROM Messages [Force BIOS].....126



IMB-H110 microATX Motherboard

UEFI Boot [Disabled]	126
Save Changes and Reset	127
Discard Changes and Reset	127
Restore Defaults	127
Save as User Defaults	127
Restore User Defaults	127

Appendix

D

Digital I/O Interface

IMB-H110 microATX Motherboard

D.1 Introduction

The DIO connector on the IMB-H110 is interfaced to GPIO ports on the Super I/O chipset. The digital inputs and digital outputs are generally control signals that control the on/off circuit of external devices or TTL devices. Data can be read or written to the selected address to enable the DIO functions.

**NOTE:**

For further information, please refer to the datasheet for the Super I/O chipset.

The BIOS interrupt call **INT 15H** controls the digital I/O.

INT 15H:

AH – 6FH		
<u>Sub-function:</u>		
AL – 8	:	Set the digital port as INPUT
AL	:	Digital I/O input value



D.2 Assembly Language Sample 1

```
MOV    AX, 6F08H    ;setting the digital port as input
INT     15H          ;
```

AL low byte = value

AH – 6FH	
<u>Sub-function:</u>	
AL – 9	:Set the digital port as OUTPUT
BL	:Digital I/O input value

D.3 Assembly Language Sample 2

```
MOV    AX, 6F09H    ;setting the digital port as output
MOV    BL, 09H      ;digital value is 09H
INT     15H          ;
```

Digital Output is 1001b



Appendix

E

Watchdog Timer



NOTE:

The following discussion applies to DOS environment. Contact IEI support or visit the IEI website for specific drivers for other operating systems.

The Watchdog Timer is provided to ensure that standalone systems can always recover from catastrophic conditions that cause the CPU to crash. This condition may have occurred by external EMIs or a software bug. When the CPU stops working correctly, Watchdog Timer either performs a hardware reset (cold boot) or a Non-Maskable Interrupt (NMI) to bring the system back to a known state.

A BIOS function call (INT 15H) is used to control the Watchdog Timer.

INT 15H:

AH – 6FH Sub-function:	
AL – 2:	Sets the Watchdog Timer’s period.
BL:	Time-out value (Its unit-second is dependent on the item “Watchdog Timer unit select” in CMOS setup).

Table E-1: AH-6FH Sub-function

Call sub-function 2 to set the time-out period of Watchdog Timer first. If the time-out value is not zero, the Watchdog Timer starts counting down. When the timer value reaches zero, the system resets. To ensure that this reset condition does not occur, calling sub-function 2 must periodically refresh the Watchdog Timer. However, the watchdog timer is disabled if the time-out value is set to zero.

A tolerance of at least 10% must be maintained to avoid unknown routines within the operating system (DOS), such as disk I/O that can be very time-consuming.

IMB-H110 microATX Motherboard

**NOTE:**

When exiting a program it is necessary to disable the Watchdog Timer, otherwise the system resets.

EXAMPLE PROGRAM:

; INITIAL TIMER PERIOD COUNTER

;

W_LOOP:

;

```

MOV      AX, 6F02H      ;setting the time-out value
MOV      BL, 30          ;time-out value is 48 seconds
INT      15H

```

;

; ADD THE APPLICATION PROGRAM HERE

;

```

CMP      EXIT_AP, 1      ;is the application over?
JNE      W_LOOP          ;No, restart the application

```

```

MOV      AX, 6F02H      ;disable Watchdog Timer
MOV      BL, 0          ;
INT      15H

```

;

; EXIT ;



Appendix

F

Error Beep Code



IMB-H110 microATX Motherboard

F.1 PEI Beep Codes

Number of Beeps	Description
1	Memory not Installed
1	Memory was installed twice (InstallPeiMemory routine in PEI Core called twice)
2	Recovery started
3	DXE IPL was not found
3	DXE Core Firmware Volume was not found
4	Recovery failed
4	S3 Resume failed
7	Reset PPI is not available

F.2 DXE Beep Codes

Number of Beeps	Description
1	Invalid password
4	Some of the Architectural Protocols are not available
5	No Console Output Devices are found
5	No Console Input Devices are found
6	Flash update is failed
7	Reset protocol is not available
8	Platform PCI resource requirements cannot be met

**NOTE:**

If you have any question, please contact IEI for further assistance.



Appendix

G

Hazardous Materials Disclosure



IMB-H110 microATX Motherboard

G.1 RoHS II Directive (2015/863/EU)

The details provided in this appendix are to ensure that the product is compliant with the RoHS II Directive (2015/863/EU). The table below acknowledges the presences of small quantities of certain substances in the product, and is applicable to RoHS II Directive (2015/863/EU).

Please refer to the following table.

Part Name	Toxic or Hazardous Substances and Elements									
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (CR(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)	Bis(2-ethylhexyl) phthalate (DEHP)	Butyl benzyl phthalate (BBP)	Dibutyl phthalate (DBP)	Diisobutyl phthalate (DIBP)
Housing	O	O	O	O	O	O	O	O	O	O
Display	O	O	O	O	O	O	O	O	O	O
Printed Circuit Board	O	O	O	O	O	O	O	O	O	O
Metal Fasteners	O	O	O	O	O	O	O	O	O	O
Cable Assembly	O	O	O	O	O	O	O	O	O	O
Fan Assembly	O	O	O	O	O	O	O	O	O	O
Power Supply Assemblies	O	O	O	O	O	O	O	O	O	O
Battery	O	O	O	O	O	O	O	O	O	O
O: This toxic or hazardous substance is contained in all of the homogeneous materials for the part is below the limit requirement in Directive (EU) 2015/863. X: This toxic or hazardous substance is contained in at least one of the homogeneous materials for this part is above the limit requirement in Directive (EU) 2015/863.										



G.2 China RoHS

此附件旨在确保本产品符合中国 RoHS 标准。以下表格标示此产品中某有毒物质的含量符合中国 RoHS 标准规定的限量要求。

本产品上会附有“环境友好使用期限”的标签，此期限是估算这些物质“不会有泄漏或突变”的年限。本产品可能包含有较短的环境友好使用期限的可替换元件，像是电池或灯管，这些元件将会单独标示出来。

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (CR(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
壳体	O	O	O	O	O	O
显示	O	O	O	O	O	O
印刷电路板	O	O	O	O	O	O
金属螺帽	O	O	O	O	O	O
电缆组装	O	O	O	O	O	O
风扇组装	O	O	O	O	O	O
电力供应组装	O	O	O	O	O	O
电池	O	O	O	O	O	O
O: 表示该有毒有害物质在该部件所有物质材料中的含量均在 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求以下。 X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求。						

