



# HPCIE-C236

Half-size PICMG 1.3 CPU Card supports LGA 1151 Intel® Xeon® E3, Core™ i3/Pentium®/Celeron® CPU with Intel® C236, ECC & non-ECC DDR4 SO-DIMM, VGA, iDP, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, mSATA, HD Audio, Intel® AMT and RoHS

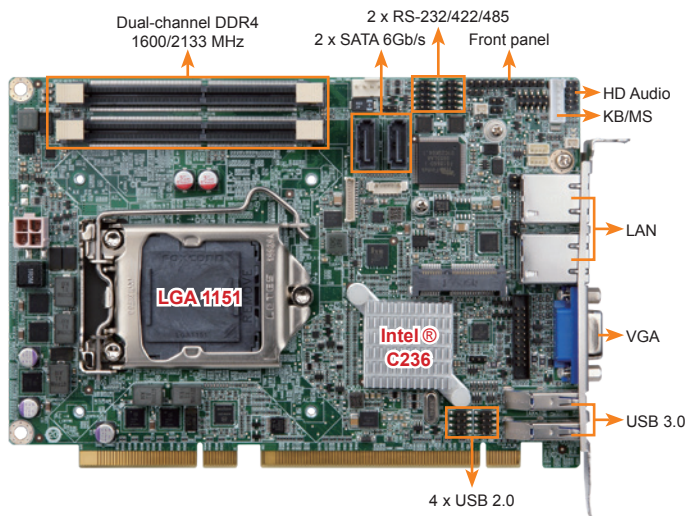

PCIe Mini slot provides mSATA and USB signal for full-size or half-size mSATA SSD and wireless LAN card.

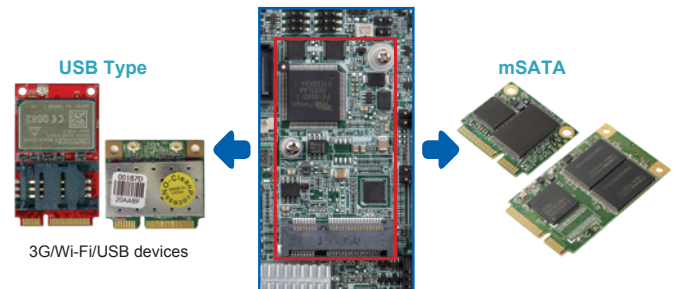

## Specifications

- ◆ CPU  
LGA 1151 socket supports Intel® Xeon® E3 v5/v6, 6th/7th generation Core™ i3, Pentium® or Celeron® processor
- ◆ Chipset  
Intel® C236
- ◆ Memory  
Two 260-pin 1866/2133 MHz dual-channel DDR4 ECC and non-ECC unbuffered SO-DIMMs support up to 32 GB
- ◆ BIOS  
UEFI BIOS
- ◆ Graphics Engine  
Intel® HD Graphics Gen 9 supports DX11/12, OpenCL 2.x and OpenGL 4.3/4.4 Decode/Encode for HEVC, VP8, VP9, VDENC
- ◆ Display Output  
1 x VGA (up to 1920x1200@60 Hz)  
1 x iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160@60 Hz)
- ◆ Ethernet  
LAN1: Intel® I219LM Clarkville-V with Intel® AMT 11.0 support  
LAN2: Intel® I210 PCIe controller
- ◆ External I/O Interface  
2 x USB 3.0
- ◆ Internal I/O Interface  
1 x KB/MS (1x6 pin)                      2 x SATA 6Gb/s (RAID 0, 1 supported)  
1 x mSATA (SATA & USB signal)        4 x USB 2.0 (2x4 pin, P=2.0)  
2 x RS-232/422/485 (2x5 pin, P=2.0)
- ◆ Front Panel  
1 x Front panel (1x10 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ LAN LED  
2 x LAN LED (1x2 pin)
- ◆ Audio  
Support 7.1-channel HD Audio by IEI AC-KIT-892HD kit
- ◆ SMBus  
1 x SMBus (1x4 pin)
- ◆ I<sup>2</sup>C  
1 x I<sup>2</sup>C (1x4 pin)
- ◆ Expansion  
16-lane PCIe signal from CPU via golden finger (supports x16, or x8 + x8, or x4 + x4 + x8)  
4-lane PCIe signal from Q170 via golden finger  
1 x Full/Half-size PCIe Mini card slot (supports mSATA)
- ◆ Watchdog Timer  
Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O  
8-bit digital I/O (2x5 pin)
- ◆ Fan Connector  
1 x CPU smart fan (1x4 pin)
- ◆ Power Supply  
5V/12V, AT/ATX support
- ◆ Power Consumption  
5V@0.13A, 12V@7.89A, 3.3V@0.10A, 5VSB@0.20A  
(Intel® Xeon® E3-1275 v5 3.60 GHz with two 16 GB 2133 MHz DDR4 memory)
- ◆ Operating Temperature  
-20°C ~ 60°C
- ◆ Operating Humidity  
5% ~ 95%, non-condensing
- ◆ Dimensions  
169 mm x 126 mm
- ◆ Weight  
GW: 1000g / NW: 420g
- ◆ CE/FCC compliant



## Features

- PICMG 1.3 half-size CPU Card
- LGA 1151 Intel® Xeon® E3 v5/v6, 6th/7th generation Core™ i3, Pentium® or Celeron® processor supported
- Two 260-pin 1866/2133 MHz dual-channel DDR4 ECC and non-ECC SO-DIMMs support up to 32 GB memory
- Supports dual independent display by VGA & internal DP pin header
- PCIe Mini card slot support mSATA & USB 2.0
- Intel® PCIe GbE with Intel® AMT 11.0 supported
- Supports RAID 0, 1 function via SATA 6Gb/s
- IEI jumper-less function

## Packing List

1 x HPCIE-C236 single board computer
1 x SATA cable
1 x QIG
1 x Utility CD

## Ordering Information

Part No.	Description
HPCIE-C236-R10	Half-size PICMG 1.3 CPU card supports LGA 1151 Intel® Xeon® E3, Core™ i3/Pentium®/Celeron® CPU with Intel® C236, ECC & non-ECC DDR4 SO-DIMM, VGA, iDP, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, mSATA, HD Audio, Intel® AMT and RoHS
19800-000075-RS	PS/2 KB/MS cable with bracket, 220mm, P=2.0
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
32205-002700-200-RS	RS-232/422/485 cable, 200mm, P=2.0
AC-KIT-892HD-R10	7.1-channel HD Audio kit with Realtek ALC892 supports dual audio streams
CF-115XA-R10	High-performance LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 73W
CF-1156C-R20	LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 45W
CF-1156D-R20	LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 65W
DP-DP-R10	DisplayPort to DisplayPort converter board (for IEI iDP connector)
DP-DVI-R10	DisplayPort to DVI-D converter board (for IEI iDP connector)
DP-HDMI-R10	DisplayPort to HDMI converter board (for IEI iDP connector)
DP-LVDS-R10	DisplayPort to LVDS converter board (for IEI iDP connector)
DP-VGA-R10	DisplayPort to VGA converter board (for IEI iDP connector)
SAIDE-KIT01-R10	SATA to IDE/CF converter board