



SPCIE-C2260-i2

Full-size PICMG 1.3 CPU Card supports LGA 1150 Intel® Xeon® E3, Core™ i3, Pentium® and Celeron® with Intel® C226, DDR3, VGA, iDP, Dual Intel® PCIe GbE, SATA 6Gb/s, mSATA, PCIe Mini, RS-232, HD Audio and RoHS

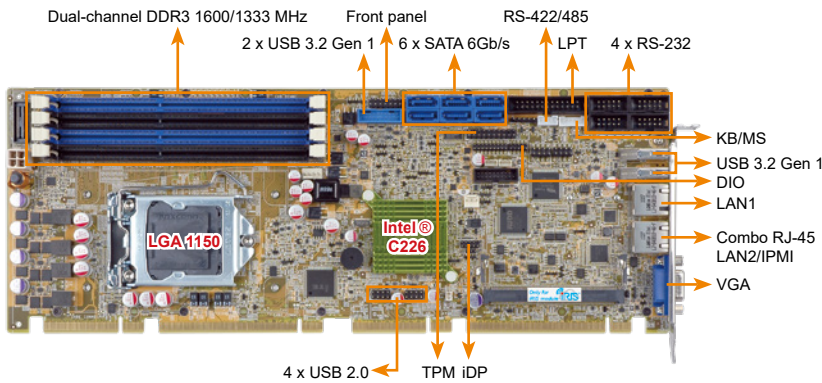

Specifications

- ◆ CPU
LGA 1150 Intel® Xeon® E3, Core™ i3, Pentium® or Celeron® processor supported
- ◆ Chipset
Intel® C226
- ◆ Memory
Four 240-pin 1600/1333 MHz dual-channel DDR3 & DDR3L SDRAM ECC and non-ECC unbuffered DIMMs support up to 32 GB
- ◆ BIOS
UEFI BIOS
- ◆ Graphics Engine
Intel® HD Graphics Gen 7.5 supports DX11.1 and OpenCL 1.2, OpenGL 3.2 Full MPEG2, VC1, AVC Decode
- ◆ Display Output
1 x VGA (up to 1920x1200@60 Hz)
1 x iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160@60 Hz)
- ◆ Ethernet
LAN1: Intel® I217LM with Intel® AMT 9.0 support
LAN2: Intel® I210-AT PCIe controller with NCSI support
- ◆ Audio
Support 7.1 channel HD Audio by IEI AC-KIT-888S-R10 kit
- ◆ External I/O Interface
2 x USB 3.2 Gen 1 (5Gb/s)
- ◆ Internal I/O Interface
1 x KB/MS (1x6 pin)
1 x LPT (2x13 pin)
1 x mSATA
1 x RS-422/485 (1x4 pin, P=2.0)
2 x USB 3.2 Gen 1 (5Gb/s) (2x10 pin)
4 x USB 2.0 (Golden finger)
4 x USB 2.0 (2x4 pin, P=2.54)
4 x RS-232 (2x5pin, P=2.54)
6 x SATA 6Gb/s (RAID 0/1/5/10 supported)
- ◆ LAN LED
2 x LAN LED (1x2 pin)
- ◆ TPM
1 x TPM (2x10 pin)
- ◆ SMBus
1 x SMBus (1x4 pin)
- ◆ I²C
1 x I²C (1x4 pin)
- ◆ Infrared Interface
1 x Infrared Interface (1x5 pin)
- ◆ Digital I/O
8-bit digital I/O (2x5 pin)
- ◆ Front Panel
1 x Front panel (2x7 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ Expansion
PCIe signal and PCI signal via golden finger
1 x Full-size PCIe Mini card slot (colay mSATA)
- ◆ Watchdog Timer
Software programmable, supports 1~255 sec. system reset
- ◆ Fan Connector
1 x CPU smart fan (1x4 pin)
1 x System smart fan (1x3 pin)
- ◆ Power Supply
5V/12V, AT/ATX support
- ◆ Power Consumption
5V@3.55A, 12V@0.37A, Vcore_12V@7.61A, 3.3V@1.55A, 5VSB@0.13A (Intel® E3-1240 v3 3.4GHz CPU with 16 GB (four 4 GB) 1333 MHz DDR3 memory)
- ◆ Operating Temperature: -20°C ~ 60°C
- ◆ Storage Temperature: -30°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 338 mm x 126 mm
- ◆ Weight: GW: 1200g / NW: 420g
- ◆ CE/FCC compliant

Features

- PICMG 1.3 full-size server grade solution
- LGA 1150 Intel® Xeon® E3, Core™ i3, Pentium® or Celeron® processor supported
- Four 240-pin 1600/1333 MHz dual-channel DDR3 DIMMs support up to 32 GB
- Supports dual independent display by VGA and iDP interfaces
- Supports PCIe Mini devices and mSATA via PCIe Mini socket
- Supports RAID function via SATA 6Gb/s
- Stiffener bars
- IEI jumper-less function

Packing List

- 1 x SPCIE-C2260-i2 single board computer
- 1 x Dual RS-232 cable
- 1 x USB 2.0 cable
- 2 x SATA cable
- 1 x QIG

Ordering Information

Part No.	Description
SPCIE-C2260-i2-R10	Full-size PICMG 1.3 CPU Card supports LGA 1150 Intel® Xeon® E3, Core™ i3, Pentium® and Celeron® with Intel® C226, DDR3, VGA, iDP, Dual Intel® PCIe GbE, SATA 6Gb/s, mSATA, PCIe Mini, RS-232, HD Audio and RoHS
19800-000049-RS	LPT flat cable, 240mm, P=2.54
19800-000075-RS	PS/2 KB/MS cable with bracket, 220mm, P=2.0
19800-010500-200-RS	USB 3.2 Gen 1 (5Gb/s) cable with bracket, 450mm
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
32205-003800-300-RS	RS-422/485 cable, 200mm, P=2.0
AC-KIT-888S-R10	Realtek ALC888S 7.1 Channel HD Audio peripheral board, RoHS
CF-1150SB-R11	Special cooler kit for LGA 1150, high-performance compatible, 65W
CF-1150SC-R20	Special cooler kit for LGA1150, 1U chassis compatible, 65W
CF-1150SE-R11	Special cooler kit for LGA1150, high-performance compatible, 95W
DP-DP-R10	DisplayPort to DisplayPort converter board (for IEI iDP connector)
DP-DVI-R10	DisplayPort to DVI-D converter board (for IEI iDP connector)
DP-HDMI-R10	DisplayPort to HDMI converter board (for IEI iDP connector)
DP-LVDS-R10	DisplayPort to LVDS converter board (for IEI iDP connector)
DP-VGA-R10	DisplayPort to VGA converter board (for IEI iDP connector)
TPM-IN01-R20	20-pin Infineon TPM module, software management tool, firmware v3.17