



IEI Technology Corp .



MODEL:  
**AFL-xxA-N270**

**Fanless All-in-one Panel PC with 1.6 GHz Intel® Atom™ Processor  
TFT LCD, Wireless LAN, Bluetooth, Touch Screen,  
RS-232/422/485 and IP 64 Protection**

## User Manual

Rev. 2.11 - 14 February, 2012





# Revision

| Date              | Version | Changes                                   |
|-------------------|---------|-------------------------------------------|
| 14 February, 2012 | 2.11    | Modified Section 2.7.3: Power Connector   |
| 13 July, 2011     | 2.10    | Updated for R21 version                   |
| 3 September, 2010 | 2.00    | Updated for R20 version                   |
| 17 March, 2010    | 1.04    | Added standard compliance statement       |
| 12 November, 2009 | 1.03    | Added wall mount screw warning in page 45 |
| 5 October, 2009   | 1.02    | Added back cover screw torque warning     |
| 19 March, 2009    | 1.01    | Changed model name                        |
| 25 February, 2009 | 1.00    | Initial release                           |

# Copyright

---

## **COPYRIGHT NOTICE**

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

## **TRADEMARKS**

All registered trademarks and product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

**WARNING:**

This equipment has been tested and found to comply with the limits for a Class A and Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

You are cautioned that any change or modifications to the equipment not expressly approve by the party responsible for compliance could void your authority to operate such equipment.

# Packing List



## NOTE:

If any of the components listed in the checklist below are missing, please do not proceed with the installation. Contact the IEI reseller or vendor you purchased the AFOLUX AFL-xxA-N270 series from or contact an IEI sales representative directly. To contact an IEI sales representative, please send an email to [sales@iei.com.tw](mailto:sales@iei.com.tw).

The items listed below should all be included in the AFOLUX AFL-xxA-N270 series package.

- 1 x AFOLUX AFL-xxA-N270 series flat panel PC
- 1 x Power adapter
- 1 x Power cord
- 1 x Screw kit
- 1 x SATA and power cable
- 1 x User manual CD and driver CD
- 1 x Touch pen

Images of the above items are shown in **Chapter 3** on **page 25**.

# Table of Contents

|                                                             |          |
|-------------------------------------------------------------|----------|
| <b>1 INTRODUCTION.....</b>                                  | <b>1</b> |
| 1.1 AFOLUX AFL-xxA-N270 SERIES FLAT PANEL PC OVERVIEW ..... | 2        |
| 1.1.1 Features and Model Variations.....                    | 2        |
| 1.1.2 Applications .....                                    | 3        |
| 1.2 EXTERNAL OVERVIEW.....                                  | 3        |
| 1.2.1 General Description.....                              | 3        |
| 1.2.2 Front Panel .....                                     | 4        |
| 1.2.3 Rear Panel .....                                      | 4        |
| 1.2.4 I/O Interface Panel .....                             | 5        |
| 1.2.5 Top Panel and Side Panels.....                        | 6        |
| 1.3 INTERNAL OVERVIEW .....                                 | 6        |
| 1.4 SYSTEM SPECIFICATIONS.....                              | 7        |
| <b>2 DETAILED SPECIFICATIONS .....</b>                      | <b>9</b> |
| 2.1 DIMENSIONS.....                                         | 10       |
| 2.1.1 AFL-07A-N270 Dimensions.....                          | 10       |
| 2.1.2 AFL-08AH-N270 Dimensions.....                         | 11       |
| 2.1.3 AFL-10A-N270 Dimensions.....                          | 12       |
| 2.1.4 AFL-12A-N270 Dimensions.....                          | 13       |
| 2.2 INTEL® ATOM™ PROCESSOR .....                            | 14       |
| 2.3 MOTHERBOARD COMPONENTS.....                             | 14       |
| 2.3.1 Memory Support.....                                   | 14       |
| 2.3.1.1 Installed Memory .....                              | 14       |
| 2.3.1.2 Additional Memory .....                             | 15       |
| 2.3.2 Storage Capacity.....                                 | 15       |
| 2.4 EXTERNAL PERIPHERAL INTERFACE CONNECTORS.....           | 15       |
| 2.4.1 Serial Port Connectors .....                          | 15       |
| 2.4.2 LAN Connectivity .....                                | 16       |
| 2.4.3 External USB Connectors.....                          | 17       |
| 2.5 AFOLUX AFL-xxA-N270 FRONT SIDE.....                     | 17       |
| 2.5.1 Monitor .....                                         | 17       |

## AFL-xxA-N270 Series Panel PC

|                                                |           |
|------------------------------------------------|-----------|
| 2.5.2 Touch-Screen Module.....                 | 18        |
| 2.6 AUDIO .....                                | 18        |
| 2.6.1 HD Audio Codec Controller .....          | 18        |
| 2.6.2 Stereo Speakers .....                    | 19        |
| 2.7 SYSTEM POWER .....                         | 19        |
| 2.7.1 Power Mode .....                         | 19        |
| 2.7.1.1 ATX Power Mode (Default).....          | 19        |
| 2.7.1.2 AT Power Mode .....                    | 20        |
| 2.7.2 Power Adapter .....                      | 20        |
| 2.7.3 Power Connector .....                    | 20        |
| 2.8 WIRELESS CONNECTIONS .....                 | 21        |
| 2.8.1 USB Bluetooth Module .....               | 21        |
| 2.8.2 Wireless Ethernet .....                  | 21        |
| <b>3 UNPACKING .....</b>                       | <b>23</b> |
| 3.1 UNPACKING .....                            | 24        |
| 3.1.1 Packing List .....                       | 25        |
| <b>4 INSTALLATION .....</b>                    | <b>28</b> |
| 4.1 ANTI-STATIC PRECAUTIONS .....              | 29        |
| 4.2 INSTALLATION PRECAUTIONS .....             | 29        |
| 4.3 PREINSTALLED COMPONENTS.....               | 30        |
| 4.4 INSTALLATION AND CONFIGURATION STEPS ..... | 30        |
| 4.5 REMOVING THE BACK COVER .....              | 31        |
| 4.6 CF CARD INSTALLATION .....                 | 32        |
| 4.7 HDD INSTALLATION (AF-12A-N270 ONLY).....   | 33        |
| 4.8 AT/ATX MODE SELECTION .....                | 34        |
| 4.8.1 AT Power Mode.....                       | 34        |
| 4.8.2 ATX Power Mode .....                     | 35        |
| 4.9 JUMPER SETTINGS .....                      | 35        |
| 4.9.1 Access the Jumpers .....                 | 36        |
| 4.9.2 Preconfigured Jumpers .....              | 36        |
| 4.9.3 Clear CMOS Jumper.....                   | 37        |
| 4.9.4 COM Port Pin 9 Select .....              | 38        |
| 4.9.4.1 COM3 RS-422 and RS-485 Pinouts .....   | 39        |

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| 4.9.5 COM3 RX Function Select Jumper.....                       | 40        |
| 4.9.6 COM3 TX Function Select Jumper .....                      | 41        |
| 4.9.7 COM3 RS-232/422/485 Serial Port Select Jumper .....       | 42        |
| 4.10 MOUNTING THE SYSTEM .....                                  | 43        |
| 4.10.1 Wall Mounting.....                                       | 44        |
| 4.10.2 Panel Mounting.....                                      | 47        |
| 4.10.3 Arm Mounting .....                                       | 49        |
| 4.10.4 Cabinet and Rack Installation .....                      | 51        |
| 4.11 BOTTOM PANEL CONNECTORS.....                               | 53        |
| 4.11.1 LAN Connection .....                                     | 53        |
| 4.11.2 Serial Device Connection.....                            | 54        |
| 4.11.3 USB Device Connection .....                              | 56        |
| <b>5 SYSTEM MAINTENANCE .....</b>                               | <b>57</b> |
| 5.1 SYSTEM MAINTENANCE INTRODUCTION .....                       | 58        |
| 5.2 ANTI-STATIC PRECAUTIONS .....                               | 58        |
| 5.3 TURN OFF THE POWER .....                                    | 59        |
| 5.4 OPENING THE SYSTEM.....                                     | 59        |
| 5.4.1 Removing the Back Cover .....                             | 59        |
| 5.4.2 AFL-xxA-N270 Series Internal Aluminum Cover Removal ..... | 60        |
| 5.5 REPLACING COMPONENTS.....                                   | 61        |
| 5.5.1 Memory Module Replacement .....                           | 61        |
| 5.5.2 CF Card Replacement.....                                  | 62        |
| 5.6 REINSTALLING THE COVERS .....                               | 63        |
| <b>6 AMI BIOS SETUP .....</b>                                   | <b>64</b> |
| 6.1 INTRODUCTION.....                                           | 65        |
| 6.1.1 Starting Setup .....                                      | 65        |
| 6.1.2 Using Setup .....                                         | 65        |
| 6.1.3 Getting Help.....                                         | 66        |
| 6.1.4 Unable to Reboot After Configuration Changes.....         | 66        |
| 6.1.5 BIOS Menu Bar.....                                        | 66        |
| 6.2 MAIN.....                                                   | 67        |
| 6.3 ADVANCED .....                                              | 68        |
| 6.3.1 CPU Configuration.....                                    | 69        |

## AFL-xxA-N270 Series Panel PC

|                                                |            |
|------------------------------------------------|------------|
| 6.3.2 IDE Configuration .....                  | 70         |
| 6.3.2.1 IDE Master, IDE Slave .....            | 72         |
| 6.3.3 Super IO Configuration .....             | 76         |
| 6.3.4 Hardware Health Configuration.....       | 79         |
| 6.3.5 Power Configuration.....                 | 82         |
| 6.3.5.1 ACPI configuration .....               | 83         |
| 6.3.6 APM Configuration.....                   | 84         |
| 6.3.7 Remote Configuration .....               | 86         |
| 6.3.8 USB Configuration.....                   | 89         |
| 6.4 PCI/PNP.....                               | 91         |
| 6.5 BOOT.....                                  | 93         |
| 6.5.1 Boot Settings Configuration.....         | 93         |
| 6.6 SECURITY .....                             | 96         |
| 6.7 CHIPSET .....                              | 97         |
| 6.7.1 North Bridge Chipset Configuration ..... | 97         |
| 6.7.2 SouthBridge Configuration.....           | 100        |
| 6.8 EXIT .....                                 | 101        |
| <b>7 SOFTWARE DRIVERS .....</b>                | <b>104</b> |
| 7.1 AVAILABLE SOFTWARE DRIVERS .....           | 105        |
| 7.2 STARTING THE DRIVER PROGRAM .....          | 105        |
| 7.3 CHIPSET DRIVER INSTALLATION.....           | 106        |
| 7.4 VGA DRIVER INSTALLATION.....               | 111        |
| 7.5 LAN DRIVER INSTALLATION .....              | 116        |
| 7.6 TOUCH SCREEN DRIVER.....                   | 118        |
| 7.7 AUDIO DRIVER INSTALLATION .....            | 121        |
| 7.8 WIRELESS DRIVER .....                      | 124        |
| 7.9 BLUETOOTH DRIVER .....                     | 127        |
| <b>A SYSTEM SPECIFICATIONS.....</b>            | <b>132</b> |
| A.1 MOTHERBOARD SPECIFICATIONS.....            | 133        |
| A.2 PROCESSOR SPECIFICATIONS .....             | 133        |
| A.3 SCREEN SPECIFICATIONS .....                | 134        |
| A.4 TOUCH SCREEN SPECIFICATIONS .....          | 135        |
| A.5 BLUETOOTH MODULE SPECIFICATIONS .....      | 136        |

|                                                                                                                                |            |
|--------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>B SAFETY PRECAUTIONS .....</b>                                                                                              | <b>137</b> |
| B.1 SAFETY PRECAUTIONS.....                                                                                                    | 138        |
| <i>B.1.1 General Safety Precautions .....</i>                                                                                  | <i>138</i> |
| <i>B.1.2 Anti-static Precautions .....</i>                                                                                     | <i>139</i> |
| <i>B.1.3 Product Disposal .....</i>                                                                                            | <i>140</i> |
| B.2 MAINTENANCE AND CLEANING PRECAUTIONS .....                                                                                 | 140        |
| <i>B.2.1 Maintenance and Cleaning.....</i>                                                                                     | <i>140</i> |
| <i>B.2.2 Cleaning Tools.....</i>                                                                                               | <i>141</i> |
| <b>C BIOS CONFIGURATION OPTIONS.....</b>                                                                                       | <b>143</b> |
| C.1 BIOS CONFIGURATION OPTIONS .....                                                                                           | 144        |
| <b>D WATCHDOG TIMER .....</b>                                                                                                  | <b>147</b> |
| <b>E HAZARDOUS MATERIALS DISCLOSURE .....</b>                                                                                  | <b>150</b> |
| E.1 HAZARDOUS MATERIAL DISCLOSURE TABLE FOR IPB PRODUCTS CERTIFIED AS<br>ROHS COMPLIANT UNDER 2002/95/EC WITHOUT MERCURY ..... | 151        |
| <b>F INDEX .....</b>                                                                                                           | <b>154</b> |

# List of Figures

|                                                                          |    |
|--------------------------------------------------------------------------|----|
| Figure 1-1: AFOLUX AFL-xxA-N270 Flat Panel PC.....                       | 2  |
| Figure 1-2: AFL-xxA-N270 Front View .....                                | 4  |
| Figure 1-3: AFL-xxA-N270 Rear View .....                                 | 4  |
| Figure 1-4: AFL-xxA-N270 I/O Interface Connector Panel .....             | 5  |
| Figure 1-5: AFL-xxA-N270 Top View.....                                   | 6  |
| Figure 1-6: AFL-10A-N270 Side View.....                                  | 6  |
| Figure 2-1: AFL-07A-N270 Dimensions (mm) .....                           | 10 |
| Figure 2-2: AFL-08AH-N270 Dimensions (mm).....                           | 11 |
| Figure 2-3: AFL-10A-N270 Top and Bottom Panel Dimensions (mm).....       | 12 |
| Figure 2-4: AFL-12A-N270 Top and Bottom Panel Dimensions (mm).....       | 13 |
| Figure 2-5: Preinstalled DDR2 SO-DIMM .....                              | 15 |
| Figure 2-6: COM Ports.....                                               | 16 |
| Figure 2-7: RJ-45 Ethernet Connectors.....                               | 16 |
| Figure 2-8: External USB Ports .....                                     | 17 |
| Figure 2-9: LCD Screen.....                                              | 18 |
| Figure 2-10: Audio Jack .....                                            | 18 |
| Figure 2-11: Stereo Speakers .....                                       | 19 |
| Figure 2-12: Power Connector .....                                       | 20 |
| Figure 2-13: PIFA Antenna and Wireless Module.....                       | 22 |
| Figure 4-1: Back Cover Retention Screws .....                            | 31 |
| Figure 4-2: AFL-xxA-N270 Plastic Back Cover Removal .....                | 31 |
| Figure 4-3: CF Card Location .....                                       | 32 |
| Figure 4-4: AFL-08AH-N270 Plastic Back Cover Replacement.....            | 32 |
| Figure 4-5: AF-12A-N270 HDD Retention Screws.....                        | 33 |
| Figure 4-6: AT/ATX Switch Location.....                                  | 34 |
| Figure 4-7: Clear CMOS Jumper .....                                      | 38 |
| Figure 4-8: COM1 and COM3 Pin 9 Setting Jumper Locations.....            | 39 |
| Figure 4-9: COM3 RX Function Select Jumper Location.....                 | 40 |
| Figure 4-10: COM3 TX Function Select Jumper Pinout Locations.....        | 41 |
| Figure 4-11: COM3 RS-232/422/485 Serial Port Select Jumper Location..... | 43 |
| Figure 4-12: Wall-mounting Bracket.....                                  | 44 |

|                                                                                  |     |
|----------------------------------------------------------------------------------|-----|
| Figure 4-13: Chassis Support Screws .....                                        | 46  |
| Figure 4-14: Secure the Panel PC .....                                           | 46  |
| Figure 4-15: AFL-07A-N270 Panel Opening .....                                    | 47  |
| Figure 4-16: AFL-08AH-N270 Panel Opening.....                                    | 47  |
| Figure 4-17: AFL-10A-N270 Panel Opening .....                                    | 48  |
| Figure 4-18: AFL-12A-N270 Panel Opening .....                                    | 48  |
| Figure 4-19: Tighten the Panel Mounting Clamp Screws .....                       | 49  |
| Figure 4-20: AFL-07A-N270/AFL-08AH-N270 Arm Mounting Retention Screw Holes ..... | 50  |
| Figure 4-21: AFL-10A-N270/AFL-12A-N270 Arm Mounting Retention Screw Holes .....  | 50  |
| Figure 4-22: The Rack/Cabinet Bracket.....                                       | 51  |
| Figure 4-23: Secure the Rack/Cabinet Bracket (AFL-10A-N270/AFL-12A-N270).....    | 52  |
| Figure 4-24: Install into a Rack/Cabinet .....                                   | 53  |
| Figure 4-25: LAN Connection .....                                                | 54  |
| Figure 4-26: Serial Device Connector.....                                        | 55  |
| Figure 4-27: USB Device Connection .....                                         | 56  |
| Figure 5-1: Back Cover Retention Screws .....                                    | 60  |
| Figure 5-2: AFL-xxA-N270 Plastic Back Cover Removal .....                        | 60  |
| Figure 5-3: AFL-10A-N270 Aluminum Back Cover Retention Screws.....               | 61  |
| Figure 5-4: AFL-10A-N270 SO-DIMM Socket Location.....                            | 61  |
| Figure 5-5: DDR SO-DIMM Module Installation.....                                 | 62  |
| Figure 7-1: Drivers .....                                                        | 106 |
| Figure 7-2: Chipset Driver Screen.....                                           | 107 |
| Figure 7-3: Chipset Driver Welcome Screen.....                                   | 107 |
| Figure 7-4: Chipset Driver License Agreement .....                               | 108 |
| Figure 7-5: Chipset Driver Read Me File .....                                    | 109 |
| Figure 7-6: Chipset Driver Setup Operations .....                                | 110 |
| Figure 7-7: Chipset Driver Installation Finish Screen.....                       | 111 |
| Figure 7-8: VGA Driver Read Me File .....                                        | 112 |
| Figure 7-9: VGA Driver Setup Files Extracted .....                               | 112 |
| Figure 7-10: VGA Driver Welcome Screen .....                                     | 113 |
| Figure 7-11: VGA Driver License Agreement.....                                   | 114 |
| Figure 7-12: VGA Driver Read Me File.....                                        | 114 |
| Figure 7-13: VGA Driver Setup Operations .....                                   | 115 |
| Figure 7-14: VGA Driver Installation Finish Screen .....                         | 115 |
| Figure 7-15: LAN Driver Welcome Screen .....                                     | 116 |

## AFL-xxA-N270 Series Panel PC

|                                                                  |     |
|------------------------------------------------------------------|-----|
| Figure 7-16: LAN Driver Welcome Screen .....                     | 117 |
| Figure 7-17: LAN Driver Installation .....                       | 117 |
| Figure 7-18: LAN Driver Installation Complete .....              | 118 |
| Figure 7-19: Welcome Screen .....                                | 119 |
| Figure 7-20: License Agreement .....                             | 119 |
| Figure 7-21: Ready to Install the Program .....                  | 120 |
| Figure 7-22: Installing PenMount DMC9000 .....                   | 120 |
| Figure 7-23: Reboot the Computer .....                           | 121 |
| Figure 7-24: Audio Driver Options .....                          | 121 |
| Figure 7-25: The InstallShield Wizard Starts .....               | 122 |
| Figure 7-26: Preparing Setup Screen .....                        | 122 |
| Figure 7-27: InstallShield Wizard Welcome Screen .....           | 123 |
| Figure 7-28: Audio Driver Software Configuration .....           | 123 |
| Figure 7-29: Restart the Computer .....                          | 124 |
| Figure 7-30: Wireless Driver Folders .....                       | 125 |
| Figure 7-31: Wireless Driver License Agreement .....             | 125 |
| Figure 7-32: Wireless Driver Configuration Tool Options .....    | 126 |
| Figure 7-33: Wireless Mode Select Window .....                   | 126 |
| Figure 7-34: Wireless Driver Installation .....                  | 127 |
| Figure 7-35: Welcome Screen .....                                | 128 |
| Figure 7-36: License Agreement .....                             | 128 |
| Figure 7-37: Bluetooth Driver Setup Options .....                | 129 |
| Figure 7-38: Bluetooth Driver Destination Folder .....           | 129 |
| Figure 7-39: Ready to Install the Program .....                  | 130 |
| Figure 7-40: Installing BlueSoleil .....                         | 130 |
| Figure 7-41: Bluetooth Driver Complete Installation Screen ..... | 131 |
| Figure 7-42: Reboot the Computer .....                           | 131 |

# List of Tables

---

|                                                                          |    |
|--------------------------------------------------------------------------|----|
| Table 1-1: Model Variations .....                                        | 3  |
| Table 1-2: AFL-xxA-N270 Series System Specifications .....               | 8  |
| Table 4-1: Jumpers .....                                                 | 36 |
| Table 4-2: Preconfigured Jumpers .....                                   | 36 |
| Table 4-3: Clear CMOS Jumper Settings.....                               | 37 |
| Table 4-4: COM1 Pin 9 Setting Jumper Settings .....                      | 38 |
| Table 4-5: COM3 Pin 9 Setting Jumper Settings .....                      | 38 |
| Table 4-6: RS-422 Pinouts .....                                          | 39 |
| Table 4-7: RS-485 Pinouts .....                                          | 39 |
| Table 4-8: COM3 RX Function Select Jumper Settings .....                 | 40 |
| Table 4-9: COM3 TX Function Select Jumper Settings.....                  | 41 |
| Table 4-10: COM3 RS-232/422/485 Serial Port Select Jumper Settings ..... | 42 |
| Table 6-1: BIOS Navigation Keys .....                                    | 66 |

Chapter

**1**

# Introduction

---

## 1.1 Overview



**Figure 1-1: AFOLUX AFL-xxA-N270 Flat Panel PC**

The AFL-xxA-N270 series is Intel® Atom™ powered flat panel PCs with a rich variety of functions and peripherals. All AFL-xxA-N270 models are designed for easy and simplified integration in to kiosk and point-of-sales (POS) applications.

An Intel® 945GSE graphics memory controller hub (GMCH) coupled with an Intel® ICH7-M input/output controller hub ensures optimal memory, graphics, and peripheral I/O support. The system comes with 1.0 GB of preinstalled DDR2 SDRAM and supports a maximum of 2.0 GB of DDR2 SDRAM ensuring smooth data throughputs with reduced bottlenecks and fast system access.

Two serial ports and two external USB 2.0 ports ensure simplified connectivity to a variety of external peripheral devices. Wi-Fi capabilities and an RJ-45 Ethernet connector ensure smooth connection of the system to an external LAN.

### 1.1.1 Features and Model Variations

There are four models in the AFL-xxA-N270 series. Both models feature the following:

- Intel® Atom™ processor
- Intel® 945GSE chipset
- 1GB 533 MHz DDR2 SDRAM preinstalled

## AFL-xxA-N270 Series Panel PC

- 802.11 b/g/n wireless module
- Two USB 2.0 ports
- Watchdog timer that triggers a system reset if the system hangs for some reason
- IP 64 compliant front panel
- AT or ATX power mode
- Touch screen
- Bluetooth
- RoHS compliance

There are four kinds of panel size of the AFL-xxA-N270 series. The model numbers and model variations are listed below.

| Model                  | Size  | Brightness            | Resolution | HSUPA |
|------------------------|-------|-----------------------|------------|-------|
| AFL-07A-N270/R/1G-R21  | 7"    | 400 cd/m <sup>2</sup> | 800 x 480  | No    |
| AFL-08AH-N270/R/1G-R21 | 8.4"  | 450 cd/m <sup>2</sup> | 800 x 600  | No    |
| AFL-10A-N270/R/1G-R21  | 10.4" | 400 cd/m <sup>2</sup> | 800 x 600  | No    |
| AFL-12A-N270/R/1G-R21  | 12.1" | 500 cd/m <sup>2</sup> | 1024 x 768 | No    |

**Table 1-1: Model Variations**

### 1.1.2 Applications

The AFL-xxA-N270 panel PCs are elegant yet sophisticated systems that are easily implemented in commercial environments, industrial environments and corporate environments.

## 1.2 External Overview


### 1.2.1 General Description

The stylish AFL-xxA-N270 panel PC comprises of a screen, rear panel, top panel, bottom panel and two side panels (left and right). An ABS/PC plastic front frame surrounds the front screen. The rear panel provides screw holes for a wall-mounting bracket compliant with VESA FDMI standard. An I/O interface panel on the bottom panel of the

AFL-xxA-N270 provides access to external interface connectors that include LAN, USB 2.0, serial port, reset button, power connector and power switch.

### 1.2.2 Front Panel


The front side of the AFOLUX AFL-xxA-N270 series is a flat panel TFT LCD screen with LED backlight surrounded by an ABS/PC plastic frame. The top of the front panel has a power LED.

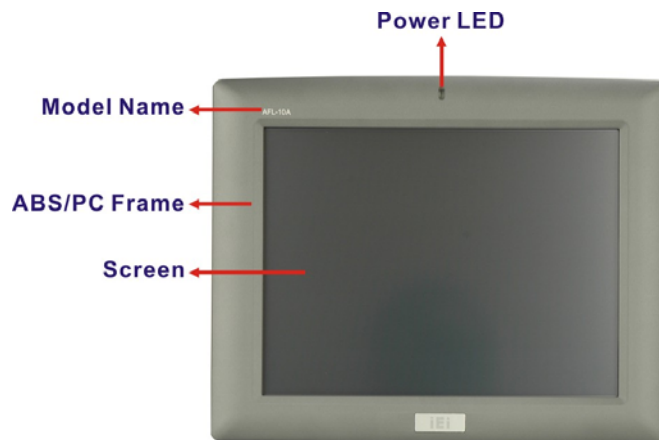

**Figure 1-2: AFL-xxA-N270 Front View**

### 1.2.3 Rear Panel

The rear panel provides access to retention screw holes that support the wall mounting. Refer to **Figure 1-3**.

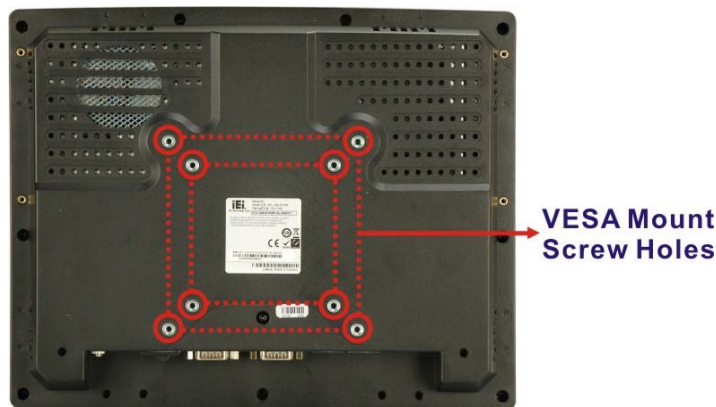

**Figure 1-3: AFL-xxA-N270 Rear View**


## AFL-xxA-N270 Series Panel PC

### 1.2.4 I/O Interface Panel

The I/O interface panel located on the bottom of the AFL-xxA-N270 has the following I/O interface connectors:

- 1 x Audio connector
- 1 x 12 V DC In connector
- 1 x External SATA connector
- 1 x RS-232 connector
- 1 x RS-232/422/485 connector
- 2 x LAN connectors
- 2 x USB 2.0 connectors
- 1 x Power switch
- 1 x Reset button

The external I/O interface connector panel is shown in **Figure 1-4**.

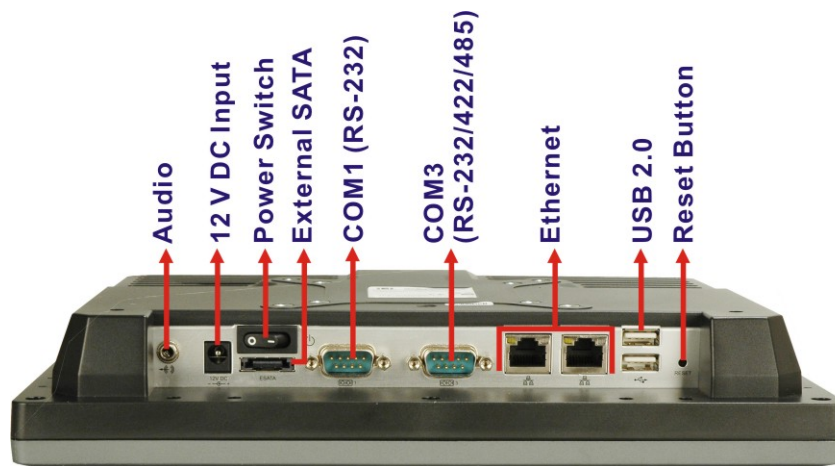

**Figure 1-4: AFL-xxA-N270 I/O Interface Connector Panel**

### 1.2.5 Top Panel and Side Panels

The top panel and side panels of AFOLUX AFL-xxA-N270 series provides access to slots that support panel mount and rack mount (**Figure 1-5**).



**Figure 1-5: AFL-xxA-N270 Top View**



**Figure 1-6: AFL-10A-N270 Side View**

### 1.3 Internal Overview

The AFOLUX AFL-xxA-N270 has the following components installed internally:

- 1 x Motherboard
- 1 x 1.0 GB 533 MHz DDR2 SDRAM SO-DIMM
- 1 x Wireless module
- 1 x Bluetooth module

## AFL-xxA-N270 Series Panel PC

### 1.4 System Specifications

The technical specifications for the AFOLUX AFL-xxA-N270 series systems are listed in **Table 1-2.**

| Specification                     | AFL-07A-N270                                                                                        | AFL-08AH-N270     | AFL-10A-N270     | AFL-12A-N270     |
|-----------------------------------|-----------------------------------------------------------------------------------------------------|-------------------|------------------|------------------|
| LCD Size                          | 7"                                                                                                  | 8.4"              | 10.4"            | 12.1"            |
| Max. Resolution                   | 800 x 480                                                                                           | 800 x 600         | 800 x 600        | 1024 x 768       |
| Contrast Ratio                    | 400:1                                                                                               | 600:1             | 700:1            | 700:1            |
| Brightness (cd / m <sup>2</sup> ) | 400                                                                                                 | 450               | 400              | 500              |
| LCD Color                         | 262K                                                                                                | 262K              | 262K             | 262K             |
| Pixel Pitch (H x V)<br>(mm)       | 0.0635 x 0.1905                                                                                     | 0.213 x 0.213     | 0.264 x 0.264    | 0.3057 x 0.3057  |
| Viewing Angle (H-V)               | 140 / 110                                                                                           | 160 / 140         | 160 / 140        | 160 / 160        |
| Backlight                         | LED backlight                                                                                       | LED backlight     | LED backlight    | LED backlight    |
| SBC Model                         | AFLMB-945GSE                                                                                        |                   |                  |                  |
| CPU                               | 1.6 GHz Intel® Atom™ N270 processor                                                                 |                   |                  |                  |
| GMCH                              | Intel® 945GSE                                                                                       |                   |                  |                  |
| Memory                            | One 1.0 GB 533 MHz DDR2 SDRAM SO-DIMM pre-installed<br>(Supports up to 2 GB 533/400 MHz DDR2 SDRAM) |                   |                  |                  |
| SSD                               | CF Type II slot                                                                                     |                   |                  |                  |
| Watchdog Timer                    | Software Programmable supports 1 sec. ~ 255 sec. system reset                                       |                   |                  |                  |
| Audio                             | AMP 1.5 W + AMP 1.5 W (built-in stereo speakers)                                                    |                   |                  |                  |
| Expansion                         | 1 x PCIe mini card (wireless LAN 802.11 b/g/n module)                                               |                   |                  |                  |
|                                   | 1 x Bluetooth module (USB interface, Bluetooth v 2.0)                                               |                   |                  |                  |
| HDD Drive Bay                     | 1 x 2.5" SATA HDD bay or HSDPA module (AFL-12A-N270 Only)                                           |                   |                  |                  |
| Construction Material             | ABS + PC plastic front frame                                                                        |                   |                  |                  |
| Mounting                          | Panel<br>Wall<br>Stand<br>Arm (VESA 75 mm x 75 mm or 100 mm x 100 mm)                               |                   |                  |                  |
| Front Panel Color                 | Gray 7539U                                                                                          |                   |                  |                  |
| Dimensions (W x H x D)<br>(mm)    | 226 x 140 x 40.18                                                                                   | 234 x 184 x 41.09 | 276 x 227 x 50.7 | 304 x 246 x 49.5 |

|                          |                                                         |        |                                                         |                                                        |
|--------------------------|---------------------------------------------------------|--------|---------------------------------------------------------|--------------------------------------------------------|
| Operation Temperature    | -10°C ~ 50°C with CF card                               |        |                                                         | -10°C ~ 50°C with<br>CF card<br>0°C ~ 40°C with<br>HDD |
| Storage Temperature      | -20°C ~ 60°C                                            |        |                                                         |                                                        |
| Net weight               | 0.6 kg                                                  | 0.8 kg | 1.4 kg                                                  | 1.8 kg                                                 |
| IP level (front panel)   | IP 64                                                   |        |                                                         |                                                        |
| EMC                      | CE, FCC and CCC                                         |        |                                                         |                                                        |
| Safety                   | CB                                                      |        |                                                         |                                                        |
| Touch Screen             | Resistive Type 4-wire<br>(touch controller is on board) |        | Resistive Type 5-wire<br>(touch controller is on board) |                                                        |
| Power Adapter            | 36 W                                                    |        | 50 W                                                    |                                                        |
|                          | Input: 90 VAC ~ 264 VAC @ 50 Hz / 60 Hz                 |        |                                                         |                                                        |
|                          | Output: 12 V DC                                         |        |                                                         |                                                        |
| Power Consumption        | 23 W                                                    | 25 W   | 28 W                                                    | 32 W                                                   |
| I / O Ports and Switches | 1 x 12 V DC input jack                                  |        |                                                         |                                                        |
|                          | 1 x Audio connector                                     |        |                                                         |                                                        |
|                          | 1 x RS-232 COM port connectors                          |        |                                                         |                                                        |
|                          | 1 x RS-232/422/485 COM port connector                   |        |                                                         |                                                        |
|                          | 2 x RJ-45 for LAN                                       |        |                                                         |                                                        |
|                          | 2 x USB 2.0 ports                                       |        |                                                         |                                                        |
|                          | 1 x Power switch                                        |        |                                                         |                                                        |
|                          | 1 x Reset button                                        |        |                                                         |                                                        |

**Table 1-2: AFL-xxA-N270 Series System Specifications**

## Chapter

## 2

# Detailed Specifications

---

## 2.1 Dimensions

The following sections provide detailed schematics and information on the dimensions of the AFL-xxA-N270 series.

### 2.1.1 AFL-07A-N270 Dimensions

The AFL-07A-N270 dimensions are shown in **Figure 2-1** and listed below.

- **Width:** 226.00 mm
- **Height:** 140.00 mm
- **Depth:** 40.18 mm

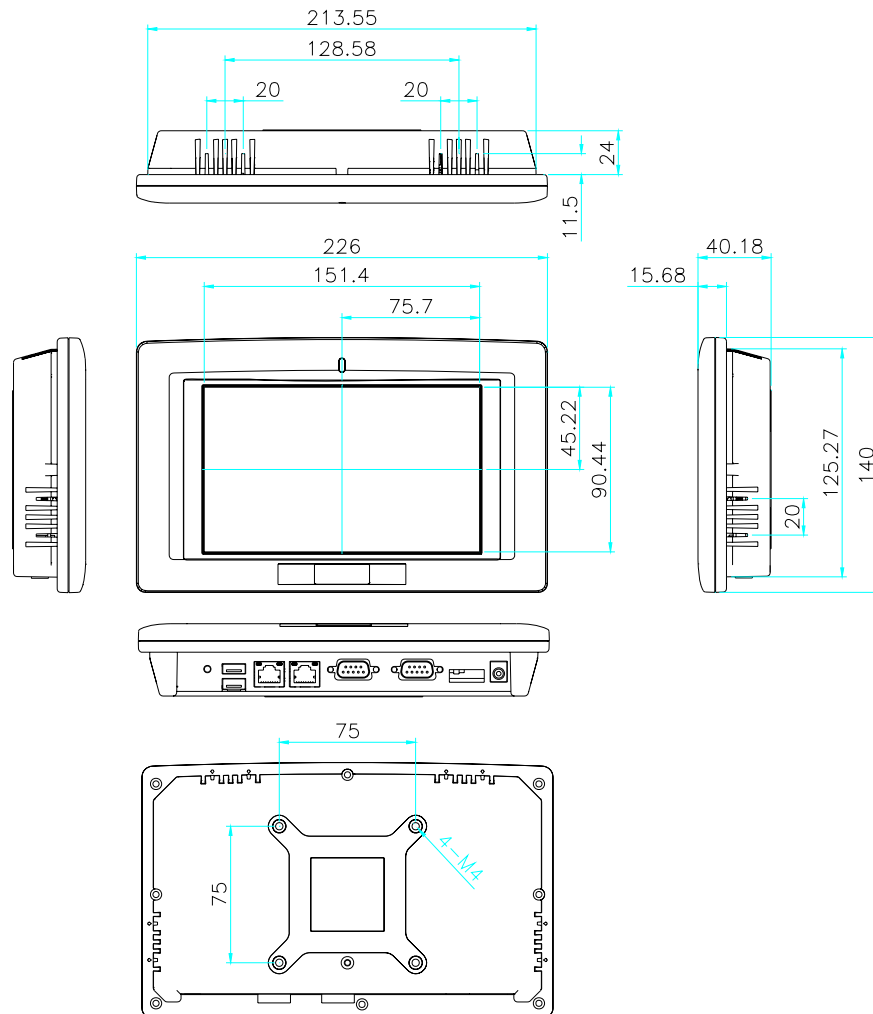



Figure 2-1: AFL-07A-N270 Dimensions (mm)

## AFL-xxA-N270 Series Panel PC

### 2.1.2 AFL-08AH-N270 Dimensions

The AFL-08AH-N270 dimensions are shown in **Figure 2-2** and listed below.

- **Width:** 233.86 mm
- **Height:** 183.86 mm
- **Depth:** 41.09 mm

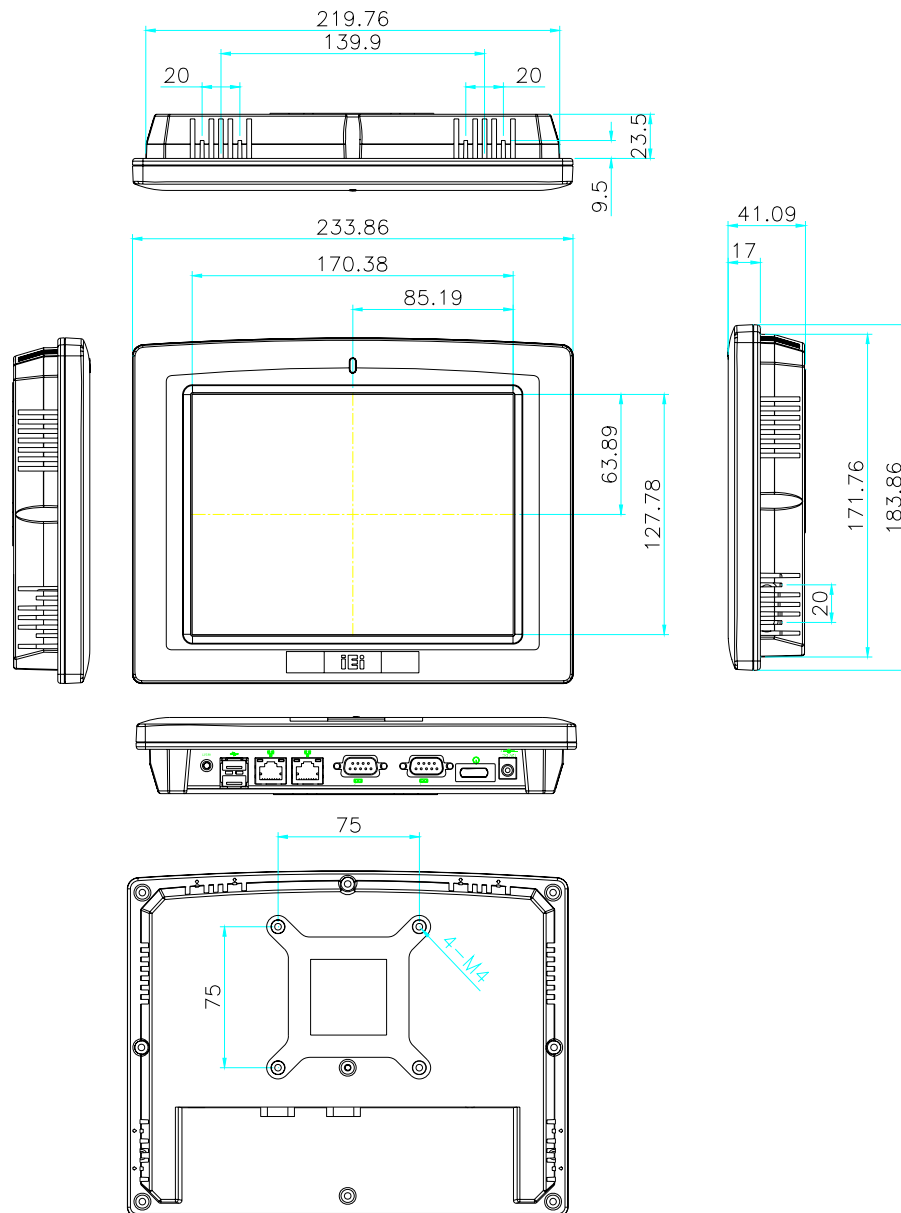

**Figure 2-2: AFL-08AH-N270 Dimensions (mm)**

### 2.1.3 AFL-10A-N270 Dimensions

The AFL-10A-N270 dimensions are shown in **Figure 2-3** and listed below.

- **Width:** 276.0 mm
- **Height:** 222.0 mm
- **Depth:** 51.0 mm

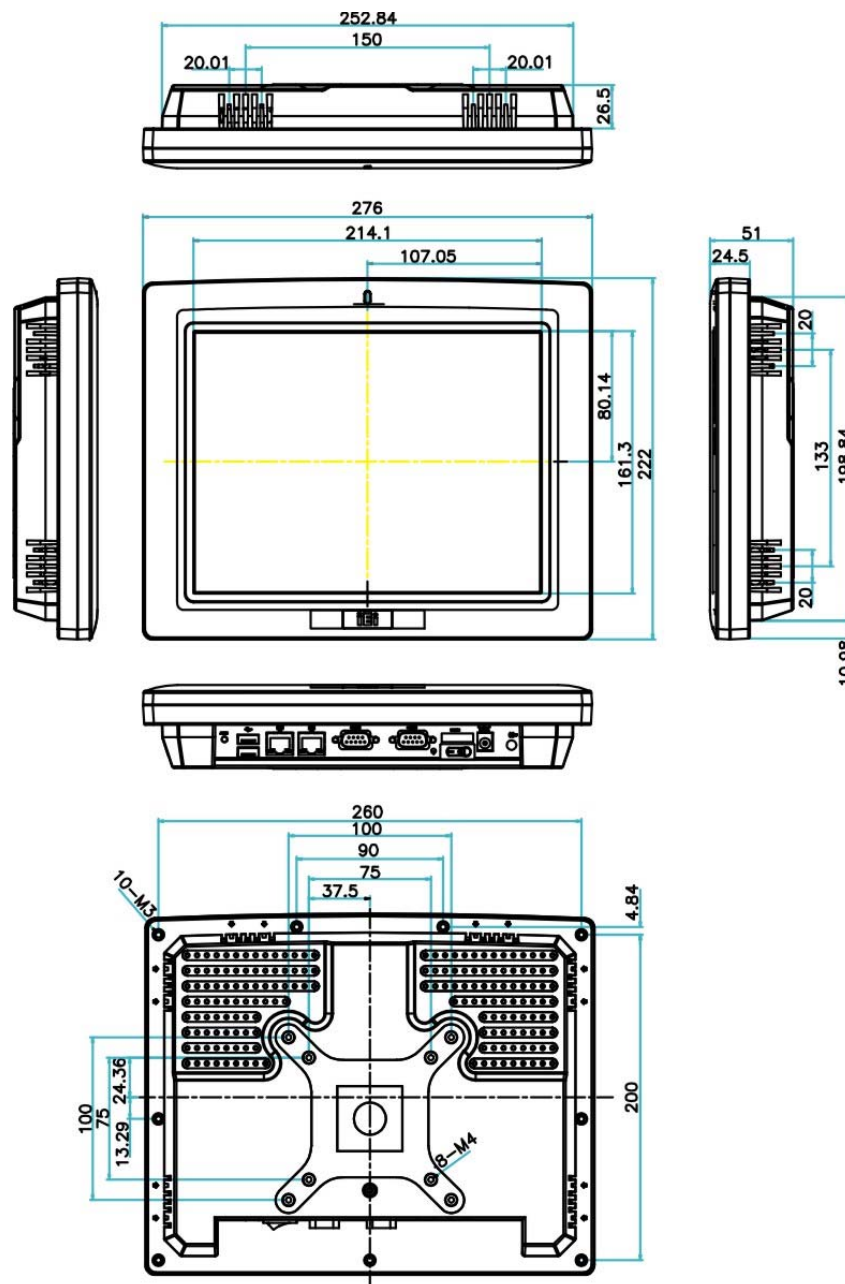



Figure 2-3: AFL-10A-N270 Top and Bottom Panel Dimensions (mm)

## AFL-xxA-N270 Series Panel PC

### 2.1.4 AFL-12A-N270 Dimensions

The AFL-12A-N270 dimensions are shown in **Figure 2-3** and listed below.

- **Width:** 304.0 mm
- **Height:** 246.0 mm
- **Depth:** 49.5 mm

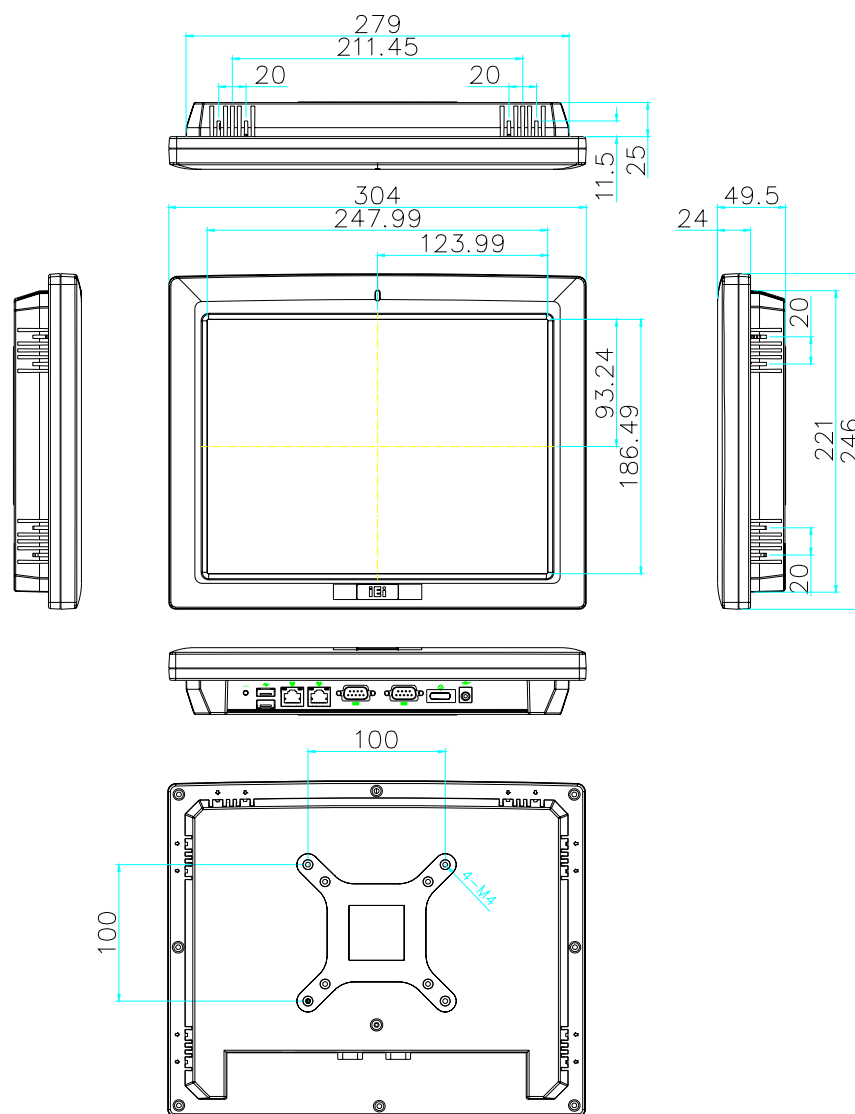

**Figure 2-4: AFL-12A-N270 Top and Bottom Panel Dimensions (mm)**

## 2.2 Intel® Atom™ Processor

A 45nm N270 Intel® Atom™ processor is installed in the system. The processor has a CPU speed of 1.6 GHz and a 533 MHz front side bus (FSB). The processor also comes with a 512 KB L2 cache and a 1.6 GHz L2 cache speed. Some of the features of the Intel® Atom™ processor N270 are listed below:

- On-die, primary 32-kB instructions cache and 24-kB write-back data cache
- 533-MHz source-synchronous front side bus (FSB)
- 2-Threads support
- On-die 512-kB, 8-way L2 cache
- Support for IA 32-bit architecture
- Intel® Streaming SIMD Extensions-2 and -3 (Intel® SSE2 and Intel® SSE3) support and Supplemental Streaming SIMD Extension 3 (SSSE3) support
- Micro-FCBGA8 packaging technologies
- Thermal management support via Intel® Thermal Monitor 1 and Intel Thermal Monitor 2
- FSB Lane Reversal for flexible routing
- Supports C0/C1(e)/C2(e)/C4(e)
- L2 Dynamic Cache Sizing
- Advanced power management features including Enhanced Intel SpeedStep® Technology
- Execute Disable Bit support for enhanced security

## 2.3 Motherboard Components

The following sections describe some of the features on the motherboard.


### 2.3.1 Memory Support

#### 2.3.1.1 Installed Memory

One 200-pin 1.0 GB 533 MHz DDR2 SDRAM SO-DIMM is installed in the AFL-xxA-N270 and controlled by the Intel® 945GSE GMCH installed on the internal motherboard.

## AFL-xxA-N270 Series Panel PC

**Preinstalled 1.0 GB 533 MHz DDR2 SO-DIMM**

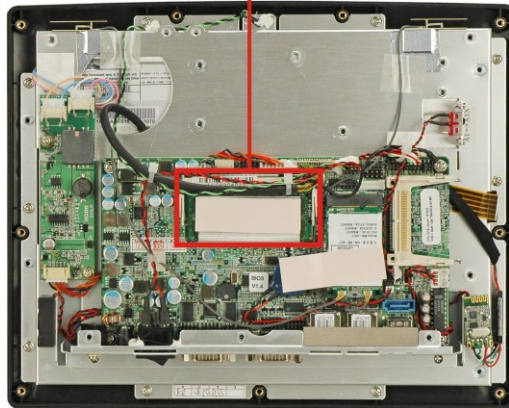

**Figure 2-5: Preinstalled DDR2 SO-DIMM**

### 2.3.1.2 Additional Memory

The Intel® 945GSE is capable of supporting one 200-pin 2.0 GB (max.) 533 MHz or 400 MHz DDR2 SDRAM SO-DIMM. If additional memory is required, please contact an IEI sales representative and discuss the necessary system requirement.

### 2.3.2 Storage Capacity

The AFL-xxA-N270 series supports an easily installed CompactFlash® Type II (CF Type II) memory disk. The AFL-xxA-N270 also supports a SATA drive through the external SATA connector on the bottom panel.

The AFL-12A-N270 model can also support either an internal 2.5" SATA hard disk drive or a HSDPA module.

## 2.4 External Peripheral Interface Connectors

The following section describes the external peripheral interface connectors on the bottom panel of the subsystem.

### 2.4.1 Serial Port Connectors

The AFL-xxA-N270 has two serial ports. One of these ports (COM1) is RS-232 only port. The other serial port (COM3) can be configured as a RS-232, RS-422 or an RS-485 serial port. Pin 9 on both ports can be set as the normal ring (RI) signal or can be designated as

a 5 V or 12 V power supply. Enabling COM devices to be powered through the COM port eliminates unnecessary and messy cabling.

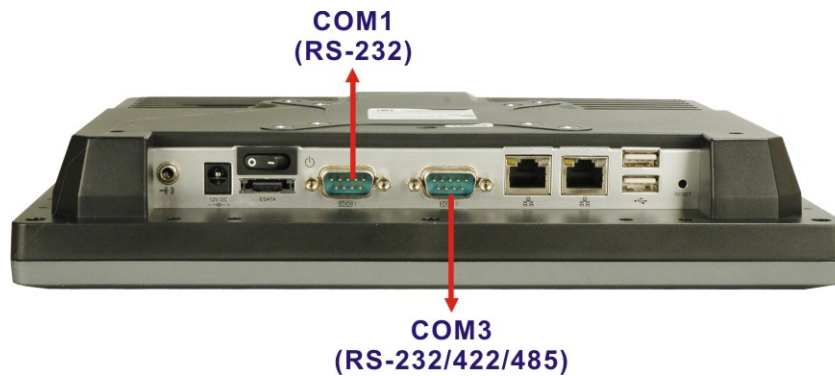


Figure 2-6: COM Ports

## 2.4.2 LAN Connectivity

The AFL-xxA-N270 has two RJ-45 LAN connectors on the bottom panel.



Figure 2-7: RJ-45 Ethernet Connectors

The PCIe lane from the Intel® ICH7 chipset of the AFL-xxA-N270 is interfaced to the Realtek RTL8111CP PCIe gigabit Ethernet (GbE) controllers. The RTL8111CP controllers are then connected directly to the RJ-45 connectors on the bottom panel and provides external GbE connectivity. Some of the RTL8111CP controller features are listed below:

- Integrated 10/100/1000 transceiver
- Supports PCI Express™ 1.1
- Fully compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Supports IEEE 802.1P Layer 2 Priority Encoding

## AFL-xxA-N270 Series Panel PC

- Supports IEEE 802.1Q VLAN tagging
- Serial EEPROM
- Transmit/Receive on-chip buffer support
- 64-pin QFN package (Green package)

### 2.4.3 External USB Connectors

There are two USB 2.0 connectors on the bottom panel of the AFL-xxA-N270. Both USB 2.0 connectors are interfaced directly to the USB controllers on the ICH7-M southbridge. These USB connectors are fully compliant with USB specification Revision 2.0 and USB specification Revision 1.1 and can be interfaced to both USB 1.1 and USB 2.0 compliant devices.

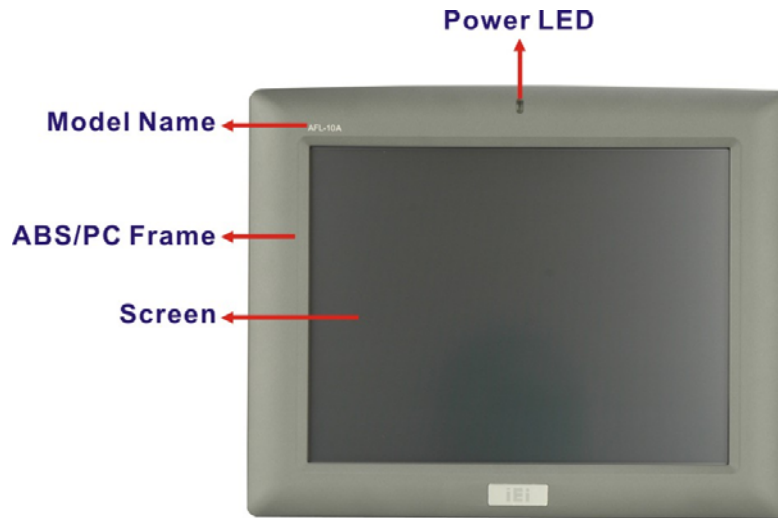


Figure 2-8: External USB Ports

## 2.5 AFOLUX AFL-xxA-N270 Front Side

### 2.5.1 Monitor

A LCD screen is installed on the front of the AFOLUX AFL-xxA-N270 series. The monitor maximum resolution is varied in different AFL-xxA-N270 models. The screen is shown in **Figure 2-9** below.



**Figure 2-9: LCD Screen**

## 2.5.2 Touch-Screen Module

A controller for the 4-wire/5-wire resistive touch screen is installed on the motherboard. The sensitive touch screen is accurate, reliable and durable.

## 2.6 Audio

### 2.6.1 HD Audio Codec Controller

The integrated HD Audio compliant audio controller on the Intel® ICH7M Southbridge is integrated to a RealTek ALC888 audio codec. The RealTek ALC888 is connected to an external audio jack, which is then connected to compliant audio devices. The audio connector is shown in **Figure 2-10**.



**Figure 2-10: Audio Jack**

## AFL-xxA-N270 Series Panel PC

### 2.6.2 Stereo Speakers

Two internal 1.5 W stereo speakers on the sides of the AFL-xxA-N270 are interfaced to the system through a Philips TDA1517p integrated class-B dual output amplifier.

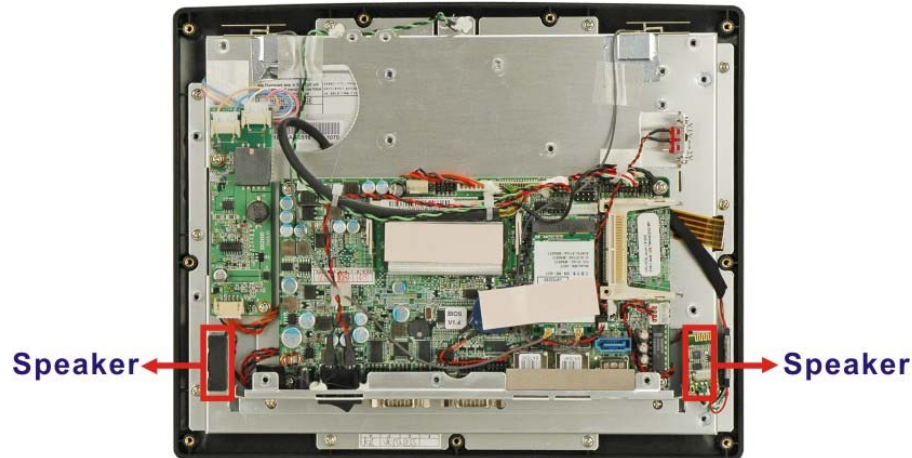


Figure 2-11: Stereo Speakers

## 2.7 System Power

### 2.7.1 Power Mode

The system can be run in the AT power mode or the ATX power mode. Both these power modes are described below.

#### 2.7.1.1 ATX Power Mode (Default)

With the ATX mode selected, the AFOLUX AFL-xxA-N270 panel PC goes in a standby mode when it is turned off. The panel PC can be easily turned on via network or a power switch in standby mode. Remote power control is perfect for advertising applications since the broadcasting time for each panel PC can be set individually and controlled remotely. Other possible application includes

- Security surveillance
- Point-of-Sale (POS)
- Advertising terminal

### 2.7.1.2 AT Power Mode

With the AT mode selected, the power is controlled by a central power unit rather than a power switch. The AFOLUX AFL-xxA-N270 panel PC turns on automatically when the power is connected. The AT mode benefits a production line to control multiple panel PCs from a central management center and other applications including:


- ATM
- Self-service kiosk
- Plant environment monitoring system
- Factory automation platform
- Manufacturing shop flow

### 2.7.2 Power Adapter

The system is shipped with a 90 V to 264 V AC power adapter that has a maximum power output of 36 W (the AFL-12A-N270 comes with a 50 W power adapter). The power adapter has a 12 V DC output connector.

### 2.7.3 Power Connector

There is one 12 V power input connector on the bottom panel. The power connector is shown in **Figure 2-12** below.

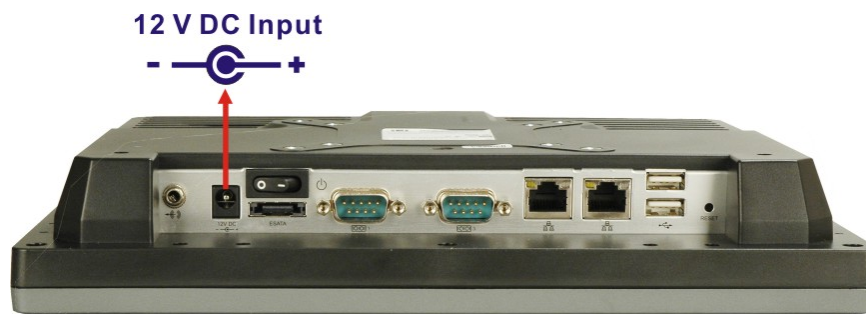

**Figure 2-12: Power Connector**

## **2.8 Wireless Connections**

The following section describes the wireless modules on the circuit.

### **2.8.1 USB Bluetooth Module**

An integrated Bluetooth module is connected to ICH7 chipset through the USB bus. The AFL-xxA-N270 Bluetooth module enables wireless communications between the AFL-xxA-N270 and various peripheral devices through a Bluetooth network. The peripheral devices may include:

- Headsets
- Barcode readers
- PDA
- Printers
- Cell phones
- Keyboard and mouse

The technical specifications of the Bluetooth module are listed in the Appendix.

### **2.8.2 Wireless Ethernet**

An integrate PIFA antenna on the AFOLUX AFL-xxA-N270 ensures an uninterrupted wireless connection. PIFA antennas can receive high-quality, uniform signals in any location from all directions without any signal degradation or impedance and are the most efficient antennas on the market.

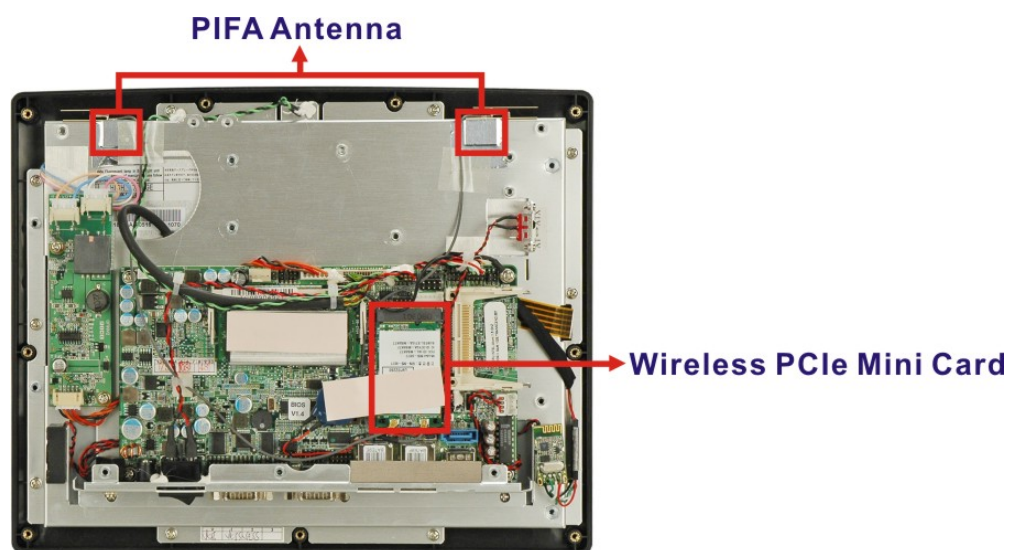


Figure 2-13: PIFA Antenna and Wireless Module

Chapter

3

# Unpacking

---

### 3.1 Unpacking

To unpack the flat panel PC, follow the steps below:



#### **WARNING!**

The front side LCD screen has a protective plastic cover stuck to the screen. Only remove the plastic cover after the flat panel PC has been properly installed. This ensures the screen is protected during the installation process.

---

- Step 1:** Use box cutters, a knife or a sharp pair of scissors that seals the top side of the external (second) box.
- Step 2:** Open the external (second) box.
- Step 3:** Use box cutters, a knife or a sharp pair of scissors that seals the top side of the internal (first) box.
- Step 4:** Lift the monitor out of the boxes.
- Step 5:** Remove both polystyrene ends, one from each side.
- Step 6:** Pull the plastic cover off the flat panel PC.
- Step 7:** Make sure all the components listed in the packing list are present.

## AFL-xxA-N270 Series Panel PC

### 3.1.1 Packing List

The AFL-xxA-N270 flat panel PC is shipped with the following components:

| Quantity        | Item                         | Image                                                                                 |
|-----------------|------------------------------|---------------------------------------------------------------------------------------|
| <b>Standard</b> |                              |                                                                                       |
| 1               | AFOLUX AFL-xxA-N270 series   |    |
| 1               | Power adapter                |   |
| 1               | Power cord                   |  |
| 1               | SATA and power cable         |  |
| 1               | Screw kit                    |  |
| 1               | User manual CD and driver CD |  |
| 1               | Touch pen                    |  |

| <b>Optional</b>                              |                                                                                       |
|----------------------------------------------|---------------------------------------------------------------------------------------|
| Panel mounting kit<br><b>(P/N: AFLPK-12)</b> |    |
| Wall mounting kit<br><b>(P/N: AFLWK-12)</b>  |    |
| Stand<br><b>(P/N: STAND-A12)</b>             |    |
| Stand<br><b>(P/N: STAND-B19)</b>             |   |
| Stand<br><b>(P/N: STAND-210-RS)</b>          |  |
| Arm<br><b>(P/N: ARM-11-RS)</b>               |  |

## AFL-xxA-N270 Series Panel PC

Arm

(P/N: ARM-31-RS)



If any of these items are missing or damaged, contact the distributor or sales representative immediately.

Chapter

4

# Installation

---

## AFL-xxA-N270 Series Panel PC

### 4.1 Anti-static Precautions



#### **WARNING:**

Failure to take ESD precautions during the maintenance of the AFL-xxA-N270 may result in permanent damage to the AFL-xxA-N270 and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the AFL-xxA-N270. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the AFL-xxA-N270 is accessed internally, or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** - Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- ***Self-grounding:*** - Before handling the board touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** - When configuring the AFL-xxA-N270, place it on an anti-static pad. This reduces the possibility of ESD damaging the AFL-xxA-N270.
- ***Only handle the edges of the PCB:*** - When handling the PCB, hold the PCB by the edges.

### 4.2 Installation Precautions

When installing the flat panel PC, please follow the precautions listed below:

- **Power turned off:** When installing the flat panel PC, make sure the power is off. Failing to turn off the power may cause severe injury to the body and/or damage to the system.
- **Certified Engineers:** Only certified engineers should install and modify onboard functionalities.

- **Anti-static Discharge:** If a user open the rear panel of the flat panel PC, to configure the jumpers or plug in added peripheral devices, ground themselves first and wear an anti-static wristband.

## 4.3 Preinstalled Components

The following components are all preinstalled.

- Motherboard
- TFT LCD screen
- 1.0 GB DDR2 memory module
- Resistive type touch screen
- Wireless LAN module
- Bluetooth module
- AT/ATX power switch
- Hard disk drive (HDD)

Preinstalled customizations may include the following.

- Different DDR2 memory module
- Hard disk drive (AFL-12A-N270 only)

Component installation is described in **the following sections**.

## 4.4 Installation and Configuration Steps

The following installation steps must be followed.

**Step 1:** Unpack the flat panel PC

**Step 2:** Install a CF card

**Step 3:** Install a HDD (AFL-12A-N270 only)

**Step 4:** Configure the system

**Step 5:** Connect peripheral devices to the bottom panel of the flat panel PC

**Step 6:** Mount the flat panel PC

## AFL-xxA-N270 Series Panel PC

## 4.5 Removing the Back Cover

**WARNING:**

Over-tightening back cover screws will crack the plastic frame.  
Maximum torque for cover screws is 5 kg-cm (0.36 lb-ft/0.49 Nm).

To access the AFL-xxA-N270 internally the back cover must be removed. To remove the back cover, please follow the steps below.

**Step 1:** Remove the retention screws (**Figure 4-1**) and lift the cover off the flat panel PC.



Figure 4-1: Back Cover Retention Screws

**Step 2:** Lift the cover off and pull down the cover a bit to make it possible to lift the cover further more after removing the retention screws (**Figure 4-2**). More strength is required to separate the cover from the chassis.


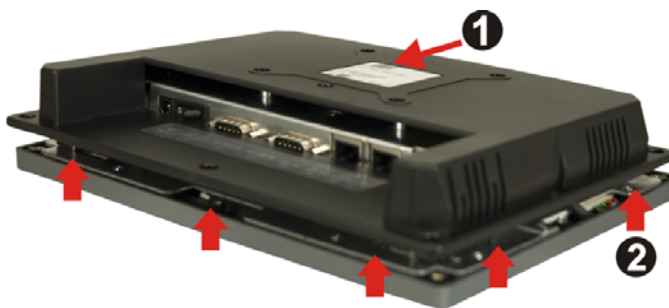


Figure 4-2: AFL-xxA-N270 Plastic Back Cover Removal

## 4.6 CF Card Installation


The AFL-xxA-N270 series has one CF Type II slot inside the rear panel. To install the CF card, follow the instructions below.

**Step 1:** Locate the CF slot. Insert a CF card into the slot (**Figure 4-3**).

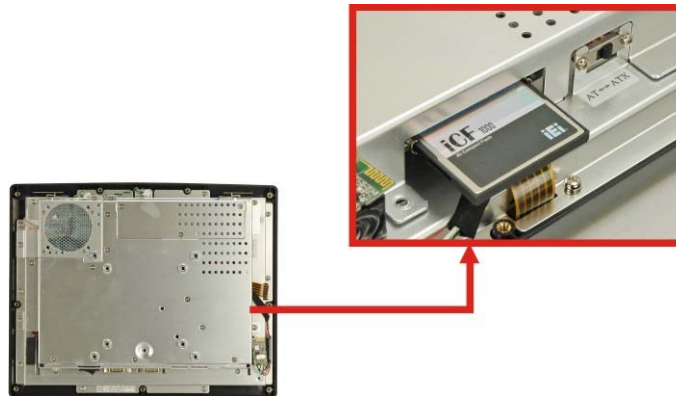

**Figure 4-3: CF Card Location**

**Step 2:** Replace the plastic back cover. For AFL-08AH-N270, more strength is required when pushing the bottom part of the cover down to the chassis (**Figure 4-4**).

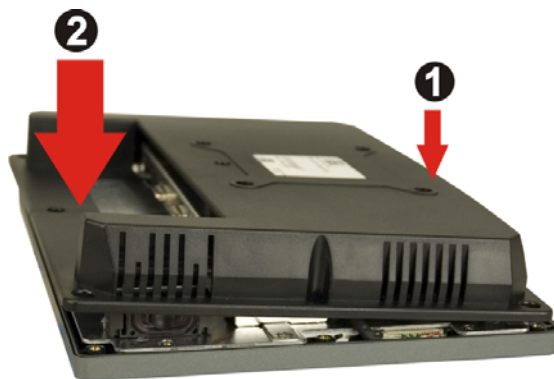

**Figure 4-4: AFL-08AH-N270 Plastic Back Cover Replacement**


**Step 3:** Once replaced reinsert the nine previously removed retention screws.

## AFL-xxA-N270 Series Panel PC

### 4.7 HDD Installation (AF-12A-N270 Only)

To install the HDD into the AF-12A-N270, please follow the steps below:

- Step 1:** Remove the plastic back cover. See **Section 4.5** above.
- Step 2:** Remove the aluminum cover. See **Section 5.4.2**.
- Step 3:** Remove the four HDD bracket retention screws and lift the HDD bracket off the panel PC.
- Step 4:** Attach the HDD brackets to the HDD. To do this, align the four retention screw holes in the both sides of the HDD bracket with the retention screw holes on the sides of the HDD. Insert four retention screws into the HDD bracket (Figure 4-5).

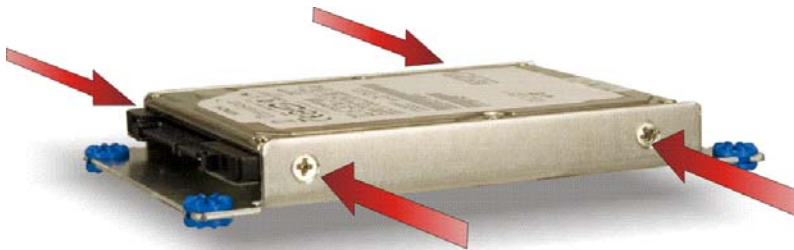

**Figure 4-5: AF-12A-N270 HDD Retention Screws**

- Step 5:** Connect the SATA cable to the rear of HDD and the SATA connector on the motherboard.
- Step 6:** Install the HDD into the AF-12A-N270 by aligning the retention screw holes in the HDD brackets with the retention screw holes on the chassis. Insert the four retention screws.
- Step 7:** Replace the aluminum back cover to the chassis.
- Step 8:** Replace the plastic back cover.

**WARNING:**

Over-tightening back cover screws will crack the plastic frame.  
Maximum torque for cover screws is 5 kg-cm (0.36 lb-ft/0.49 Nm).

## 4.8 AT/ATX Mode Selection

AT and ATX power modes can both be used on the AFL-xxA-N270 series. The selection is made through an AT/ATX switch on the aluminum chassis inside the plastic back cover (Figure 4-6). To select AT mode or ATX mode, follow the steps below.

**Step 1:** Remove the plastic back cover. See **Section 4.5** above.

**Step 2:** Locate the AT/ATX switch on the aluminum chassis (**Figure 4-6**).

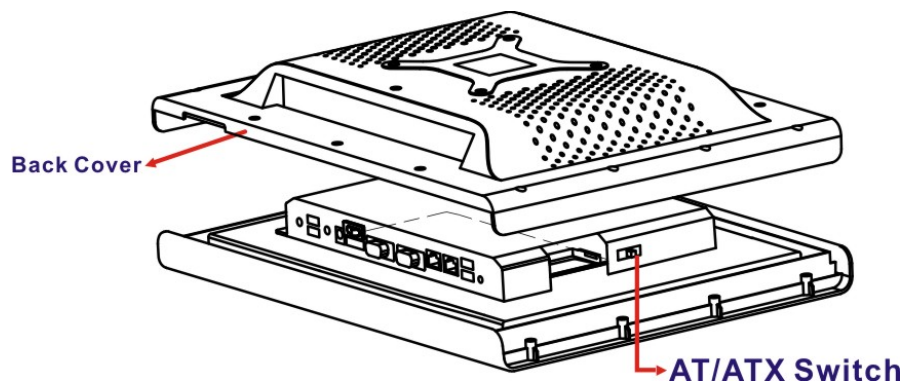


Figure 4-6: AT/ATX Switch Location

**Step 3:** Adjust the AT/ATX switch.

### 4.8.1 AT Power Mode

With the AT mode selected, the power is controlled by a central power unit rather than a power switch. The AFL-xxA-N270 panel PC turns on automatically when the power is connected. The AT mode benefits a production line to control multiple panel PCs from a central management center and other applications including:

## AFL-xxA-N270 Series Panel PC

- ATM
- Self-service kiosk
- Plant environment monitoring system
- Factory automation platform
- Manufacturing shop flow

### 4.8.2 ATX Power Mode

With the ATX mode selected, the AFL-xxA-N270 panel PC goes in a standby mode when it is turned off. The panel PC can be easily turned on via network or a power switch in standby mode. Remote power control is perfect for advertising applications since the broadcasting time for each panel PC can be set individually and controlled remotely. Other possible application includes


- Security surveillance
- Point-of-Sale (POS)
- Advertising terminal

## 4.9 Jumper Settings



### NOTE:

A jumper is a metal bridge used to close an electrical circuit. It consists of two or three metal pins and a small metal clip (often protected by a plastic cover) that slides over the pins to connect them. To CLOSE/SHORT a jumper means connecting the pins of the jumper with the plastic clip and to OPEN a jumper means removing the plastic clip from a jumper.



The following jumpers can be found on the motherboard installed in the AFL-xxA-N270. Before the AFL-xxA-N270 is installed, the jumpers must be set in accordance with the desired configuration. The jumpers on the AFL-xxA-N270 motherboard are listed in **Table 4-1**.

| Description                   | Label   | Type          |
|-------------------------------|---------|---------------|
| Clear CMOS                    | J_COMS1 | 2-pin header  |
| COM1 Pin 9 setting            | JP8     | 10-pin header |
| COM3 Pin 9 setting            | JP10    | 6-pin header  |
| COM3 RX RS-232/422/485 select | JP9     | 8-pin header  |
| COM3 TX RS-422/485 select     | JP11    | 6-pin header  |
| COM3 RS-232/422/485 select    | JP6     | 12-pin header |

**Table 4-1: Jumpers**

#### 4.9.1 Access the Jumpers

To access the jumpers, remove the back cover. To remove the back cover, please refer to **Section 4.7 Step 1 ~ Step 4**.

#### 4.9.2 Preconfigured Jumpers



#### **WARNING:**

Do not change the settings on the jumpers in described here. Doing so may disable or damage the system.

The following jumpers are preconfigured for the AFL-xxA-N270. Users should no change these jumpers (**Table 4-2**).

| Jumper Name               | Label       | Type          |
|---------------------------|-------------|---------------|
| LVDS voltage selection    | J_VLVDS1    | 3-pin header  |
| Touch Screen Select       | J1          | 4-pin header  |
| Panel Type and Resolution | J_LCD_TYPE1 | 10-pin header |

**Table 4-2: Preconfigured Jumpers**

## AFL-xxA-N270 Series Panel PC

### 4.9.3 Clear CMOS Jumper

|                         |                       |
|-------------------------|-----------------------|
| <b>Jumper Label:</b>    | <b>J_CMOS1</b>        |
| <b>Jumper Type:</b>     | 2-pin header          |
| <b>Jumper Settings:</b> | See <b>Table 4-3</b>  |
| <b>Jumper Location:</b> | See <b>Figure 4-7</b> |

If the AFL-xxA-N270 fails to boot due to improper BIOS settings, the clear CMOS jumper clears the CMOS data and resets the system BIOS information. To do this, use the jumper cap to close the pins for a few seconds then remove the jumper clip.

If the “CMOS Settings Wrong” message is displayed during the boot up process, the fault may be corrected by pressing the F1 to enter the CMOS Setup menu. Do one of the following:

- Enter the correct CMOS setting
- Load Optimal Defaults
- Load Failsafe Defaults.

After having done one of the above, save the changes and exit the CMOS Setup menu.

The clear CMOS jumper settings are shown in **Table 4-3**.

| Clear CMOS  | Description      |         |
|-------------|------------------|---------|
| Short 1 - 2 | Keep CMOS Setup  | Default |
| Short 2 - 3 | Clear CMOS Setup |         |

**Table 4-3: Clear CMOS Jumper Settings**

The location of the clear CMOS jumper is shown in **Figure 4-7** below.



**Figure 4-7: Clear CMOS Jumper**

#### **4.9.4 COM Port Pin 9 Select**

**Jumper Label:** JP8 and JP10

**Jumper Settings:** See Table 4-4

**Jumper Location:** See Figure 4-8

Two jumpers (JP8 and JP10) configure pin 9 on COM1 and COM3 DB-9 connectors. Pin 9 on the COM1 and the COM3 DB-9 connectors can be set as the ring (RI) signal, +5 V or +12 V. The COM1 and COM3 Pin 9 Setting jumper selection options are shown in **Table 4-4**.

| JP8       | Description           |         |
|-----------|-----------------------|---------|
| Short 1-3 | COM1 RI Pin use +12 V |         |
| Short 5-7 | COM1 RI Pin use +5 V  |         |
| Short 7-9 | COM1 RI Pin use RI    | Default |


**Table 4-4: COM1 Pin 9 Setting Jumper Settings**

| JP10      | Description           |         |
|-----------|-----------------------|---------|
| Short 1-2 | COM3 RI Pin use +12 V |         |
| Short 3-4 | COM3 RI Pin use RI    | Default |
| Short 5-6 | COM3 RI Pin use +5 V  |         |

**Table 4-5: COM3 Pin 9 Setting Jumper Settings**

## AFL-xxA-N270 Series Panel PC

The COM1 and COM3 Pin 9 Setting jumper locations are shown in **Figure 4-8** below.

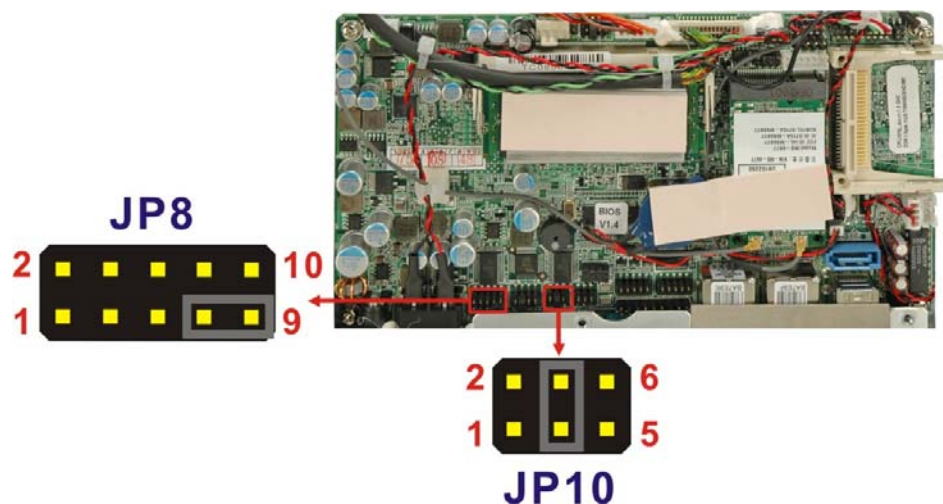

**Figure 4-8: COM1 and COM3 Pin 9 Setting Jumper Locations**

### 4.9.4.1 COM3 RS-422 and RS-485 Pinouts

The pinouts for RS-422 and RS-485 operation of external serial port COM 3 are detailed below.

| COM 3 | RS-422 Description |
|-------|--------------------|
| Pin 1 | TX-                |
| Pin 2 | TX+                |
| Pin 6 | RX-                |
| Pin 7 | RX+                |

**Table 4-6: RS-422 Pinouts**

| COM 3 | RS-485 Description |
|-------|--------------------|
| Pin 1 | Data-              |
| Pin 2 | Data+              |

**Table 4-7: RS-485 Pinouts**

#### 4.9.5 COM3 RX Function Select Jumper

|                         |                       |
|-------------------------|-----------------------|
| <b>Jumper Label:</b>    | <b>JP9</b>            |
| <b>Jumper Type:</b>     | 8-pin header          |
| <b>Jumper Settings:</b> | See <b>Table 4-8</b>  |
| <b>Jumper Location:</b> | See <b>Figure 4-9</b> |

The COM3 RX Function Select jumper sets the communication protocol used by the RX serial communications port COM3 as RS-232, RS-422 or RS-485. The COM3 RX Function Select jumper settings are shown in **Table 4-8**.

| COM3 RX Function Select | Description |         |
|-------------------------|-------------|---------|
| Short 3-4               | RS-232      | Default |
| Short 1-2, 5-6          | RS-422      |         |
| Short 1-2, 7-8          | RS-485      |         |

**Table 4-8: COM3 RX Function Select Jumper Settings**

The COM3 RX Function Select jumper location is shown in **Figure 4-9**.



**Figure 4-9: COM3 RX Function Select Jumper Location**

## AFL-xxA-N270 Series Panel PC

### 4.9.6 COM3 TX Function Select Jumper


|                         |                        |
|-------------------------|------------------------|
| <b>Jumper Label:</b>    | <b>JP11</b>            |
| <b>Jumper Type:</b>     | 6-pin header           |
| <b>Jumper Settings:</b> | See <b>Table 4-9</b>   |
| <b>Jumper Location:</b> | See <b>Figure 4-10</b> |

The COM3 TX Function Select jumper configures the TX pin on COM3 serial port connector as RS-422 as an RS-485. The COM3 TX Function Select jumper selection options are shown in **Table 4-9**.

| COM3 TX Function Select | Description |         |
|-------------------------|-------------|---------|
| Short 1 – 3             | RS-422      | Default |
| Short 2 – 4             | RS-422      | Default |
| Short 3 – 5             | RS-485      |         |
| Short 4 – 6             | RS-485      |         |

**Table 4-9: COM3 TX Function Select Jumper Settings**

The COM3 TX Function Select jumper location is shown in **Figure 4-10** below.

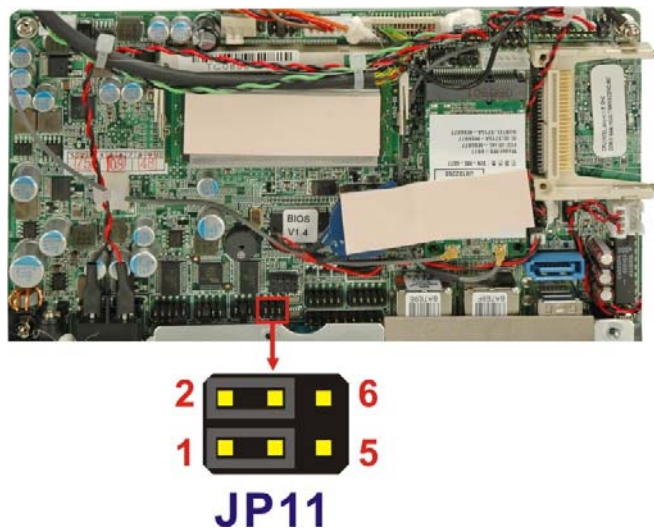

**Figure 4-10: COM3 TX Function Select Jumper Pinout Locations**

#### 4.9.7 COM3 RS-232/422/485 Serial Port Select Jumper

|                         |                                             |
|-------------------------|---------------------------------------------|
| <b>Jumper Label:</b>    | <b>JP6</b>                                  |
| <b>Jumper Type:</b>     | 12-pin header (four 3-pin headers combined) |
| <b>Jumper Settings:</b> | See <b>Table 4-10</b>                       |
| <b>Jumper Location:</b> | See <b>Figure 4-11</b>                      |

The COM3 RS-232/422/485 Serial Port Select jumper sets the communication protocol used by the second serial communications port (COM3) as RS-232, RS-422 or RS-485. The COM3 RS-232/422/485 Serial Port Select settings are shown in **Table 4-10**.

| RS-232 / 485 Select | Description  |         |
|---------------------|--------------|---------|
| Short 1-2           | RS-232       | Default |
| Short 4-5           | RS-232       | Default |
| Short 7-8           | RS-232       | Default |
| Short 10-11         | RS-232       | Default |
| Short 2-3           | RS-422 / 485 |         |
| Short 5-6           | RS-422 / 485 |         |
| Short 8-9           | RS-422 / 485 |         |
| Short 11-12         | RS-422 / 485 |         |

**Table 4-10: COM3 RS-232/422/485 Serial Port Select Jumper Settings**

The COM3 RS-232/422/485 Serial Port Select jumper location is shown in **Figure 4-11**.

## AFL-xxA-N270 Series Panel PC

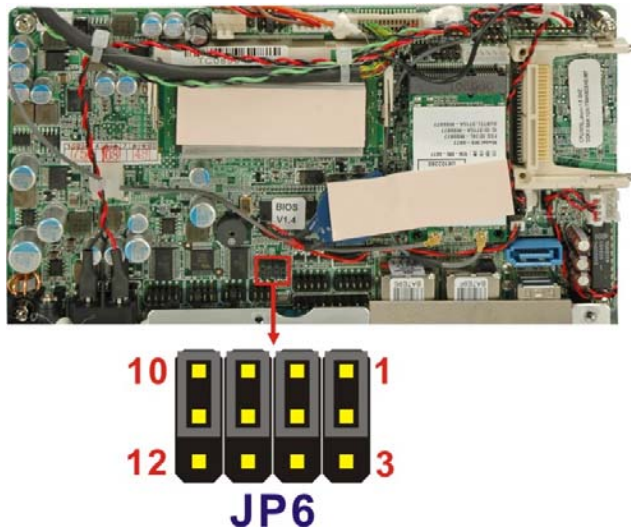


Figure 4-11: COM3 RS-232/422/485 Serial Port Select Jumper Location

## 4.10 Mounting the System



### WARNING!

When mounting the flat panel PC onto an arm, onto the wall or onto a panel, it is better to have more than one person to help with the installation to make sure the panel PC does not fall down and get damaged.

The four methods of mounting the AFOLUX AFL-xxA-N270 are listed below.

- Wall mounting
- Panel mounting
- Arm mounting
- Rack mounting

The four mounting methods are described below.

#### 4.10.1 Wall Mounting

To mount the flat panel PC onto the wall, please follow the steps below.

- Step 1:** Select the location on the wall for the wall-mounting bracket.
- Step 2:** Carefully mark the locations of the four screw holes in the bracket on the wall.
- Step 3:** Drill four pilot holes at the marked locations on the wall for the bracket retention screws.
- Step 4:** Align the wall-mounting bracket screw holes with the pilot holes.
- Step 5:** Secure the mounting-bracket to the wall by inserting the retention screws into the four pilot holes and tightening them (**Figure 4-12**).

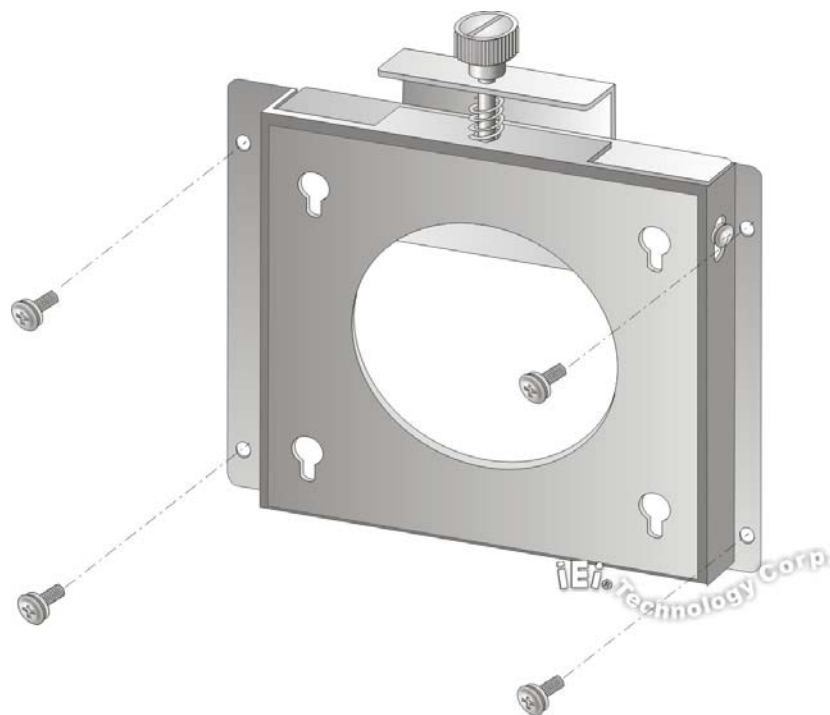


Figure 4-12: Wall-mounting Bracket


## AFL-xxA-N270 Series Panel PC

**Step 6:** Insert the four monitor mounting screws provided in the wall mount kit into the four screw holes on the rear panel of the flat panel PC and tighten until the screw shank is secured against the rear panel (**Figure 4-13**).



### WARNING:

Please use the M4 screws provided in the wall mount kit for the rear panel. If the screw is missing, the thread depth of the replacement screw should be not more than 4 mm.



---

**Step 7:** Align the mounting screws on the monitor rear panel with the mounting holes on the bracket.

**Step 8:** Carefully insert the screws through the holes and gently pull the monitor downwards until the monitor rests securely in the slotted holes (**Figure 4-13**). Ensure that all four of the mounting screws fit snugly into their respective slotted holes.



### NOTE:

In the diagram below the bracket is already installed on the wall.

---

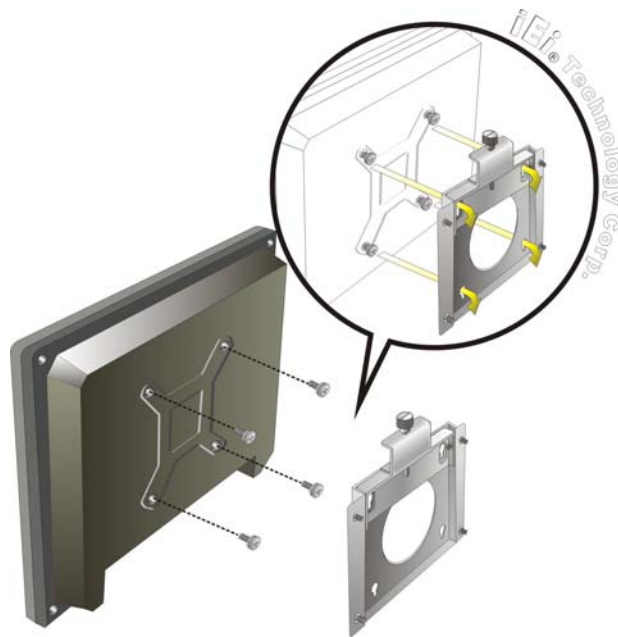


Figure 4-13: Chassis Support Screws

**Step 9:** Secure the panel PC by fastening the retention screw of the wall-mounting bracket. (Figure 4-14).

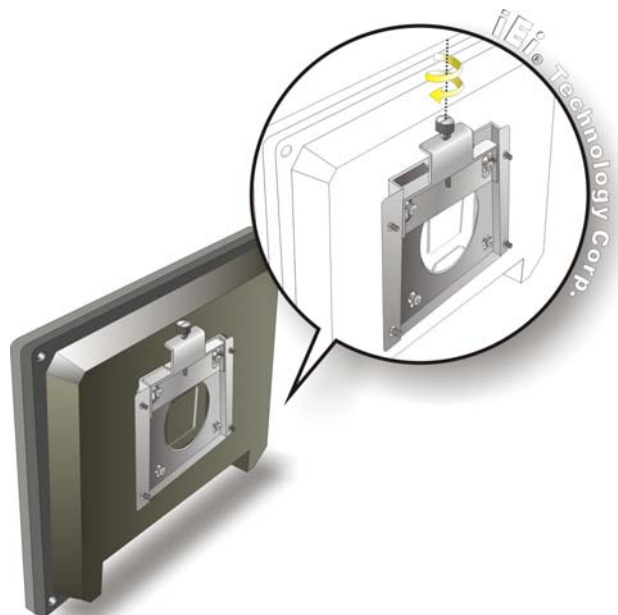


Figure 4-14: Secure the Panel PC

## AFL-xxA-N270 Series Panel PC

### 4.10.2 Panel Mounting

To mount the AFOLUX AFL-xxA-N270 series flat panel PC into a panel, please follow the steps below.

**Step 1:** Select the position on the panel to mount the flat panel PC.

**Step 2:** Cut out a section from the panel that corresponds to the rear panel dimensions of the flat panel PC. Take care that the panel section that is cut out is smaller than the overall size of the frame that surrounds the flat panel PC but just large enough for the rear panel of the flat panel PC to fit through (see **Figure 4-15**, **Figure 4-16**, **Figure 4-17** and **Figure 4-18**).

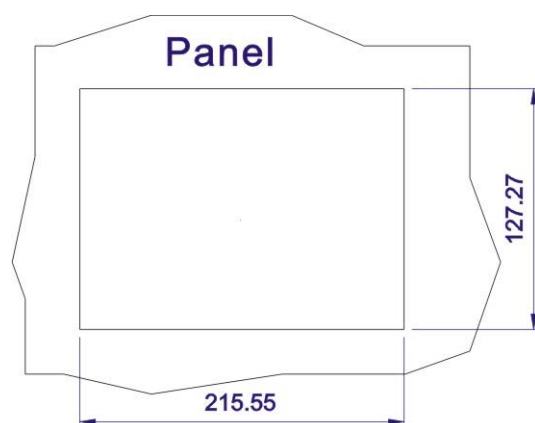


Figure 4-15: AFL-07A-N270 Panel Opening

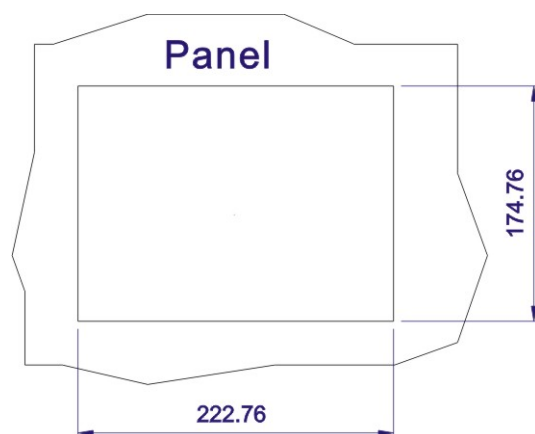


Figure 4-16: AFL-08AH-N270 Panel Opening

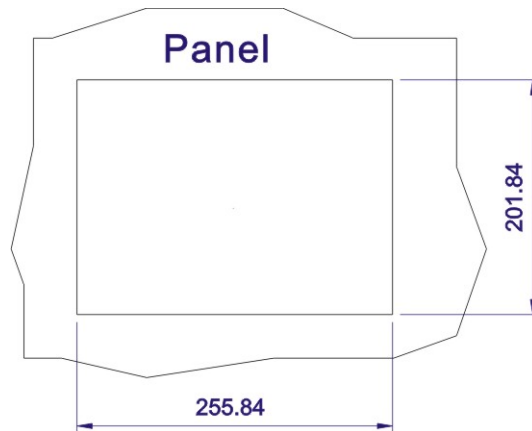


Figure 4-17: AFL-10A-N270 Panel Opening

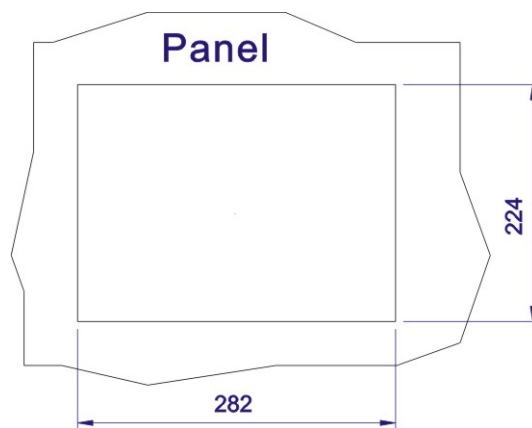


Figure 4-18: AFL-12A-N270 Panel Opening

- Step 3:** Slide the flat panel PC through the hole until the frame is flush against the panel.
- Step 4:** Insert the panel mounting clamps into the pre-formed holes along the edges of the chassis, behind the frame.
- Step 5:** Tighten the screws that pass through the panel mounting clamps until the plastic caps at the front of all the screws are firmly secured to the panel (**Figure 4-19**).

## AFL-xxA-N270 Series Panel PC

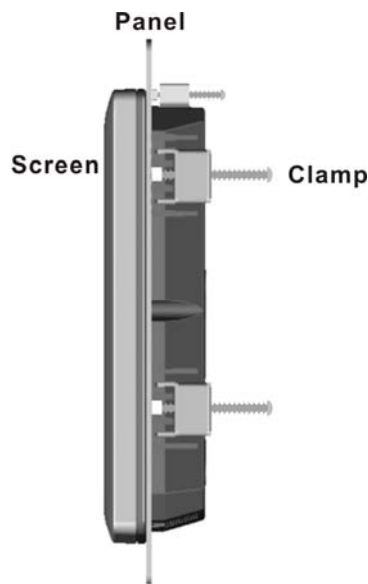


Figure 4-19: Tighten the Panel Mounting Clamp Screws

### 4.10.3 Arm Mounting

The AFL-xxA-N270 series is VESA (Video Electronics Standards Association) compliant and can be mounted on an arm with a 75mm or 100mm interface pad. To mount the AFL-xxA-N270 series on an arm, please follow the steps below.

**Step 1:** The arm is a separately purchased item. Please correctly mount the arm onto the surface it uses as a base. To do this, refer to the installation documentation that came with the mounting arm.




#### NOTE:


When purchasing the arm please ensure that it is VESA compliant and that the arm has a 75 mm interface pad. If the mounting arm is not VESA compliant it cannot be used to support the AFL-xxA-N270 series flat panel PC. The AFL-10A-N270 and AFL-12A-N270 also support VESA MIS-D 100.

**Step 2:** Once the mounting arm has been firmly attached to the surface, lift the flat panel PC onto the interface pad of the mounting arm.

**Step 3:** Align the retention screw holes on the mounting arm interface with those in the flat panel PC. The AFL-07A-N270/ AFL-08AH-N270 arm mount retention screw holes are shown in **Figure 4-20** and the AFL-10A-N270 /AFL-12A-N270 are shown in **Figure 4-21**.

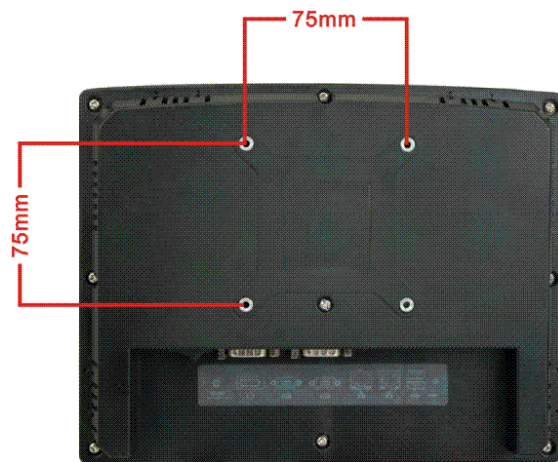

**Figure 4-20: AFL-07A-N270/AFL-08AH-N270 Arm Mounting Retention Screw Holes**

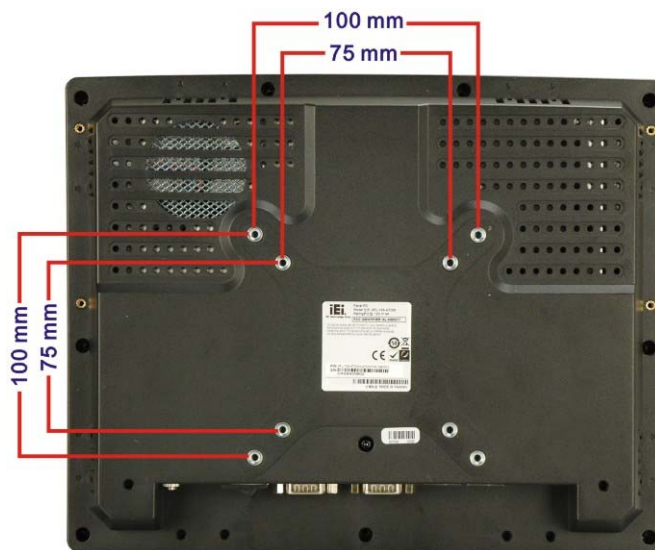

**Figure 4-21: AFL-10A-N270/AFL-12A-N270 Arm Mounting Retention Screw Holes**

## AFL-xxA-N270 Series Panel PC

**Step 4:** Secure the flat panel PC to the interface pad by inserting four retention screws through the bottom of the mounting arm interface pad and into the flat panel PC.

### 4.10.4 Cabinet and Rack Installation

The AFL-xxA-N270 series flat panel PC can be installed into a cabinet or rack. The installation procedures are similar to the panel mounting installation. To do this, please follow the steps below:




#### NOTE:

When purchasing the cabinet/rack installation bracket, make sure it is compatible with both the AFL-xxA-N270 series flat panel PC and the rack/cabinet into which the AFL-xxA-N270 series is installed.

---

**Step 1:** Slide the rear chassis of the AFL-xxA-N270 series flat panel PC through the rack/cabinet bracket until the aluminum frame is flush against the front of the bracket (**Figure 4-22**).

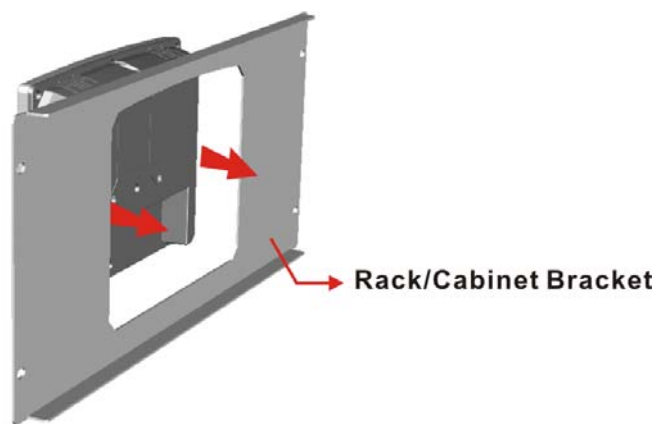


**Figure 4-22: The Rack/Cabinet Bracket**

**Step 2:** Insert the rack mounting clamps into the pre-formed holes along the edges of the flat panel PC, behind the ABS/PC plastic frame. There are a total of 4 rack

mounting clamps for AFL-07A-N270/ AFL-08AH-N270 and 6 rack mounting clamps for AFL-10A-N270/AFL-12A-N270.


**Step 3:** Tighten the screws that pass through the rack mounting clamps until the plastic caps at the front of all the screws are firmly secured to the bracket (**Figure 4-23**).

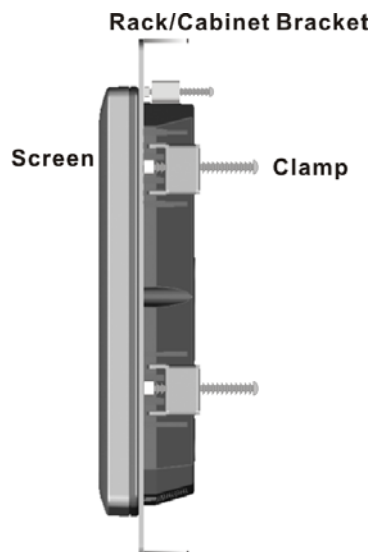

**Figure 4-23: Secure the Rack/Cabinet Bracket (AFL-10A-N270/AFL-12A-N270)**

**Step 4:** Slide the flat panel PC with the attached rack/cabinet bracket into a rack or cabinet (**Figure 4-24**).

## AFL-xxA-N270 Series Panel PC

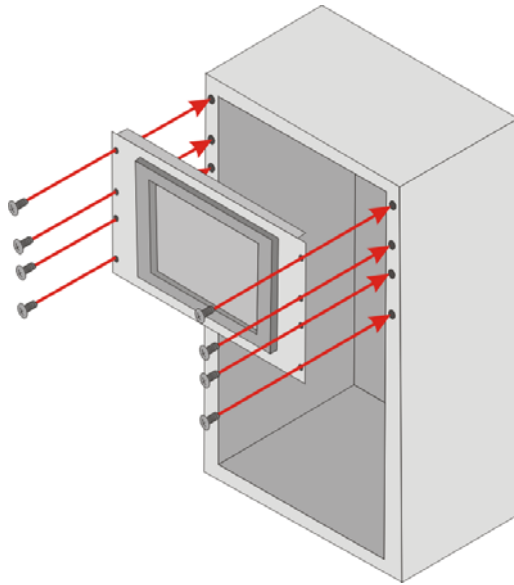

**Figure 4-24: Install into a Rack/Cabinet**

**Step 5:** Once the flat panel PC with the attached rack/cabinet bracket has been properly inserted into the rack or cabinet, secure the front of the rack/cabinet bracket to the front of the rack or cabinet (**Figure 4-24**).

## 4.11 Bottom Panel Connectors

### 4.11.1 LAN Connection

There are two external RJ-45 LAN connectors. The RJ-45 connector enables connection to an external network. To connect a LAN cable with an RJ-45 connector, please follow the instructions below.

**Step 1:** **Locate the RJ-45 connectors** on the bottom panel of the AFOLUX AFL-xxA-N270 Series.

**Step 2:** **Align the connectors.** Align the RJ-45 connector on the LAN cable with one of the RJ-45 connectors on the bottom panel of the AFOLUX AFL-xxA-N270 Series. See **Figure 4-25**.

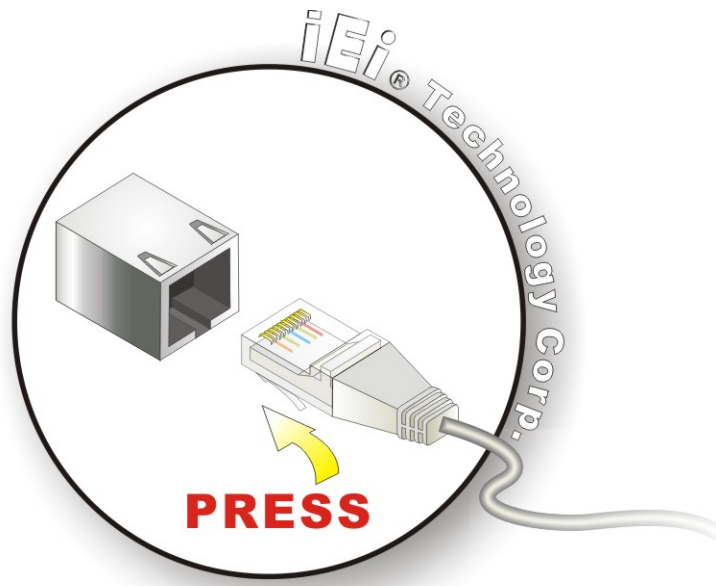


Figure 4-25: LAN Connection

**Step 3:** Insert the LAN cable RJ-45 connector. Once aligned, gently insert the LAN cable RJ-45 connector into the onboard RJ-45 connector.

#### 4.11.2 Serial Device Connection

The AFOLUX AFL-xxA-N270 Series has two male DB-9 connectors on the bottom panel for serial devices to be connected. Follow the steps below to connect a serial device to the AFOLUX AFL-xxA-N270 Series panel PC.

**Step 1:** Locate the DB-9 connector. The location of the DB-9 connector is shown in Chapter 2.

**Step 2:** Insert the serial connector. Insert the DB-9 connector of a serial device into the DB-9 connector on the bottom panel. See **Figure 4-26**.

## AFL-xxA-N270 Series Panel PC

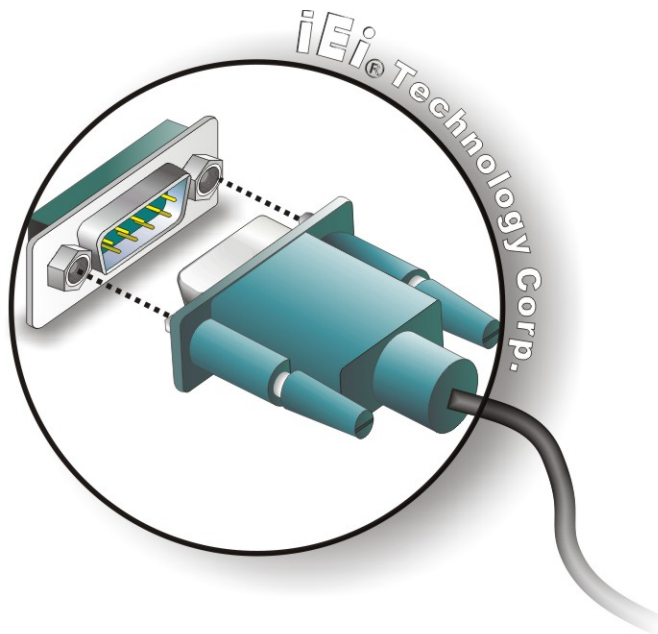


Figure 4-26: Serial Device Connector

**Step 3: Secure the connector.** Secure the serial device connector to the external interface by tightening the two retention screws on either side of the connector.

### 4.11.3 USB Device Connection

There are two external USB 2.0 connectors. To connect a USB 2.0 or USB 1.1 device, please follow the instructions below.

**Step 1:** Located the USB connectors. The locations of the USB connectors are shown in Chapter 2.

**Step 2:** Align the connectors. Align the USB device connector with one of the connectors on the bottom panel. See Figure 4-27.

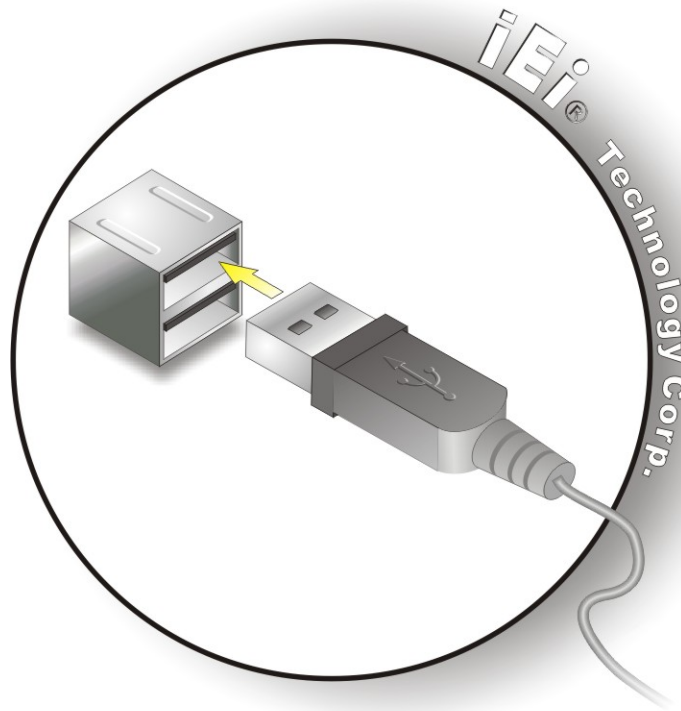


Figure 4-27: USB Device Connection

**Step 3:** Insert the device connector. Once aligned, gently insert the USB device connector into the onboard connector.

Chapter

**5**

# System Maintenance

---

## 5.1 System Maintenance Introduction

If the components of the AFOLUX AFL-xxA-N270 series fail they must be replaced.

Components that can be replaced include:

- CF Module
- Bluetooth module
- Wireless LAN module
- SO-DIMM module

Please contact the system reseller or vendor to purchase the replacement parts. Back cover removal instructions for the AFOLUX AFL-xxA-N270 series are described below.

## 5.2 Anti-static Precautions



### WARNING:

Failure to take ESD precautions during the maintenance of the AFL-xxA-N270 may result in permanent damage to the AFL-xxA-N270 and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the AFL-xxA-N270. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the AFL-xxA-N270 is accessed internally, or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** - Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- ***Self-grounding:*** - Before handling the board touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** - When configuring the AFL-xxA-N270, place it on an anti-static pad. This reduces the possibility of ESD damaging the AFL-xxA-N270.

## AFL-xxA-N270 Series Panel PC

- **Only handle the edges of the PCB:** - When handling the PCB, hold the PCB by the edges.

### 5.3 Turn off the Power

---



#### **WARNING:**

Failing to turn off the system before opening it can cause permanent damage to the system and serious or fatal injury to the user.

---

Before any maintenance procedures are carried out on the system, make sure the system is turned off.

### 5.4 Opening the System

#### 5.4.1 Removing the Back Cover

---



#### **WARNING:**

Over-tightening back cover screws will crack the plastic frame.  
Maximum torque for cover screws is 5 kg-cm (0.36 lb-ft/0.49 Nm).

---

To access the AFL-xxA-N270 internally the back cover must be removed. To remove the back cover, please follow the steps below.

**Step 1:** Follow all anti-static procedures. See Section 5.2.

**Step 2:** Turn off the power. See Section 5.3.

**Step 3:** Remove the retention screws on the back. Remove the retention screws (Figure 5-1) from the back cover.



Figure 5-1: Back Cover Retention Screws

**Step 4:** Lift the cover off and pull down the cover a bit to make it possible to lift the cover further more after removing the retention screws (**Figure 4-2**). More strength is required to separate the cover from the chassis.

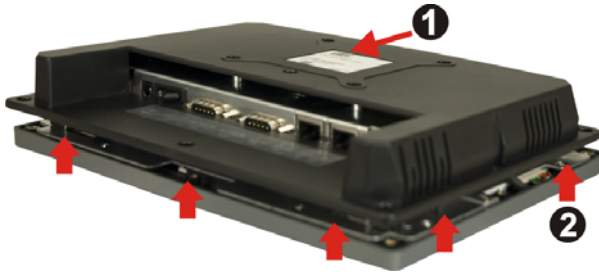


Figure 5-2: AFL-xxA-N270 Plastic Back Cover Removal

#### 5.4.2 AFL-xxA-N270 Series Internal Aluminum Cover Removal

To remove the internal aluminum cover, follow the steps below.

**Step 1:** Remove the retention screws securing the internal aluminum cover. The screw numbers are varied in different models. **Figure 5-3** shows the aluminum cover retention screws of the AFL-10A-N270.

## AFL-xxA-N270 Series Panel PC

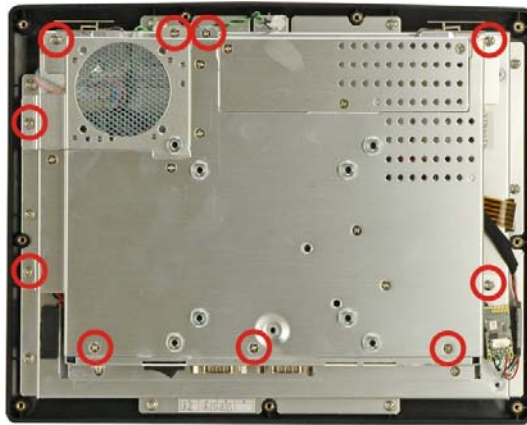


Figure 5-3: AFL-10A-N270 Aluminum Back Cover Retention Screws

**Step 2:** Lift the aluminum cover off the AFL-xxA-N270 series.

## 5.5 Replacing Components

### 5.5.1 Memory Module Replacement

The flat panel PC is preinstalled with a 1 GB DDR2 memory module. If the memory module is fail, follow the instructions below to replace the memory module.

**Step 1:** Remove the back cover. See **Section 5.4.1** above.

**Step 2:** Remove the internal aluminum back cover. See **Section 5.4.2** above.

**Step 3:** Locate the DDR2 SO-DIMM on the motherboard (**Figure 5-4**).

**Preinstalled 1.0 GB 533 MHz DDR2 SO-DIMM**

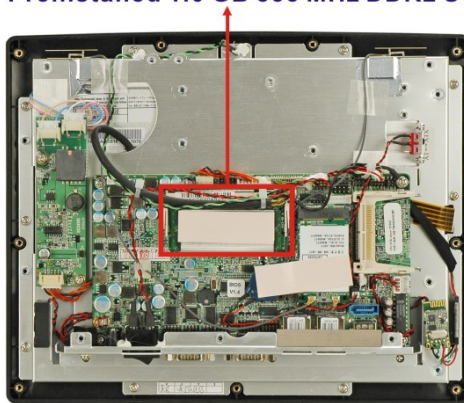


Figure 5-4: AFL-10A-N270 SO-DIMM Socket Location

- Step 4:** Remove the DDR memory module by pulling both the spring retainer clips outward from the socket.
- Step 5:** Grasp the DDR memory module by the edges and carefully pull it out of the socket.
- Step 6:** Install the new DDR memory module by pushing it into the socket at an angle (Figure 5-5).
- Step 7:** Gently pull the spring retainer clips of the SO-DIMM socket out and push the rear of the DDR memory module down (Figure 5-5).
- Step 8:** Release the spring retainer clips on the SO-DIMM socket. They clip into place and secure the DDR memory module in the socket.

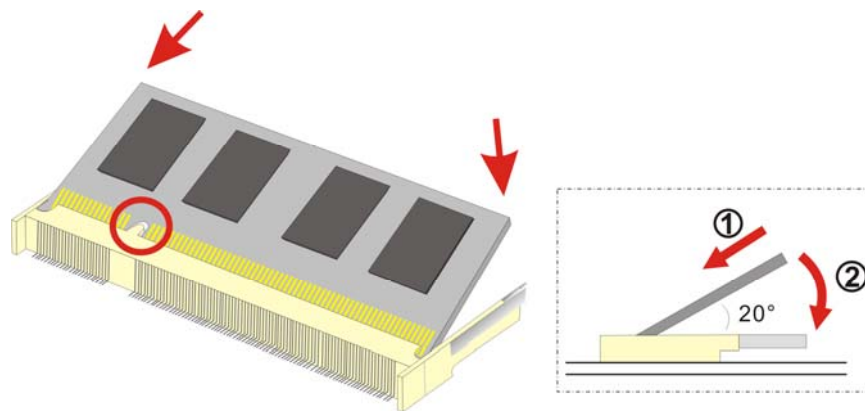


Figure 5-5: DDR SO-DIMM Module Installation

### 5.5.2 CF Card Replacement

The AFOLUX AFL-xxA-N270 series has one CF Type II slot. To replace the CF card, follow the instructions below.

- Step 1:** Follow all anti-static procedures. See Section 5.2.
- Step 2:** Turn off the power. See Section 5.3.
- Step 3:** Remove the back cover. See Section 5.4.1.
- Step 4:** Follow the instruction listed in Section 4.6 to replace the CF card.

## 5.6 Reinstalling the Covers

---

**WARNING:**

Failing to reinstall the covers may result in permanent damage to the system. Please make sure all coverings are properly installed.

---

When maintenance procedures are complete, please make sure all the covers are replaced, including the following:

- Aluminum cover
- Plastic cover

Chapter

6

# AMI BIOS Setup

---

## AFL-xxA-N270 Series Panel PC

### 6.1 Introduction

A licensed copy of AMI BIOS is preprogrammed into the ROM BIOS. The BIOS setup program allows users to modify the basic system configuration. This chapter describes how to access the BIOS setup program and the configuration options that may be changed.

#### 6.1.1 Starting Setup

The AMI BIOS is activated when the computer is turned on. The setup program can be activated in one of two ways.

1. Press the **DELETE** key as soon as the system is turned on or
2. Press the **DELETE** key when the “**Press Del to enter SETUP**” message appears on the screen.

If the message disappears before the **DELETE** key is pressed, restart the computer and try again.

#### 6.1.2 Using Setup

Use the arrow keys to highlight items, press **ENTER** to select, use the PageUp and PageDown keys to change entries, press **F1** for help and press **Esc** to quit. Navigation keys are shown in.

| Key         | Function                                                                                                                                             |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Up arrow    | Move to previous item                                                                                                                                |
| Down arrow  | Move to next item                                                                                                                                    |
| Left arrow  | Move to the item on the left hand side                                                                                                               |
| Right arrow | Move to the item on the right hand side                                                                                                              |
| Esc key     | Main Menu – Quit and not save changes into CMOS<br>Status Page Setup Menu and Option Page Setup Menu --<br>Exit current page and return to Main Menu |
| Page Up key | Increase the numeric value or make changes                                                                                                           |
| Page Dn key | Decrease the numeric value or make changes                                                                                                           |

|            |                                                                          |
|------------|--------------------------------------------------------------------------|
| F1 key     | General help, only for Status Page Setup Menu and Option Page Setup Menu |
| F2 /F3 key | Change color from total 16 colors. F2 to select color forward.           |
| F10 key    | Save all the CMOS changes, only for Main Menu                            |

**Table 6-1: BIOS Navigation Keys**

### 6.1.3 Getting Help

When **F1** is pressed a small help window describing the appropriate keys to use and the possible selections for the highlighted item appears. To exit the Help Window press **Esc** or the **F1** key again.

### 6.1.4 Unable to Reboot After Configuration Changes

If the computer cannot boot after changes to the system configuration is made, CMOS defaults. Use the jumper described in **Chapter 5**.

### 6.1.5 BIOS Menu Bar

The **menu bar** on top of the BIOS screen has the following main items:

- **Main** Changes the basic system configuration.
- **Advanced** Changes the advanced system settings.
- **PCIPnP** Changes the advanced PCI/PnP Settings
- **Boot** Changes the system boot configuration.
- **Security** Sets User and Supervisor Passwords.
- **Chipset** Changes the chipset settings.
- **Exit** Selects exit options and loads default settings


The following sections completely describe the configuration options found in the menu items at the top of the BIOS screen and listed above.

## AFL-xxA-N270 Series Panel PC

### 6.2 Main

The **Main** BIOS menu (**BIOS Menu 1**) appears when the **BIOS Setup** program is entered.

The **Main** menu gives an overview of the basic system information.

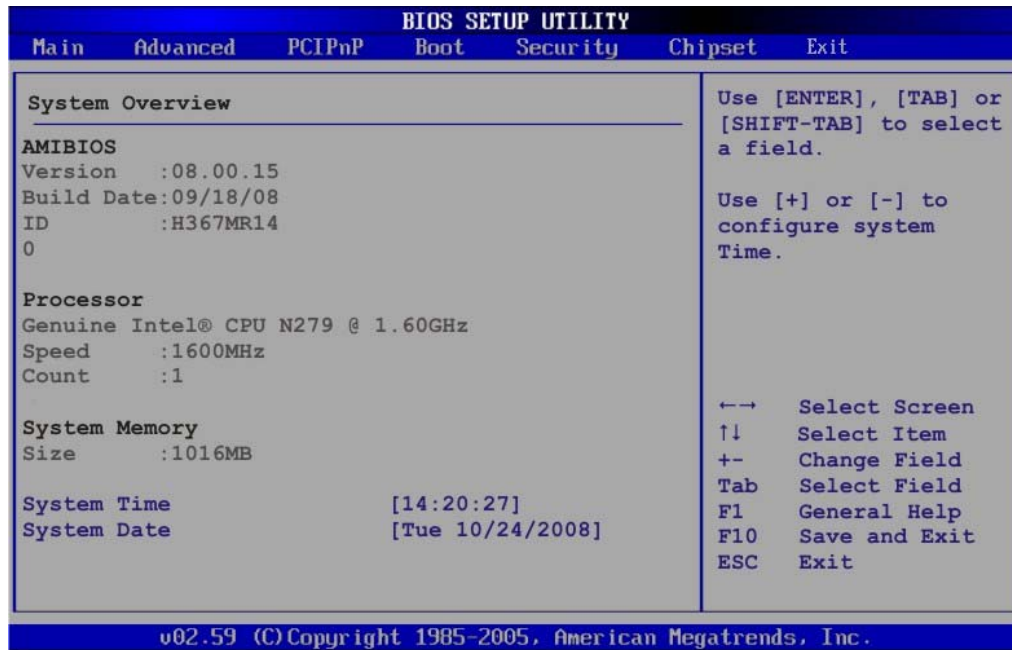

#### BIOS Menu 1: Main

#### → System Overview

The **System Overview** lists a brief summary of different system components. The fields in **System Overview** cannot be changed. The items shown in the system overview include:

- **AMI BIOS:** Displays auto-detected BIOS information
  - Version: Current BIOS version
  - Build Date: Date the current BIOS version was made
  - ID: Installed BIOS ID
- **Processor:** Displays auto-detected CPU specifications
  - Type: Names the currently installed processor
  - Speed: Lists the processor speed
  - Count: The number of CPUs on the CPU card
- **System Memory:** Displays the auto-detected system memory.
  - Size: Lists memory size

The System Overview field also has two user configurable fields:

→ **System Time [xx:xx:xx]**

Use the **System Time** option to set the system time. Manually enter the hours, minutes and seconds.

→ **System Date [xx/xx/xx]**

Use the **System Date** option to set the system date. Manually enter the day, month and year.

## 6.3 Advanced

Use the **Advanced** menu (**BIOS Menu 2**) to configure the CPU and peripheral devices through the following sub-menus:




**WARNING:**

Setting the wrong values in the sections below may cause the system to malfunction. Make sure that the settings made are compatible with the hardware.

---

- CPU Configuration (see **Section 6.3.1**)
- IDE Configuration (see **Section 6.3.2**)
- SuperIO Configuration (see **Section 6.3.3**)
- Hardware Health Configuration (see **Section 6.3.4**)
- Power Configuration (see **Section 6.3.5**)
- Remote Access Configuration (see **Section 6.3.6**)
- USB Configuration (see **Section 6.3.8**)


## AFL-xxA-N270 Series Panel PC

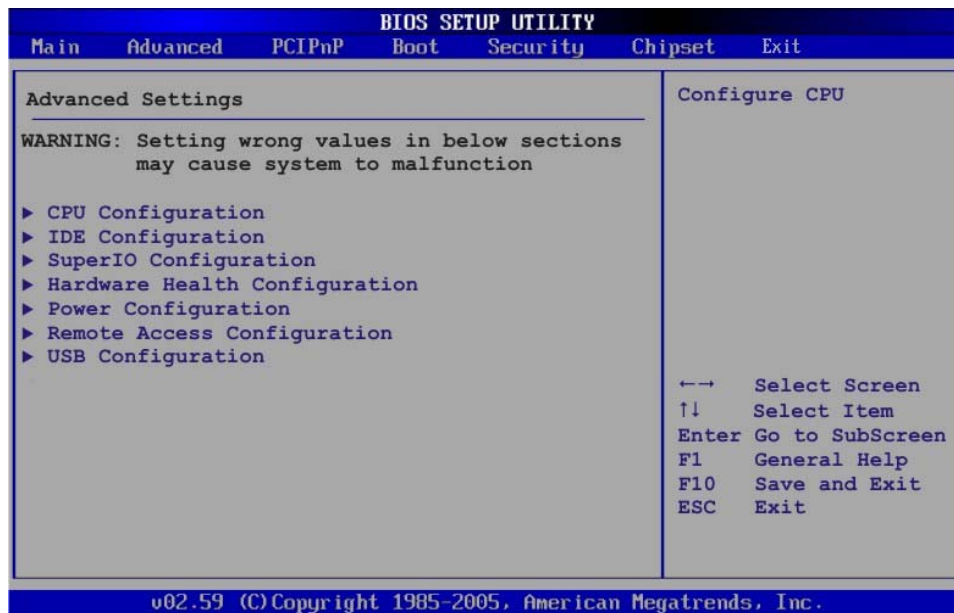

### BIOS Menu 2: Advanced

#### 6.3.1 CPU Configuration

Use the **CPU Configuration** menu (BIOS Menu 3) to view detailed CPU specifications and configure the CPU.

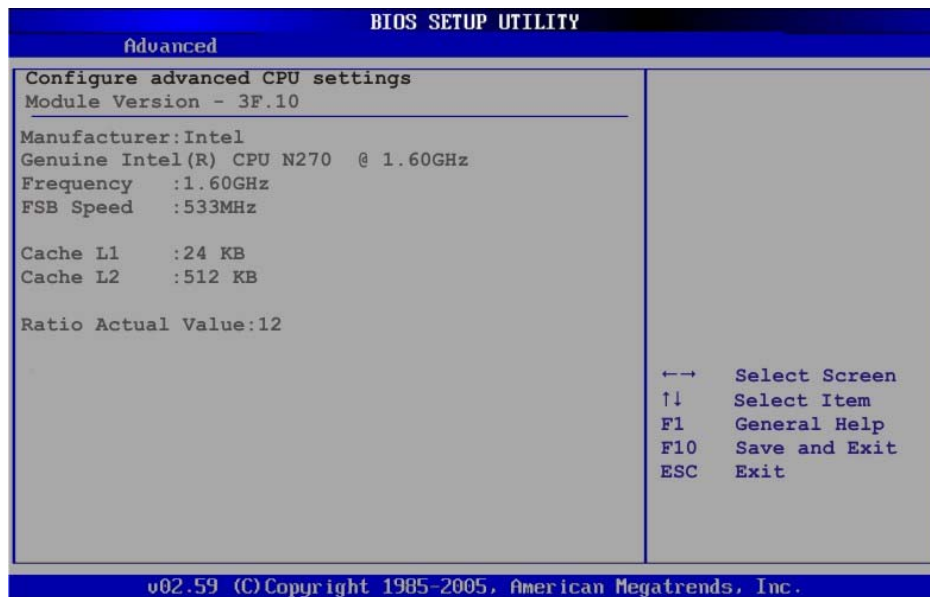


### BIOS Menu 3: CPU Configuration

The CPU Configuration menu (**BIOS Menu 3**) lists the following CPU details:

- **Manufacturer:** Lists the name of the CPU manufacturer
- **Brand String:** Lists the brand name of the CPU being used
- **Frequency:** Lists the CPU processing speed
- **FSB Speed:** Lists the FSB speed
- **Cache L1:** Lists the CPU L1 cache size
- **Cache L2:** Lists the CPU L2 cache size

### 6.3.2 IDE Configuration

Use the **IDE Configuration** menu (**BIOS Menu 4**) to change and/or set the configuration of the IDE devices installed in the system.

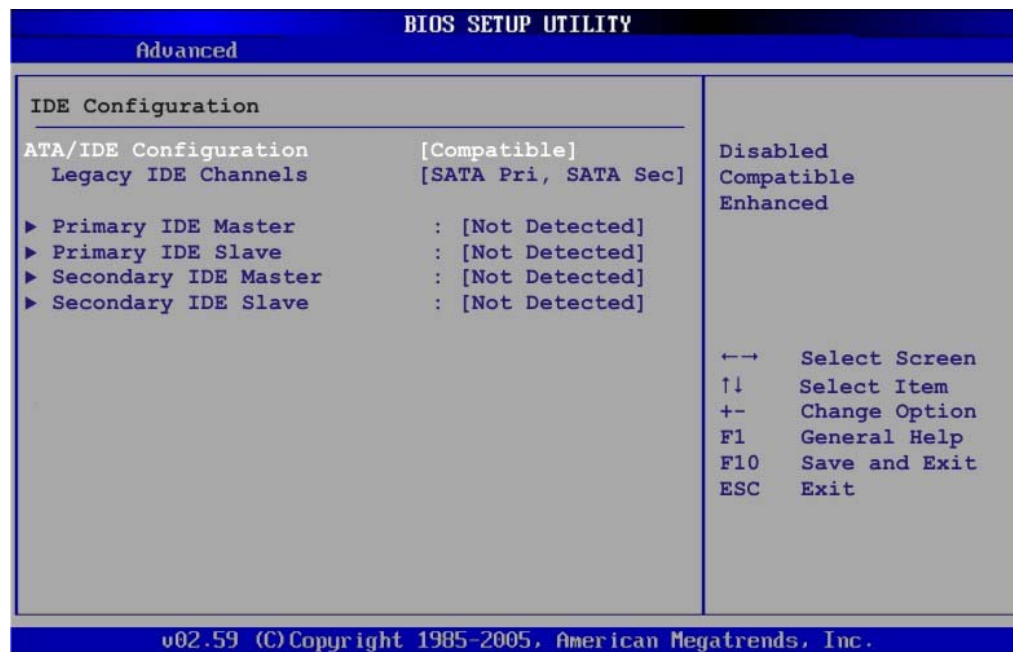

**BIOS Menu 4: IDE Configuration**

#### ➔ **ATA/IDE Configurations [Compatible]**

Use the **ATA/IDE Configurations** option to configure the ATA/IDE controller.

- ➔ **Disabled**                      Disables the on-board ATA/IDE controller.
- ➔ **Compatible**    **DEFAULT**    Configures the on-board ATA/IDE controller to be in

## AFL-xxA-N270 Series Panel PC

compatible mode. In this mode, a SATA channel will replace one of the IDE channels. This mode supports up to 4 storage devices.

### → Enhanced

Configures the on-board ATA/IDE controller to be in Enhanced mode. In this mode, IDE channels and SATA channels are separated. This mode supports up to 6 storage devices. Some legacy OS do not support this mode.

### → Legacy IDE Channels [PATA Pri, SATA Sec]

#### → SATA Only

Only the SATA drives are enabled.

#### → SATA Pri, PATA Sec

DEFAULT

The IDE drives are enabled on the Primary IDE channel. The SATA drives are enabled on the Secondary IDE channel.

#### → PATA Only

The IDE drives are enabled on the primary and secondary IDE channels. SATA drives are disabled.

### → IDE Master and IDE Slave


When entering setup, BIOS auto detects the presence of IDE devices. BIOS displays the status of the auto detected IDE devices. The following IDE devices are detected and are shown in the **IDE Configuration** menu:

- Primary IDE Master
- Primary IDE Slave
- Secondary IDE Master
- Secondary IDE Slave

The **IDE Configuration** menu (**BIOS Menu 4**) allows changes to the configurations for the IDE devices installed in the system. If an IDE device is detected, and one of the above listed four BIOS configuration options are selected, the IDE configuration options shown in **Section 6.3.2.1** appear.

### 6.3.2.1 IDE Master, IDE Slave

Use the **IDE Master** and **IDE Slave** configuration menu to view both primary and secondary IDE device details and configure the IDE devices connected to the system.

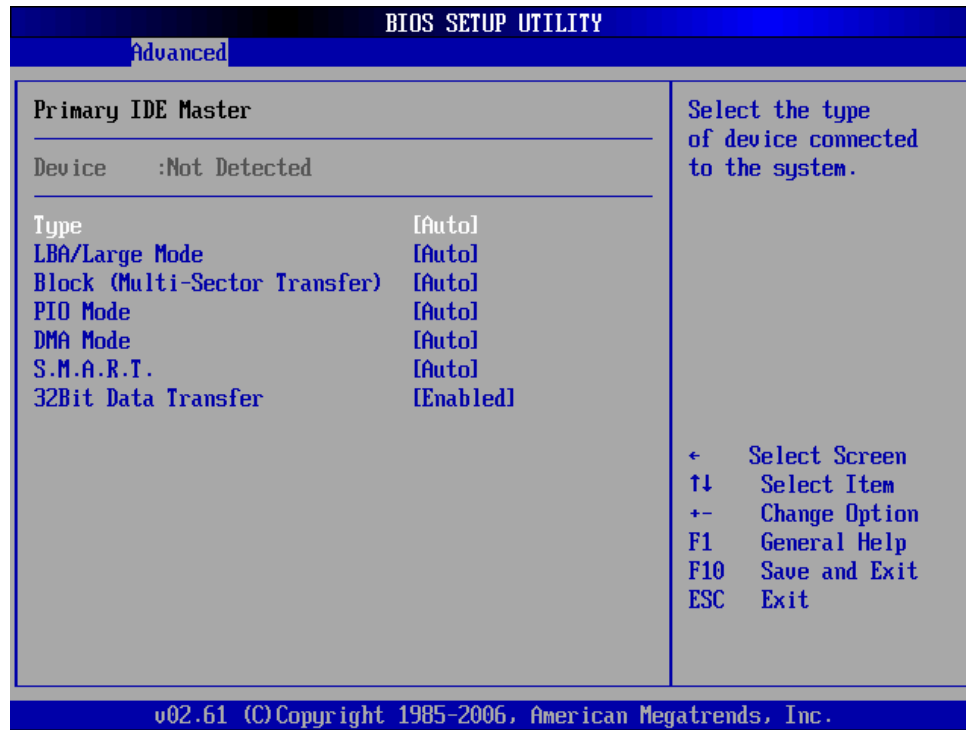

### BIOS Menu 5: IDE Master and IDE Slave Configuration

#### ➔ Auto-Detected Drive Parameters

The “grayed-out” items in the left frame are IDE disk drive parameters automatically detected from the firmware of the selected IDE disk drive. The drive parameters are listed as follows:

- **Device:** Lists the device type (e.g. hard disk, CD-ROM etc.)
- **Type:** Indicates the type of devices a user can manually select
- **Vendor:** Lists the device manufacturer
- **Size:** List the storage capacity of the device.

## AFL-xxA-N270 Series Panel PC

- **LBA Mode:** Indicates whether the LBA (Logical Block Addressing) is a method of addressing data on a disk drive is supported or not.
- **Block Mode:** Block mode boosts IDE drive performance by increasing the amount of data transferred. Only 512 bytes of data can be transferred per interrupt if block mode is not used. Block mode allows transfers of up to 64 KB per interrupt.
- **PIO Mode:** Indicates the PIO mode of the installed device.
- **Async DMA:** Indicates the highest Asynchronous DMA Mode that is supported.
- **Ultra DMA:** Indicates the highest Synchronous DMA Mode that is supported.
- **S.M.A.R.T.:** Indicates whether or not the Self-Monitoring Analysis and Reporting Technology protocol is supported.
- **32Bit Data Transfer:** Enables 32-bit data transfer.

### → Type [Auto]

Use the **Type** BIOS option select the type of device the AMIBIOS attempts to boot from after the Power-On Self-Test (POST) is complete.

- |   |                      |                |                                                                                                                                                                                                 |
|---|----------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| → | <b>Not Installed</b> |                | BIOS is prevented from searching for an IDE disk drive on the specified channel.                                                                                                                |
| → | <b>Auto</b>          | <b>DEFAULT</b> | The BIOS auto detects the IDE disk drive type attached to the specified channel. This setting should be used if an IDE hard disk drive is attached to the specified channel.                    |
| → | <b>CD/DVD</b>        |                | The CD/DVD option specifies that an IDE CD-ROM drive is attached to the specified IDE channel. The BIOS does not attempt to search for other types of IDE disk drives on the specified channel. |
| → | <b>ARMD</b>          |                | This option specifies an ATAPI Removable Media Device. These include, but are not limited to: <ul style="list-style-type: none"> <li>→ <b>ZIP</b></li> <li>→ <b>LS-120</b></li> </ul>           |

➔ **LBA/Large Mode [Auto]**

Use the **LBA/Large Mode** option to disable or enable BIOS to auto detects LBA (Logical Block Addressing). LBA is a method of addressing data on a disk drive. In LBA mode, the maximum drive capacity is 137 GB.

- ➔ **Disabled** BIOS is prevented from using the LBA mode control on the specified channel.
- ➔ **Auto** **DEFAULT** BIOS auto detects the LBA mode control on the specified channel.

➔ **Block (Multi Sector Transfer) [Auto]**

Use the **Block (Multi Sector Transfer)** to disable or enable BIOS to auto detect if the device supports multi-sector transfers.

- ➔ **Disabled** BIOS is prevented from using Multi-Sector Transfer on the specified channel. The data to and from the device occurs one sector at a time.
- ➔ **Auto** **DEFAULT** BIOS auto detects Multi-Sector Transfer support on the drive on the specified channel. If supported the data transfer to and from the device occurs multiple sectors at a time.

➔ **PIO Mode [Auto]**

Use the **PIO Mode** option to select the IDE PIO (Programmable I/O) mode program timing cycles between the IDE drive and the programmable IDE controller. As the PIO mode increases, the cycle time decreases.

- ➔ **Auto** **DEFAULT** BIOS auto detects the PIO mode. Use this value if the IDE disk drive support cannot be determined.
- ➔ **0** PIO mode 0 selected with a maximum transfer rate of 3.3MBps
- ➔ **1** PIO mode 1 selected with a maximum transfer rate of 5.2MBps
- ➔ **2** PIO mode 2 selected with a maximum transfer rate of 8.3MBps

## AFL-xxA-N270 Series Panel PC

- 3 PIO mode 3 selected with a maximum transfer rate of 11.1MBps
- 4 PIO mode 4 selected with a maximum transfer rate of 16.6MBps  
(This setting generally works with all hard disk drives manufactured after 1999. For other disk drives, such as IDE CD-ROM drives, check the specifications of the drive.)

### → DMA Mode [Auto]

Use the **DMA Mode** BIOS selection to adjust the DMA mode options.

- **Auto**      **DEFAULT**      BIOS auto detects the DMA mode. Use this value if the IDE disk drive support cannot be determined.
- **SWDMA0**      Single Word DMA mode 0 selected with a maximum data transfer rate of 2.1MBps
- **SWDMA1**      Single Word DMA mode 1 selected with a maximum data transfer rate of 4.2MBps
- **SWDMA2**      Single Word DMA mode 2 selected with a maximum data transfer rate of 8.3MBps
- **MWDMA0**      Multi Word DMA mode 0 selected with a maximum data transfer rate of 4.2MBps
- **MWDMA1**      Multi Word DMA mode 1 selected with a maximum data transfer rate of 13.3MBps
- **MWDMA2**      Multi Word DMA mode 2 selected with a maximum data transfer rate of 16.6MBps
- **UDMA1**      Ultra DMA mode 0 selected with a maximum data transfer rate of 16.6MBps
- **UDMA1**      Ultra DMA mode 1 selected with a maximum data transfer rate of 25MBps
- **UDMA2**      Ultra DMA mode 2 selected with a maximum data transfer rate of 33.3MBps
- **UDMA3**      Ultra DMA mode 3 selected with a maximum data transfer

rate of 44MBps (To use this mode, it is required that an 80-conductor ATA cable is used.)

➔ **UDMA4**

Ultra DMA mode 4 selected with a maximum data transfer rate of 66.6MBps (To use this mode, it is required that an 80-conductor ATA cable is used.)

➔ **UDMA5**

Ultra DMA mode 5 selected with a maximum data transfer rate of 99.9MBps (To use this mode, it is required that an 80-conductor ATA cable is used.)

➔ **S.M.A.R.T [Auto]**

Use the **S.M.A.R.T** option to auto-detect, disable or enable Self-Monitoring Analysis and Reporting Technology (SMART) on the drive on the specified channel. **S.M.A.R.T** predicts impending drive failures. The **S.M.A.R.T** BIOS option enables or disables this function.

➔ **Auto**      **DEFAULT**      BIOS auto detects HDD SMART support.

➔ **Disabled**      Prevents BIOS from using the HDD SMART feature.

➔ **Enabled**      Allows BIOS to use the HDD SMART feature

➔ **32Bit Data Transfer [Enabled]**

Use the **32Bit Data Transfer** BIOS option to enables or disable 32-bit data transfers.


➔ **Disabled**      Prevents the BIOS from using 32-bit data transfers.

➔ **Enabled**      **DEFAULT**      Allows BIOS to use 32-bit data transfers on supported hard disk drives.

### 6.3.3 Super IO Configuration

Use the **Super IO Configuration** menu (**BIOS Menu 6**) to set or change the configurations for the FDD controllers, parallel ports and serial ports.

## AFL-xxA-N270 Series Panel PC

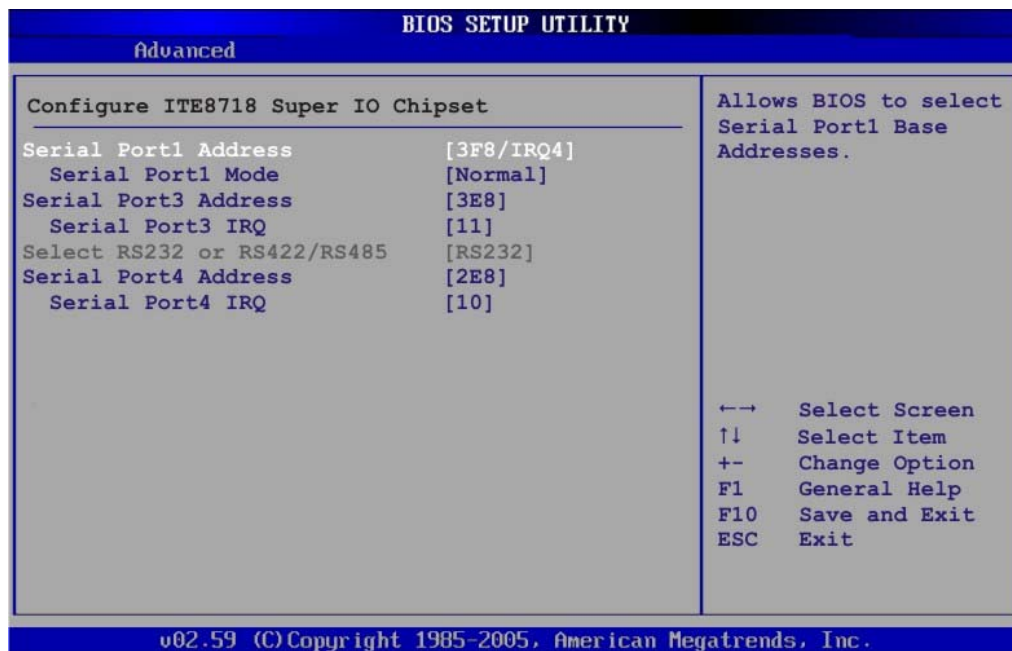

### BIOS Menu 6: Super IO Configuration

#### → Serial Port1 Address [3F8/IRQ4]

Use the **Serial Port1 Address** option to select the Serial Port 1 base address.

- **Disabled** No base address is assigned to Serial Port 1
- **3F8/IRQ4** **DEFAULT** Serial Port 1 I/O port address is 3F8 and the interrupt address is IRQ4
- **2F8/IRQ3** Serial Port 1 I/O port address is 2F8 and the interrupt address is IRQ3
- **3E8/IRQ4** Serial Port 1 I/O port address is 3E8 and the interrupt address is IRQ4
- **2E8/IRQ3** Serial Port 1 I/O port address is 2E8 and the interrupt address is IRQ3

#### → Serial Port1 Mode [Normal]

Use the **Serial Port1 Mode** option to select the transmitting and receiving mode for the first serial port.

- ➔ **Normal**      **DEFAULT**      Serial Port 1 mode is normal
- ➔ **IrDA**                      Serial Port 1 mode is IrDA
- ➔ **ASK IR**                      Serial Port 1 mode is ASK IR

#### ➔ **Serial Port3 Address [3E8]**

Use the **Serial Port3 Address** option to select the Serial Port 3 base address.

- ➔ **Disabled**                      No base address is assigned to Serial Port 3
- ➔ **3E8**              **DEFAULT**      Serial Port 3 I/O port address is 3E8
- ➔ **2E8**                      Serial Port 3 I/O port address is 2E8
- ➔ **2F0**                      Serial Port 3 I/O port address is 2F0
- ➔ **2E0**                      Serial Port 3 I/O port address is 2E0

#### ➔ **Serial Port3 IRQ [11]**

Use the **Serial Port3 IRQ** option to select the interrupt address for serial port 3.

- ➔ **10**                      Serial port 3 IRQ address is 10
- ➔ **11**              **DEFAULT**      Serial port 3 IRQ address is 11

#### ➔ **Serial Port4 Address [2E8]**

Use the **Serial Port4 IRQ** option to select the interrupt address for serial port 4.

- ➔ **Disabled**                      No base address is assigned to serial port 3
- ➔ **2E8**              **DEFAULT**      Serial port 4 I/O port address is 2E8

#### ➔ **Serial Port4 IRQ [10]**


Use the **Serial Port4 IRQ** option to select the interrupt address for serial port 4.

- ➔ **10**              **DEFAULT**      Serial port 4 IRQ address is 10

## AFL-xxA-N270 Series Panel PC

### 6.3.4 Hardware Health Configuration

The **Hardware Health Configuration** menu (**BIOS Menu 7**) shows the operating temperature, fan speeds and system voltages.

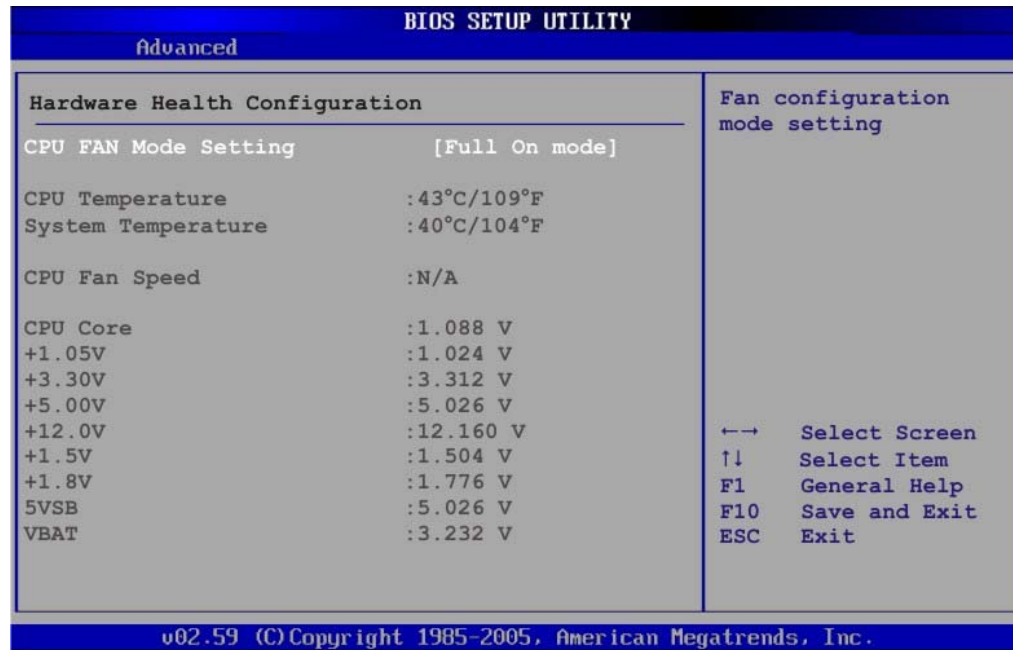

#### BIOS Menu 7: Hardware Health Configuration

##### → CPU FAN Mode Setting [Full On Mode]

Use the **CPU FAN Mode Setting** option to configure the second fan.

- |                   |         |                                                                                    |
|-------------------|---------|------------------------------------------------------------------------------------|
| → Full On Mode    | DEFAULT | Fan is on all the time                                                             |
| → Automatic mode  |         | Fan is off when the temperature is low enough. Parameters must be set by the user. |
| → PWM Manual mode |         | Pulse width modulation set manually                                                |

When the **CPU FAN Mode Setting** option is in the **Automatic Mode**, the following parameters can be set.

- CPU Temp. Limit of OFF

- CPU Temp. Limit of Start
- CPU Fan Start PWM
- Slope PWM

When the **CPU FAN Mode Setting** option is in the **PWM Manual Mode**, the following parameters can be set.

- CPU Fan PWM control

#### → CPU Temp. Limit of OFF [000]

---



#### **WARNING:**

Setting this value too high may cause the fan to stop when the CPU is at a high temperature and therefore cause the system to be damaged.

---

The **CPU Temp. Limit of OFF** option can only be set if the **CPU FAN Mode Setting** option is set to **Automatic Mode**. Use the **CPU Temp. Limit of OFF** option to select the CPU temperature at which the cooling fan should automatically turn off. To select a value, select the **CPU Temp. Limit of OFF** option and enter a decimal number between 000 and 127. The temperature range is specified below.

- Minimum Value: 0°C
- Maximum Value: 127°C

#### → CPU Temp. Limit of Start [020]

---



#### **WARNING:**

Setting this value too high may cause the fan to start only when the CPU is at a high temperature and therefore cause the system to be damaged.

---

## AFL-xxA-N270 Series Panel PC

The **CPU Temp. Limit of Start** option can only be set if the **CPU FAN Mode Setting** option is set to **Automatic Mode**. Use the **CPU Temp. Limit of Start** option to select the CPU temperature at which the cooling fan should automatically turn on. When the fan starts, it rotates using the starting pulse width modulation (PWM) specified in the **Fan 3 Start PWM** option below. To select a value, select the **CPU Temp. Limit of Start** option and enter a decimal number between 000 and 127. The temperature range is specified below.

- Minimum Value: 0°C
- Maximum Value: 127°C

### → CPU Fan Start PWM [070]

The **Fan 3 Start PWM** option can only be set if the **CPU FAN Mode Setting** option is set to **Automatic Mode**. Use the **Fan 3 Start PWM** option to select the PWM mode the fan starts to rotate with after the temperature specified in the **Temperature 3 Limit of Start** is exceeded. The Super I/O chipset supports 128 PWM modes. To select a value, select the **Fan 3 Start PWM** option and enter a decimal number between 000 and 127. The temperature range is specified below.

- PWM Minimum Mode: 0
- PWM Maximum Mode: 127

### → Slope PWM [0.5 PWM]

The **Slope PWM 1** option can only be set if the **CPU FAN Mode Setting** option is set to **Automatic Mode**. Use the **Slope PWM 1** option to select the linear rate at which the PWM mode increases with respect to an increase in temperature. A list of available options is shown below:

- 0.125 PWM
- 0.25 PWM
- 0.5 PWM
- 1 PWM
- 2 PWM
- 4 PWM
- 8 PWM

- 15 PWM


The following system parameters and values are shown. The system parameters that are monitored are:

- **System Temperatures:** The following system temperatures are monitored
  - CPU Temperature
  - System Temperature
- **Fan Speeds:** The CPU cooling fan speed is monitored.
  - CPU Fan Speed
- **Voltages:** The following system voltages are monitored
  - CPU Core
  - +1.05V
  - +3.30V
  - +5.00V
  - +12.0 V
  - +1.5V
  - +1.8V
  - 5VSB
  - VBAT

### 6.3.5 Power Configuration

The **Power Configuration** menu (**BIOS Menu 8**) configures the Advanced Configuration and Power Interface (ACPI) and Power Management (APM) options.


## AFL-xxA-N270 Series Panel PC

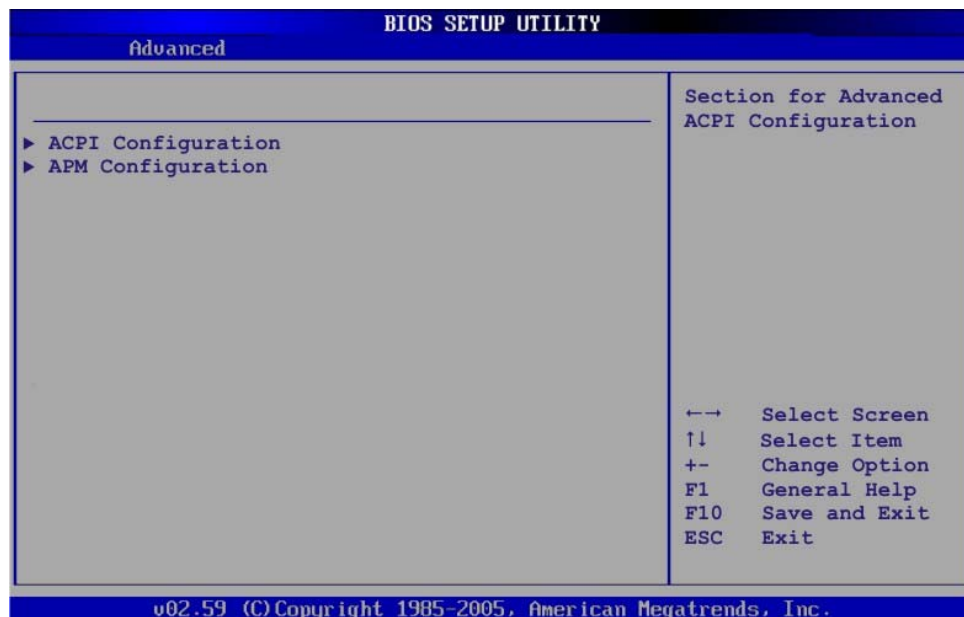

BIOS Menu 8: Power Configuration

### 6.3.5.1 ACPI configuration

The **ACPI Configuration** menu (**BIOS Menu 9**) configures the Advanced Configuration and Power Interface (ACPI).

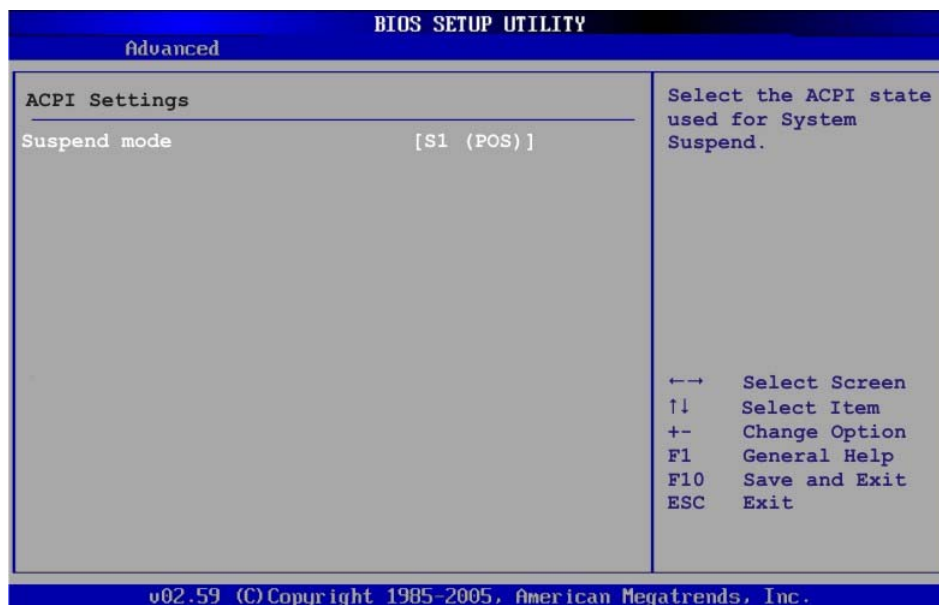

BIOS Menu 9: ACPI Configuration

➔ **Suspend Mode [S1(POS)]**


Use the **Suspend Mode** BIOS option to specify the sleep state the system enters when it is not being used.

➔ **S1 (POS) DEFAULT** System appears off. The CPU is stopped; RAM is refreshed; the system is running in a low power mode.

➔ **S3 (STR)** System appears off. The CPU has no power; RAM is in slow refresh; the power supply is in a reduced power mode.

### 6.3.6 APM Configuration

The **APM Configuration** menu (**BIOS Menu 10**) allows the advanced power management options to be configured.

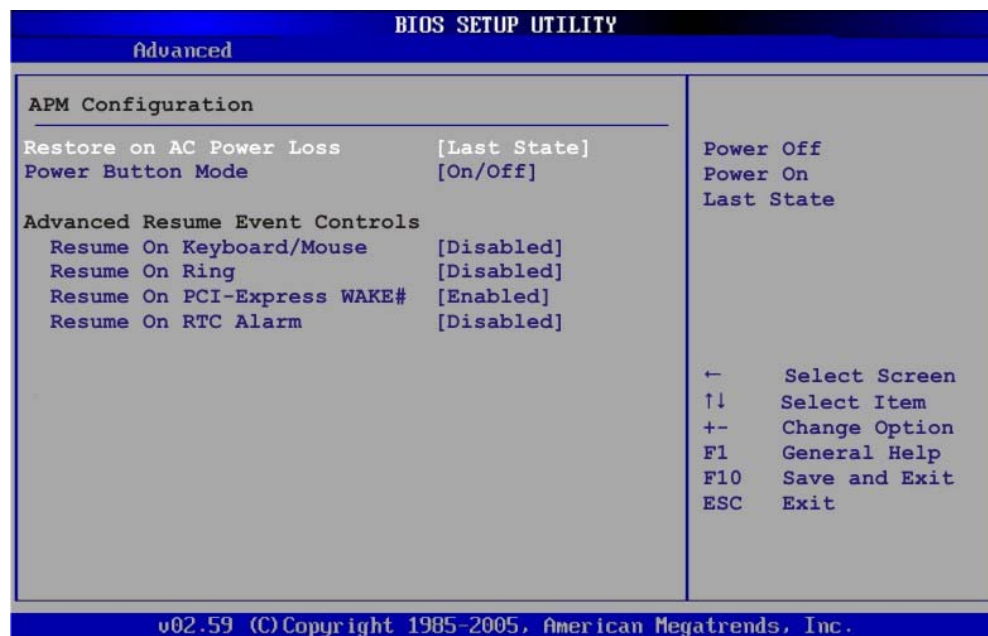

**BIOS Menu 10: Advanced Power Management Configuration**

➔ **Restore on AC Power Loss [Last State]**

Use the **Restore on AC Power Loss** BIOS option to specify what state the system returns to if there is a sudden loss of power to the system.

## AFL-xxA-N270 Series Panel PC

- **Power Off**                      The system remains turned off
- **Power On**                      The system turns on
- **Last State**    **DEFAULT**    The system returns to its previous state. If it was on, it turns itself on. If it was off, it remains off.

### → **Power Button Mode [On/Off]**

Use the **Power Button Mode** BIOS to specify how the power button functions.

- **On/Off**    **DEFAULT**    When the power button is pressed the system is either turned on or off
- **Suspend**                      When the power button is pressed the system goes into suspend mode

### → **Resume on Keyboard/Mouse [Disabled]**

Use the **Resume on Keyboard/Mouse** BIOS option to enable activity on either the keyboard or mouse to rouse the system from a suspend or standby state. That is, the system is roused when the mouse is moved or a button on the keyboard is pressed.

- **Disabled**                      **DEFAULT**    Wake event not generated by activity on the keyboard or mouse
- **Resume**    **On**                      Wake event not generated by activity on the  
**KeyBoard**
- **Resume**    **On**                      Wake event not generated by activity on the  
**Mouse**
- **Enabled**                      Wake event generated by activity on the keyboard or mouse

### → **Resume on Ring [Disabled]**

Use the **Resume on Ring** BIOS option to enable activity on the RI (ring in) modem line to rouse the system from a suspend or standby state. That is, the system will be roused by an incoming call on a modem.

- **Disabled**      **DEFAULT**      Wake event not generated by an incoming call
- **Enabled**                      Wake event generated by an incoming call

→ **Resume on PCI-Express WAKE# [Enabled]**

Use the **Resume PCI-Express WAKE#** BIOS option to enable activity on the PCI-Express WAKE# signal to rouse the system from a suspend or standby state.

- **Disabled**                      Wake event not generated by PCI-Express WAKE# signal activity
- **Enabled**      **DEFAULT**      Wake event generated by PCI-Express WAKE# signal activity

→ **Resume On RTC Alarm [Disabled]**

Use the **Resume On RTC Alarm** option to specify the time the system should be roused from a suspended state.

- **Disabled**      **DEFAULT**      The real time clock (RTC) cannot generate a wake event
- **Enabled**                      If selected, the following appears with values that can be selected:

→ **RTC Alarm Date (Days)**


→ **System Time**

After setting the alarm, the computer turns itself on from a suspend state when the alarm goes off.

### 6.3.7 Remote Configuration

Use the **Remote Access Configuration** menu (**BIOS Menu 11**) to configure remote access parameters. The **Remote Access Configuration** is an AMIBIOS feature and allows a remote host running a terminal program to display and configure the BIOS settings.

## AFL-xxA-N270 Series Panel PC

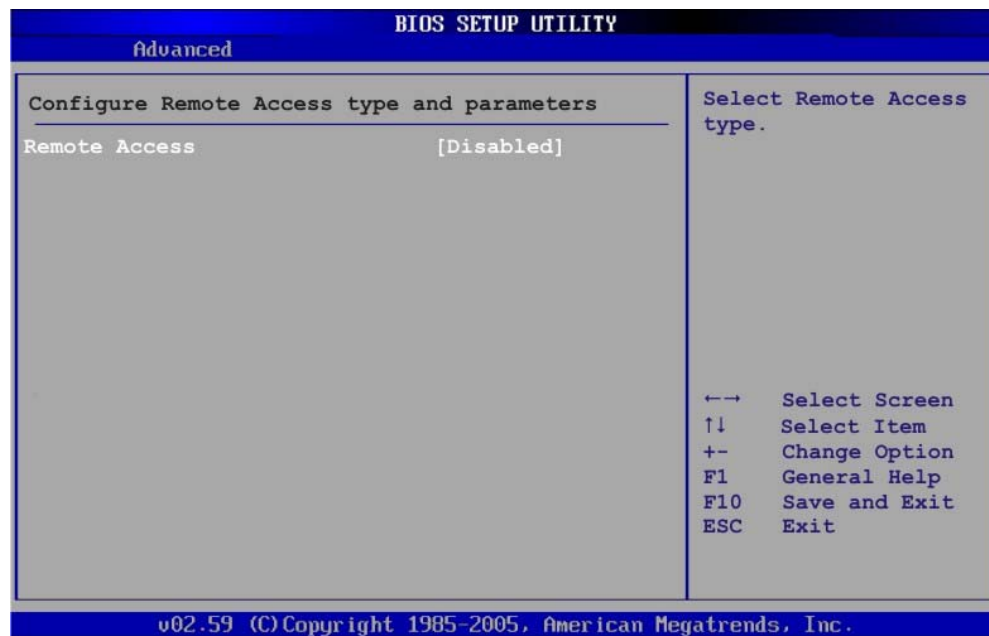

**BIOS Menu 11: Remote Access Configuration [Advanced]**

### → Remote Access [Disabled]

Use the **Remote Access** option to enable or disable access to the remote functionalities of the system.

- |   |                 |                |                                                         |
|---|-----------------|----------------|---------------------------------------------------------|
| → | <b>Disabled</b> | <b>DEFAULT</b> | Remote access is disabled.                              |
| → | <b>Enabled</b>  |                | Remote access configuration options shown below appear: |

- **Serial Port Number**
- **Serial Port Mode**
- **Redirection after BIOS POST**
- **Terminal Type**

These configuration options are discussed below.

**→ Serial Port Number [COM1]**

Use the **Serial Port Number** option allows to select the serial port used for remote access.

- COM1    DEFAULT**      System is remotely accessed through COM1
- COM2**                      System is remotely accessed through COM2
- COM3**                      System is remotely accessed through COM3

**NOTE:** Make sure the selected COM port is enabled through the Super I/O configuration menu.

**→ Base Address, IRQ [3F8h,4]**

The **Base Address, IRQ** option cannot be configured and only shows the interrupt address of the serial port listed above.

**→ Serial Port Mode [115200 8,n,1]**

Use the **Serial Port Mode** option to select baud rate through which the console redirection is made. The following configuration options are available

- 115200 8,n,1 **DEFAULT**
- 57600 8,n,1
- 38400 8,n,1
- 19200 8,n,1
- 09600 8,n,1

**NOTE:**

Identical baud rate setting must be set on the host (a management computer running a terminal software) and the slave.

---

**→ Redirection After BIOS POST [Always]**

Use the **Redirection After BIOS POST** option to specify when console redirection should occur.

## AFL-xxA-N270 Series Panel PC

- |   |                    |                |                                                                        |
|---|--------------------|----------------|------------------------------------------------------------------------|
| → | <b>Disabled</b>    |                | The console is not redirected after POST                               |
| → | <b>Boot Loader</b> |                | Redirection is active during POST and during Boot Loader               |
| → | <b>Always</b>      | <b>DEFAULT</b> | Redirection is always active (Some OSES may not work if set to Always) |


### → Terminal Type [ANSI]

Use the **Terminal Type** BIOS option to specify the remote terminal type.

- |   |                |                |                                     |
|---|----------------|----------------|-------------------------------------|
| → | <b>ANSI</b>    | <b>DEFAULT</b> | The target terminal type is ANSI    |
| → | <b>VT100</b>   |                | The target terminal type is VT100   |
| → | <b>VT-UTF8</b> |                | The target terminal type is VT-UTF8 |

## 6.3.8 USB Configuration

Use the **USB Configuration** menu (**BIOS Menu 12**) to read USB configuration information and configure the USB settings.

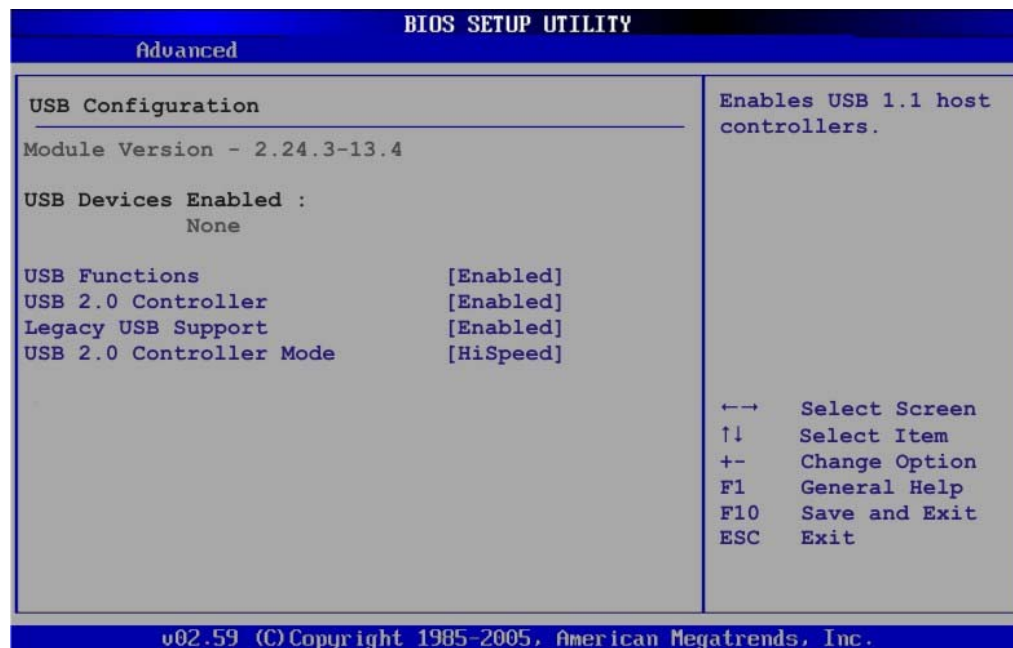

**BIOS Menu 12: USB Configuration**

### ➔ **USB Functions [Enabled]**

Use the **USB Function** option to enable or disable the USB controllers.

- ➔ **Disabled** USB controllers are enabled
- ➔ **Enabled** **DEFAULT** USB controllers are disabled

### ➔ **USB 2.0 Controller [Enabled]**

The **USB 2.0 Controller** BIOS option enables or disables the USB 2.0 controller

- ➔ **Enabled** **DEFAULT** USB function enabled
- ➔ **Disabled** USB function disabled

### ➔ **Legacy USB Support [Enabled]**

Use the **Legacy USB Support** BIOS option to enable USB mouse and USB keyboard support.

Normally if this option is not enabled, any attached USB mouse or USB keyboard does not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB driver loaded onto the system.

- ➔ **Disabled** Legacy USB support disabled
- ➔ **Enabled** **DEFAULT** Legacy USB support enabled
- ➔ **Auto** Legacy USB support disabled if no USB devices are connected

### ➔ **USB2.0 Controller Mode [HiSpeed]**

The **USB2.0 Controller Mode** BIOS option sets the speed of the USB2.0 controller.

- ➔ **FullSpeed** The controller is capable of operating at full speed  
12 Mb/s

## AFL-xxA-N270 Series Panel PC

- ➔ **HiSpeed**      **DEFAULT**      The controller is capable of operating at high speed 480 Mb/s


### 6.4 PCI/PnP

Use the PCI/PnP menu (**BIOS Menu 13**) to configure advanced PCI and PnP settings.



#### **WARNING:**

Setting wrong values for the BIOS selections in the PCIPnP BIOS menu may cause the system to malfunction.

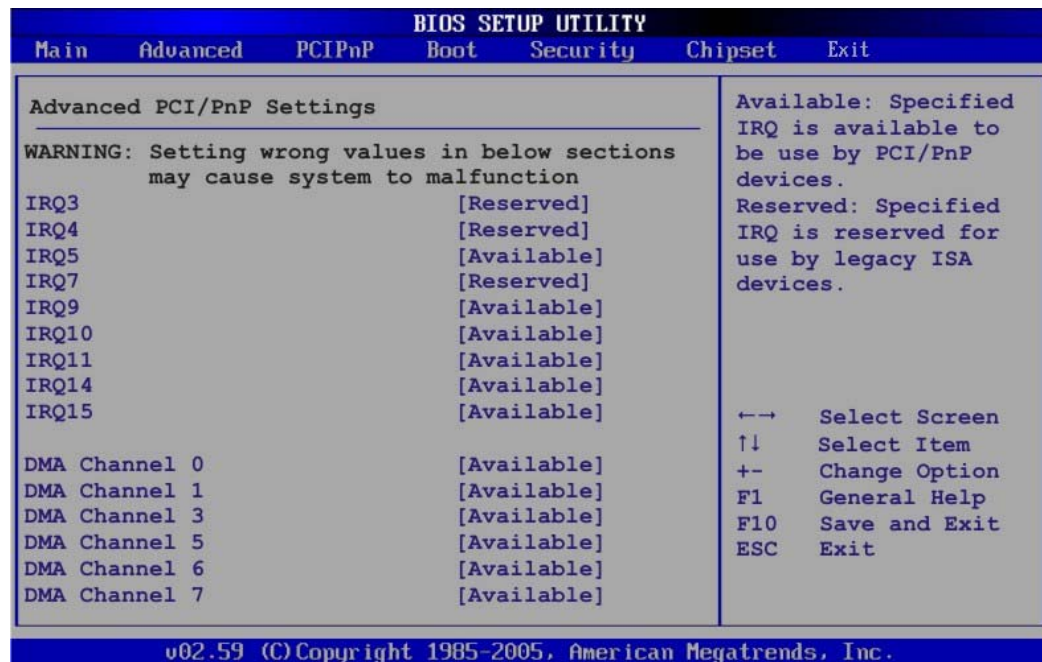

#### **BIOS Menu 13: PCI/PnP Configuration**

- ➔ **IRQ#**      **[Available]**

Use the **IRQ#** address to specify what IRQs can be assigned to a particular peripheral device.

- ➔ **Available**      **DEFAULT**      The specified IRQ is available to be used by PCI/PnP devices

➔ **Reserved**

The specified IRQ is reserved for use by Legacy ISA devices

Available IRQ addresses are:

- IRQ3
- IRQ4
- IRQ5
- IRQ7
- IRQ9
- IRQ10
- IRQ 11
- IRQ 14
- IRQ 15

➔ **DMA Channel# [Available]**

Use the **DMA Channel#** option to assign a specific DMA channel to a particular PCI/PnP device.

➔ **Available      DEFAULT**

The specified DMA is available to be used by PCI/PnP devices

➔ **Reserved**

The specified DMA is reserved for use by Legacy ISA devices

Available DMA Channels are:

- DM Channel 0
- DM Channel 1
- DM Channel 3
- DM Channel 5
- DM Channel 6
- DM Channel 7

## AFL-xxA-N270 Series Panel PC


### ➔ Reserved Memory Size [Disabled]

Use the **Reserved Memory Size** BIOS option to specify the amount of memory that should be reserved for legacy ISA devices.

|   |                 |                |                                                 |
|---|-----------------|----------------|-------------------------------------------------|
| ➔ | <b>Disabled</b> | <b>DEFAULT</b> | No memory block reserved for legacy ISA devices |
| ➔ | <b>16K</b>      |                | 16KB reserved for legacy ISA devices            |
| ➔ | <b>32K</b>      |                | 32KB reserved for legacy ISA devices            |
| ➔ | <b>64K</b>      |                | 54KB reserved for legacy ISA devices            |

## 6.5 Boot


Use the Boot menu (**BIOS Menu 14**) to configure system boot options.

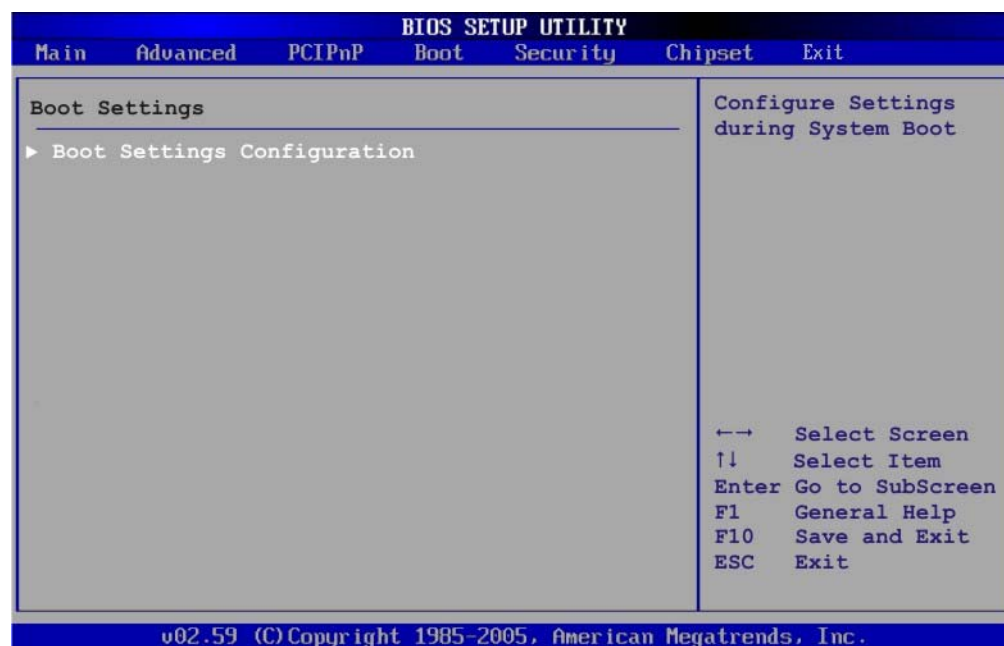

**BIOS Menu 14: Boot**

### 6.5.1 Boot Settings Configuration

Use the Boot Settings Configuration menu (**BIOS Menu 15**) to configure advanced system boot options.

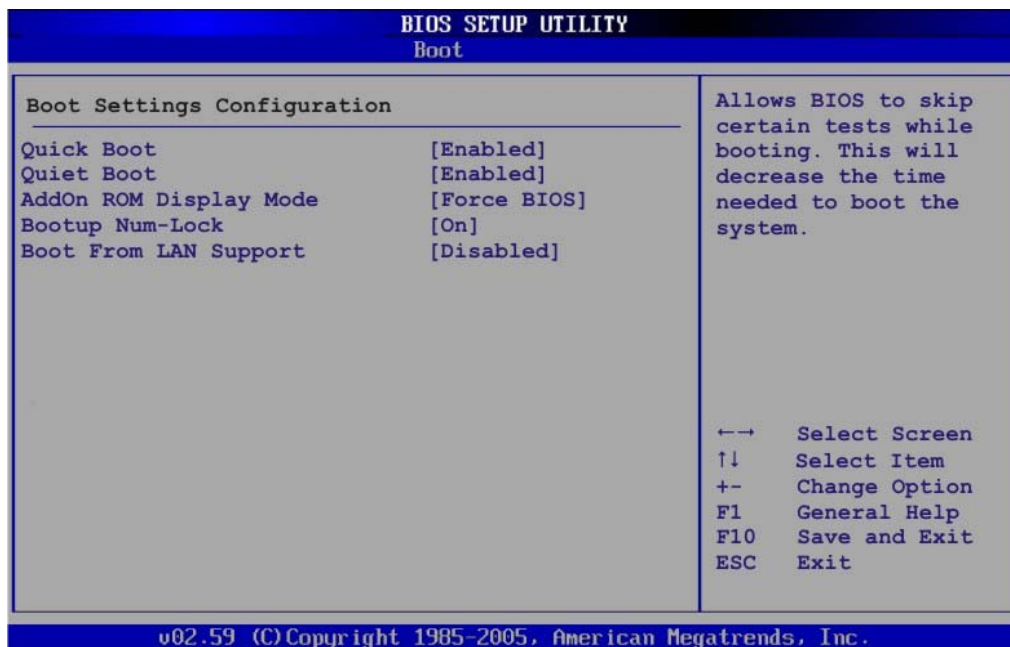

#### BIOS Menu 15: Boot Settings Configuration

##### → Quick Boot [Enabled]

Use the **Quick Boot** BIOS option to make the computer speed up the boot process.

- **Disabled** No POST procedures are skipped
- **Enabled** **DEFAULT** Some POST procedures are skipped to decrease the system boot time

##### → Quiet Boot [Disabled]

Use the **Quiet Boot** BIOS option to select the screen display when the system boots.

- **Disabled** **DEFAULT** Normal POST messages displayed
- **Enabled** OEM Logo displayed instead of POST messages

## AFL-xxA-N270 Series Panel PC

### → AddOn ROM Display Mode [Force BIOS]

The **AddOn ROM Display Mode** option allows add-on ROM (read-only memory) messages to be displayed.

- **Force BIOS**      **DEFAULT**      Allows the computer system to force a third party BIOS to display during system boot.
- **Keep Current**      Allows the computer system to display the information during system boot.

### → Bootup Num-Lock [On]

The **Bootup Num-Lock** BIOS option allows the Number Lock setting to be modified during boot up.

- **Off**      Does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard lights up when the Number Lock is engaged.
- **On**      **DEFAULT**      Allows the Number Lock on the keyboard to be enabled automatically when the computer system boots up. This allows the immediate use of the 10-key numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard is lit.


### → Boot From LAN Support [Disabled]

The **BOOT From LAN Support** option enables the system to be booted from a remote system.

- **Enabled**      Can be booted from a remote system through the LAN
- **Disabled**      **DEFAULT**      Cannot be booted from a remote system through the LAN

## 6.6 Security

Use the Security menu (**BIOS Menu 16**) to set system and user passwords.

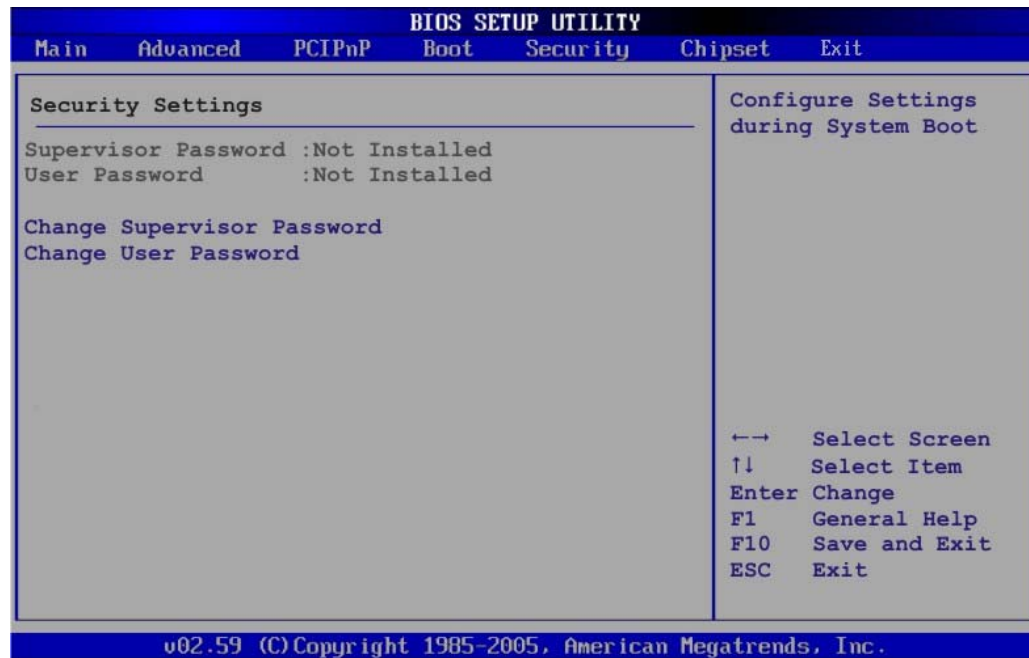

### BIOS Menu 16: Security

#### → Change Supervisor Password

Use the **Change Supervisor Password** to set or change a supervisor password. The default for this option is **Not Installed**. If a supervisor password must be installed, select this field and enter the password. After the password has been added, **Install** appears next to **Change Supervisor Password**.

#### → Change User Password

Use the **Change User Password** to set or change a user password. The default for this option is **Not Installed**. If a user password must be installed, select this field and enter the password. After the password has been added, **Install** appears next to **Change User Password**.


## AFL-xxA-N270 Series Panel PC

## 6.7 Chipset

Use the **Chipset** menu (**BIOS Menu 17**) to access the NorthBridge and SouthBridge configuration menus

**WARNING:**


Setting the wrong values for the Chipset BIOS selections in the Chipset BIOS menu may cause the system to malfunction.

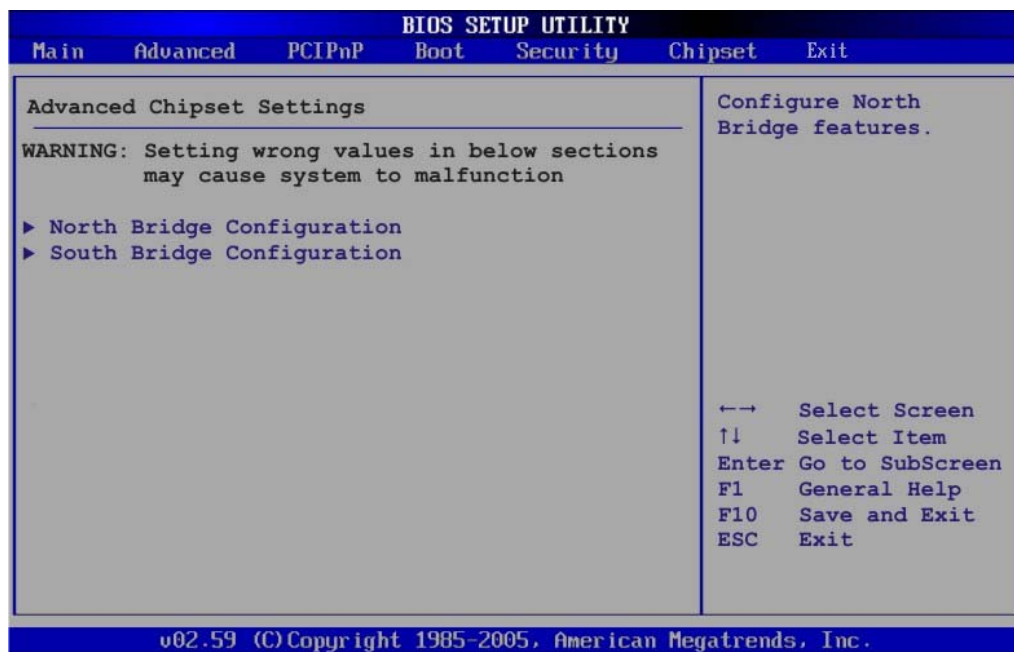

**BIOS Menu 17: Chipset**

### 6.7.1 North Bridge Chipset Configuration

Use the **North Bridge Chipset Configuration** menu (**BIOS Menu 18**) to configure the Northbridge chipset settings.

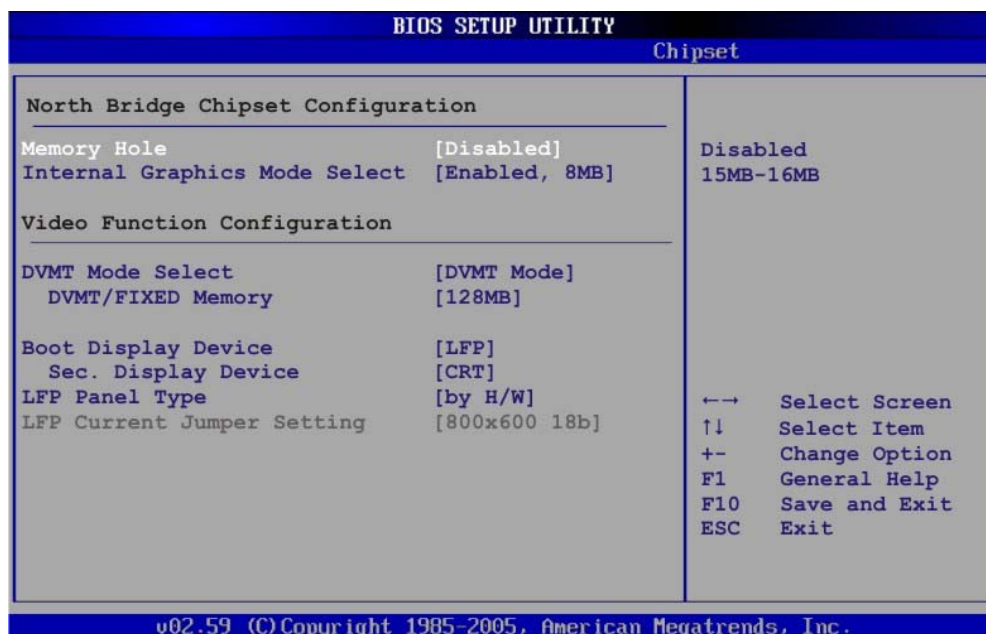

#### BIOS Menu 18:North Bridge Chipset Configuration

##### → Memory Hole [Disabled]

The **Memory Hole** reserves the memory space between 15MB and 16MB for ISA expansion cards that require a specified area of memory to work properly. If an older ISA expansion card is used, please refer to the documentation that came with the card to see if it is necessary to reserve the space.

- **Disabled**      **DEFAULT**      Memory is not reserved for ISA expansion cards
- **Enabled**                      Memory is reserved for ISA expansion cards

##### → Internal Graphics Mode Select [Enable, 8MB]

The **Internal Graphic Mode Select** option determines the amount of system memory that can be used by the Internal graphics device.

- **Disable**
- **Enable, 1MB**                      1MB of memory used by internal graphics device
- **Enable, 8MB**      **DEFAULT**      8MB of memory used by internal graphics device

## AFL-xxA-N270 Series Panel PC

### → DVMT Mode Select [DVMT Mode]

Use the **DVMT Mode Select** option to select the Intel Dynamic Video Memory Technology (DVMT) operating mode.

- |   |                   |                |                                                                                                                                                                                   |
|---|-------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| → | <b>Fixed Mode</b> |                | A fixed portion of graphics memory is reserved as graphics memory.                                                                                                                |
| → | <b>DVMT Mode</b>  | <b>DEFAULT</b> | Graphics memory is dynamically allocated according to the system and graphics needs.                                                                                              |
| → | <b>Combo Mode</b> |                | A fixed portion of graphics memory is reserved as graphics memory. If more memory is needed, graphics memory is dynamically allocated according to the system and graphics needs. |

### → DVMT/FIXED Memory

Use the **DVMT/FIXED Memory** option to specify the maximum amount of memory that can be allocated as graphics memory. This option can only be configured for if **DVMT Mode** or **Fixed Mode** is selected in the **DVMT Mode Select** option. If **Combo Mode** is selected, the maximum amount of graphics memory is 128MB. Configuration options are listed below.

- |   |              |                |
|---|--------------|----------------|
| ▪ | 64MB         |                |
| ▪ | 128MB        | <b>DEFAULT</b> |
| ▪ | Maximum DVMT |                |

### → Boot Display Device [LFP]

Use the **Boot Display Device** option to select the display device used by the system when it boots. Configuration options are listed below.

- |   |     |                |
|---|-----|----------------|
| ▪ | CRT |                |
| ▪ | LFP | <b>DEFAULT</b> |

**→ Sec. Display Device [CRT]**

Use the **Sec. Display Device** option to select the second display device used by the system. Configuration options are listed below.

- Disabled
- CRT **DEFAULT**

**→ LFP Panel Type [by H/W]**


Use the **LFP Panel Type** option to select the type of flat panel connected to the system. Configuration options are listed below.

- 640x480 18b
- 800x480 18b
- 800x600 18b
- 1024x768 18b
- 1280x1024 36b
- 1400x1050 36b
- 1440x900 36b
- 1600x1200 36b
- by H/W **DEFAULT**

**6.7.2 SouthBridge Configuration**

The **SouthBridge Configuration** menu (**BIOS Menu 19**) the southbridge chipset to be configured.

## AFL-xxA-N270 Series Panel PC

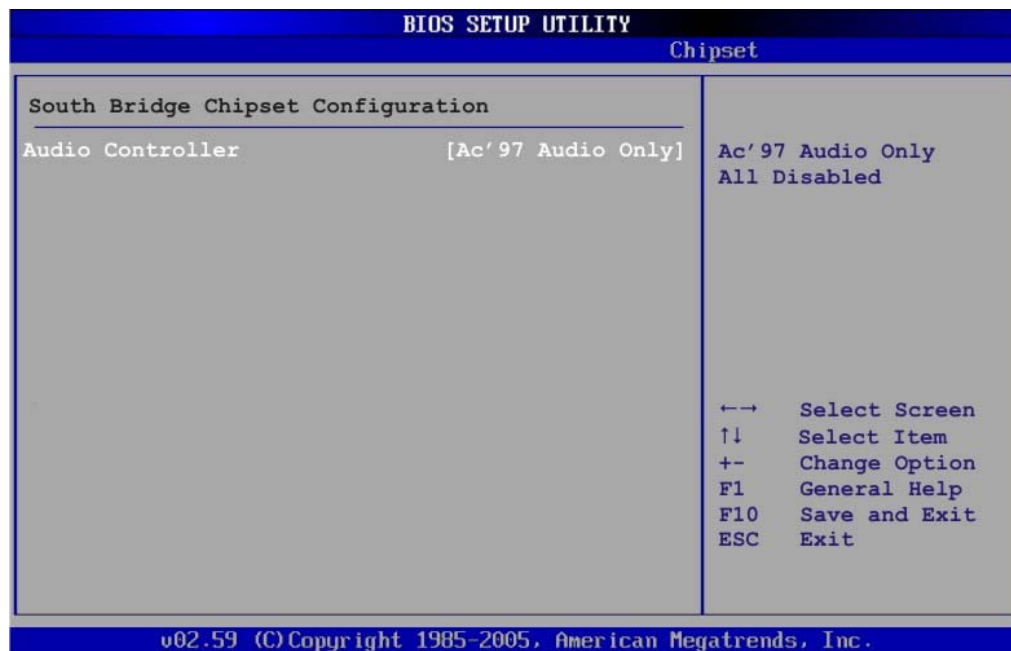

### BIOS Menu 19: SouthBridge Chipset Configuration


#### → Audio Controller [AC'97 Audio Only]

The **Audio Controller** option enables or disables the audio controller.

- **AC'97 Audio Only**                      The on-board AC'97 audio controller is enabled.
- **All Disabled**                      **DEFAULT**      The on-board audio controller is disabled.

## 6.8 Exit

Use the **Exit** menu (**BIOS Menu 20**) to load default BIOS values, optimal failsafe values and to save configuration changes.

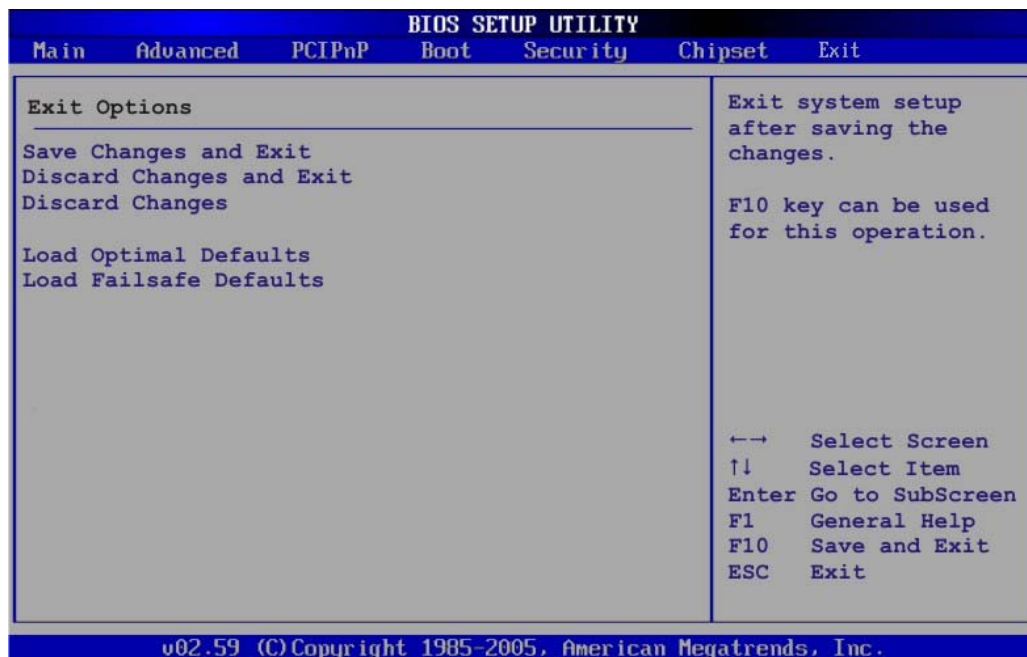

#### BIOS Menu 20:Exit

##### → Save Changes and Exit

Use the **Save Changes and Exit** option to save the changes made to the BIOS options and to exit the BIOS configuration setup program.

##### → Discard Changes and Exit

Use the **Discard Changes and Exit** option to exit the BIOS configuration setup program without saving the changes made to the system.

##### → Discard Changes

Use the **Discard Changes** option to discard the changes and remain in the BIOS configuration setup program.

##### → Load Optimal Defaults

Use the **Load Optimal Defaults** option to load the optimal default values for each of the parameters on the Setup menus. **F9 key can be used for this operation.**

## AFL-xxA-N270 Series Panel PC

### ➔ Load Failsafe Defaults

Use the **Load Failsafe Defaults** option to load failsafe default values for each of the parameters on the Setup menus. **F8 key can be used for this operation.**

Chapter

7

# Software Drivers

---

## AFL-xxA-N270 Series Panel PC

### 7.1 Available Software Drivers

---



#### NOTE:

The content of the CD may vary throughout the life cycle of the product and is subject to change without prior notice. Visit the IEI website or contact technical support for the latest updates.

---

The following drivers can be installed on the system:

- Chipset
- VGA
- LAN
- Touch screen
- Audio
- Wireless
- Bluetooth

Installation instructions are given below.

### 7.2 Starting the Driver Program

To access the driver installation programs, please do the following.

**Step 1:** Insert the CD-ROM that came with the system into a CD-ROM drive attached to the system.

**Step 2:** Click **AFLMB-945GSE-N270-R10 Driver**.

**Step 3:** The list of drivers in **Figure 7-1** appears.



Figure 7-1: Drivers

### 7.3 Chipset Driver Installation

To install the chipset driver, please do the following.

**Step 1:** Access the driver list shown in **Figure 7-1** (See **Section 7.2**). Click “Chipset”.

**Step 2:** The setup files are extracted as shown in **Figure 7-2**.

## AFL-xxA-N270 Series Panel PC



Figure 7-2: Chipset Driver Screen

**Step 3:** When the setup files are completely extracted the **Welcome Screen** in **Figure 7-3** appears.



Figure 7-3: Chipset Driver Welcome Screen

**Step 4:** Click **Next** to continue.

**Step 5:** The license agreement in **Figure 7-4** appears.

**Step 6:** Read the **License Agreement**.

**Step 7:** Click the **Yes** icon to continue.



**Figure 7-4: Chipset Driver License Agreement**

**Step 8:** The Read Me file in **Figure 7-5** appears.

**Step 9:** Click **Next** to continue.

## AFL-xxA-N270 Series Panel PC



Figure 7-5: Chipset Driver Read Me File

**Step 10:** Setup Operations are performed as shown in Figure 7-6.



**Figure 7-6: Chipset Driver Setup Operations**

**Step 11:** Once the **Setup Operations** are complete, click the **Next** icon to continue.

**Step 12:** The **Finish** screen appears.

**Step 13:** Select “Yes, I want to restart the computer now” and click the **Finish** icon.

See **Figure 7-7**.

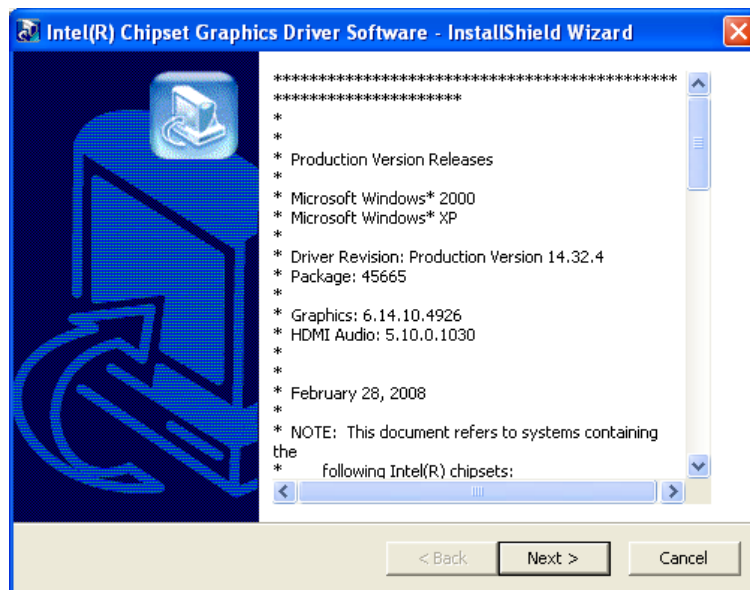


Figure 7-7: Chipset Driver Installation Finish Screen

## 7.4 VGA Driver Installation


To install the VGA driver, please do the following.

- Step 1:** Access the driver list shown in **Figure 7-1** (See **Section 7.2**). Click “VGA”.
- Step 2:** The VGA Read Me file in **Figure 7-8** appears.
- Step 3:** Click **Next** to continue.



**Figure 7-8: VGA Driver Read Me File**

**Step 4:** The installation files are extracted. See **Figure 7-9**.

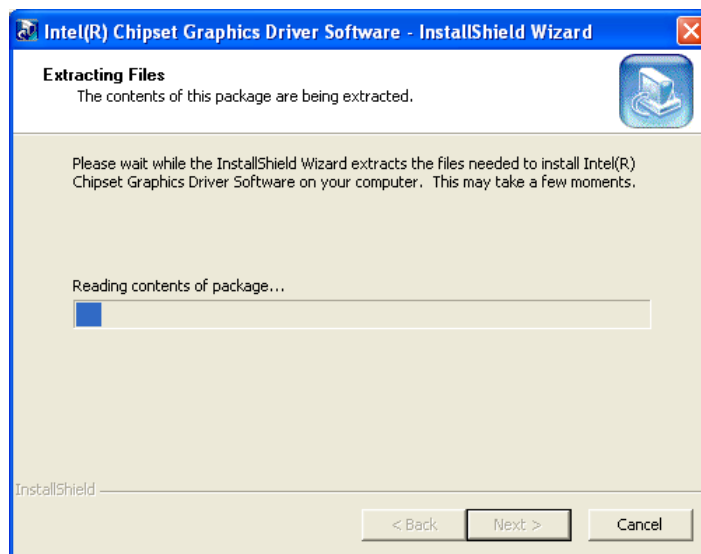

**Figure 7-9: VGA Driver Setup Files Extracted**


**Step 5:** The **Welcome Screen** in **Figure 7-10** appears.

## AFL-xxA-N270 Series Panel PC



**Figure 7-10: VGA Driver Welcome Screen**


- Step 6:** Click **Next** to continue.
- Step 7:** The license agreement in **Figure 7-11** appears.
- Step 8:** Read the **License Agreement**.
- Step 9:** Click the **Yes** icon to continue.

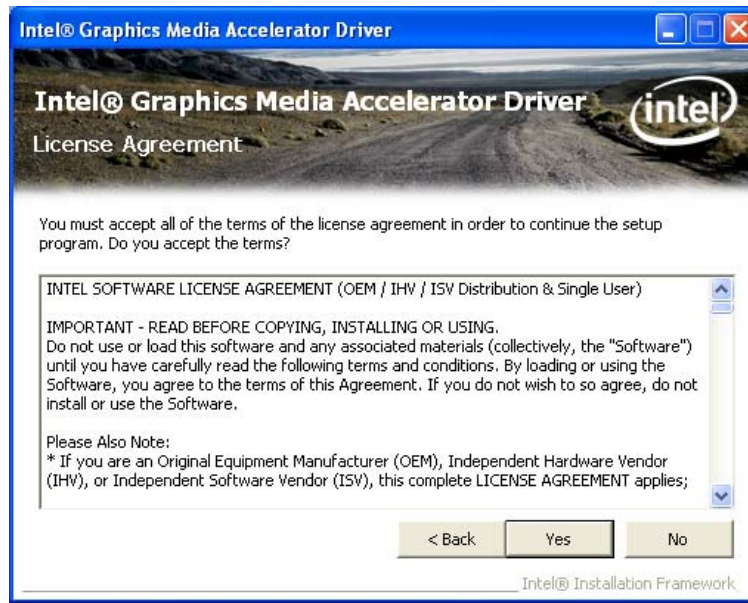

**Figure 7-11: VGA Driver License Agreement**

**Step 10:** The Read Me file in **Figure 7-12** appears.

**Step 11:** Click **Next** to continue.

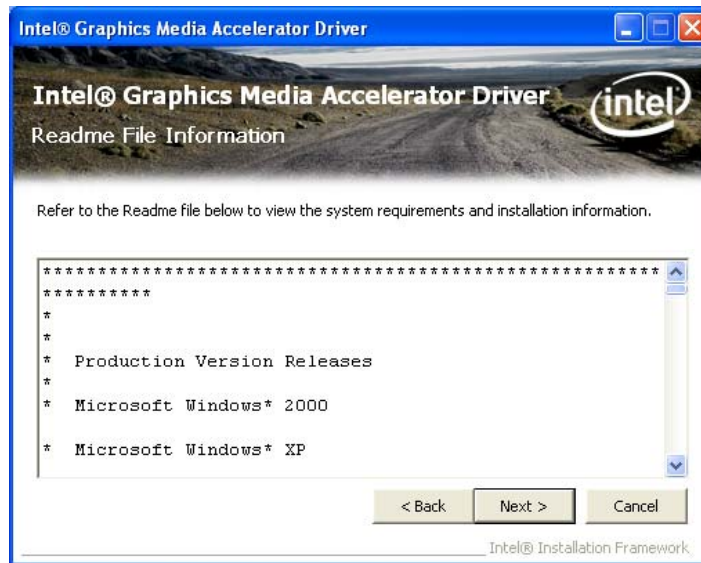

**Figure 7-12: VGA Driver Read Me File**

**Step 12:** Setup Operations are performed as shown in **Figure 7-13**.

## AFL-xxA-N270 Series Panel PC

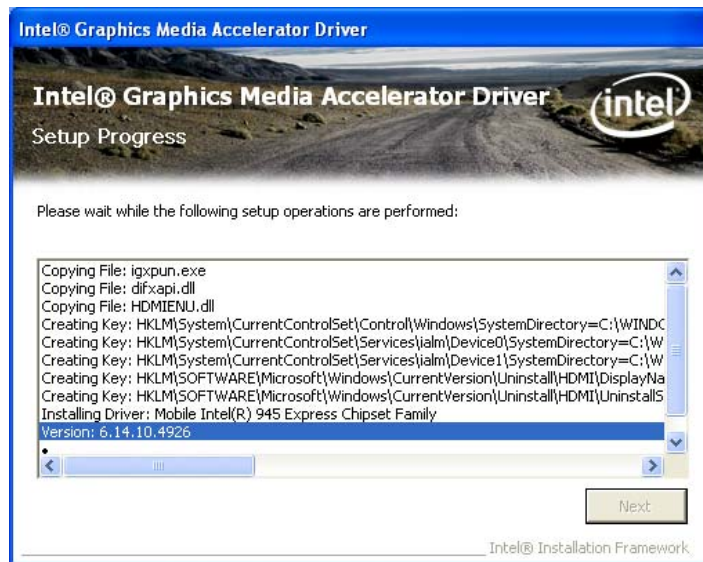


Figure 7-13: VGA Driver Setup Operations

**Step 13:** Once the **Setup Operations** are complete, click the **Next** icon to continue.

**Step 14:** The **Finish** screen appears.

**Step 15:** Select “Yes, I want to restart the computer now” and click the **Finish** icon.

See Figure 7-14.

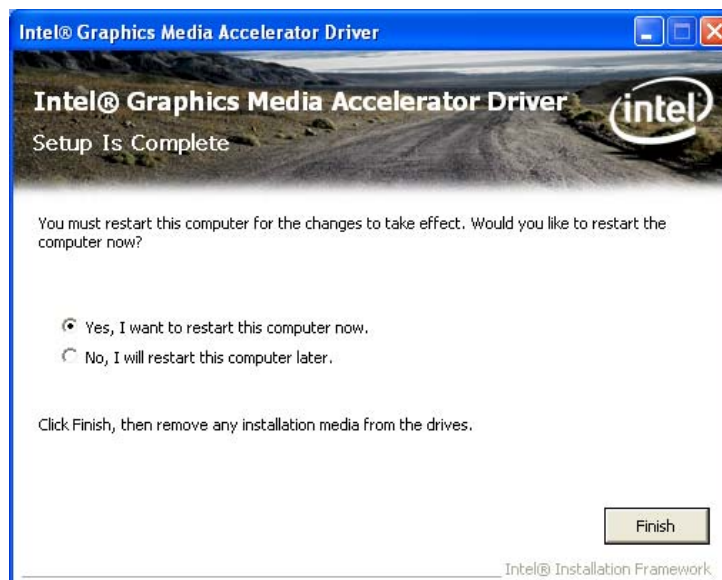



Figure 7-14: VGA Driver Installation Finish Screen

## 7.5 LAN Driver Installation

To install the LAN driver, please do the following.

**Step 1:** Access the driver list shown in **Figure 7-1** (See **Section 7.2**). Click “LAN”.

**Step 2:** The **Welcome** screen in **Figure 7-15** appears.

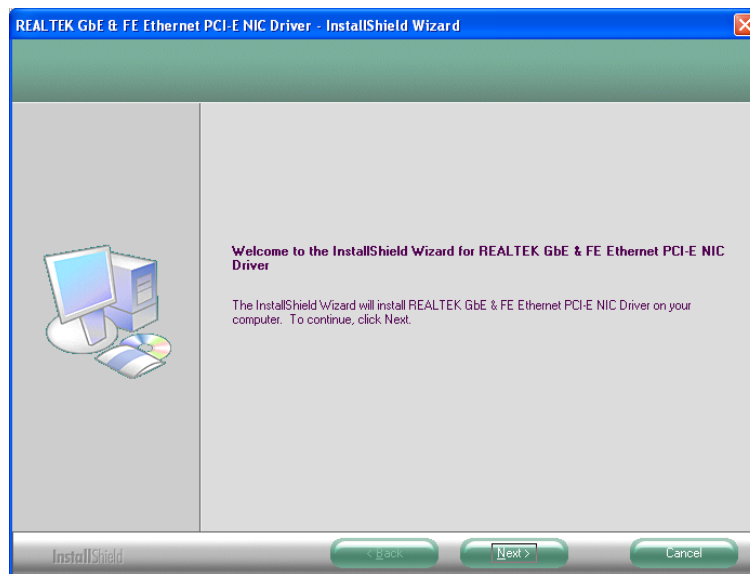


**Figure 7-15: LAN Driver Welcome Screen**

**Step 3:** Click **Next** to continue.

**Step 4:** The **Ready to Install** screen in **Figure 7-16** appears.

**Step 5:** Click **Next** to proceed with the installation.


## AFL-xxA-N270 Series Panel PC

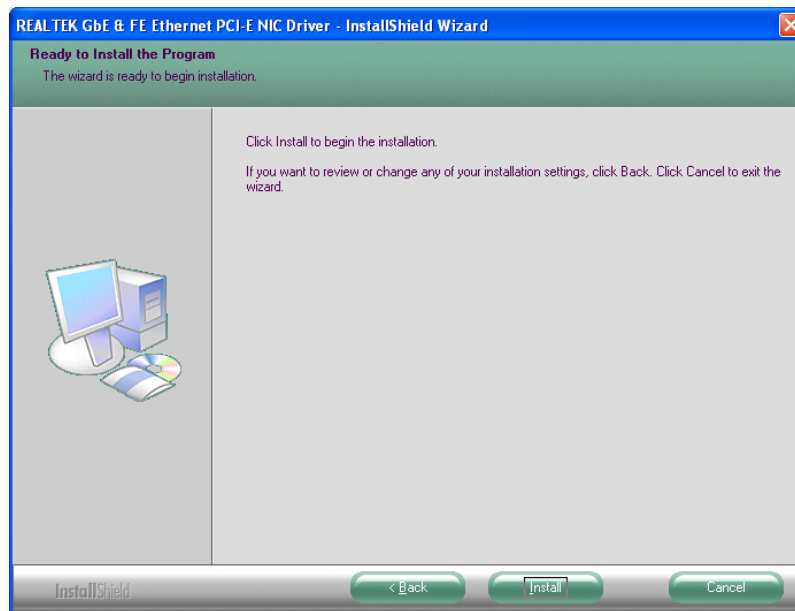

**Figure 7-16: LAN Driver Welcome Screen**


**Step 6:** The program begins to install.

**Step 7:** The installation progress can be monitored in the progress bar shown in **Figure 7-17**.

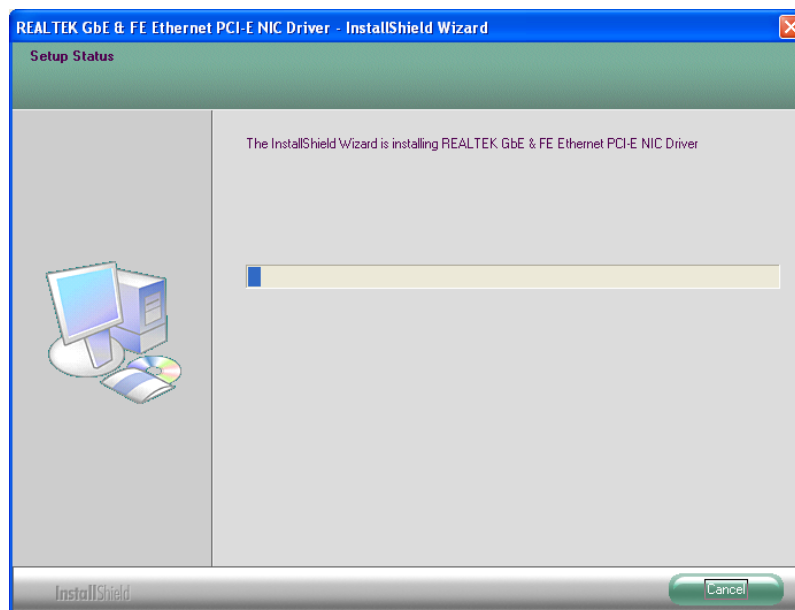

**Figure 7-17: LAN Driver Installation**

**Step 8:** When the driver installation is complete, the screen in **Figure 7-18** appears.

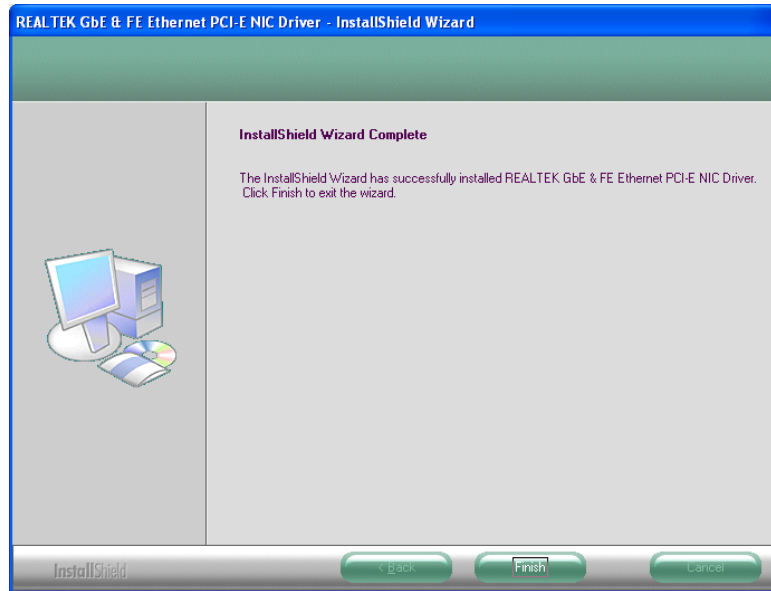

**Figure 7-18: LAN Driver Installation Complete**

## 7.6 Touch Screen Driver

To install the touch panel software driver, please follow the steps below.

- Step 1:** Access the driver list shown in **Figure 7-1** (See **Section 7.2**). Click “**Touch Screen**”.
- Step 2:** A welcome screen appears (**Figure 7-19**). To continue the installation process click **NEXT**.

## AFL-xxA-N270 Series Panel PC

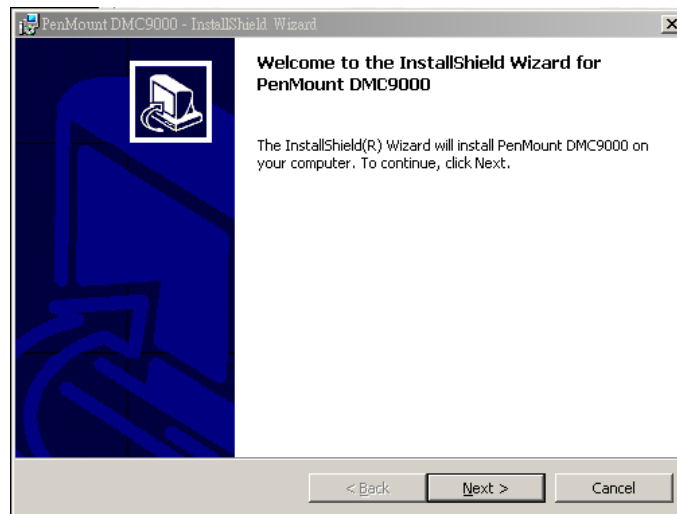


Figure 7-19: Welcome Screen

**Step 3:** The license agreement shown in Figure 7-20 appears. Agree to the license by selecting “I accept the terms in the license agreement”.


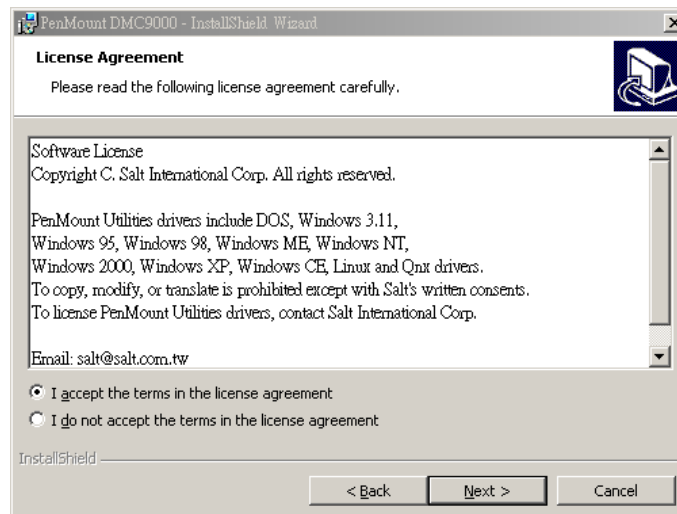



Figure 7-20: License Agreement

**Step 4:** Click NEXT and the Installshield Wizard is ready to install the program (Figure 7-21).

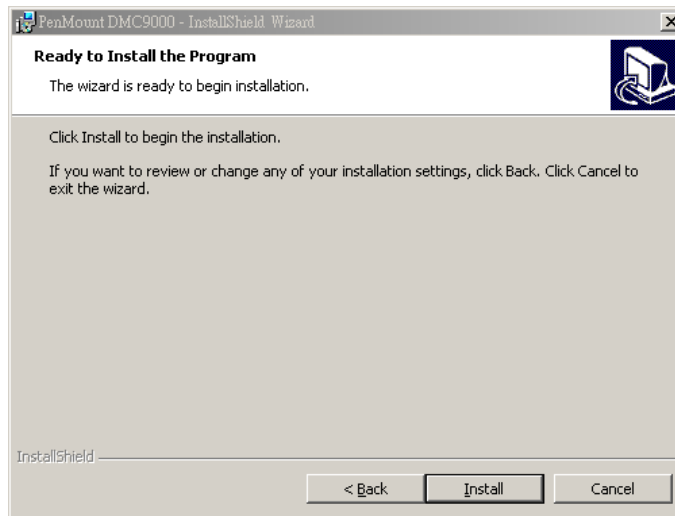

**Figure 7-21: Ready to Install the Program**

**Step 5:** Click **INSTALL** to continue. The Installing PenMount DMC9000 screen appears as the program is installed (Figure 7-22).

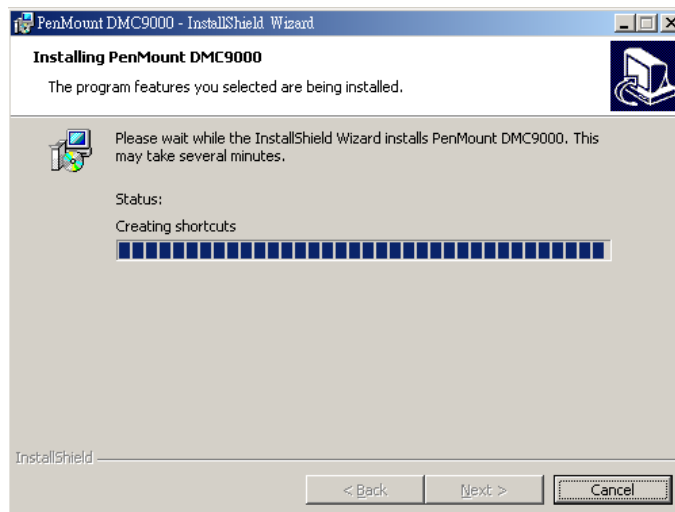

**Figure 7-22: Installing PenMount DMC9000**

**Step 6:** The user is then prompted to select to restart the computer now or later (Figure 7-23). For the settings to take effect, the computer must be restarted. Click **Yes** to restart the computer.

## AFL-xxA-N270 Series Panel PC

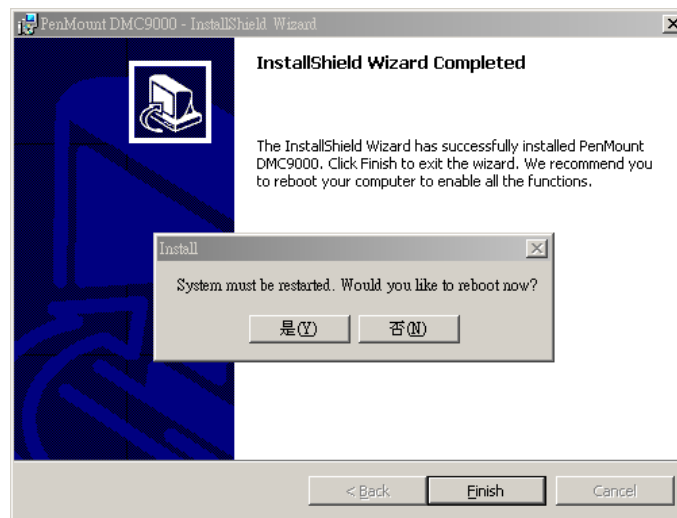


Figure 7-23: Reboot the Computer

## 7.7 Audio Driver Installation

To install the audio driver, please do the following.

**Step 1:** Access the driver list shown in **Figure 7-1** (See **Section 7.2**). Click “**Audio**”.


**Step 2:** The screen in **Figure 7-24** appears. Double click the “WDM\_R253” folder.



Figure 7-24: Audio Driver Options


**Step 3:** Click the **WDM\_R253.exe** icon.

**Step 4:** The **InstallShield Wizard** starts (**Figure 7-25**).

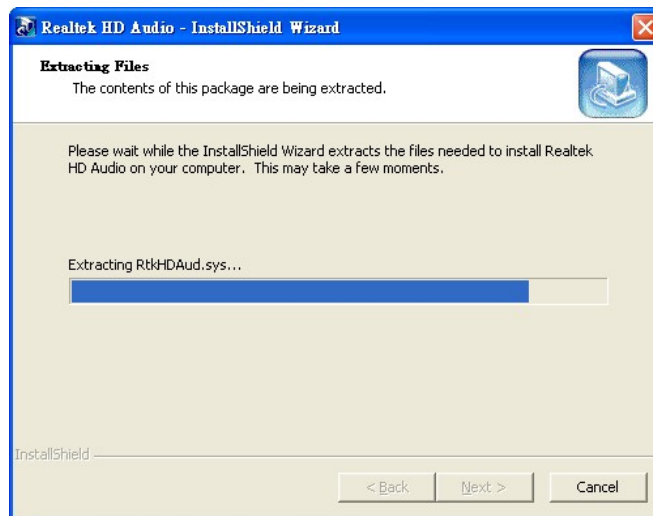

**Figure 7-25: The InstallShield Wizard Starts**


**Step 5:** The **InstallShield Wizard** is prepared to guide the user through the rest of the process (**Figure 7-26**).

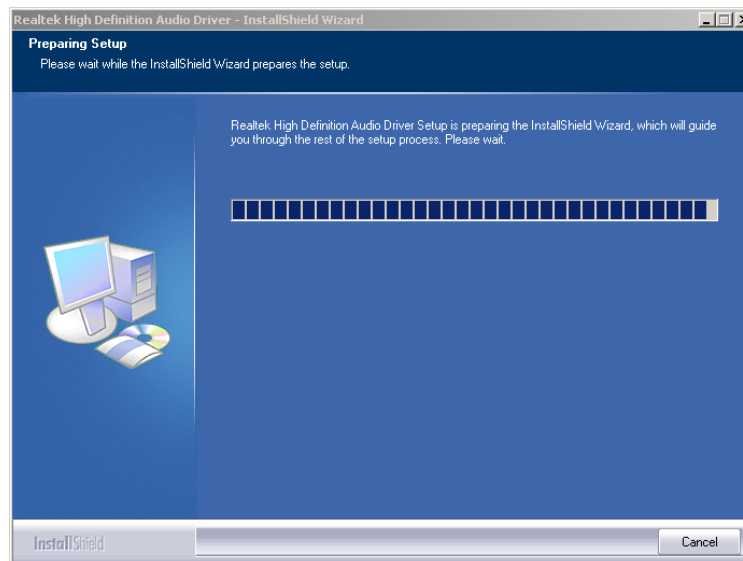

**Figure 7-26: Preparing Setup Screen**

**Step 6:** Once initialized, the **InstallShield Wizard** welcome screen appears (**Figure 7-27**).


## AFL-xxA-N270 Series Panel PC

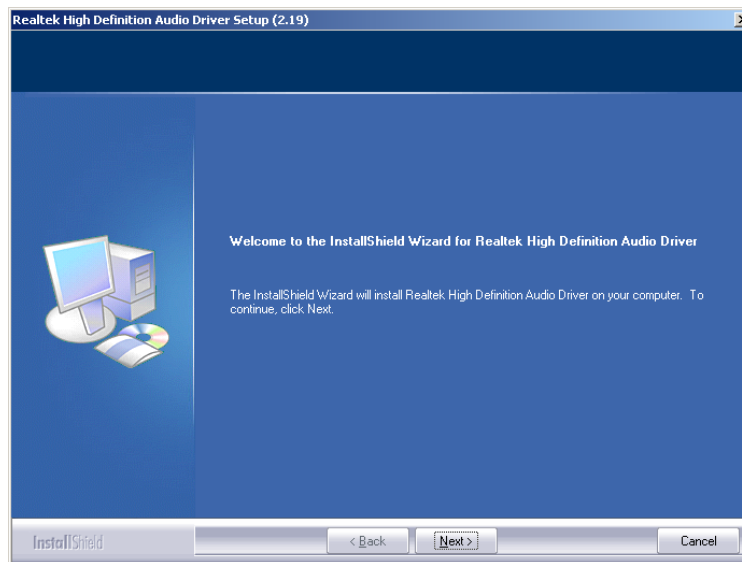

**Figure 7-27: InstallShield Wizard Welcome Screen**


**Step 7:** Click **NEXT** to continue the installation.

**Step 8:** InstallShield starts to install the new software as shown in **Figure 7-28**.

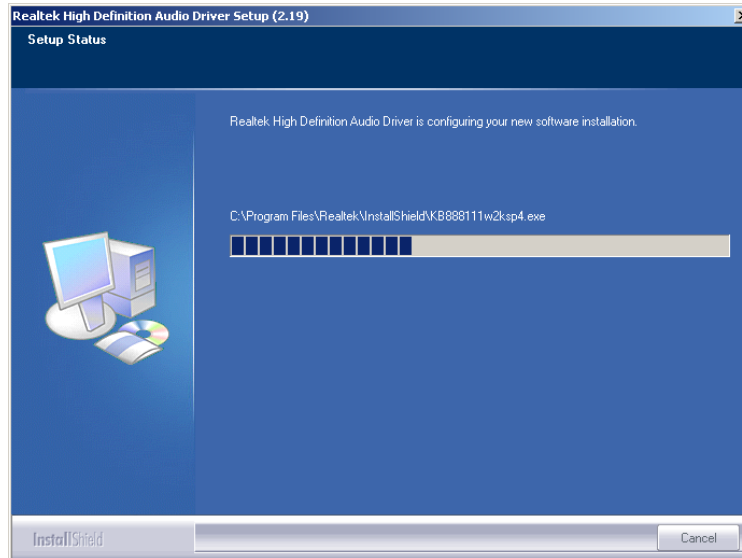

**Figure 7-28: Audio Driver Software Configuration**

**Step 9:** After the driver installation process is complete, a confirmation screen appears (Figure 7-29).

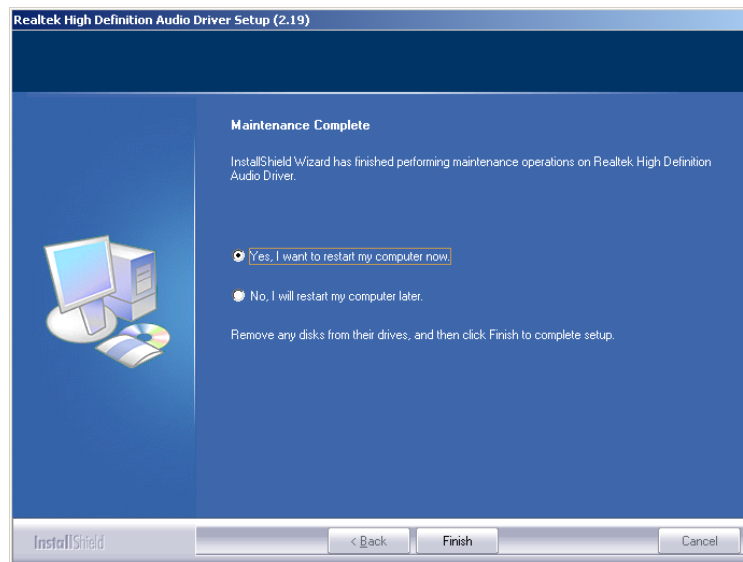

**Figure 7-29: Restart the Computer**

**Step 10:** The confirmation screen offers the option of restarting the computer now or later.

For the settings to take effect, the computer must be restarted. Click **FINISH** to restart the computer.


## 7.8 Wireless Driver

To install the wireless driver, please follow the steps below.

**Step 1:** Select **Wireless** from the list in **Figure 7-1**.


**Step 2:** A new window opens (**Figure 7-30**). Select the **RT3090** folder. Double click the .exe file to install the wireless LAN driver.

## AFL-xxA-N270 Series Panel PC

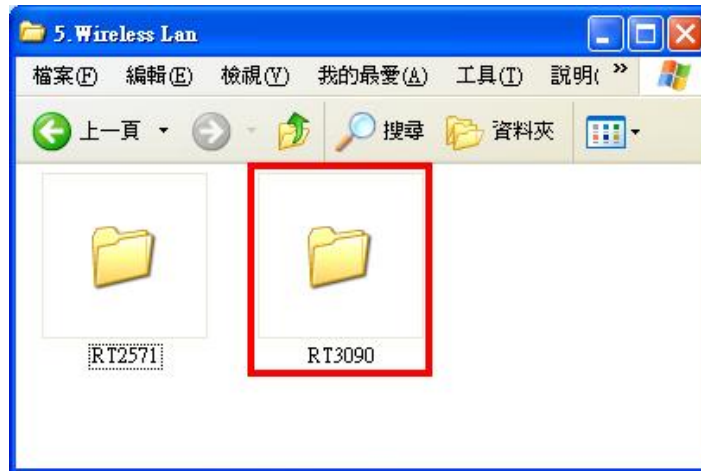

**Figure 7-30: Wireless Driver Folders**

**Step 3:** The license agreement in **Figure 7-31** appears.

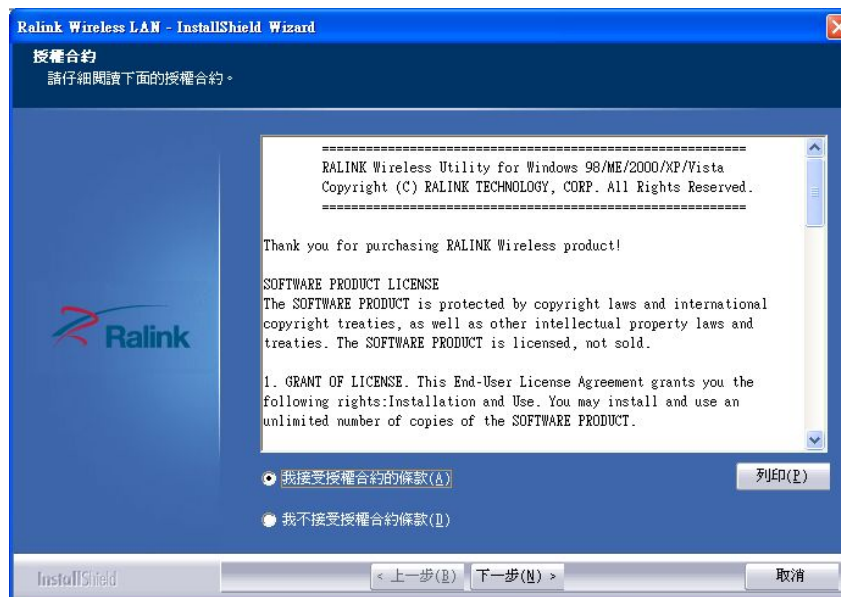

**Figure 7-31: Wireless Driver License Agreement**

**Step 4:** Accept the conditions of the license agreement and click **NEXT** to continue.

**Step 5:** The **Configuration Tool Options** screen in **Figure 7-32** appears next.



Figure 7-32: Wireless Driver Configuration Tool Options

**Step 6:** Select configuration tool in **Figure 7-32** and click **NEXT** to continue.

**Step 7:** The **Wireless Mode Options** window in **Figure 7-33** appears.

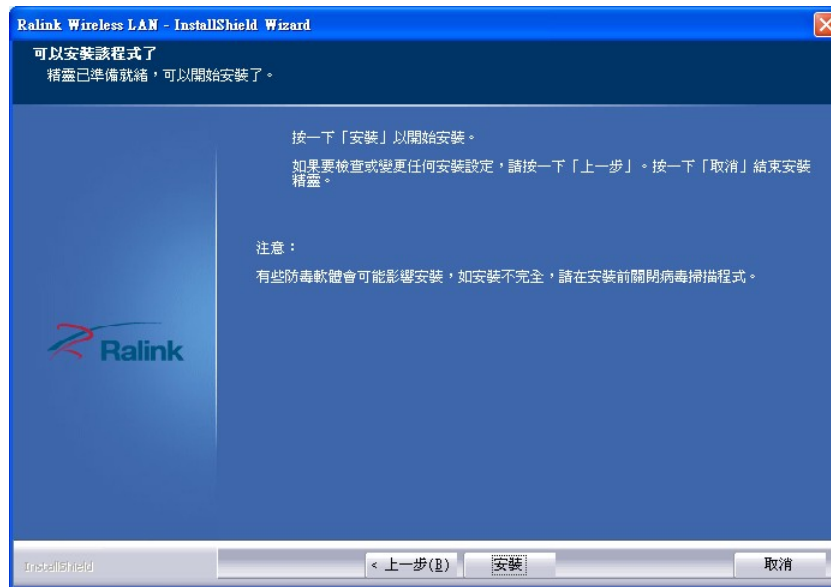


Figure 7-33: Wireless Mode Select Window

**Step 8:** Click **NEXT** in **Figure 7-33**.

## AFL-xxA-N270 Series Panel PC

**Step 9:** Click **INSTALL** in **Figure 7-34** to start to install the driver.



**Figure 7-34: Wireless Driver Installation**

**Step 10:** When the installation is finished. Click **FINISH** in the termination screen.

## 7.9 Bluetooth Driver

To install the Bluetooth software driver, please follow the steps below.

**Step 1:** Select **Bluetooth** from the list in **Figure 7-1**.

**Step 2:** A welcome screen appears (**Figure 7-35**). To continue the installation process click **NEXT**.

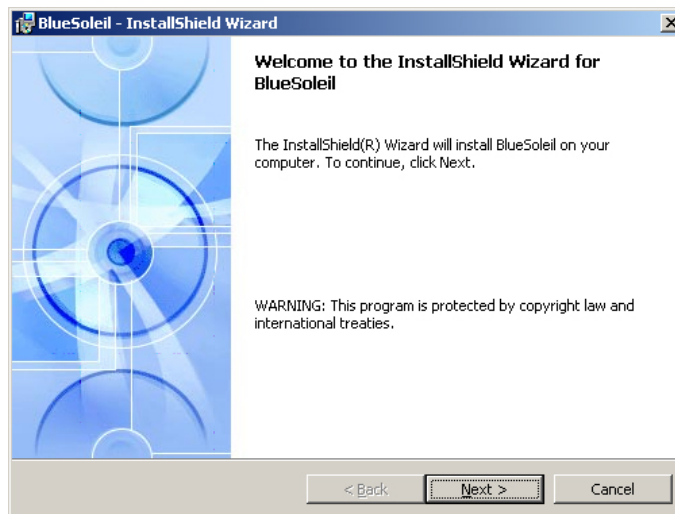


Figure 7-35: Welcome Screen

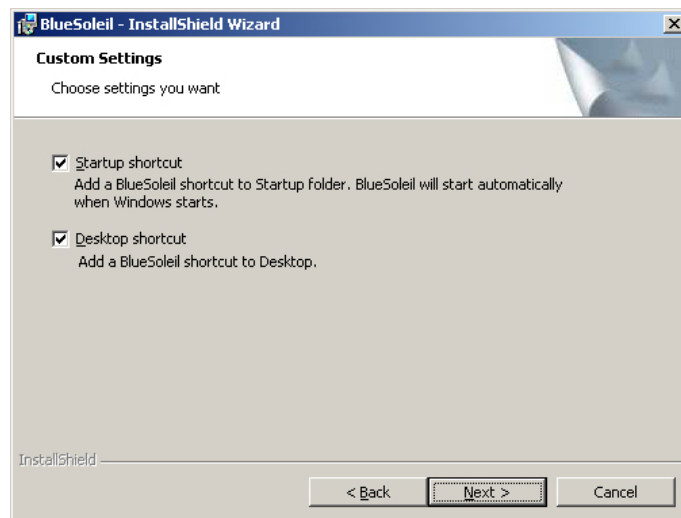
**Step 3:** The license agreement shown in **Figure 7-36** appears. Agree to the license by selecting “I accept the terms in the license agreement”.



Figure 7-36: License Agreement


**Step 4:** The Custom Settings screen in **Figure 7-37** appears next.

## AFL-xxA-N270 Series Panel PC


**Figure 7-37: Bluetooth Driver Setup Options**

**Step 5:** Select the required installation configuration in **Figure 7-37** and click **NEXT** to continue.

**Step 6:** The **Destination Folder** screen in **Figure 7-38** appears next. Confirm the destination folder to install the Bluetooth driver.

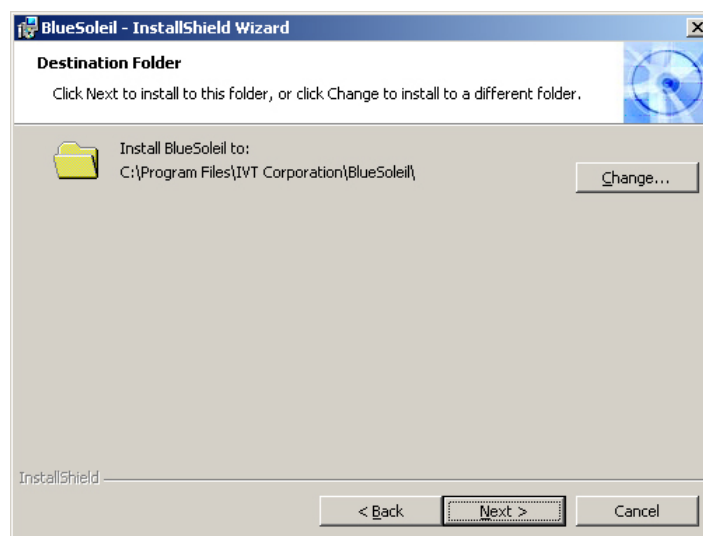
**Figure 7-38: Bluetooth Driver Destination Folder**

**Step 7:** Click **NEXT** and the Installshield Wizard is ready to install the program (**Figure 7-39**).

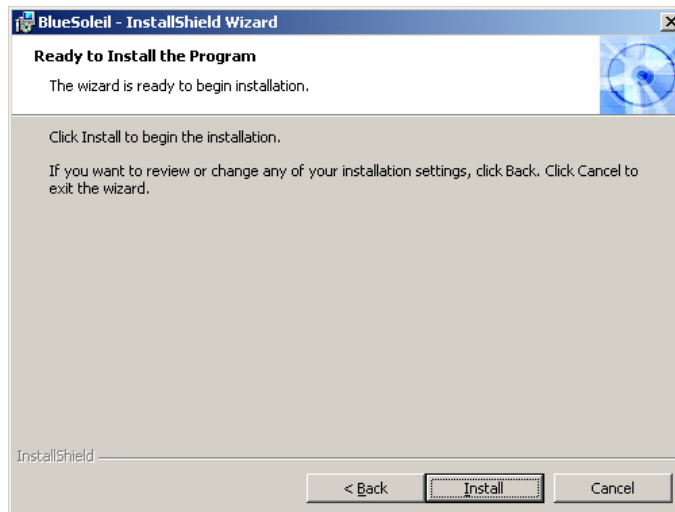

**Figure 7-39: Ready to Install the Program**

**Step 8:** Click **INSTALL** to continue. The Installing BlueSoleil screen appears as the program is installed (**Figure 7-40**).

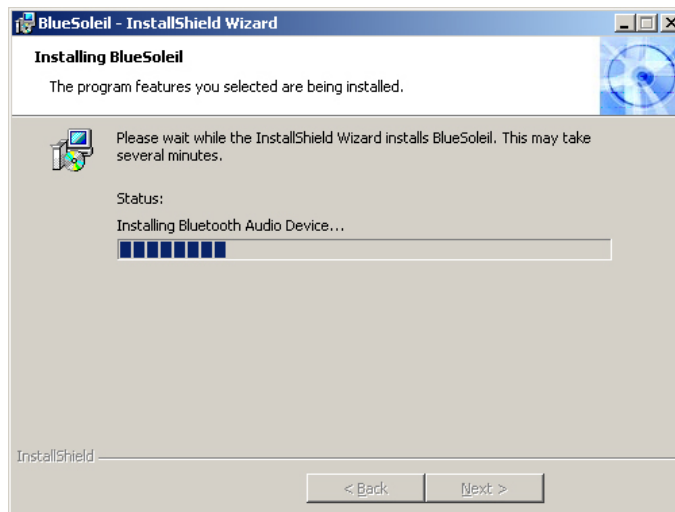

**Figure 7-40: Installing BlueSoleil**

**Step 9:** When the installation process is complete, the Setup Complete screen appears. See **Figure 7-41**.

## AFL-xxA-N270 Series Panel PC

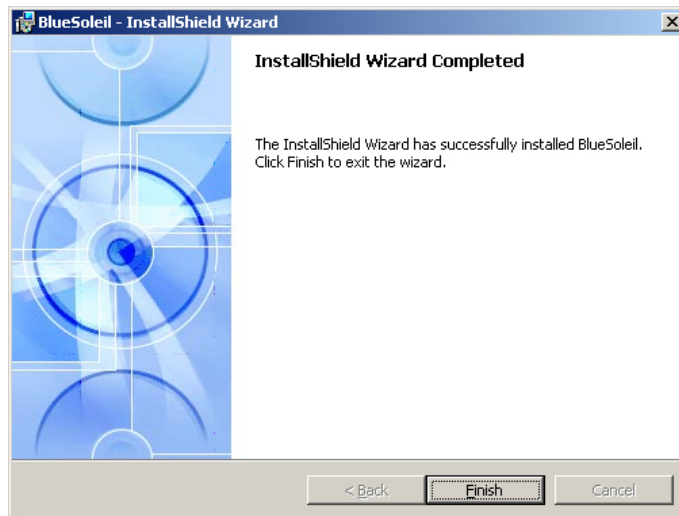


Figure 7-41: Bluetooth Driver Complete Installation Screen

**Step 10:** To complete the chipset driver installation, click **FINISH**. The user is then prompted to select to restart the computer now or later (**Figure 7-42**). For the settings to take effect, the computer must be restarted. Click **Yes** to restart the computer.

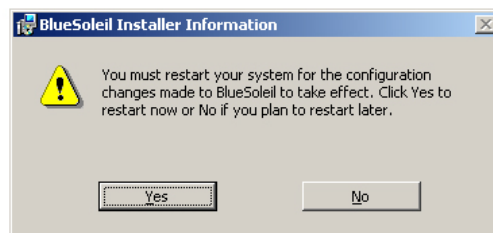


Figure 7-42: Reboot the Computer

Step 1:

Appendix

**A**

# System Specifications

---

## A.1 Motherboard Specifications

The system comes with an IEI AFLMB-945GSE motherboard. The detailed specifications for the motherboard are listed below.

| Specification     | AFLMB-945GSE                                                                         |
|-------------------|--------------------------------------------------------------------------------------|
| Northbridge       | Intel® 945GSE                                                                        |
| Southbridge       | Intel® ICH7M                                                                         |
| Processor         | 1.6 GHz Intel® Atom™ N270 processor                                                  |
| FSB Speed         | 533 MHz                                                                              |
| Supported Memory  | One 200-pin 2.0 GB (max.) 533 MHz or 400 MHz DDR2 SDRAM SO-DIMM (system max. 2.0 GB) |
| System BIOS       | AMI BIOS                                                                             |
| Hard disk drives  | Two SATA drives                                                                      |
| VGA               | Integrated in the Intel® 945GSE                                                      |
| LAN               | Realtek RTL8111CP PCIe GbE Controllers                                               |
| Expansion Options | One PCIe Mini                                                                        |
| Super I / O       | ITE IT8718F                                                                          |
| Audio Codec       | RealTek ALC888                                                                       |
| Audio Amplifier   | NXP TDA1517P                                                                         |
| USB               | Two external USB 2.0 ports<br>Two internal pin headers                               |
| RS-232            | Fintek                                                                               |
| FAN connector     | One 4-pin CPU fan connector                                                          |
| Extra-Module      | Bluetooth Module (USB protocol BT-330C-V2)                                           |

## A.2 Processor Specifications

The N270 Intel® Atom™ processor specifications are given below.

| Parameter      | Specifications |
|----------------|----------------|
| CPU Speed      | 1.6 GHz        |
| Bus Speed      | 533 MHz        |
| L2 Cache Size  | 512 KB         |
| L2 Cache Speed | 1.6 GHz        |

|                                 |                                                        |
|---------------------------------|--------------------------------------------------------|
| <b>Manufacturing Technology</b> | 45 nm                                                  |
| <b>L1 Cache</b>                 | 32 KB instruction cache<br>24 KB write-back data cache |
| <b>Thermal Design Power</b>     | 2.5 W                                                  |
| <b>Tjunction</b>                | 0 to 90°C                                              |

### A.3 Screen Specifications

The AFL-xxA-N270 comes with a TFT LCD monitor at the front of the flat panel PC. Specifications for the screens are shown below.

| SPECIFICATION                          | AFL-07A-N270       | AFL-08AH-N270      | AFL-10A-N270       | AFL-12A-N270       |
|----------------------------------------|--------------------|--------------------|--------------------|--------------------|
| <b>Size</b>                            | 7"                 | 8.4"               | 10.4"              | 12.1"              |
| <b>Resolution</b>                      | 800 x 480 (VGA)    | 800 x 600 (SVGA)   | 800 x 600 (SVGA)   | 1024 x 768 (XGA)   |
| <b>Pixel Pitch (mm)</b>                | 0.0635 x 0.1905    | 0.213 x 0.213      | 0.264 x 0.264      | 0.3057 x 0.3057    |
| <b>LCD Color</b>                       | Native 262K colors | Native 262K colors | Native 262K colors | Native 262K colors |
| <b>View Angel (H/V)</b>                | 140/110            | 160/140            | 160/140            | 160/160            |
| <b>Brightness (cd / m<sup>2</sup>)</b> | 400                | 450                | 400                | 500                |
| <b>Contrast Ratio</b>                  | 400:1              | 600:1              | 700:1              | 700:1              |
| <b>Backlight</b>                       | LED                | LED                | LED                | LED                |
| <b>RGB Bit</b>                         | 6-bit              | 6-bit              | 6-bit              | 6-bit              |

## AFL-xxA-N270 Series Panel PC

### A.4 Touch Screen Specifications

The AFL-xxA-N270 series comes with an analog resistive type touch panel. The touch panel specifications are listed below.

| SPECIFICATION         | AFL-07A-N270                      | AFL-08AH-N270     | AFL-10A-N270       | AFL-12A-N270    |
|-----------------------|-----------------------------------|-------------------|--------------------|-----------------|
| Model                 | PANJIT 1070404C                   | PANJIT 1084403B   | PANJIT 1104502A    | PANJIT 1121505B |
| Type                  | Analog Resistive Type Touch Panel |                   |                    |                 |
| Wire Type             | 4-wire                            | 4-wire            | 5-wire             | 5-wire          |
| Viewing Area (mm)     | 154.90 x 93.94                    | 130.75 x 173.38   | 219.8 x 166.8      | 188.0 x 250.0   |
| Active Area (mm)      | 152.40 x 91.44                    | 127.78 x 170.38   | 212.1 x 159.3      | 185.0 x 246.0   |
| Total Transmission    | 78%                               |                   |                    |                 |
| Maximum Voltage       | DC7V                              |                   |                    |                 |
| Connector Type        | FPC.                              |                   |                    |                 |
| Operating Temperature | -10°C ~ 60°C                      | -10°C ~ 40°C      | -10°C ~ 50°C       |                 |
| Operating Humidity    | 20% ~ 90% RH                      |                   |                    |                 |
| Storage Temperature   | -20°C ~ 70°C                      |                   |                    |                 |
| Storage Humidity      | 20% ~ 90% RH                      |                   |                    |                 |
| Dimensions            | 165 x 104 x 1.4                   | 145.5 x 188 x 2.1 | 238.8x 188.7 x 2.6 | 204 x 268 x 2.1 |

## A.5 Bluetooth Module Specifications

The specifications for the Bluetooth module on the AFL-xxA-N270 are shown below.

| Specification      | Bluetooth Module                                          |
|--------------------|-----------------------------------------------------------|
| Standard           | Bluetooth v2.0                                            |
| Frequency Band     | 2.402GHz~2.480GHz unlicensed ISM band                     |
| Modulation Method  | GFSK for 1Mbps<br>π/4-DQPSK for 2Mbps<br>8-DPSK for 3Mbps |
| Spread Spectrum    | FHSS (Frequency Hopping Spread Spectrum)                  |
| RF Output Power    | Class 2 (under 4dBm)                                      |
| Antenna Terminal   | 50 Ohms                                                   |
| DC Power           | DC 3.3V or DC 5V                                          |
| I/O Interface      | USB 2.0 interface                                         |
| Two GPIO Interface | LED link indicator interface                              |
| Dimensions         | 35mm x 11mm                                               |
| Operating System   | Windows XP, Windows 2000, Windows 98SE, Windows Me        |

Appendix

**B**

# Safety Precautions

---


**WARNING:**

The precautions outlined in this chapter should be strictly followed. Failure to follow these precautions may result in permanent damage to the AFOLUX AFL-xxA-N270 series.

## B.1 Safety Precautions

Please follow the safety precautions outlined in the sections that follow:

### B.1.1 General Safety Precautions

Please ensure the following safety precautions are adhered to at all times.

- ***Follow the electrostatic precautions*** outlined below whenever the AFOLUX AFL-xxA-N270 series is opened.
- ***Make sure the power is turned off and the power cord is disconnected*** whenever the AFOLUX AFL-xxA-N270 series is being installed, moved or modified.
- ***Do not apply voltage levels that exceed the specified voltage range.*** Doing so may cause fire and/or an electrical shock.
- ***Electric shocks can occur*** if the AFOLUX AFL-xxA-N270 series chassis is opened when the AFOLUX AFL-xxA-N270 series is running.
- ***Do not drop or insert any objects*** into the ventilation openings of the AFOLUX AFL-xxA-N270 series.
- ***If considerable amounts of dust, water, or fluids enter the AFOLUX AFL-xxA-N270 series***, turn off the power supply immediately, unplug the power cord, and contact the AFOLUX AFL-xxA-N270series vendor.
- **DO NOT:**
  - Drop the AFOLUX AFL-xxA-N270 series against a hard surface.
  - Strike or exert excessive force onto the LCD panel.
  - Touch any of the LCD panels with a sharp object
  - In a site where the ambient temperature exceeds the rated temperature

## AFL-xxA-N270 Series Panel PC

### B.1.2 Anti-static Precautions



#### WARNING:

Failure to take ESD precautions during the installation of the AFOLUX AFL-xxA-N270 series may result in permanent damage to the AFOLUX AFL-xxA-N270 series and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the AFOLUX AFL-xxA-N270 series. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the AFOLUX AFL-xxA-N270 series is opened and any of the electrical components are handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** Wearing a simple anti-static wristband can help to prevent ESD from damaging any electrical component.
- ***Self-grounding:*** Before handling any electrical component, touch any grounded conducting material. During the time the electrical component is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** When configuring or working with an electrical component, place it on an anti-static pad. This reduces the possibility of ESD damage.
- ***Only handle the edges of the electrical component:*** When handling the electrical component, hold the electrical component by its edges.

### B.1.3 Product Disposal




#### CAUTION:

Risk of explosion if battery is replaced by and incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

- Outside the European Union - If you wish to dispose of used electrical and electronic products outside the European Union, please contact your local authority so as to comply with the correct disposal method.
- Within the European Union:



EU-wide legislation, as implemented in each Member State, requires that waste electrical and electronic products carrying the mark (left) must be disposed of separately from normal household waste. This includes monitors and electrical accessories, such as signal cables or power cords.

When you need to dispose of your display products, please follow the guidance of your local authority, or ask the shop where you purchased the product. The mark on electrical and electronic products only applies to the current European Union Member States.

Please follow the national guidelines for electrical and electronic product disposal.

## B.2 Maintenance and Cleaning Precautions

When maintaining or cleaning the AFOLUX AFL-xxA-N270 series, please follow the guidelines below.

### B.2.1 Maintenance and Cleaning

Prior to cleaning any part or component of the AFOLUX AFL-xxA-N270 series, please read the details below.

## AFL-xxA-N270 Series Panel PC

- Except for the LCD panel, never spray or squirt liquids directly onto any other components. To clean the LCD panel, gently wipe it with a piece of soft dry cloth or a slightly moistened cloth.
- The interior of the AFOLUX AFL-xxA-N270X series does not require cleaning. Keep fluids away from the AFOLUX AFL-xxA-N270 series interior.
- Be cautious of all small removable components when vacuuming the AFOLUX AFL-xxA-N270 series.
- Turn the AFOLUX AFL-xxA-N270 series off before cleaning the AFOLUX AFL-xxA-N270 series.
- Never drop any objects or liquids through the openings of the AFOLUX AFL-xxA-N270 series.
- Be cautious of any possible allergic reactions to solvents or chemicals used when cleaning the AFOLUX AFL-xxA-N270 series.
- Avoid eating, drinking and smoking within vicinity of the AFOLUX AFL-xxA-N270 series.

### B.2.2 Cleaning Tools

Some components in the AFOLUX AFL-xxA-N270 series may only be cleaned using a product specifically designed for the purpose. In such case, the product will be explicitly mentioned in the cleaning tips. Below is a list of items to use when cleaning the AFOLUX AFL-xxA-N270 series.

- **Cloth** – Although paper towels or tissues can be used, a soft, clean piece of cloth is recommended when cleaning the AFOLUX AFL-xxA-N270 series.
- **Water or rubbing alcohol** – A cloth moistened with water or rubbing alcohol can be used to clean the AFOLUX AFL-xxA-N270 series.
- **Using solvents** – The use of solvents is not recommended when cleaning the AFOLUX AFL-xxA-N270 series as they may damage the plastic parts.
- **Vacuum cleaner** – Using a vacuum specifically designed for computers is one of the best methods of cleaning the AFOLUX AFL-xxA-N270 series. Dust and dirt can restrict the airflow in the AFOLUX AFL-xxA-N270 series and cause its circuitry to corrode.
- **Cotton swabs** - Cotton swabs moistened with rubbing alcohol or water are excellent tools for wiping hard to reach areas.

- **Foam swabs** - Whenever possible, it is best to use lint free swabs such as foam swabs for cleaning.

Appendix

**C**

# BIOS Configuration Options

---

## C.1 BIOS Configuration Options

Below is a list of BIOS configuration options described in **Chapter 6**.

|                                                |    |
|------------------------------------------------|----|
| System Overview .....                          | 67 |
| System Time [xx:xx:xx] .....                   | 68 |
| System Date [xx/xx/xx] .....                   | 68 |
| ATA/IDE Configurations [Compatible] .....      | 70 |
| Legacy IDE Channels [PATA Pri, SATA Sec] ..... | 71 |
| IDE Master and IDE Slave .....                 | 71 |
| Auto-Detected Drive Parameters .....           | 72 |
| Type [Auto] .....                              | 73 |
| ZIP .....                                      | 73 |
| LS-120 .....                                   | 73 |
| LBA/Large Mode [Auto] .....                    | 74 |
| Block (Multi Sector Transfer) [Auto] .....     | 74 |
| PIO Mode [Auto] .....                          | 74 |
| DMA Mode [Auto] .....                          | 75 |
| S.M.A.R.T [Auto] .....                         | 76 |
| 32Bit Data Transfer [Enabled] .....            | 76 |
| Serial Port1 Address [3F8/IRQ4] .....          | 77 |
| Serial Port1 Mode [Normal] .....               | 77 |
| Serial Port3 Address [3E8] .....               | 78 |
| Serial Port3 IRQ [11] .....                    | 78 |
| Serial Port4 Address [2E8] .....               | 78 |
| Serial Port4 IRQ [10] .....                    | 78 |
| CPU FAN Mode Setting [Full On Mode] .....      | 79 |
| CPU Temp. Limit of OFF [000] .....             | 80 |
| CPU Temp. Limit of Start [020] .....           | 80 |
| CPU Fan Start PWM [070] .....                  | 81 |
| Slope PWM [0.5 PWM] .....                      | 81 |
| Suspend Mode [S1(POS)] .....                   | 84 |
| Restore on AC Power Loss [Last State] .....    | 84 |
| Power Button Mode [On/Off] .....               | 85 |
| Resume on Keyboard/Mouse [Disabled] .....      | 85 |

## AFL-xxA-N270 Series Panel PC

|                                                   |     |
|---------------------------------------------------|-----|
| Resume on Ring [Disabled] .....                   | 85  |
| Resume on PCI-Express WAKE# [Enabled] .....       | 86  |
| Resume On RTC Alarm [Disabled] .....              | 86  |
| RTC Alarm Date (Days) .....                       | 86  |
| System Time .....                                 | 86  |
| Remote Access [Disabled] .....                    | 87  |
| Serial Port Number .....                          | 87  |
| Serial Port Mode .....                            | 87  |
| Redirection after BIOS POST .....                 | 87  |
| Terminal Type .....                               | 87  |
| Serial Port Number [COM1] .....                   | 88  |
| Base Address, IRQ [3F8h,4] .....                  | 88  |
| Serial Port Mode [115200 8,n,1] .....             | 88  |
| Redirection After BIOS POST [Always] .....        | 88  |
| Terminal Type [ANSI] .....                        | 89  |
| USB Functions [Enabled] .....                     | 90  |
| USB 2.0 Controller [Enabled] .....                | 90  |
| Legacy USB Support [Enabled] .....                | 90  |
| USB2.0 Controller Mode [HiSpeed] .....            | 90  |
| IRQ# [Available] .....                            | 91  |
| DMA Channel# [Available] .....                    | 92  |
| Reserved Memory Size [Disabled] .....             | 93  |
| Quick Boot [Enabled] .....                        | 94  |
| Quiet Boot [Disabled] .....                       | 94  |
| AddOn ROM Display Mode [Force BIOS] .....         | 95  |
| Bootup Num-Lock [On] .....                        | 95  |
| Boot From LAN Support [Disabled] .....            | 95  |
| Change Supervisor Password .....                  | 96  |
| Change User Password .....                        | 96  |
| Memory Hole [Disabled] .....                      | 98  |
| Internal Graphics Mode Select [Enable, 8MB] ..... | 98  |
| DVMT Mode Select [DVMT Mode] .....                | 99  |
| DVMT/FIXED Memory .....                           | 99  |
| Boot Display Device [LFP] .....                   | 99  |
| Sec. Display Device [CRT] .....                   | 100 |



|                                                 |            |
|-------------------------------------------------|------------|
| <b>LFP Panel Type [by H/W].....</b>             | <b>100</b> |
| <b>Audio Controller [AC'97 Audio Only].....</b> | <b>101</b> |
| <b>Save Changes and Exit .....</b>              | <b>102</b> |
| <b>Discard Changes and Exit.....</b>            | <b>102</b> |
| <b>Discard Changes.....</b>                     | <b>102</b> |
| <b>Load Optimal Defaults.....</b>               | <b>102</b> |
| <b>Load Failsafe Defaults.....</b>              | <b>103</b> |

## Appendix

**D**

# Watchdog Timer

---


**NOTE:**

The following discussion applies to DOS environment. IEI support is contacted or the IEI website visited for specific drivers for more sophisticated operating systems, e.g., Windows and Linux.

The Watchdog Timer is provided to ensure that standalone systems can always recover from catastrophic conditions that cause the CPU to crash. This condition may have occurred by external EMI or a software bug. When the CPU stops working correctly, Watchdog Timer either performs a hardware reset (cold boot) or a Non-Maskable Interrupt (NMI) to bring the system back to a known state.

A BIOS function call (INT 15H) is used to control the Watchdog Timer:

**INT 15H:**

| <b>AH – 6FH Sub-function:</b> |                                                                                                       |
|-------------------------------|-------------------------------------------------------------------------------------------------------|
| AL – 2:                       | Sets the Watchdog Timer's period.                                                                     |
| BL:                           | Time-out value (Its unit-second is dependent on the item "Watchdog Timer unit select" in CMOS setup). |

**Table D-1: AH-6FH Sub-function**

Call sub-function 2 to set the time-out period of Watchdog Timer first. If the time-out value is not zero, the Watchdog Timer starts counting down. While the timer value reaches zero, the system resets. To ensure that this reset condition does not occur, calling sub-function 2 must periodically refresh the Watchdog Timer. However, the Watchdog timer is disabled if the time-out value is set to zero.

A tolerance of at least 10% must be maintained to avoid unknown routines within the operating system (DOS), such as disk I/O that can be very time-consuming.

## AFL-xxA-N270 Series Panel PC



### NOTE:

When exiting a program it is necessary to disable the Watchdog Timer, otherwise the system resets.

### Example program:

```
; INITIAL TIMER PERIOD COUNTER
;
W_LOOP:

    MOV     AX, 6F02H      ;setting the time-out value
    MOV     BX, 05         ;time-out value is 5 seconds
    INT     15H

;
; ADD THE APPLICATION PROGRAM HERE
;

    CMP     EXIT_AP, 1     ;is the application over?
    JNE     W_LOOP         ;No, restart the application

    MOV     AX, 6F02H      ;disable Watchdog Timer
    MOV     BX, 0          ;
    INT     15H

;
; EXIT ;
```



Appendix

E

# Hazardous Materials Disclosure

---

## **E.1 Hazardous Material Disclosure Table for IPB Products Certified as RoHS Compliant Under 2002/95/EC Without Mercury**

The details provided in this appendix are to ensure that the product is compliant with the Peoples Republic of China (China) RoHS standards. The table below acknowledges the presences of small quantities of certain materials in the product, and is applicable to China RoHS only.

A label will be placed on each product to indicate the estimated “Environmentally Friendly Use Period” (EFUP). This is an estimate of the number of years that these substances would “not leak out or undergo abrupt change.” This product may contain replaceable sub-assemblies/components which have a shorter EFUP such as batteries and lamps. These components will be separately marked.

Please refer to the table on the next page.

| Part Name                                                                                                                                                                                                                                                                                                                       | Toxic or Hazardous Substances and Elements |                 |                 |                                    |                                      |                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|-----------------|------------------------------------|--------------------------------------|---------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                 | Lead<br>(Pb)                               | Mercury<br>(Hg) | Cadmium<br>(Cd) | Hexavalent<br>Chromium<br>(CR(VI)) | Polybrominated<br>Biphenyls<br>(PBB) | Polybrominated<br>Diphenyl Ethers<br>(PBDE) |
| Housing                                                                                                                                                                                                                                                                                                                         | X                                          | O               | O               | O                                  | O                                    | X                                           |
| Display                                                                                                                                                                                                                                                                                                                         | X                                          | O               | O               | O                                  | O                                    | X                                           |
| Printed Circuit<br>Board                                                                                                                                                                                                                                                                                                        | X                                          | O               | O               | O                                  | O                                    | X                                           |
| Metal Fasteners                                                                                                                                                                                                                                                                                                                 | X                                          | O               | O               | O                                  | O                                    | O                                           |
| Cable Assembly                                                                                                                                                                                                                                                                                                                  | X                                          | O               | O               | O                                  | O                                    | X                                           |
| Fan Assembly                                                                                                                                                                                                                                                                                                                    | X                                          | O               | O               | O                                  | O                                    | X                                           |
| Power Supply<br>Assemblies                                                                                                                                                                                                                                                                                                      | X                                          | O               | O               | O                                  | O                                    | X                                           |
| Battery                                                                                                                                                                                                                                                                                                                         | O                                          | O               | O               | O                                  | O                                    | O                                           |
| <p>O: This toxic or hazardous substance is contained in all of the homogeneous materials for the part is below the limit requirement in SJ/T11363-2006</p> <p>X: This toxic or hazardous substance is contained in at least one of the homogeneous materials for this part is above the limit requirement in SJ/T11363-2006</p> |                                            |                 |                 |                                    |                                      |                                             |

## AFL-xxA-N270 Series Panel PC

此附件旨在确保本产品符合中国 RoHS 标准。以下表格标示此产品中某有毒物质的含量符合中国 RoHS 标准规定的限量要求。

本产品上会附有“环境友好使用期限”的标签，此期限是估算这些物质“不会有泄漏或突变”的年限。本产品可能包含有较短的环境友好使用期限的可替换元件，像是电池或灯管，这些元件将会单独标示出来。

| 部件名称                                                                                                                             | 有毒有害物质或元素 |           |           |                 |               |                 |
|----------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|-----------------|---------------|-----------------|
|                                                                                                                                  | 铅<br>(Pb) | 汞<br>(Hg) | 镉<br>(Cd) | 六价铬<br>(CR(VI)) | 多溴联苯<br>(PBB) | 多溴二苯醚<br>(PBDE) |
| 壳体                                                                                                                               | X         | O         | O         | O               | O             | X               |
| 显示                                                                                                                               | X         | O         | O         | O               | O             | X               |
| 印刷电路板                                                                                                                            | X         | O         | O         | O               | O             | X               |
| 金属螺帽                                                                                                                             | X         | O         | O         | O               | O             | O               |
| 电缆组装                                                                                                                             | X         | O         | O         | O               | O             | X               |
| 风扇组装                                                                                                                             | X         | O         | O         | O               | O             | X               |
| 电力供应组装                                                                                                                           | X         | O         | O         | O               | O             | X               |
| 电池                                                                                                                               | O         | O         | O         | O               | O             | O               |
| <p>O: 表示该有毒有害物质在该部件所有物质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。</p> <p>X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11363-2006 标准规定的限量要求。</p> |           |           |           |                 |               |                 |

# Index

---

## AFL-xxA-N270 Series Panel PC

### A

|                              |             |
|------------------------------|-------------|
| ABS/PC plastic frame .....   | 4, 51       |
| <b>ACPI</b> .....            | 82, 83      |
| anti-static precautions..... | 29, 58      |
| anti-static pad .....        | 29, 58, 139 |
| anti-static wristband.....   | 29, 58, 139 |
| handling .....               | 29, 59, 139 |
| self-grounding.....          | 29, 58, 139 |

### B

|                  |                                                                                                                   |
|------------------|-------------------------------------------------------------------------------------------------------------------|
| back cover ..... | 33, 34, 61                                                                                                        |
| BGA type.....    | V                                                                                                                 |
| <b>BIOS</b> ..   | 65, 66, 67, 68, 69, 70, 71, 72, 76, 77, 79, 82, 83, 84, 86, 87, 88, 89, 91, 93, 94, 95, 96, 97, 98, 100, 101, 102 |
| bracket.....     | 3, 33, 44, 45, 51, 52, 53                                                                                         |
| Brightness.....  | 134                                                                                                               |

### C

|                                 |    |
|---------------------------------|----|
| clear CMOS jumper .....         | 37 |
| location .....                  | 37 |
| settings .....                  | 37 |
| CMOS .....                      | 37 |
| clear CMOS jumper.....          | 37 |
| COM 1/2 pin 9 setting jumper    |    |
| location .....                  | 39 |
| COM 1/3 pin 9 setting jumper    |    |
| settings .....                  | 38 |
| COM 2 function select jumper    |    |
| location .....                  | 40 |
| COM1 pin 9 setting jumper ..... | 38 |

|                |    |
|----------------|----|
| settings ..... | 38 |
|----------------|----|

### COM3

|                                        |     |
|----------------------------------------|-----|
| COM3 RS-232/422/485 select .....       | 42  |
| COM3 RX function select .....          | 40  |
| COM3 TX function select.....           | 41  |
| COM3 pin 9 setting jumper              |     |
| settings .....                         | 38  |
| COM3 pin 9 setting jumper .....        | 38  |
| COM3 RS-232/422/485 serial port select |     |
| jumper.....                            | 42  |
| location .....                         | 42  |
| settings .....                         | 42  |
| COM3 RX function select jumper .....   | 40  |
| settings .....                         | 40  |
| COM3 TX function select jumper.....    | 41  |
| COM3 TX Function Select jumper         |     |
| location .....                         | 41  |
| settings .....                         | 41  |
| Contrast Ratio .....                   | 134 |
| cooling fan.....                       | 82  |

### D

|                      |    |
|----------------------|----|
| DB-9 connector ..... | 54 |
|----------------------|----|

### E

|                               |        |
|-------------------------------|--------|
| electrostatic discharge ..... | 29, 58 |
|-------------------------------|--------|

### F

|           |    |
|-----------|----|
| FDD.....  | 76 |
| FSB ..... | 70 |

## AFL-xxA-N270 Series Panel PC

### H

HDD .....33

### I

IrDA.....78

### J

jumper .....35

clear CMOS .....37

COM3 pin 9 setting jumper.....38

COM3 RS-232/422/485 serial port select  
.....42

COM3 RX function select.....40

COM3 TX function select .....41

jumper configuration.....35

### L

LAN connection .....53

### M

Memory .....61

### P

panel mounting clamps.....51, 52

Pixel Pitch .....134

Power Button Mode .....85

power switch .....4

### R

Resolution .....134

RJ-45 connection .....53

single connector .....53

### S

Safety Precautions.....138

Serial Device

connection .....54

serial port .....4

SO-DIMM .....61, 62

system voltages .....79, 82

### T

temperature.....79

### U

USB.....89, 90

external USB device connection .....56

USB 2.0 .....4, 90

USB device connection.....56

single connector .....56

USB2.0.....90

### W

wall .....3, 4, 43, 44, 45

wall mounting .....45

wall-mounting bracket.....44